

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-151-21440-00-00  
Spot: W2NWSE Sec/Twnshp/Rge: 5-26S-11W  
1980 feet from S Section Line, 2040 feet from E Section Line  
Lease Name: FREYMILLER Well #: 1-5  
County: PRATT Total Vertical Depth: 4402 feet

Operator License No.: 30128  
Op Name: WHITE, KENNETH S.  
Address: 2400 N. WOODLAWN, SUITE 115  
WICHITA, KS 67220

| String | Size  | Depth (ft) | Pulled (ft) | Comment         |
|--------|-------|------------|-------------|-----------------|
| PROD   | 4.5   | 4394       | 1968        | WITH 150 SX CMT |
| SURF   | 8.625 | 307        |             | WITH 175 SX CMT |

\$1143.07

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 03/07/2006 3:30 PM  
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.  
Proposal Rcvd. from: FELIX TOBAR Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 3990' & 4 SX CMT. PLUG AT 650' WITH 10 SX GEL & 50 SX CMT. PLUG AT 330' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 03/07/2006 4:45 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:  
SANDED BACK TO 3980' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 4 1/2" CASING. 1ST PLUG AT 650 WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 330' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:


| Top  | Bot  | Thru | Comments |
|------|------|------|----------|
| 4099 |      |      |          |
| 4097 |      |      |          |
| 4089 |      |      |          |
| 4087 |      |      |          |
| 4077 |      |      |          |
| 4075 |      |      |          |
| 4041 | 4056 |      |          |

RECEIVED  
MAR 20 2006  
KCC WICHITA  
INVOICED

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.  
Plugged through: CSG

DATE 3-21-06  
NO. 2006000312

District: 01

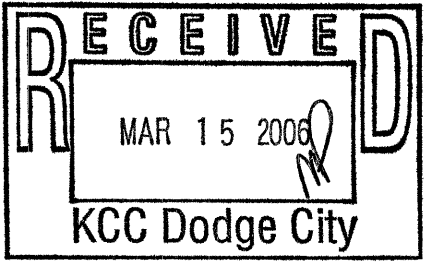

Signed Stephen J. Puffer  
(TECHNICIAN)

Form CT-23