

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-22910-00-00
Spot: SWNENE Sec/Twnshp/Rge: 32-25S-11W
990 feet from N Section Line, 990 feet from E Section Line
Lease Name: NELSON Well #: 1
County: STAFFORD Total Vertical Depth: 4230 feet

Operator License No.: 30128
Op Name: WHITE, KENNETH S.
Address: 2400 N. WOODLAWN, SUITE 115
WICHITA, KS 67220

String	Size	Depth (ft)	Pulled (ft)	Comment
COND	10.75	256		WITH 175 SX CMT
PROD	5.5	4188	3048	WITH 100 SX CMT
SURF	8.625	916		WITH 200 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 03/14/2006 3:00 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND BOTTOM TO 3870' & 5 SX CMT. PLUG AT 930' WITH GEL & 50 SX CMT. PLUG AT 400' WITH 40 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 03/14/2006 5:15 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED BOTTOM TO 3870' & 5 SX CMT WITH DUMP BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 930' WITH 28 SX GEL - 50 SX CMT. 2ND PLUG AT 400' WITH 40 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.


Perfs:

Top	Bot	Thru	Comments
3943	3972		

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

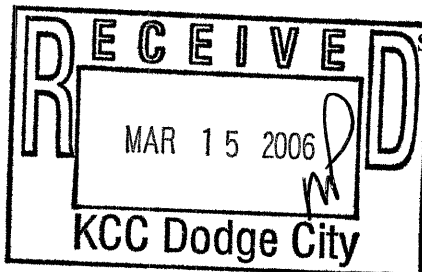

Signed Richard W. Lacey
(TECHNICIAN)

RECEIVED
MAR 20 2006
KCC WICHITA

Form CP-2/3

INVOICED
DATE 3-21-06
2006061312