

TO:
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION - PLUGGING
 130 SOUTH MARKET, SUITE 2078
 WICHITA, KANSAS 67202

API Well Number: 15-145-20235-00-01
 Spot: SWSWSE Sec/Twnshp/Rge: 26-22S-16W
330 feet from S Section Line, 2310 feet from E Section Line
 Lease Name: BLACKWELL Well #: 1-26
 County: PAWNEE Total Vertical Depth: 4038 feet

Operator License No.: 3180
 Op Name: DEUTSCH, KENT A. DBA DEUTSCH OI
 Address: 8100 E. 22ND ST. N.
WICHITA, KS 67226

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		2046		
CIBP		2134		
CIBP		2150		
CIBP		3802		
PROD	4.5	4037	0	
SURF	8.625	235		

131-24

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 03/13/2006 9:00 AM
 Plug Co. License No.: 6901 Plug Co. Name: D S & W WELL SERVICING, INC.
 Proposal Rcvd. from: KIRK GLENN Company: D S & W WELL SERVICING, INC. Phone: (620) 587-3361

Proposed Plugging Method: SAND 50' ABOVE PERFS & 4 SX CMT. PLUG AT 1025' WITH 15 SX GEL & 40 SX CMT. PLUG AT 600' WITH 40 SX CMT. PLUG AT 240' WITH 40 SX CMT. PLUG AT 40 WITH 15 SX CMT.

Plugging Proposal Received By: MICHAEL MAIER WitnessType: COMPLETE (100%)
 Date/Time Plugging Completed: 03/13/2006 11:50 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

ANHYDRITE = 1020'. WELL FLOWING 2 BWPM UP ANNULUS. SANDED BACK TO 1550' & 4 SX CMT WITH DUMP BAILER. PERFORATED 4 1/2" @ 1025'. PUMPED 80 SX CMT DOWN 4 1/2". DISPLACED TO 600'. MAXIMUM PUMP PRESSURE = 1000 PSIG. SHUT DOWN FOR 20 MINUTES. 4 1/2" HOLDING STATIC. PERFORATED 4 1/2" @ 250'. PUMPED 195 SX CMT DOWN 4 1/2" CIRCULATED CMT TO SURFACE UP 10 3/4" X 4 1/2" ANNULUS. SHUT IN ANNULUS & SQUEEZED DOWN WELL WITH 25 SX CMT. MAXIMUM PRESSURE = 600 PSIG. SHUT IN PRESSURE = 100 PSIG.

Perfs:

Top	Bot	Thru	Comments
3953	3978		
3629	3649		
3613	3623		
2032	2042		
2014	2024		


INVOICED

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

DATE 3-21-06
2006061313

District: 01

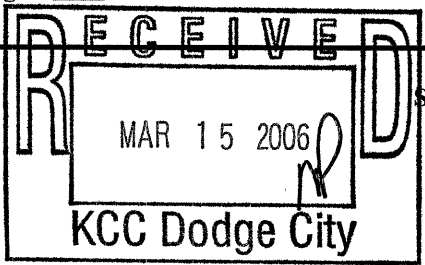

Signed Richard W. Lacey
 RECEIVED (TECHNICIAN)

MAR 20 2006
 KCC WICHITA