

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-101-21912-00-00
Spot: NESWNE Sec/Twnshp/Rge: 33-17S-27W
1690 feet from N Section Line, 1730 feet from E Section Line
Lease Name: CHRISTINE Well #: 1
County: LANE Total Vertical Depth: 4590 feet

Operator License No.: 5474
Op Name: NORTHERN LIGHTS OIL COMPANY, L
Address: PO BOX 164
ANDOVER, KS 67002

String Size Depth (ft) Pulled (ft) Comment
SURF 8.625 259 WITH 220 SX CMT

ST 149.18

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 03/16/2006 2:45 AM
Plug Co. License No.: 4958 Plug Co. Name: MALLARD, J. V., INC.
Proposal Rcvd. from: CAROL NICHOLS Company: MALLARD, J. V., INC. Phone: (620) 241-4640

Proposed Plugging Method: 1ST PLUG AT 2100' WITH 50 SX CMT. 2ND PLUG AT 1200' WITH 80 SX CMT. 3RD PLUG AT 600' WITH 50 SX CMT. 4TH PLUG AT 290' WITH 40 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: KEN JEHLIK WitnessType: NONE
Date/Time Plugging Completed: 03/16/2006 5:15 AM KCC Agent: KEN JEHLIK

Actual Plugging Report:

Perfs:

1ST PLUG AT 2100' WITH 50 SX CMT. 2ND PLUG AT 1200' WITH 80 SX CMT. 3RD PLUG AT 600' WITH 50 SX CMT. 4TH PLUG AT 290' WITH 40 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.


INVOICE

DATE 3-27-06
20060061401

Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

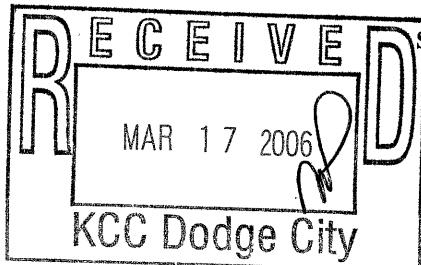

Signed

Ken Jehlik
(TECHNICIAN)

RECEIVED
MAR 27 2006
KCC WICHITA

Form CP-28

RKT