


Company				K3 OIL & GAS OPERATING COMPANY			
Well				EATON #3-18			
Field				WILDCAT			
County				LANE			
State				KANSAS			
RECON BHC SONIC GAMMA RAY X-Y CALIPER							
SEC		TWP		RGE		OTHER SERVICES:	
18		16S		28W		DDT CNL	
Location, 879' FNL & 1966' FWL				NE/SW/NE/NW			
SURE. SAME		AP#.		015-101-22560-00-00			
Permanent Datum		Ground Level		Elev		ELEVATIONS	
Log Measured From		Kelly Bushing				K.B. 2657 G.L. 2649 D.F. N/A	
Drilling Measured From		Kelly Bushing					
Date	07-AUG-2015						
Run No.	ONE						
TD Driller	4540			ft			ft
TD RECON	4540			ft			ft
Bot Logged Interval	4539			ft			2100 ft
Top Logged Interval	3500			ft			2000 ft
Casing Depth Driller	8 5/8			in.			in.
Casing Depth RECON	8 5/8			in.			in.
Bit Size	7 7/8			in.			in.
Drilling Fluid Type	WBM						
Density	Viscosity			49			
Fluid Loss	PH			9.6			8.0
Source Of Sample	Flowline						
RM @ Measured Temp	3.37			Ohmm			@ 75 Ohmm @
RMF @ Measured Temp	2.53			Ohmm			@ 75 Ohmm @
RMC @ Measured Temp	3.01			Ohmm			@ 75 Ohmm @
RM @ MRT	1.91			Ohmm			@ 131 Ohmm @
Max Recorded Temp	131			DegF			DegF
Time Drilling Stopped	07-AUG-2015			02:00			
Time Circulation Stopped	07-AUG-2015			04:45			
Time Logger On Bottom	07-AUG-2015			17:17			
Unit Num	Location			S406			OKLAHOMA CITY, OK
Recorded By	K.HELDERMON						
Witnessed By	T.WILLIAMS						

All interpretations are based on inferences from electrical or other readings, and therefore, RECON cannot and will not guarantee the accuracy of any interpretations of log data. RECON shall not be liable for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from	interpretations made by any of our officers, agents or employees, except in the case of provable Gross Neglegence or willfull damage. Interpretations are also subject to the terms and conditions of our Price Schedule and General Service Agreement.
--	--

RIG INFORMATION	
Drill Contr/Rig#	DUKE DRILLING #4

GENERAL REMARKS SECTION	
FIRST RUN IN THE HOLE CNL AND LDT LOGGED IN A LIMESTONE MATRIX TOP MARK - 283, BOTTOM MARK - 4387.5 CNL/LDT LOGGED MATRIX: 2.71 g/cc. CHLORIDES: 3800 LCM: TRACE THANK YOU FOR USING RECON PETROTECHNOLOGIES LTD.	AHV CALCULATED ON 5.5" PROD. CASING MICROLOG PAD APPEARS TO HAVE RIPPED AT ABOUT 4225' ON HDD REPEAT (FIRST PASS). CREW: M.CALLENINE

**DUAL INDUCTION – SP / BHC SONIC /
GAMMA RAY / LITHO-DENSITY / X CALIPER
COMPENSATED NEUTRON / Y-CALIPER
MICRO - LOG / M-CALIPER**

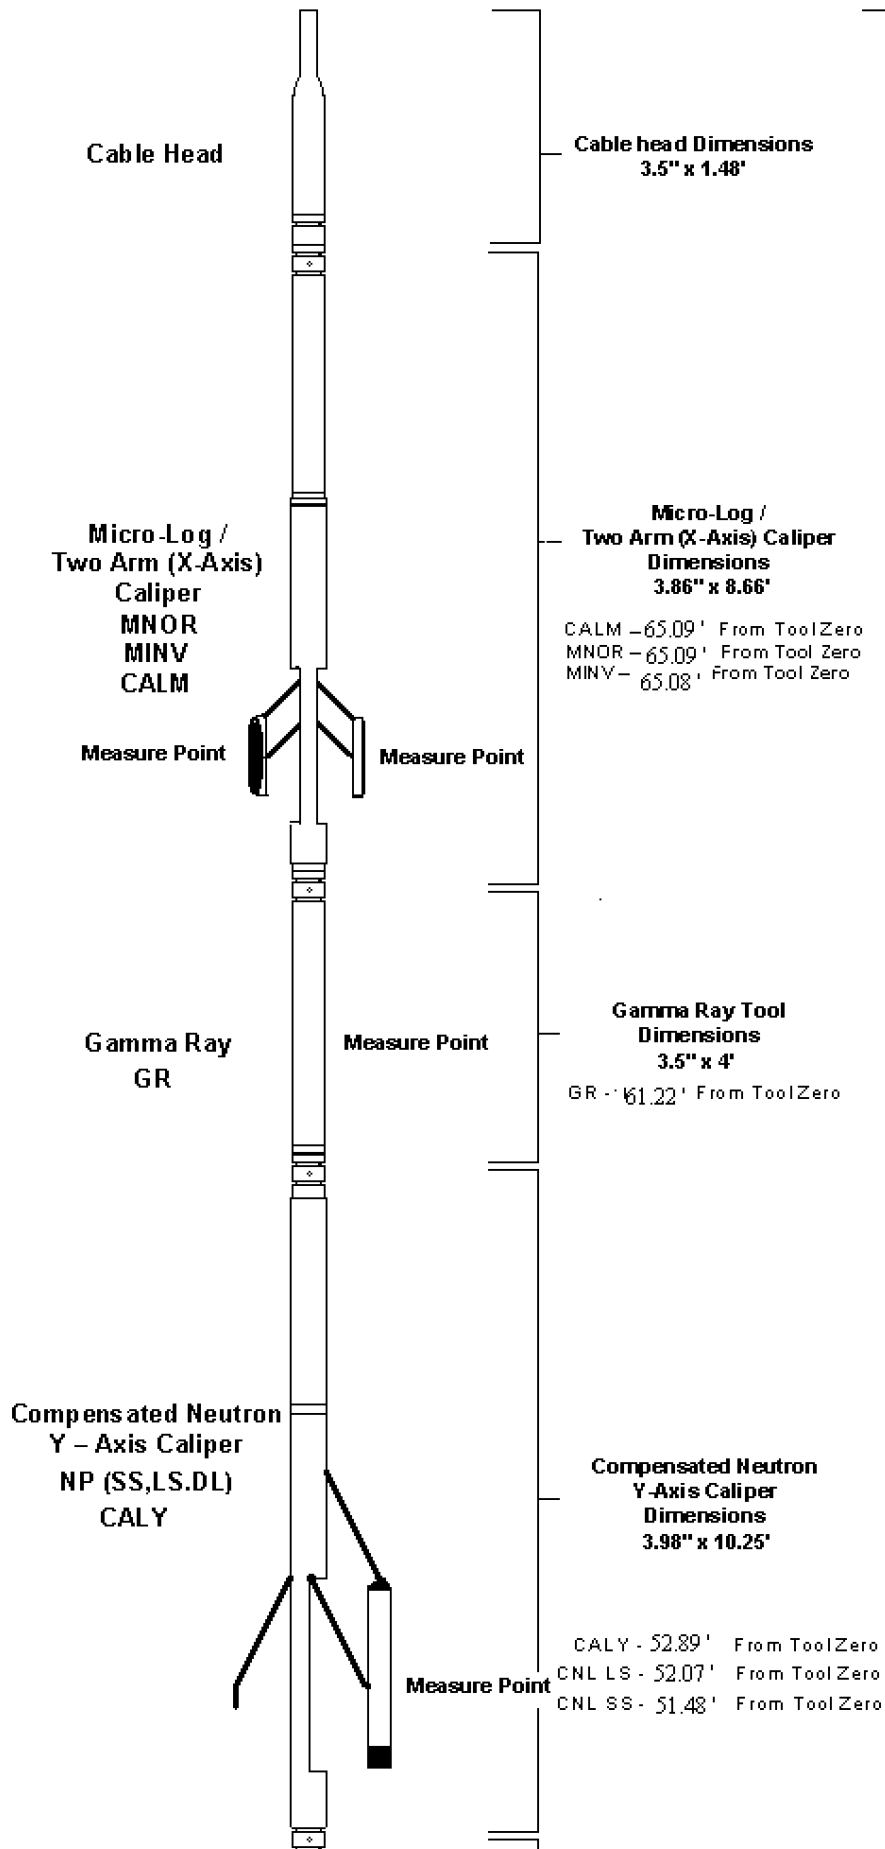

Digital Telemetry

**Digital Telemetry Section
Dimensions
3.5" x 3.15'**

**Tool String
Length Total
73.64 '**

**Compensated
Litho-Density (Pe)
X - Axis Caliper**

DP(SS,LS,DL)
RHOB
DRHO
PE
CALX
Measure Point

**Compensated Litho-Density
X-Axis Caliper
Dimensions
3.98" x 9.35'**

CALX - 38.94' From ToolZero
LDT w1 -
LDT w2 - -38.68' From ToolZero
LDT w3 -
LDT w4 -
LDT SS - 38.19' From ToolZero

**Borehole
Compensated
Sonic**

SP(SS,LS,DL)
DT
TTI
VDL
TT
Measure Point
Tool First Reading
Point

T-1
Transmitter 1

**Borehole Compensated Sonic
Tool Dimensions
3.5" x 15.75'**



T1R1 - 33.35' From ToolZero
T1R2 - 31.35' From ToolZero



R-1
Receiver 1



R-2
Receiver 2



T2R1 - 28.54' From ToolZero
T2R2 - 28.37' From ToolZero



T-2
Transmitter 2

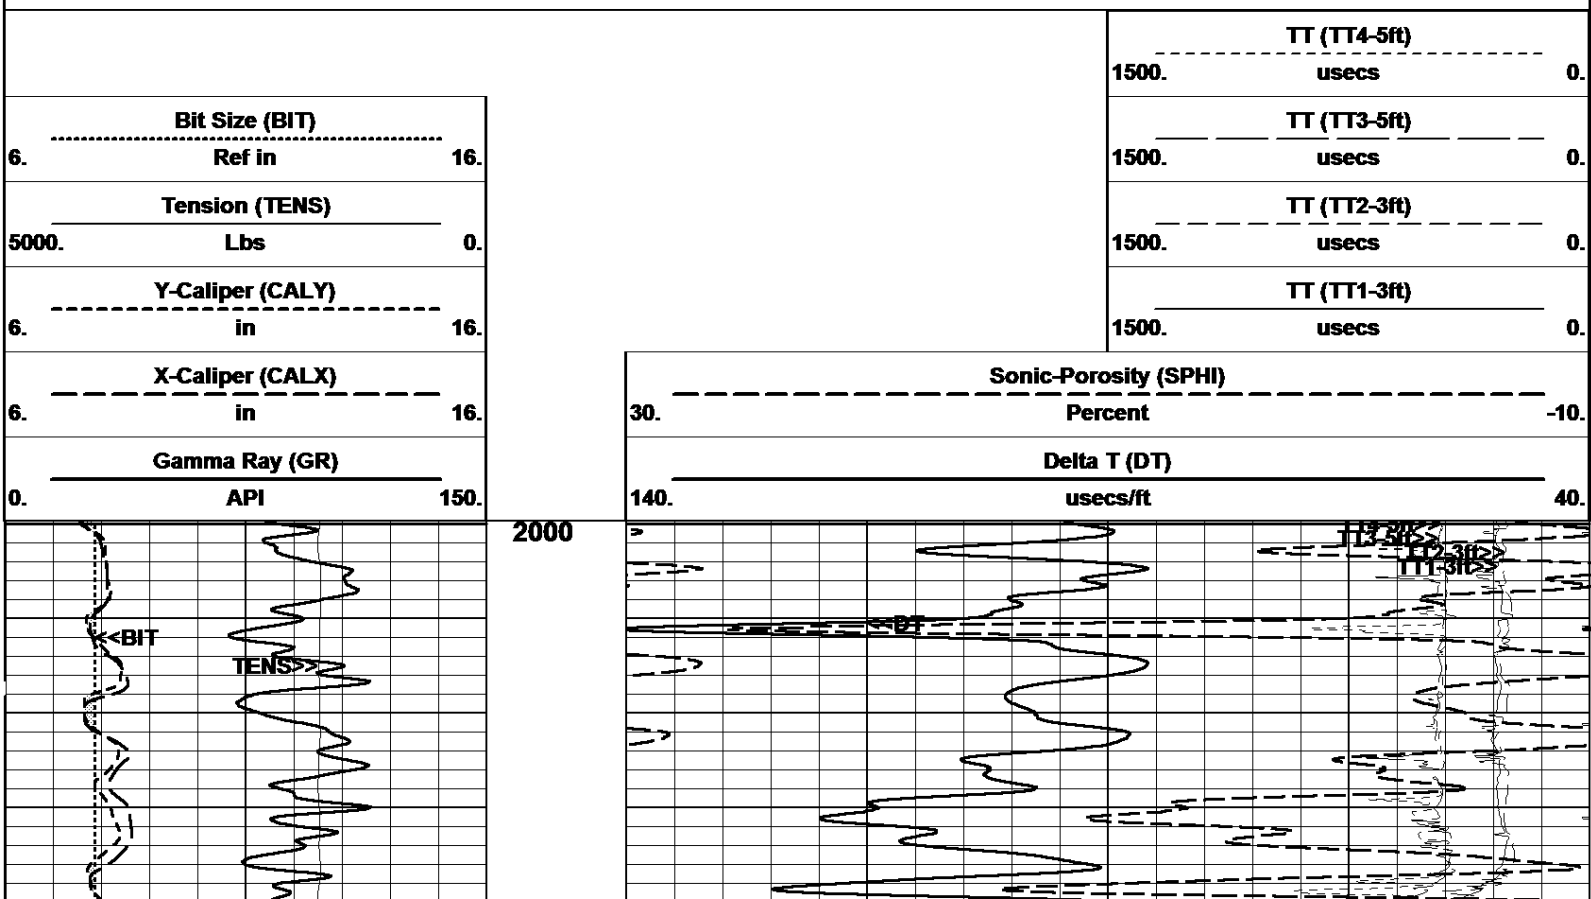
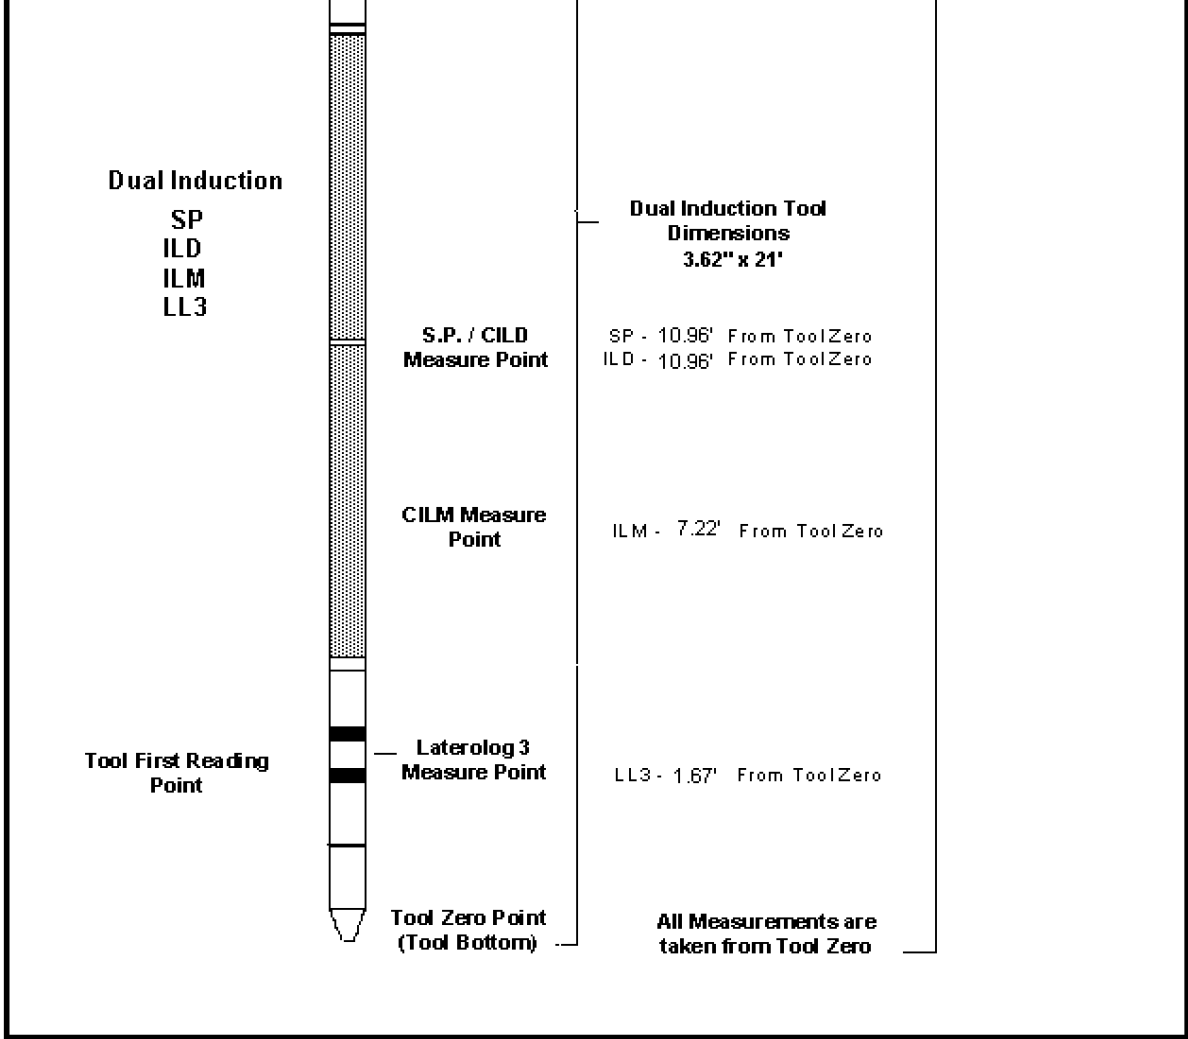


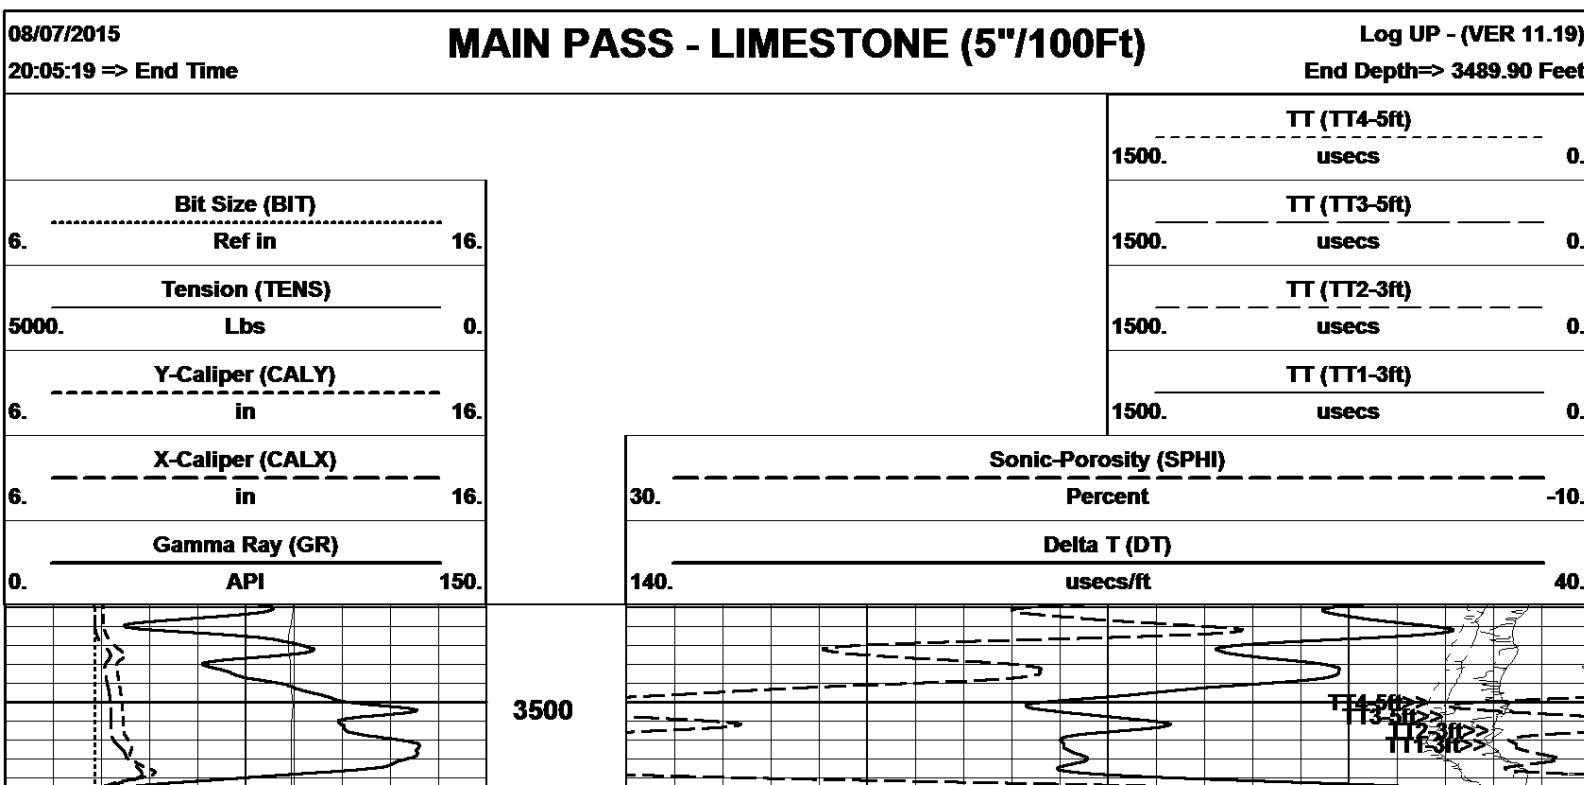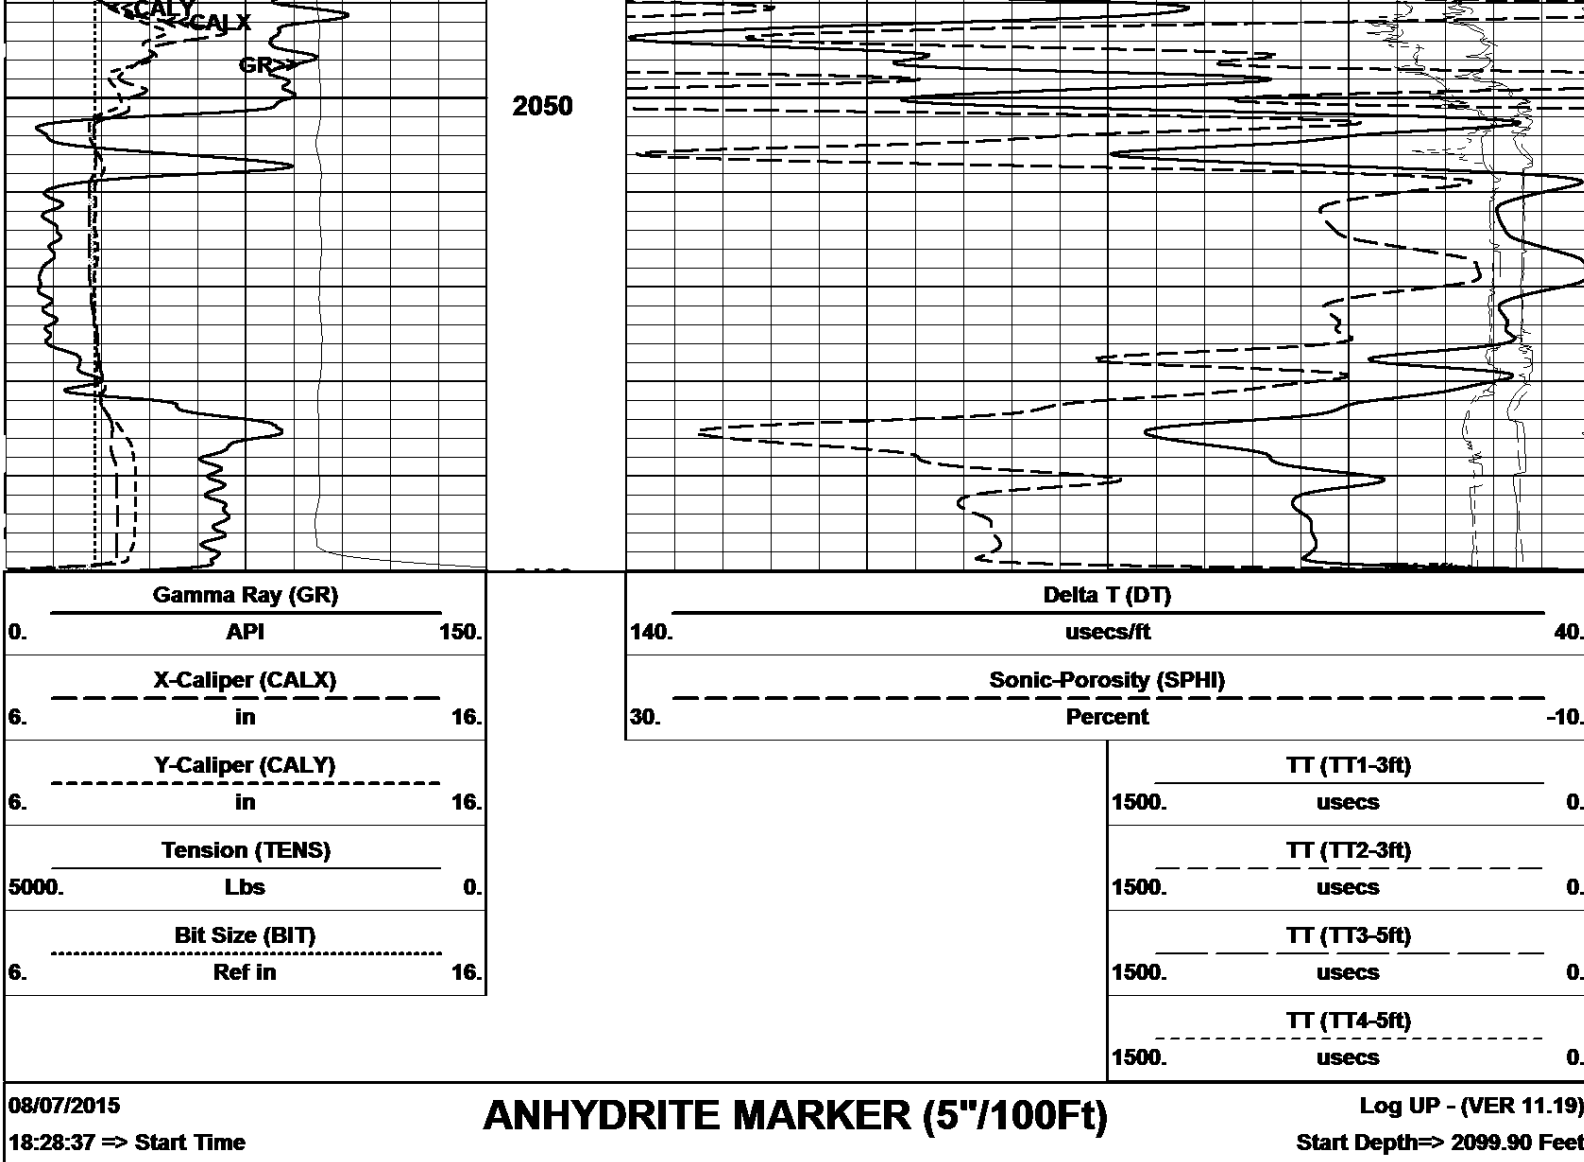


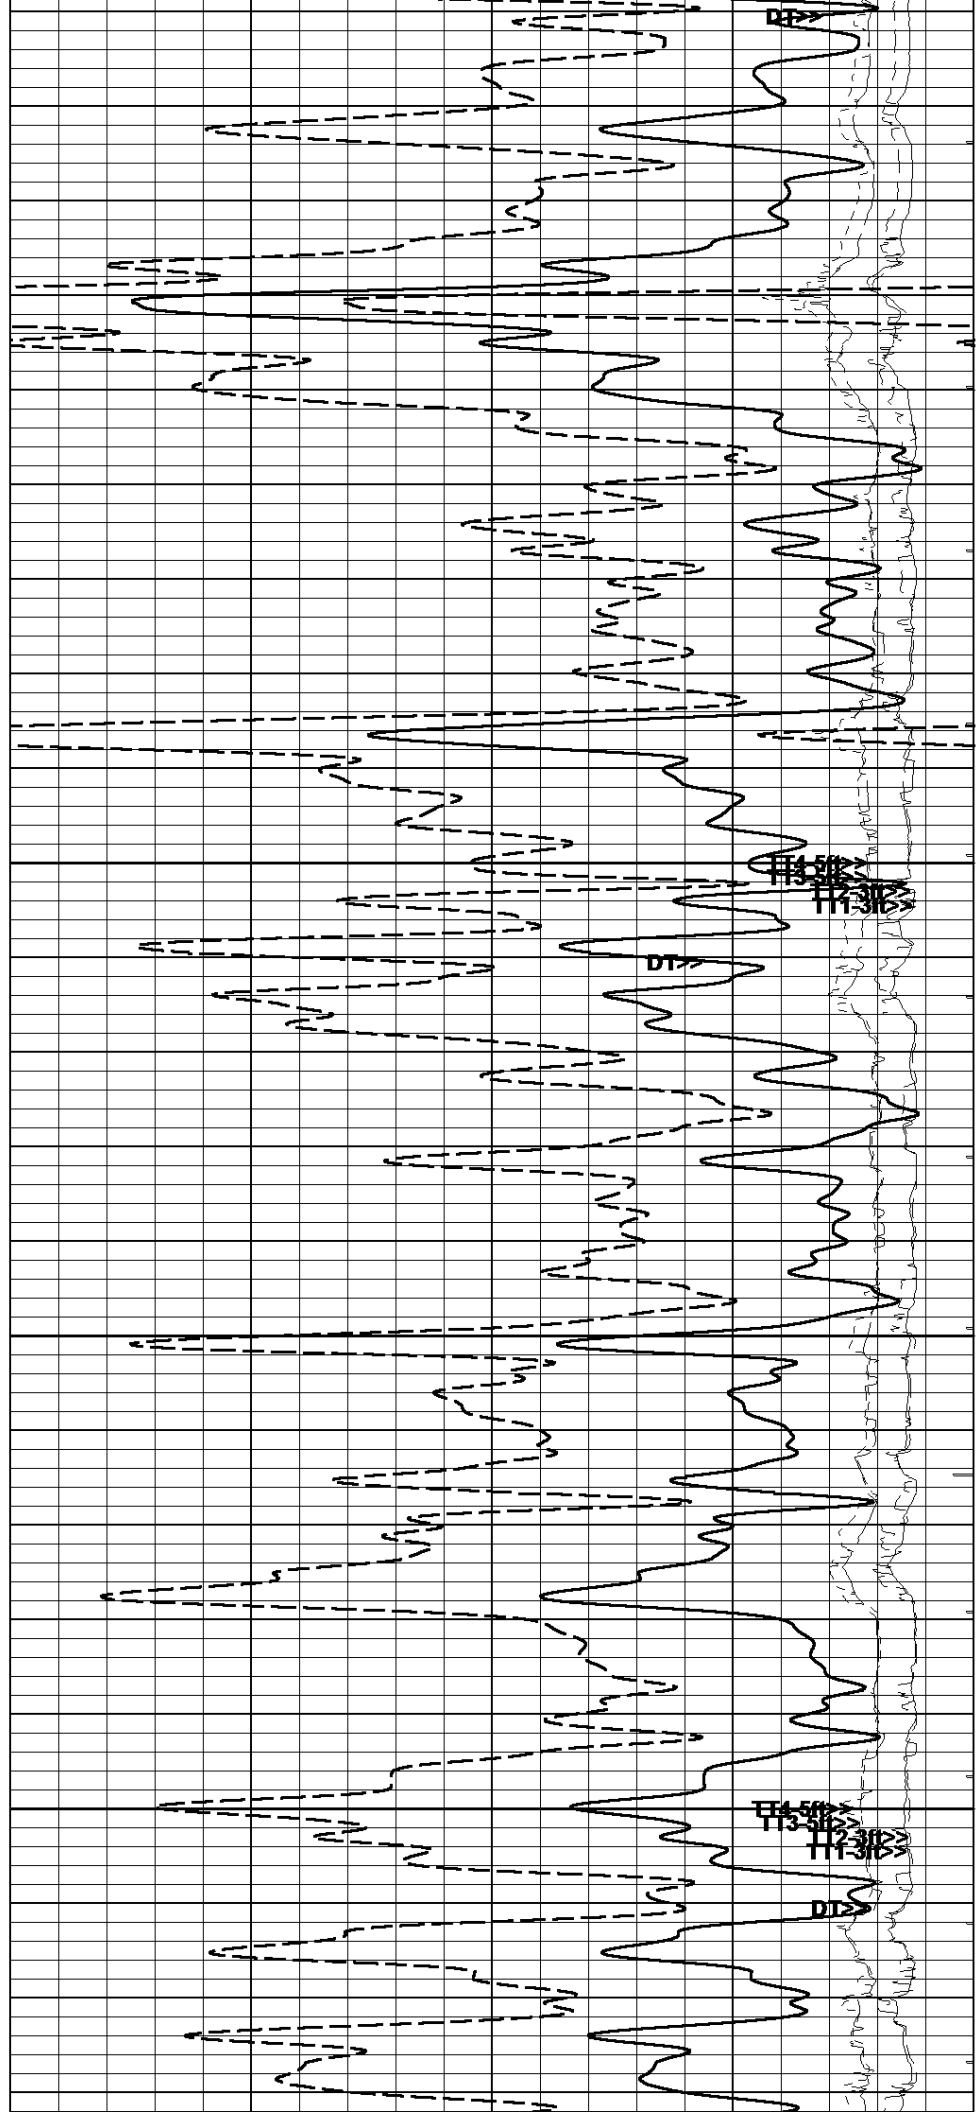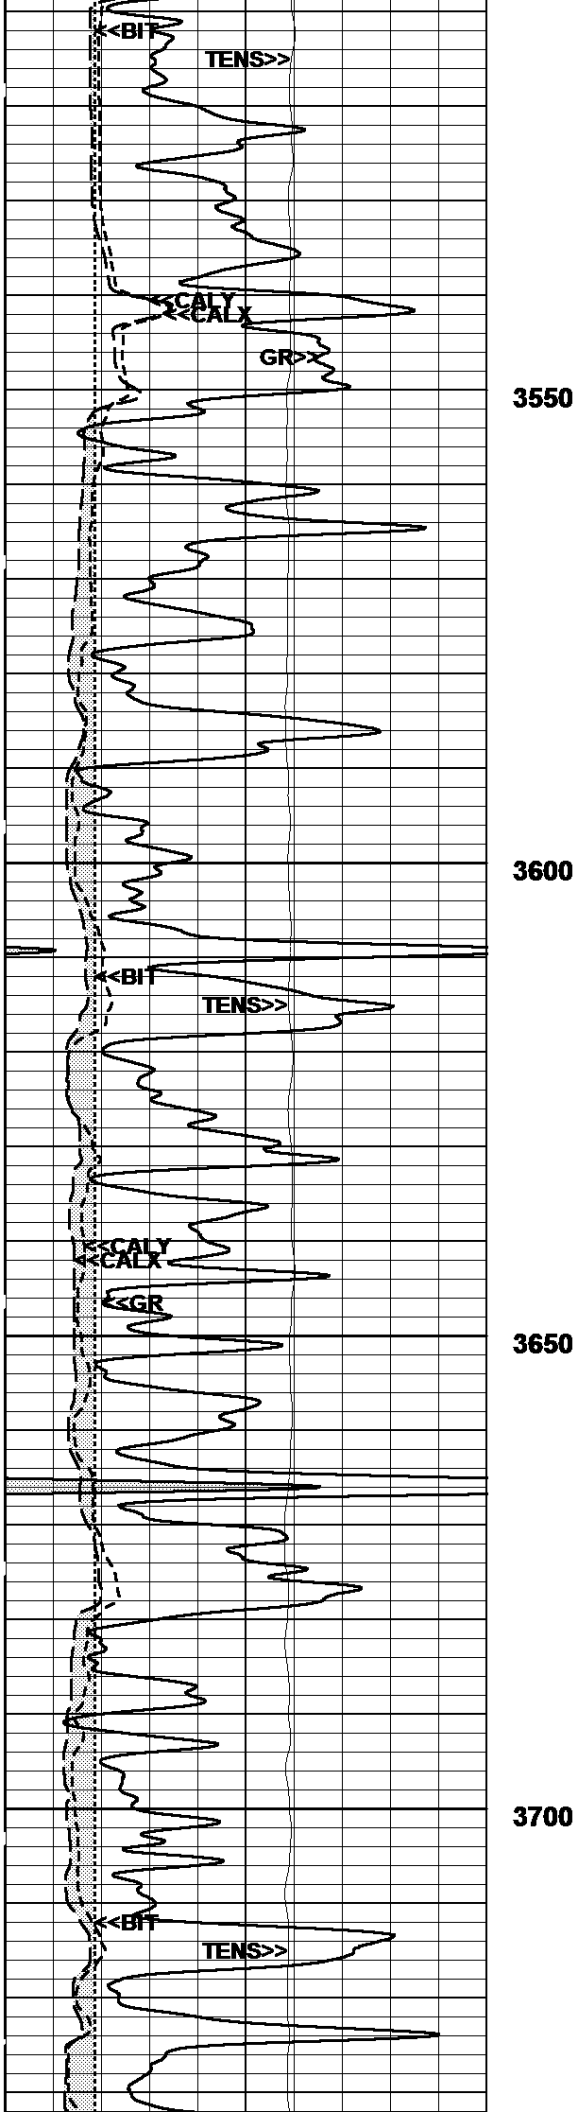

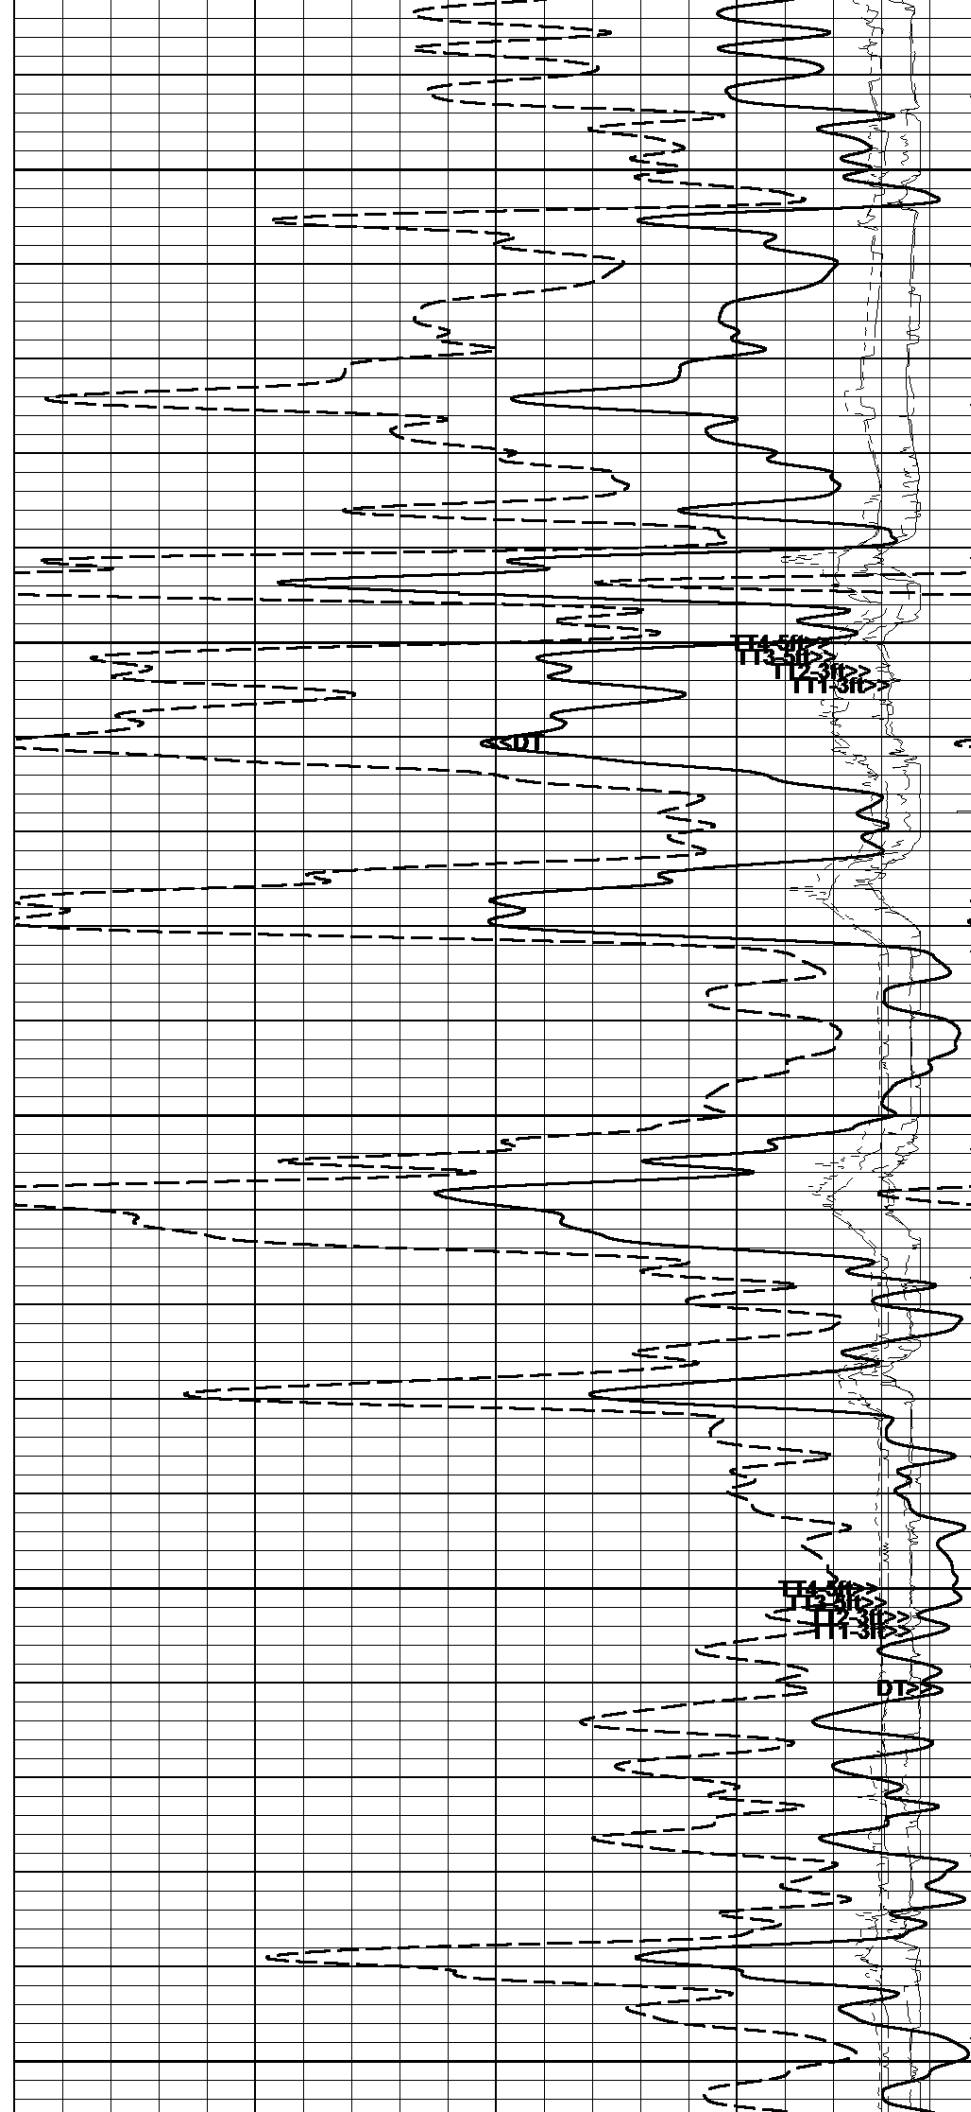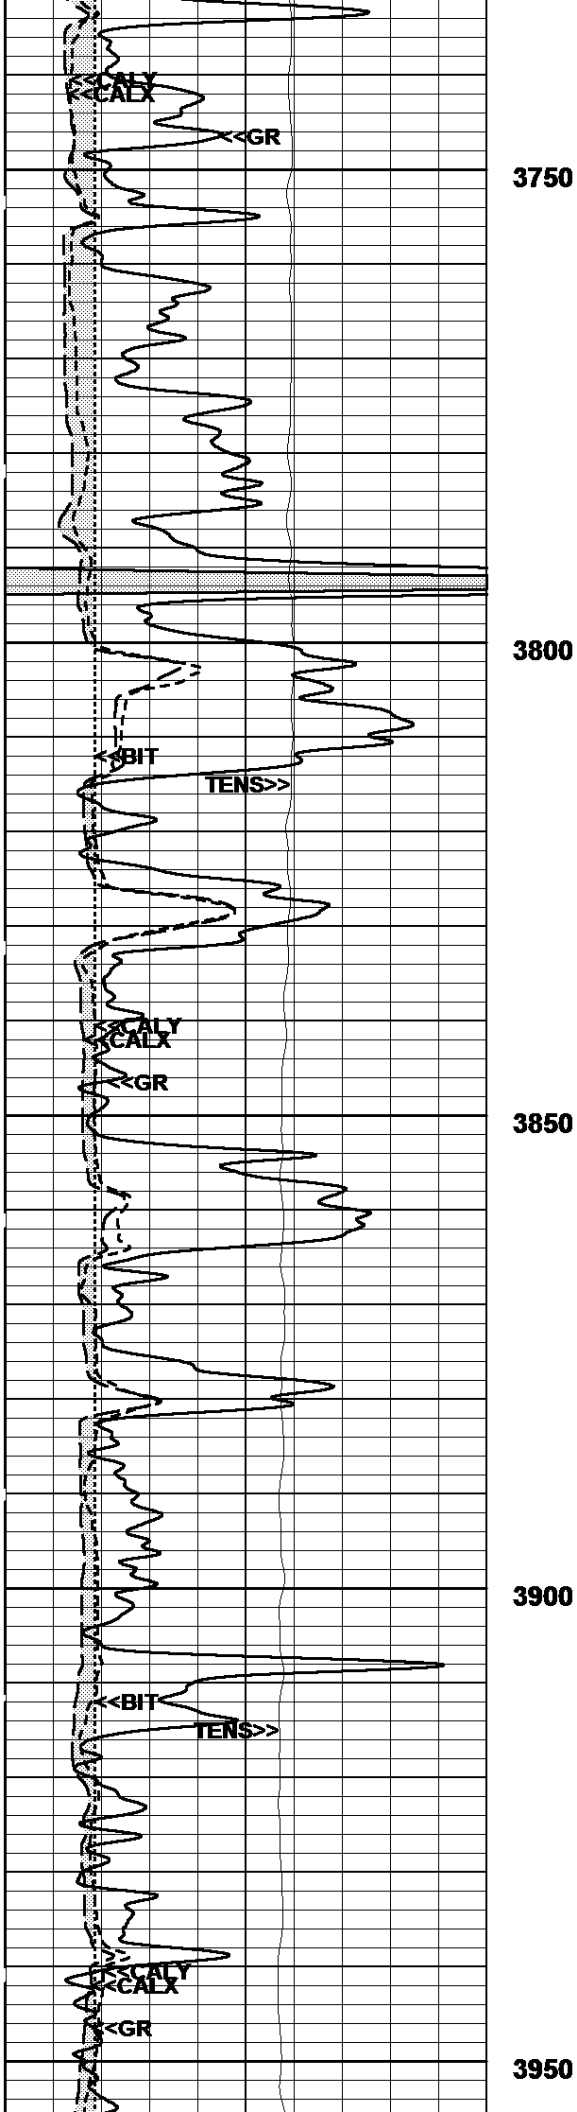

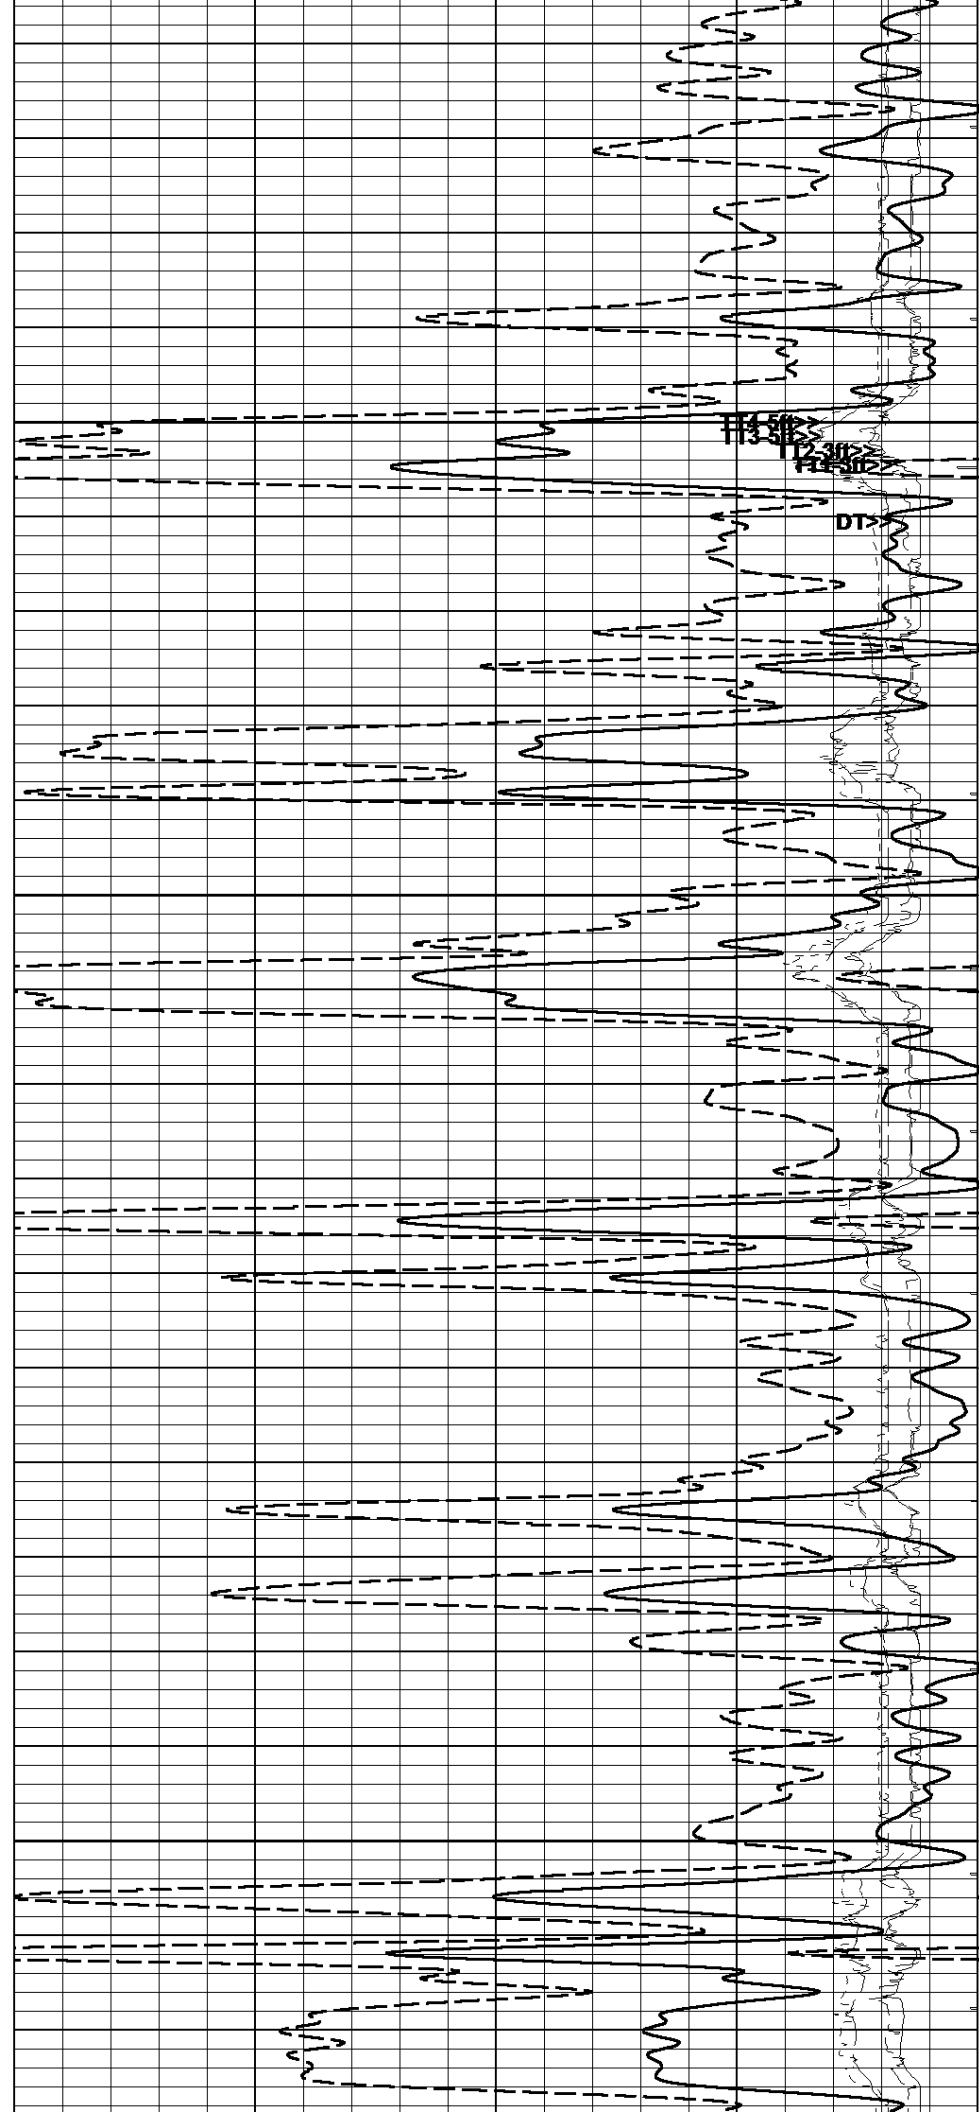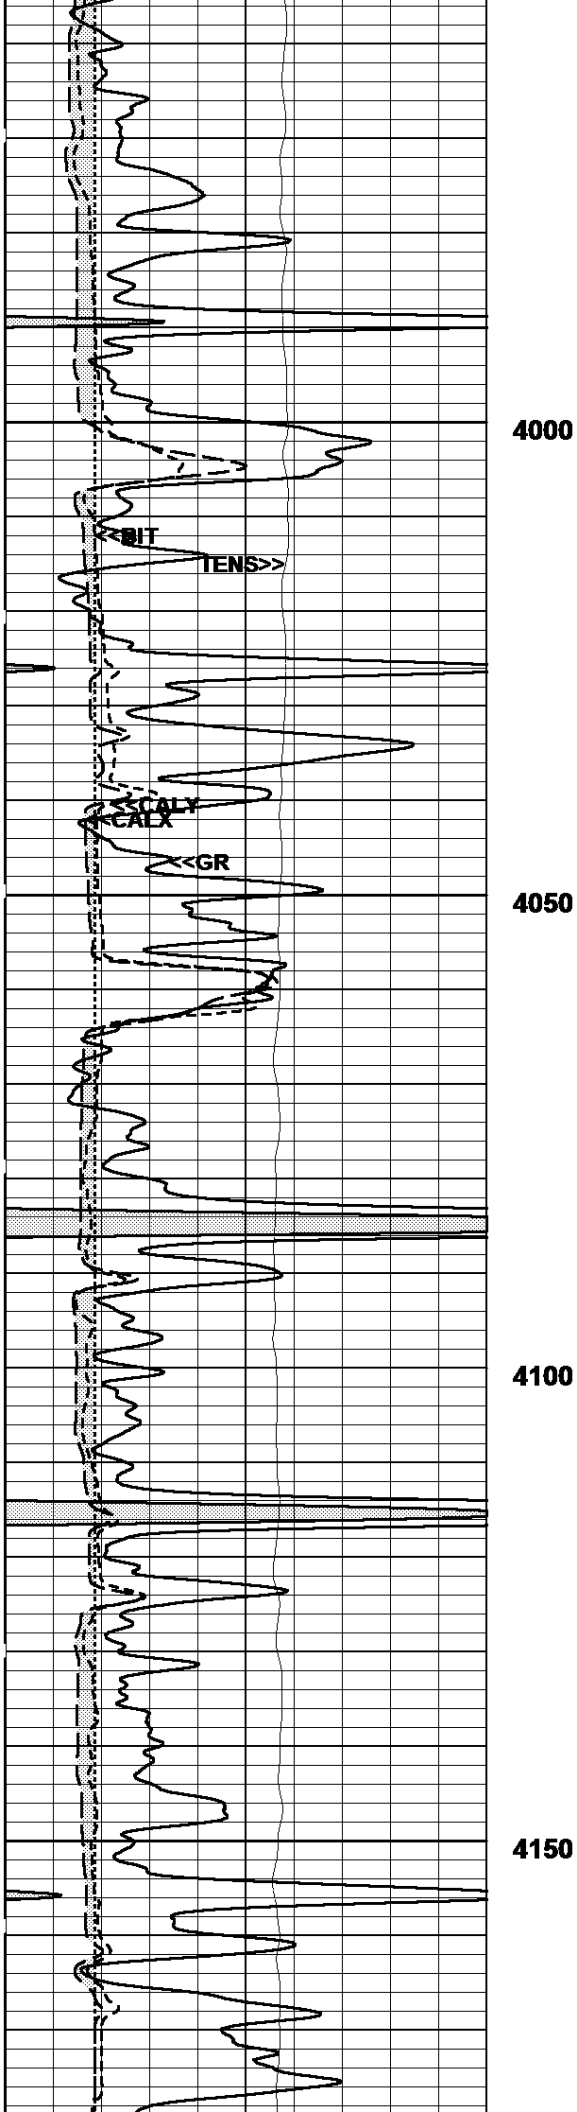

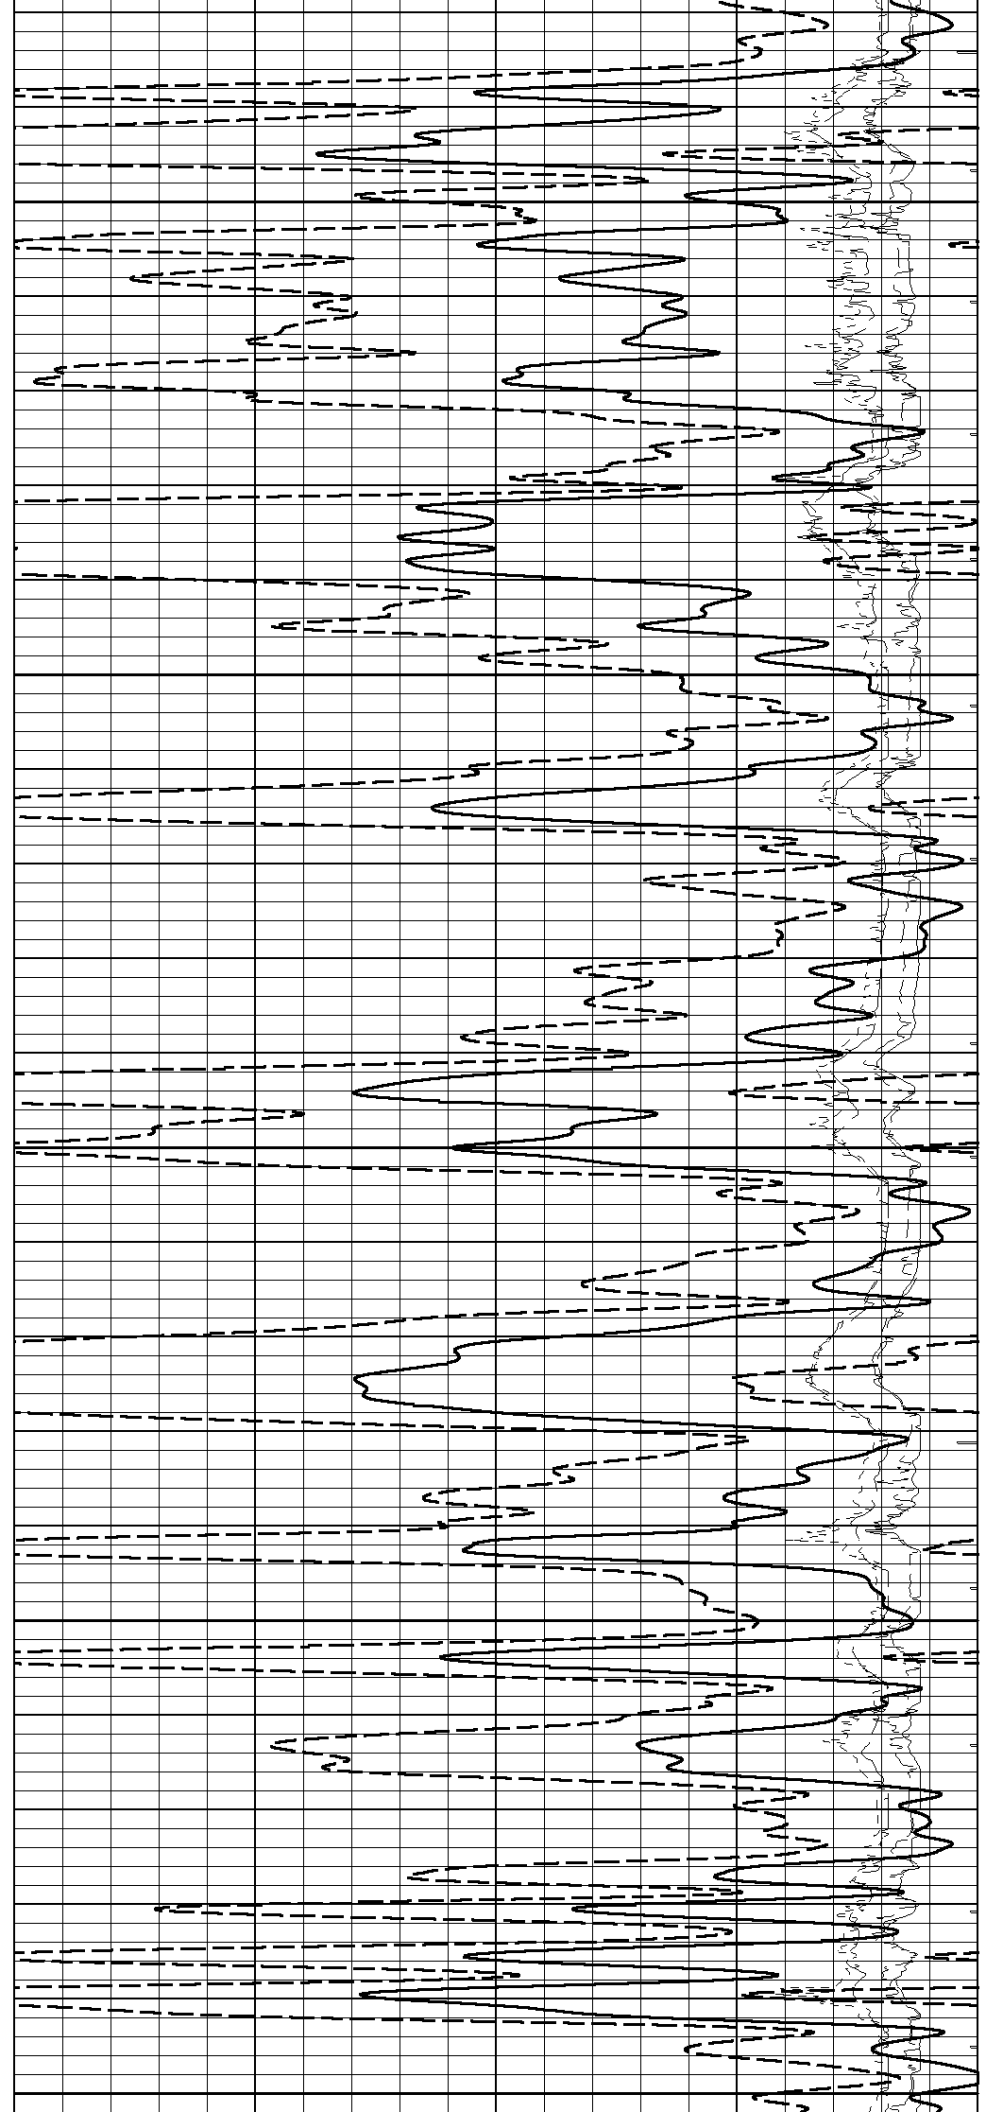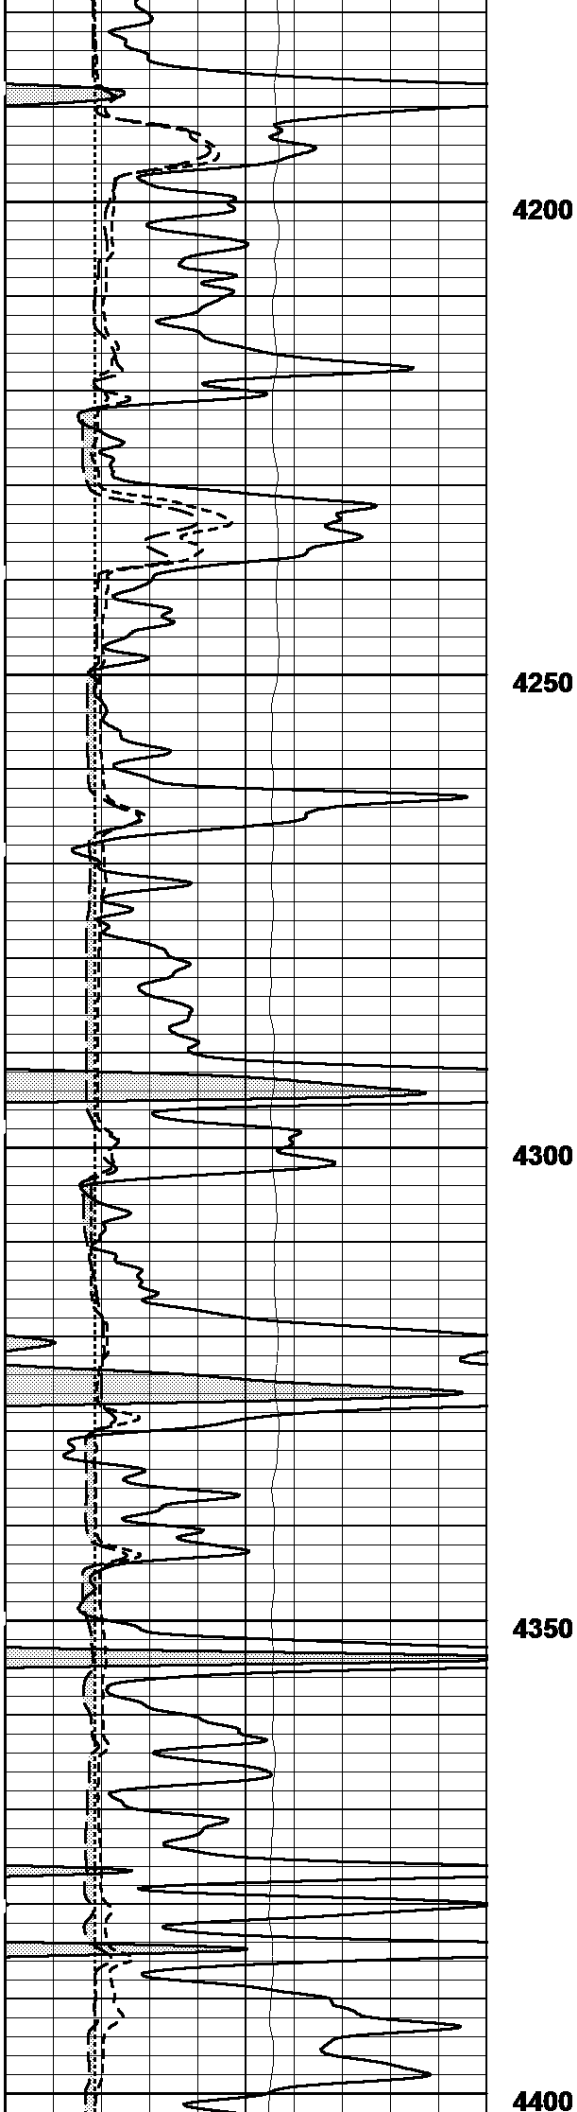

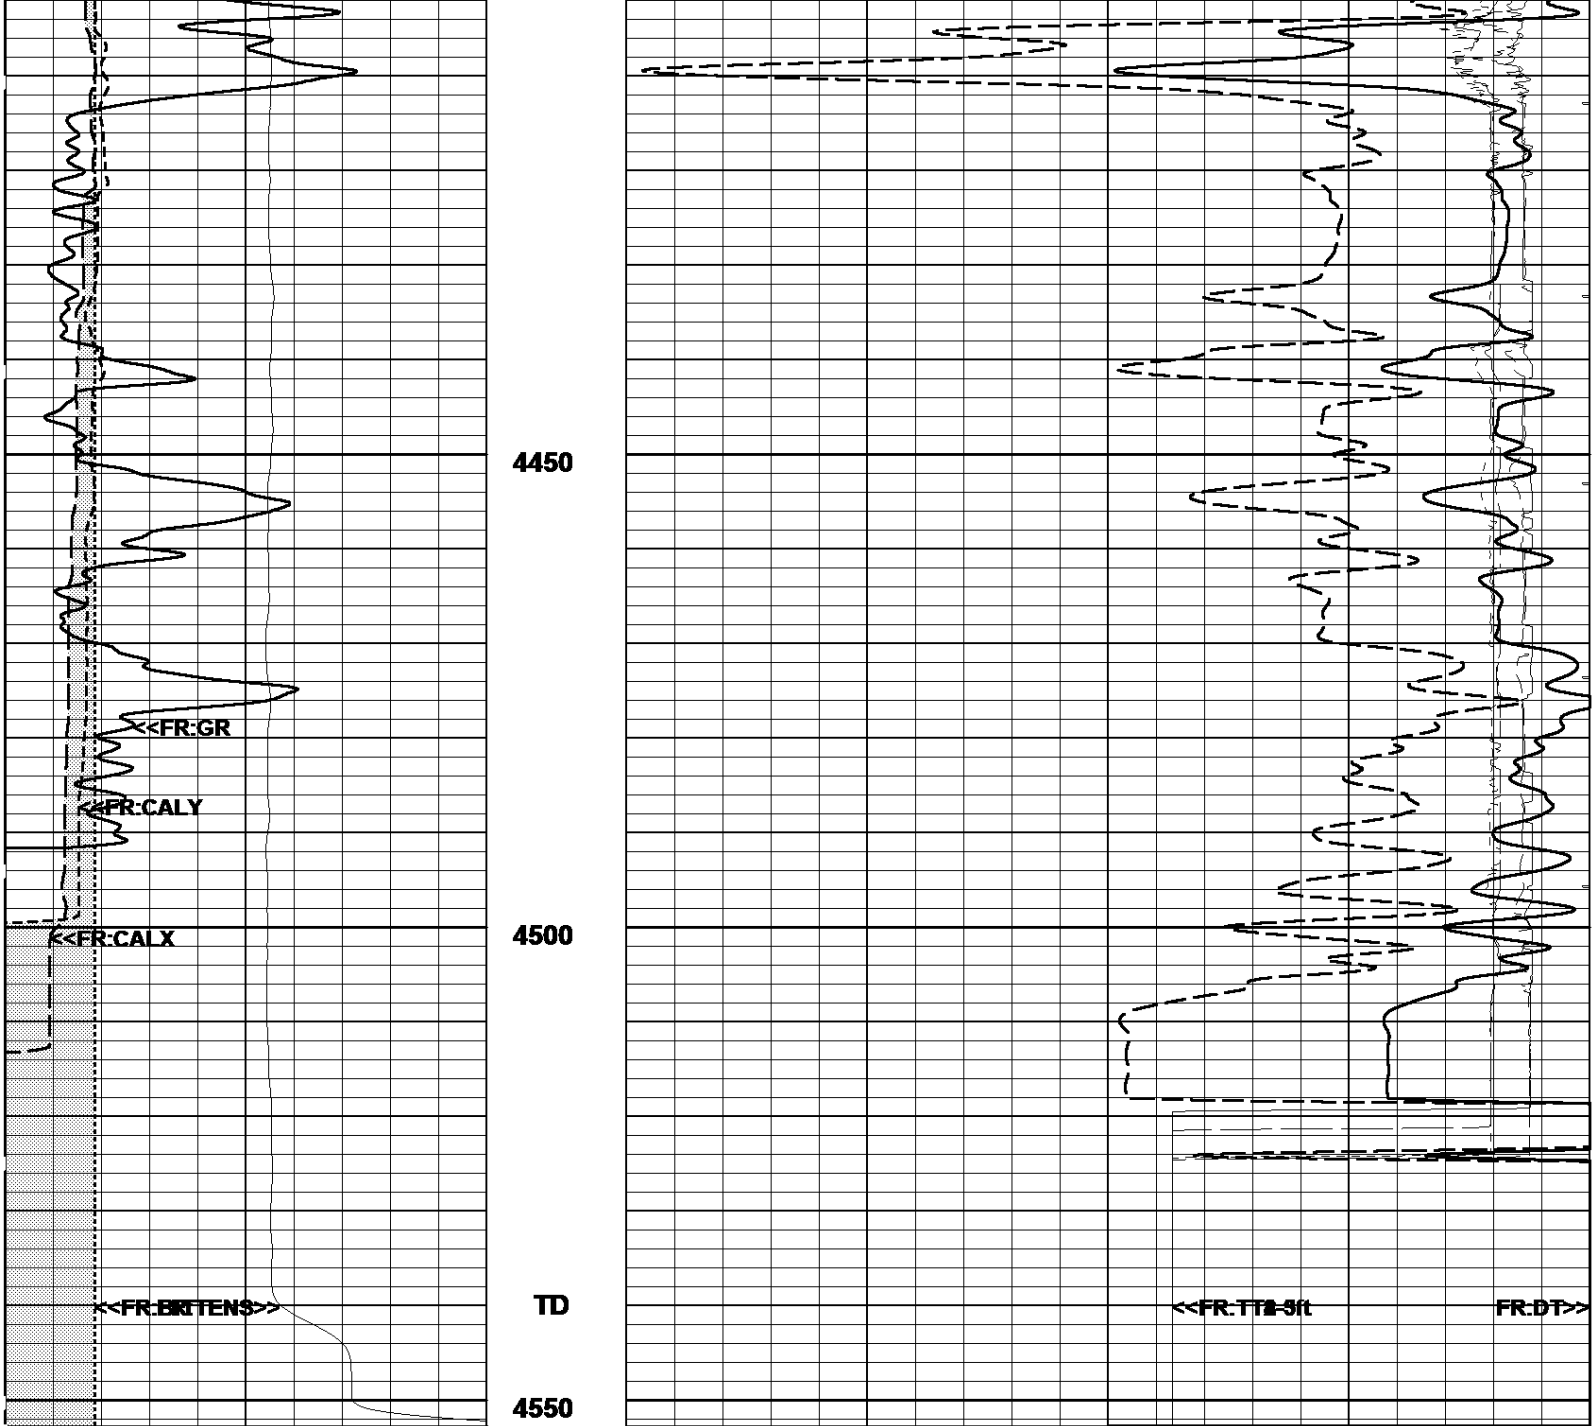

Gamma Ray (GR)			Delta T (DT)		
0.	API	150.	140.	usecs/ft	40.
X-Caliper (CALX)			Sonic Porosity (SPHI)		
6.	in	16.	30.	Percent	-10.
Y-Caliper (CALY)			TT (TT1-3ft)		
6.	in	16.	1500.	usecs	0.
Tension (TENS)			TT (TT2-3ft)		
5000.	Lbs	0.	1500.	usecs	0.
Bit Size (BIT)			TT (TT3-5ft)		
6.	Ref in	16.	1500.	usecs	0.
			TT (TT4-5ft)		
			1500.	usecs	0.

08/07/2015
18:21:25 => End Time


REPEAT PASS - LIMESTONE (5"/100Ft)



Log UP - (VER 11.19)
End Depth=> 3489.90 Feet



Bit Size (BIT)		
6.	Ref in	16.
Tension (TENS)		
5000.	Lbs	0.
Y-Caliper (CALY)		
6.	in	16.
X-Caliper (CALX)		
6.	in	16.
Gamma Ray (GR)		
0.	API	150.



TT (TT4-5ft)		
1500.	usecs	0.
TT (TT3-5ft)		
1500.	usecs	0.
TT (TT2-3ft)		
1500.	usecs	0.
TT (TT1-3ft)		
1500.	usecs	0.


Sonic-Porosity (SPHI)		
30.	Percent	-10.
Delta T (DT)		
140.	usecs/ft	40.

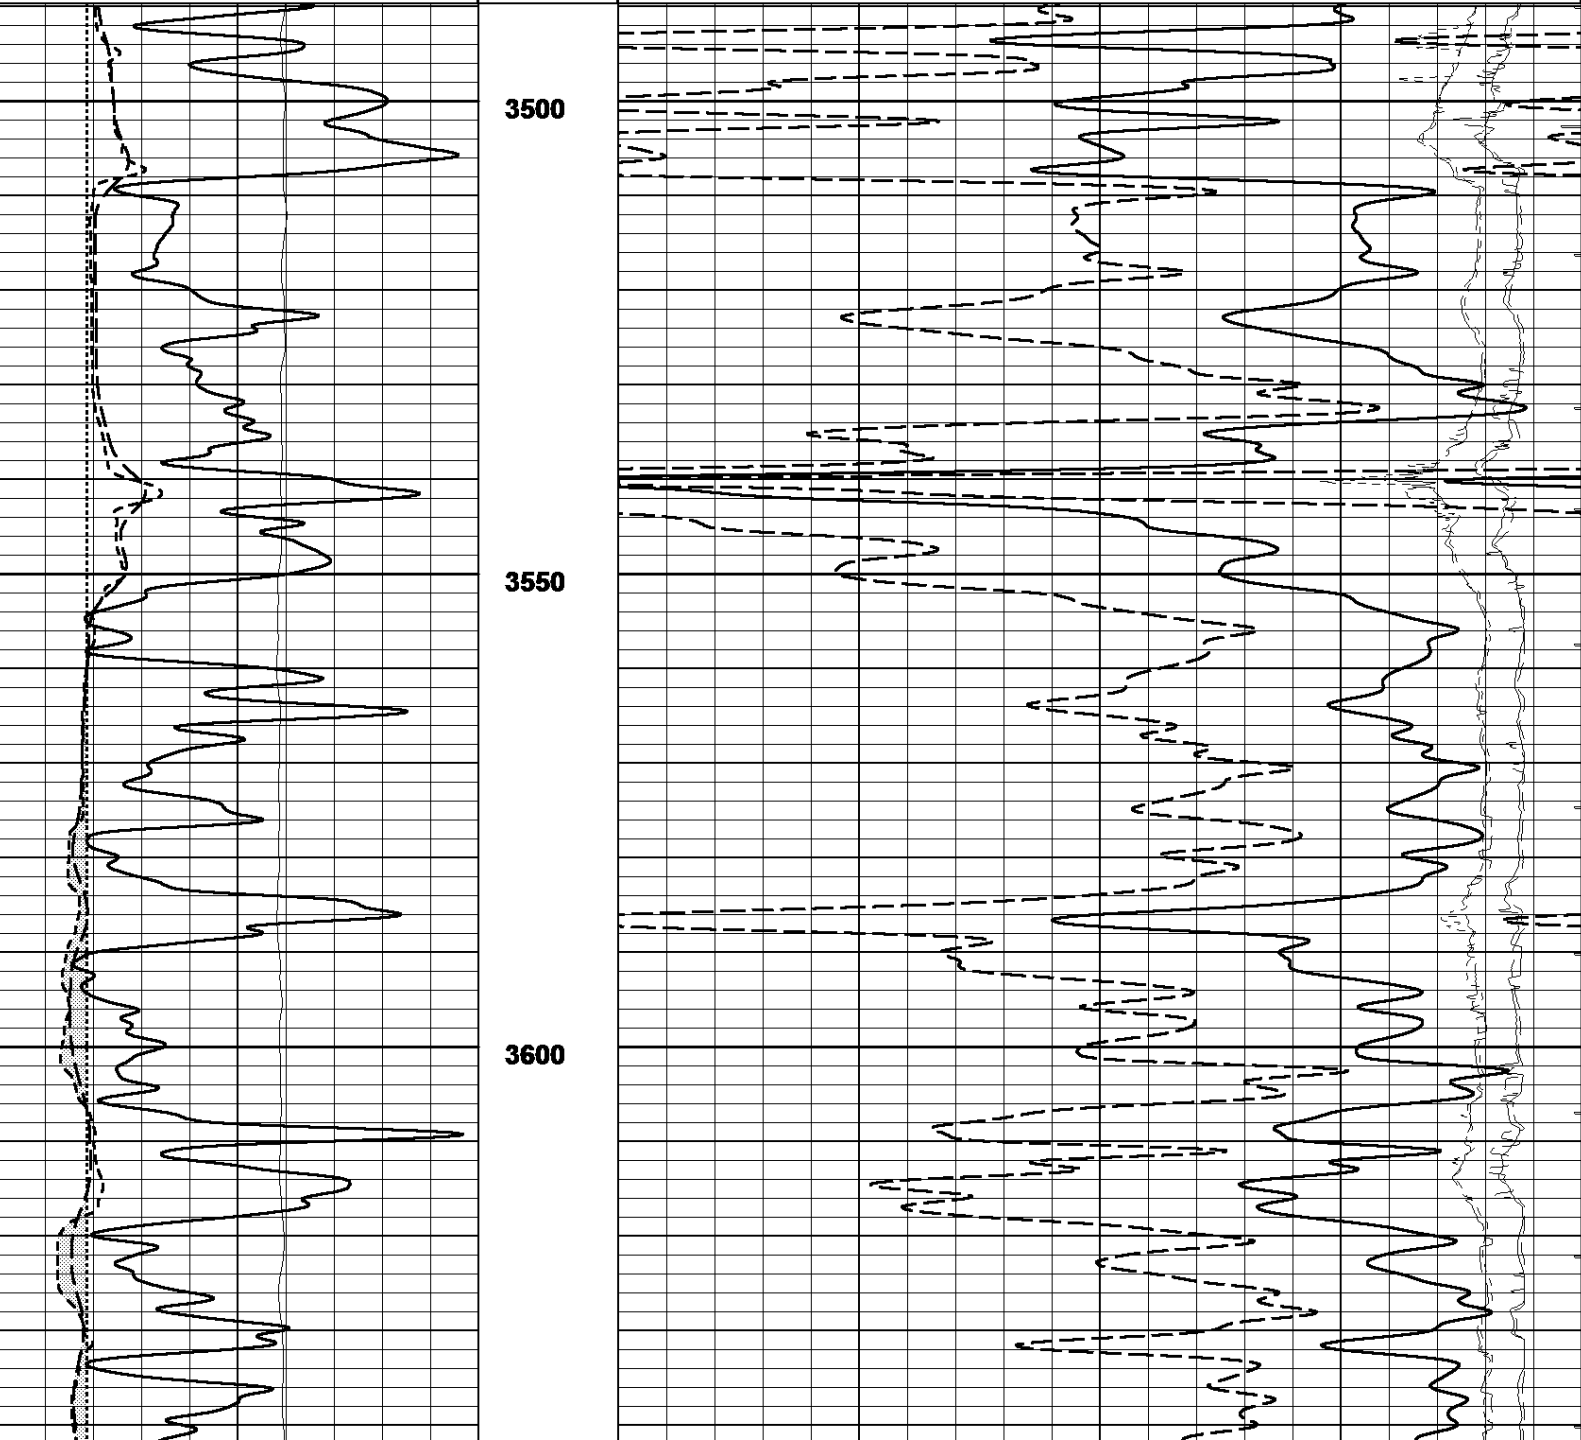

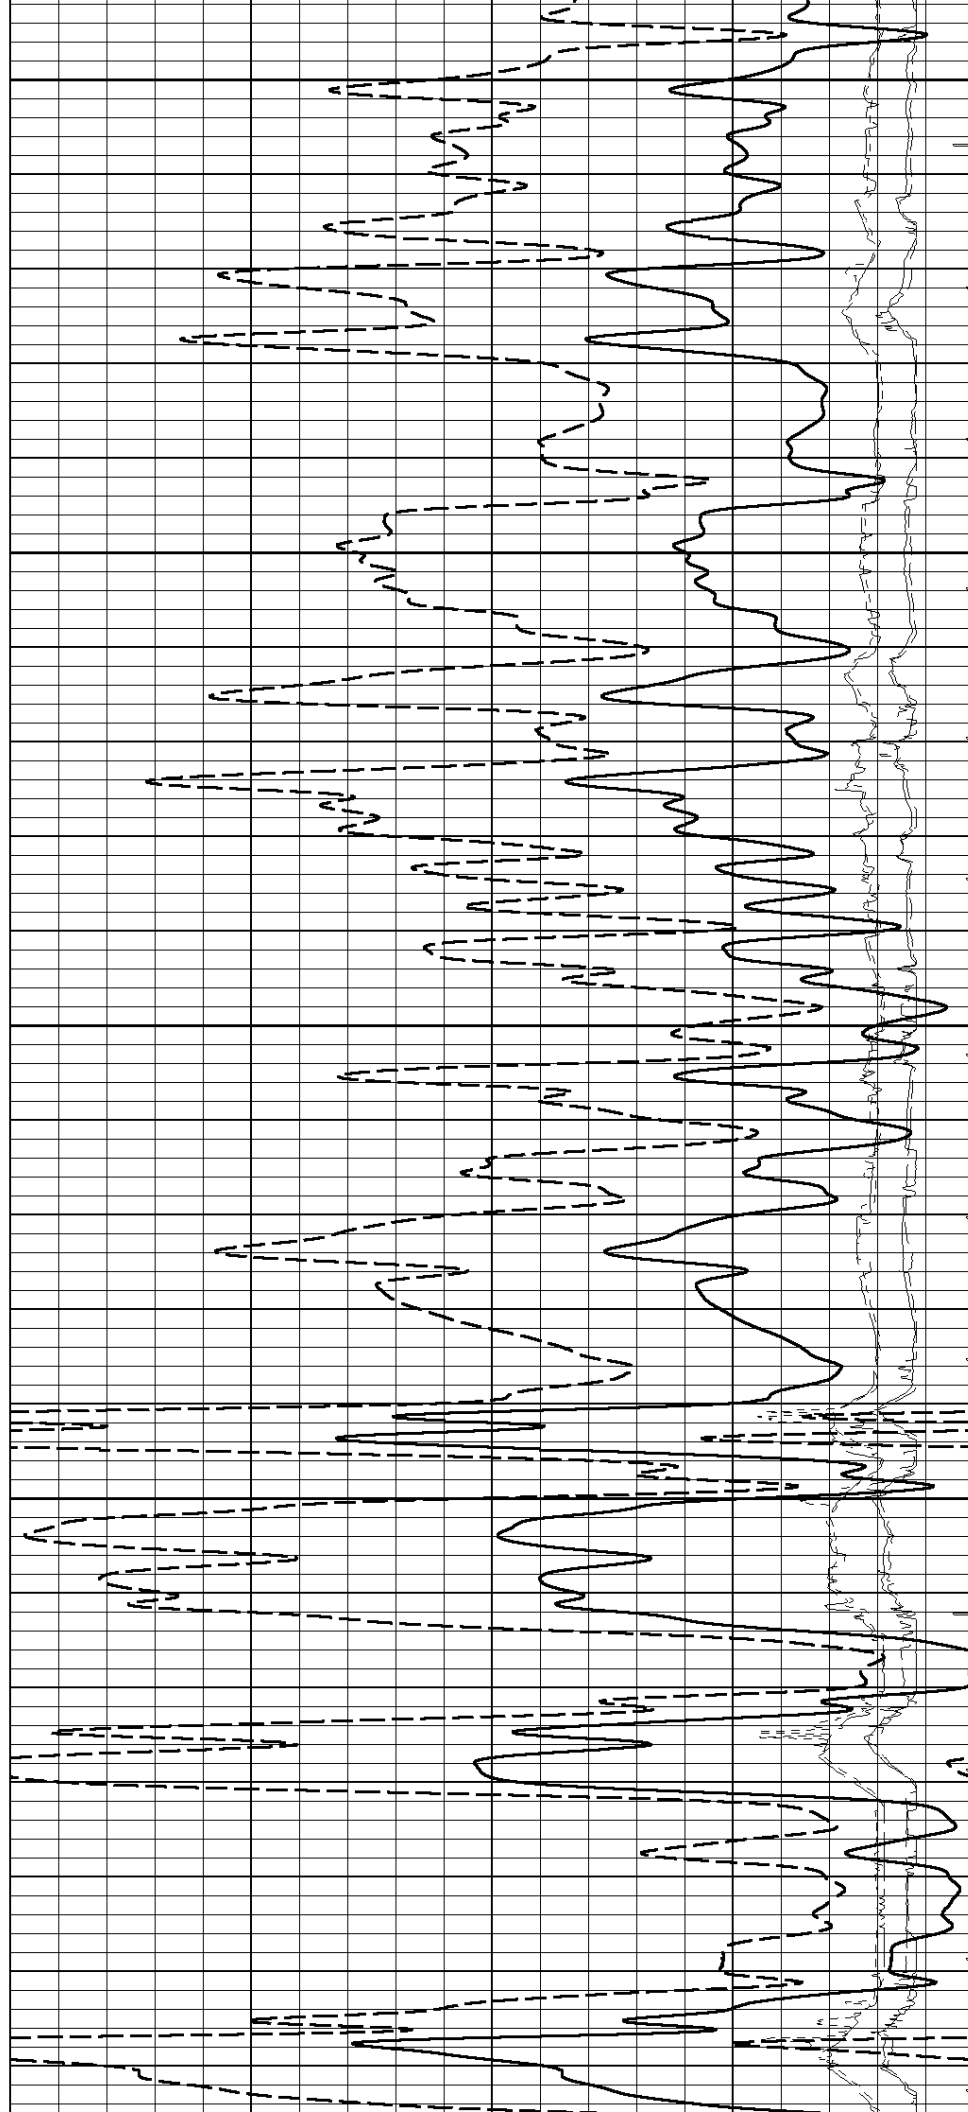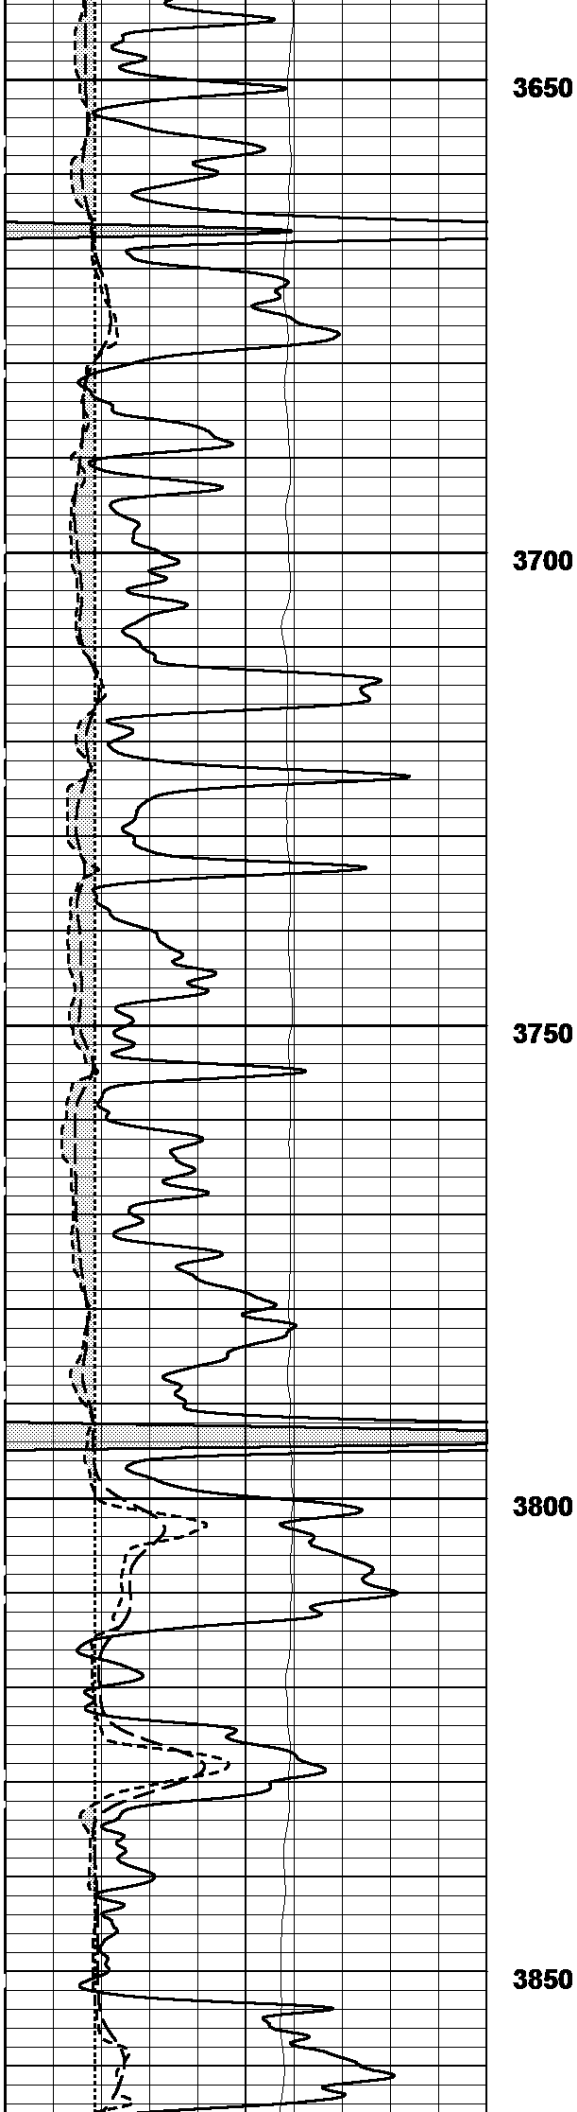

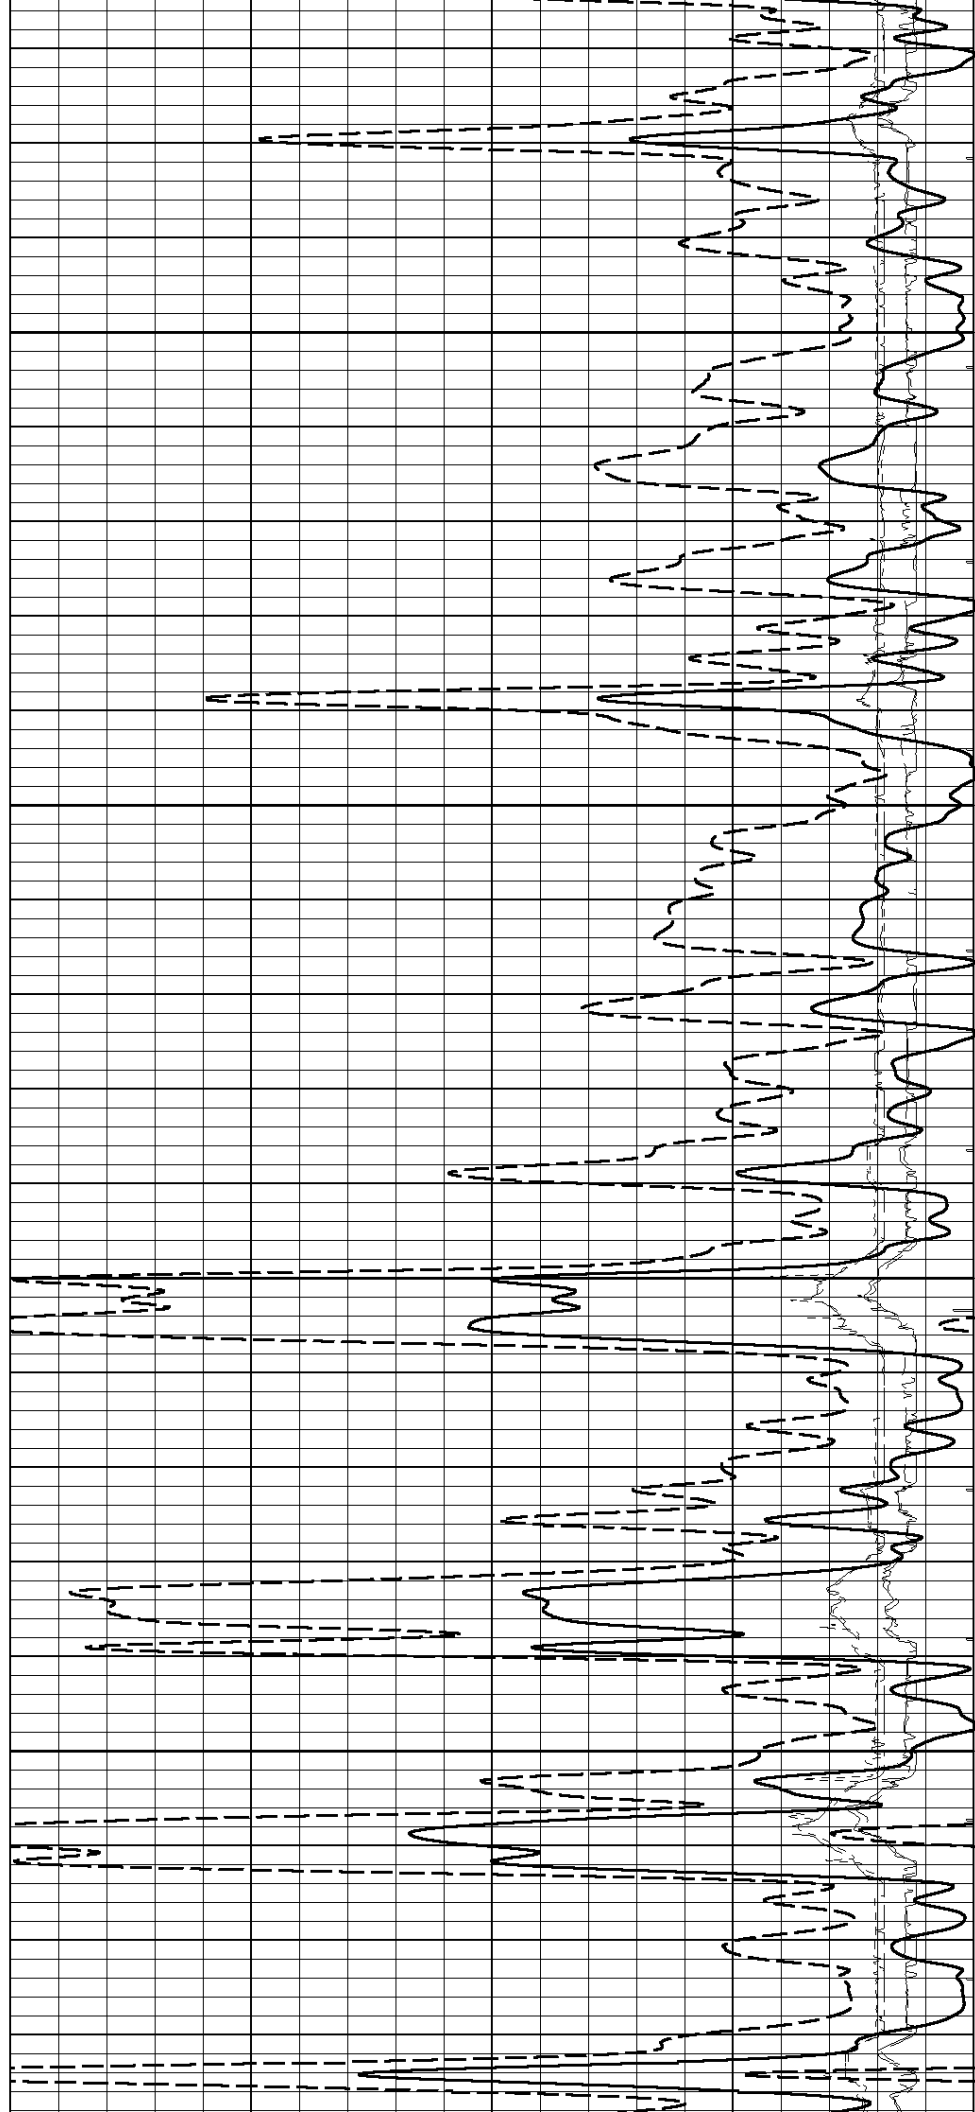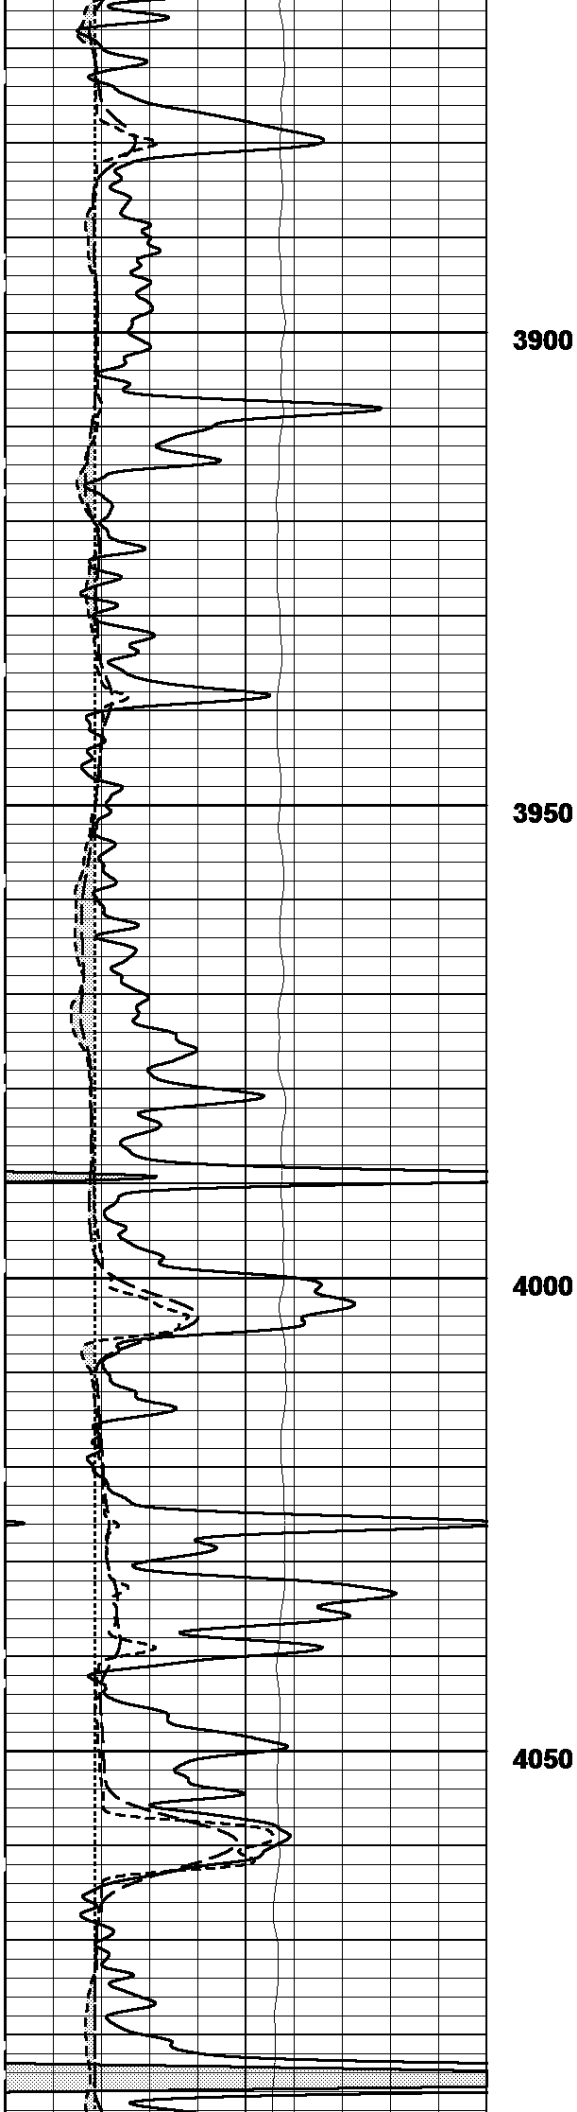

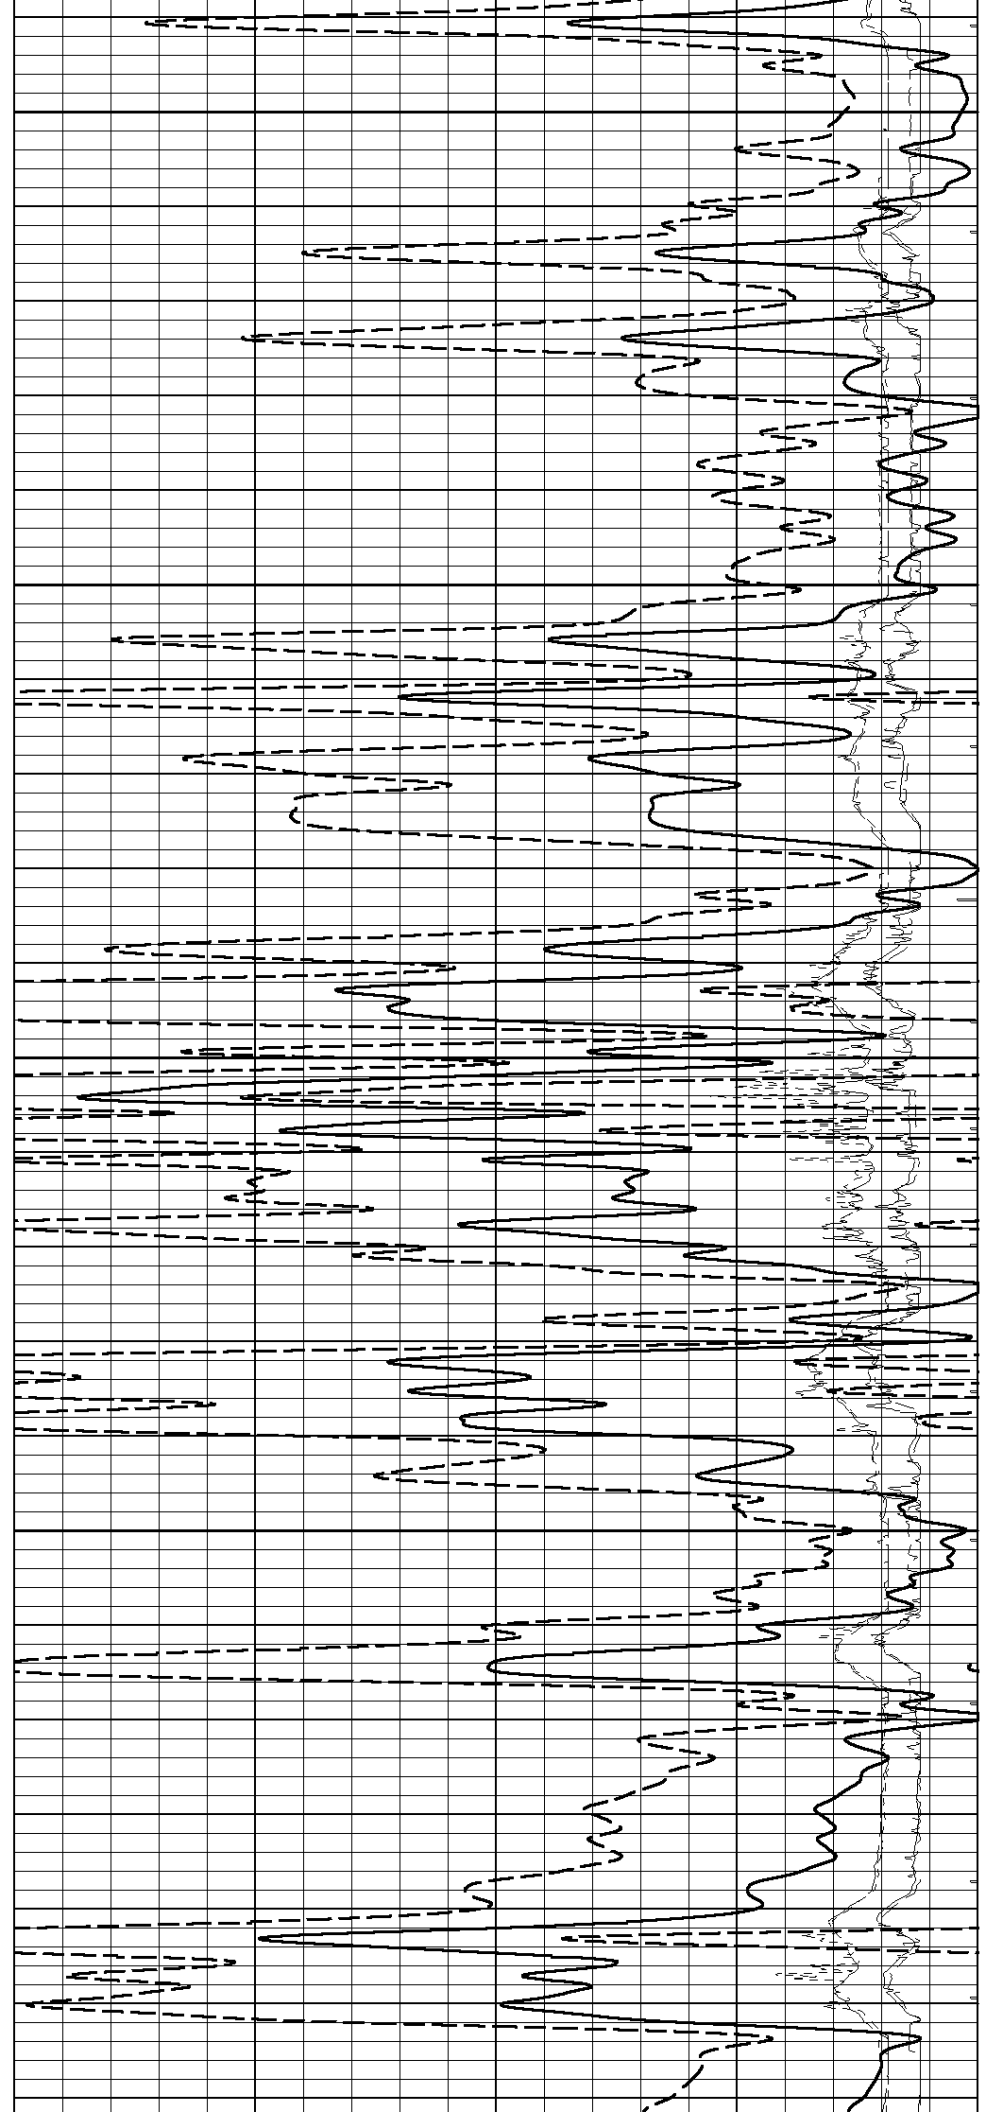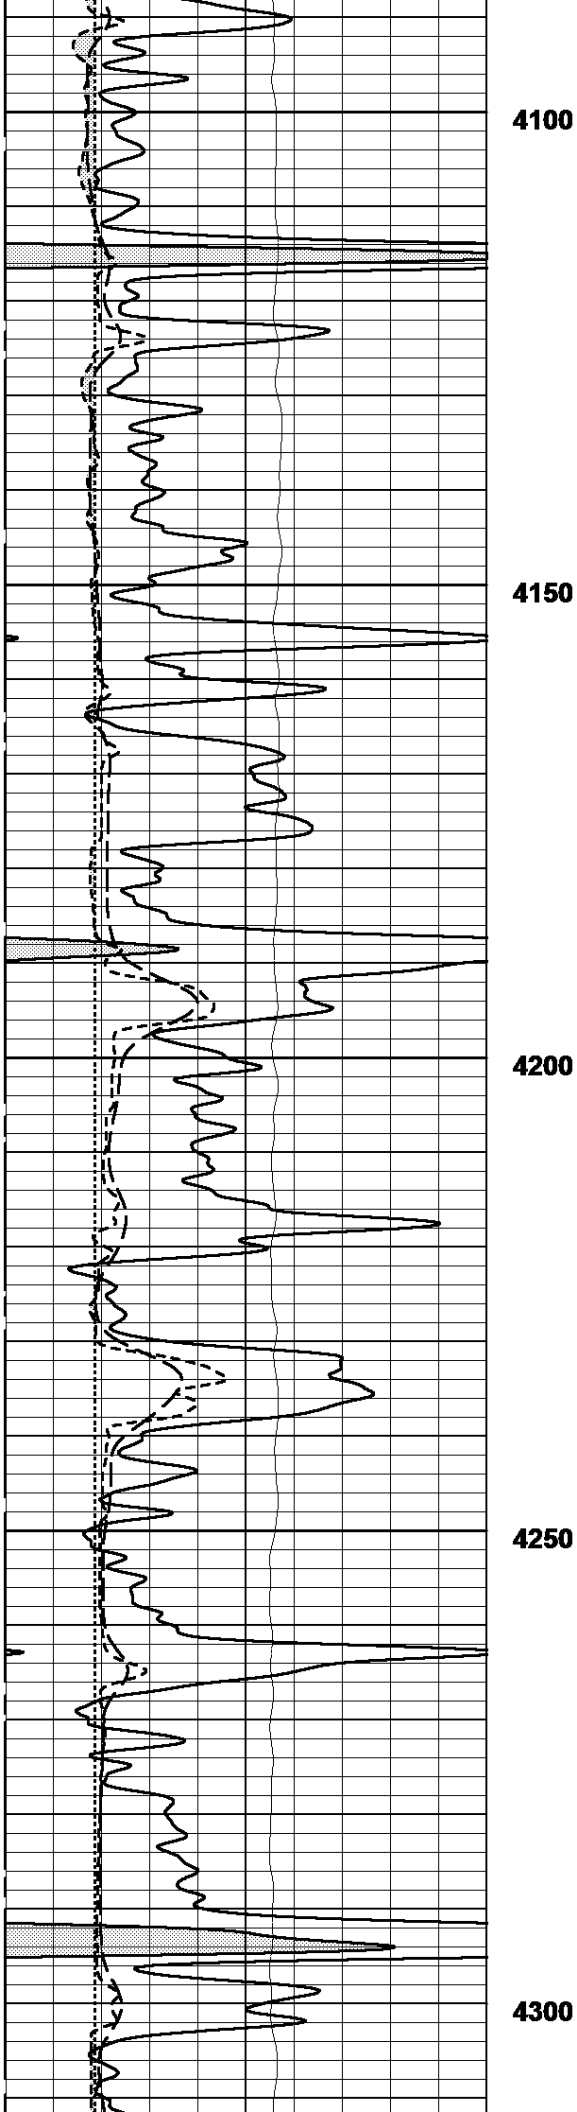

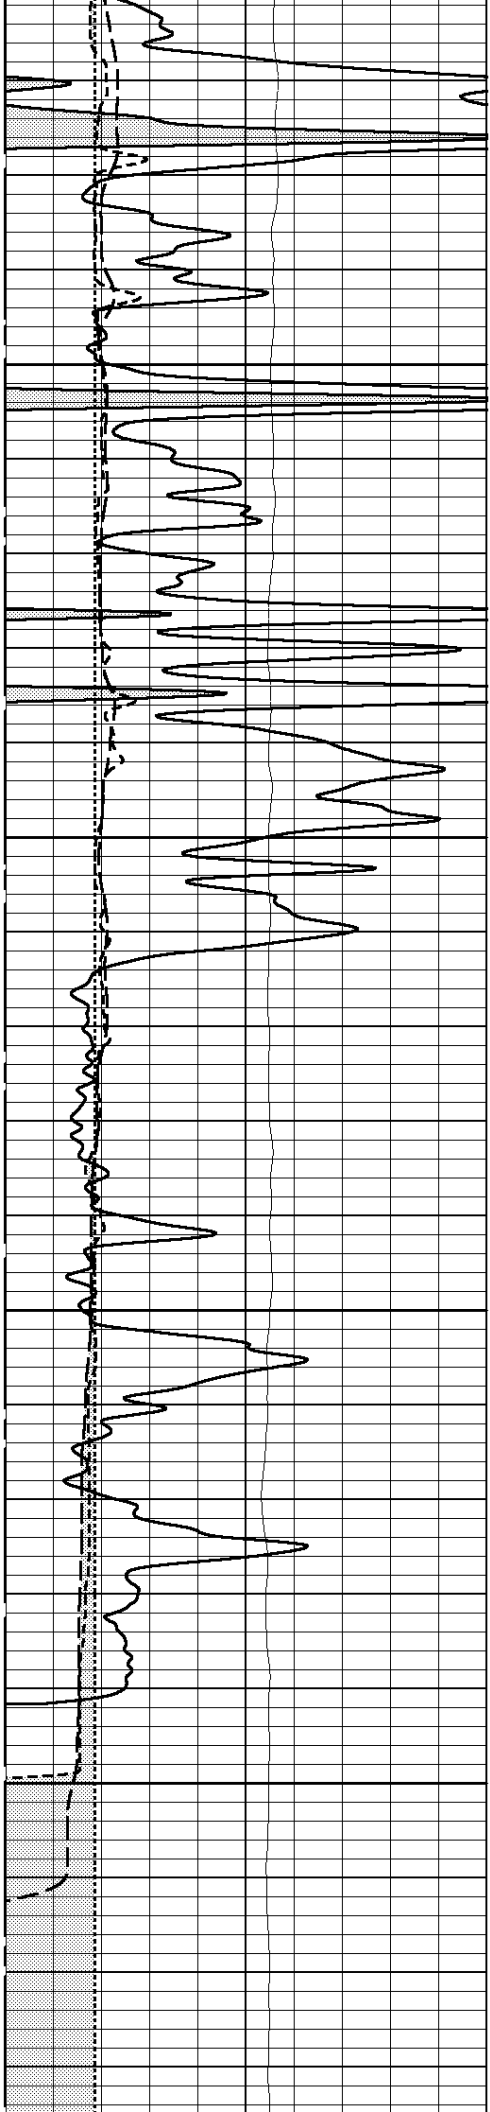




4350



4400


4450

4500

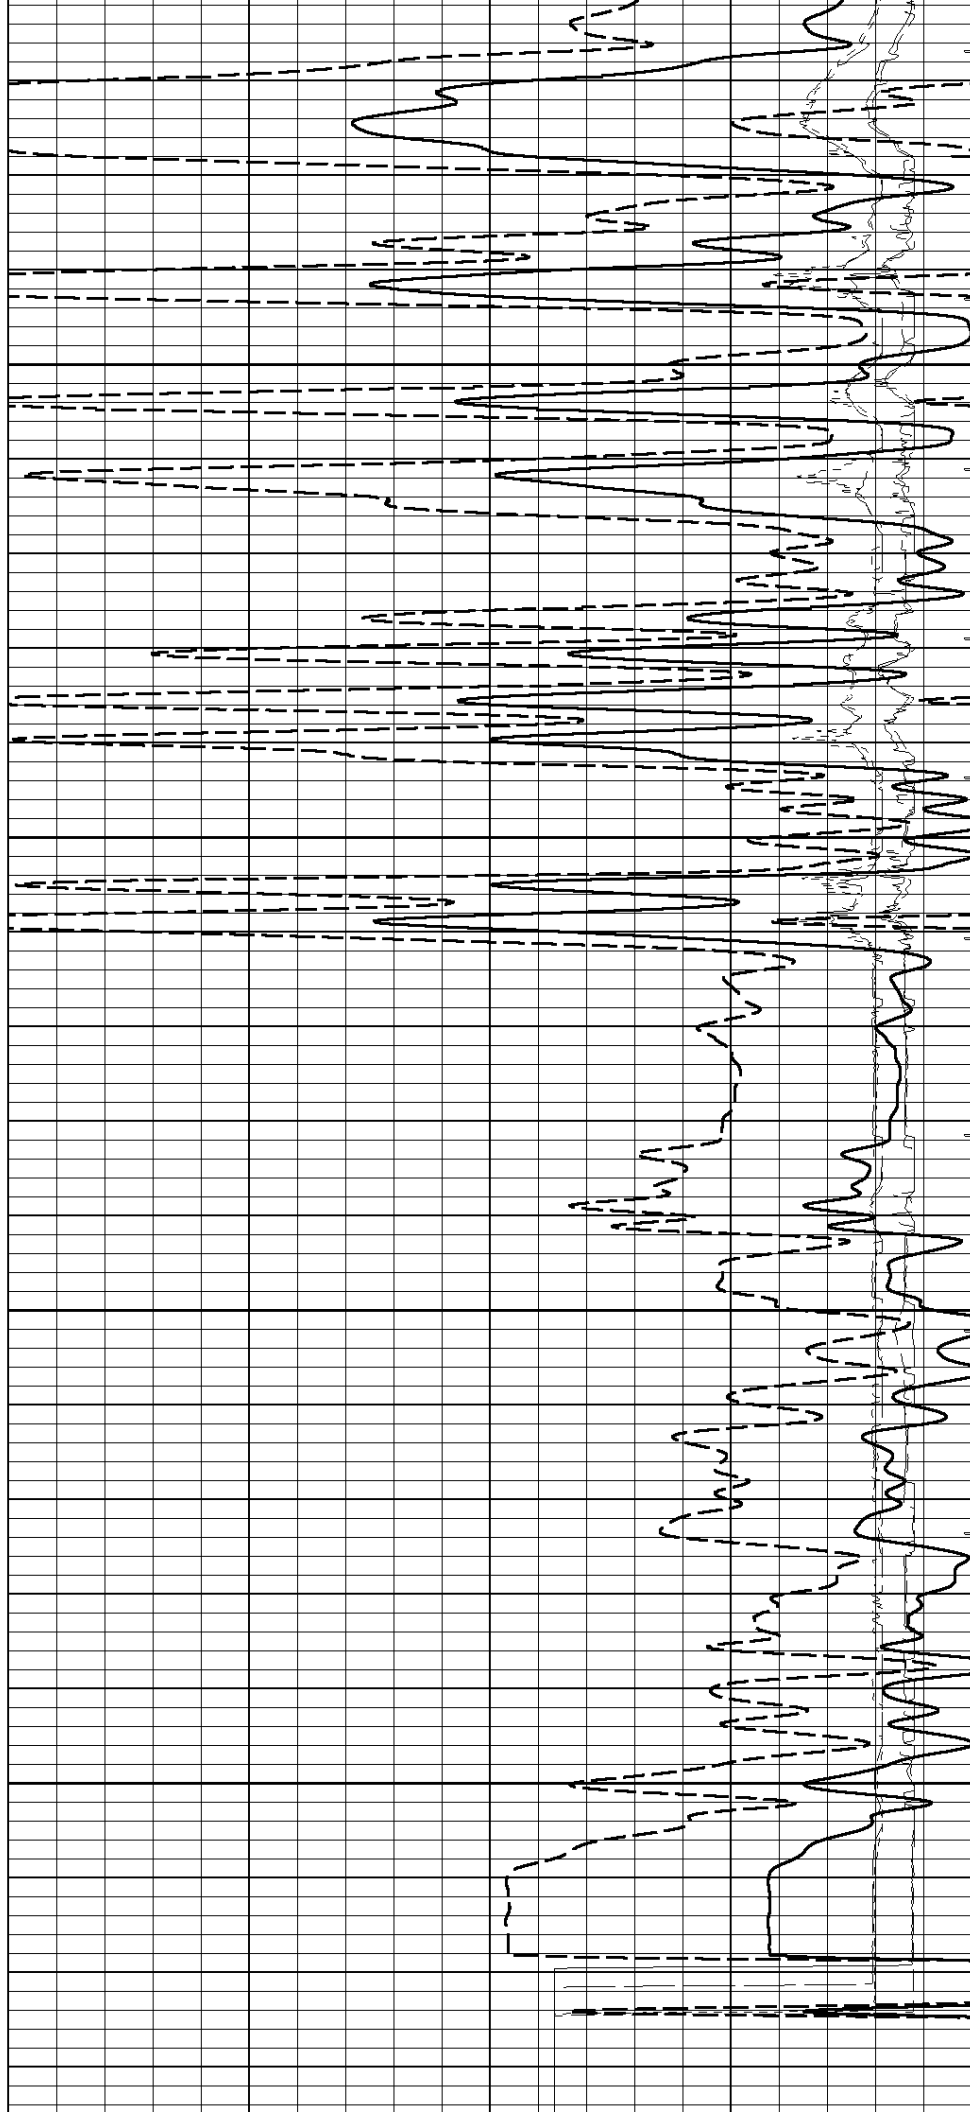

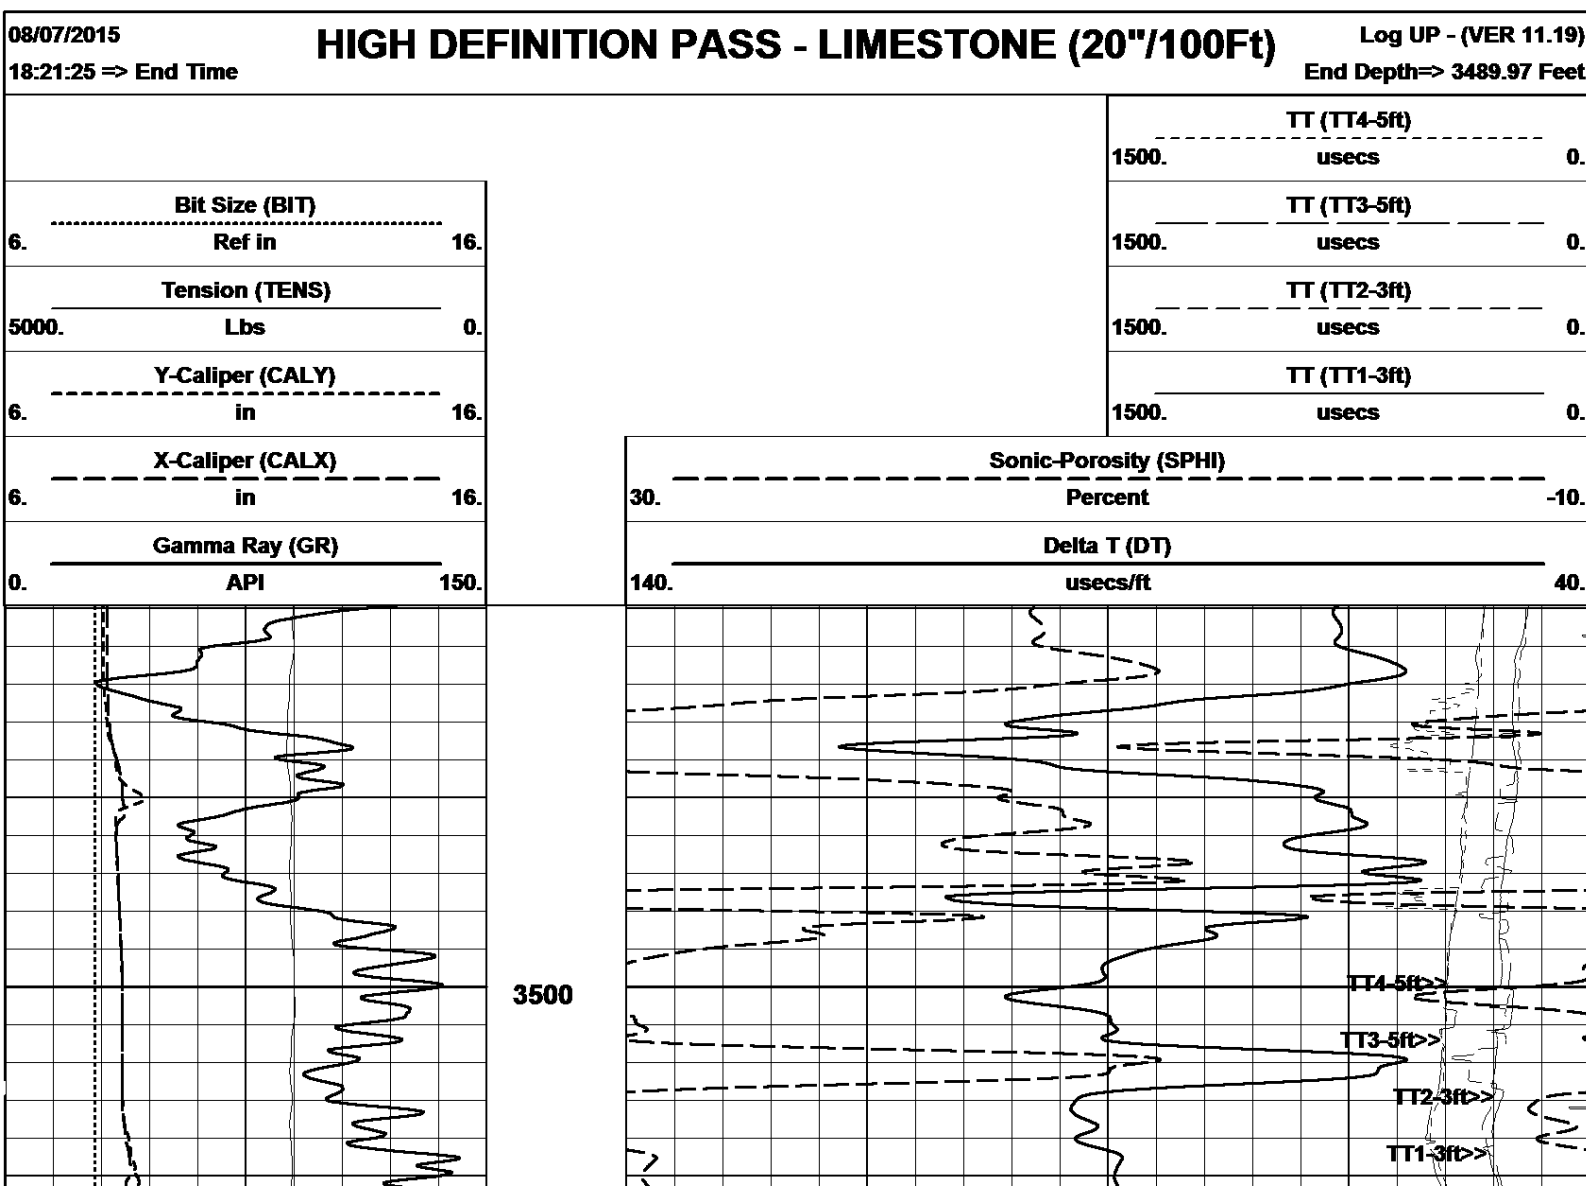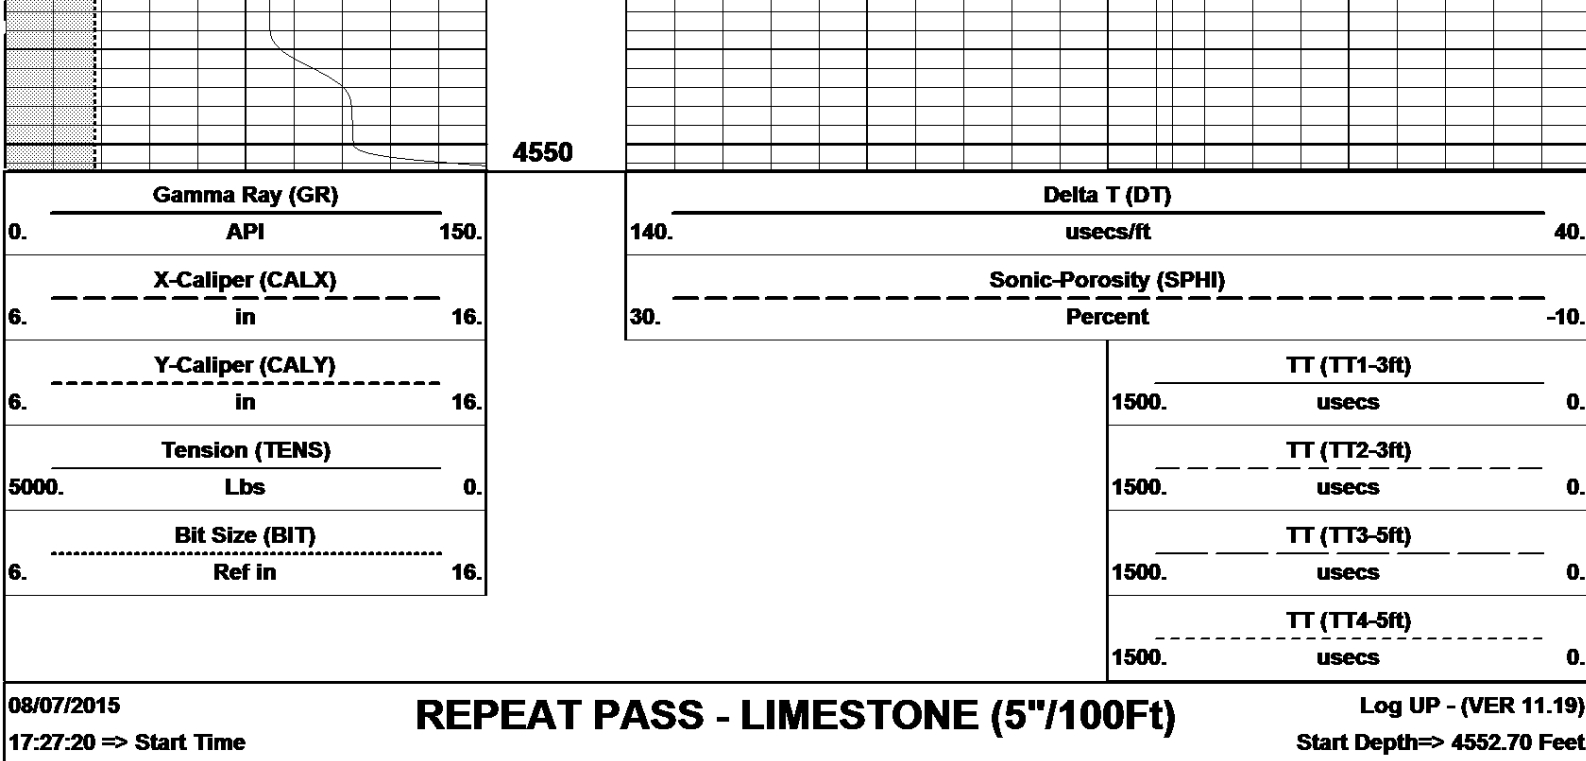


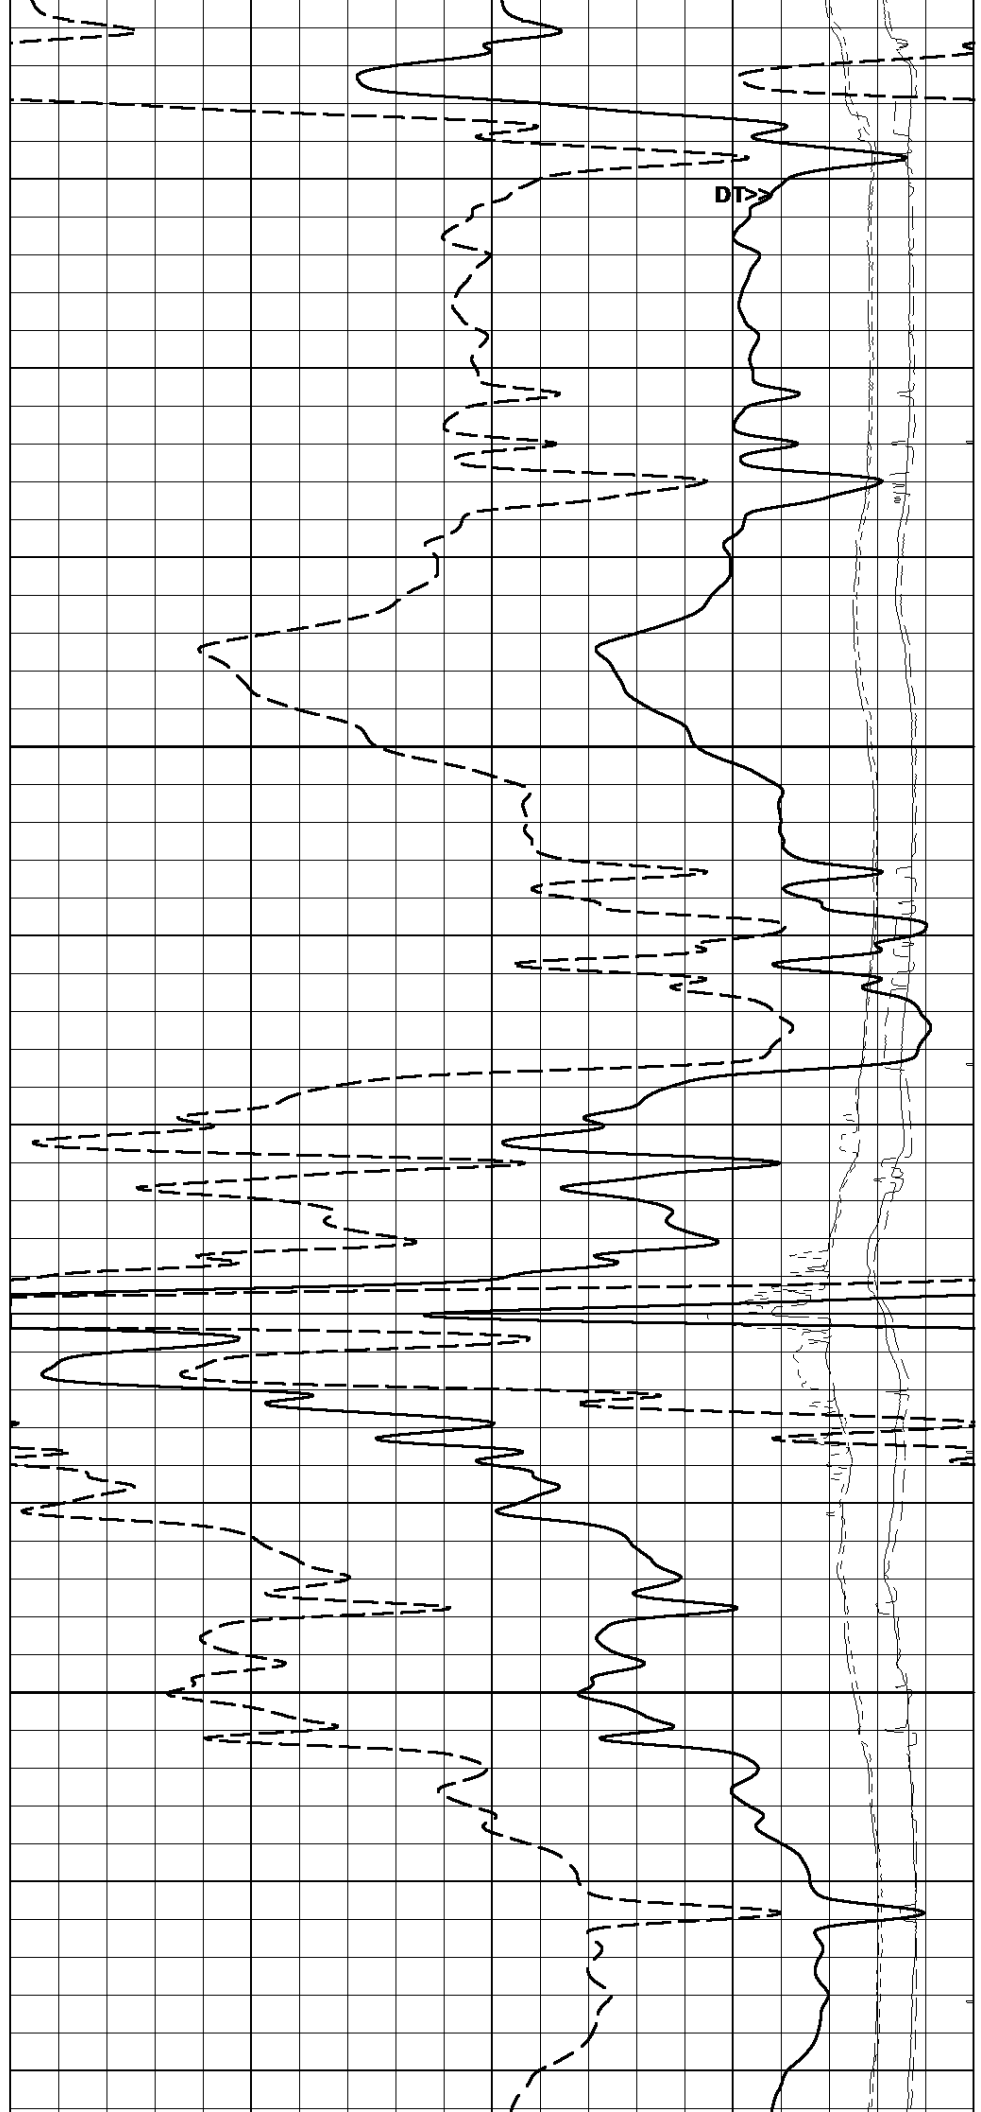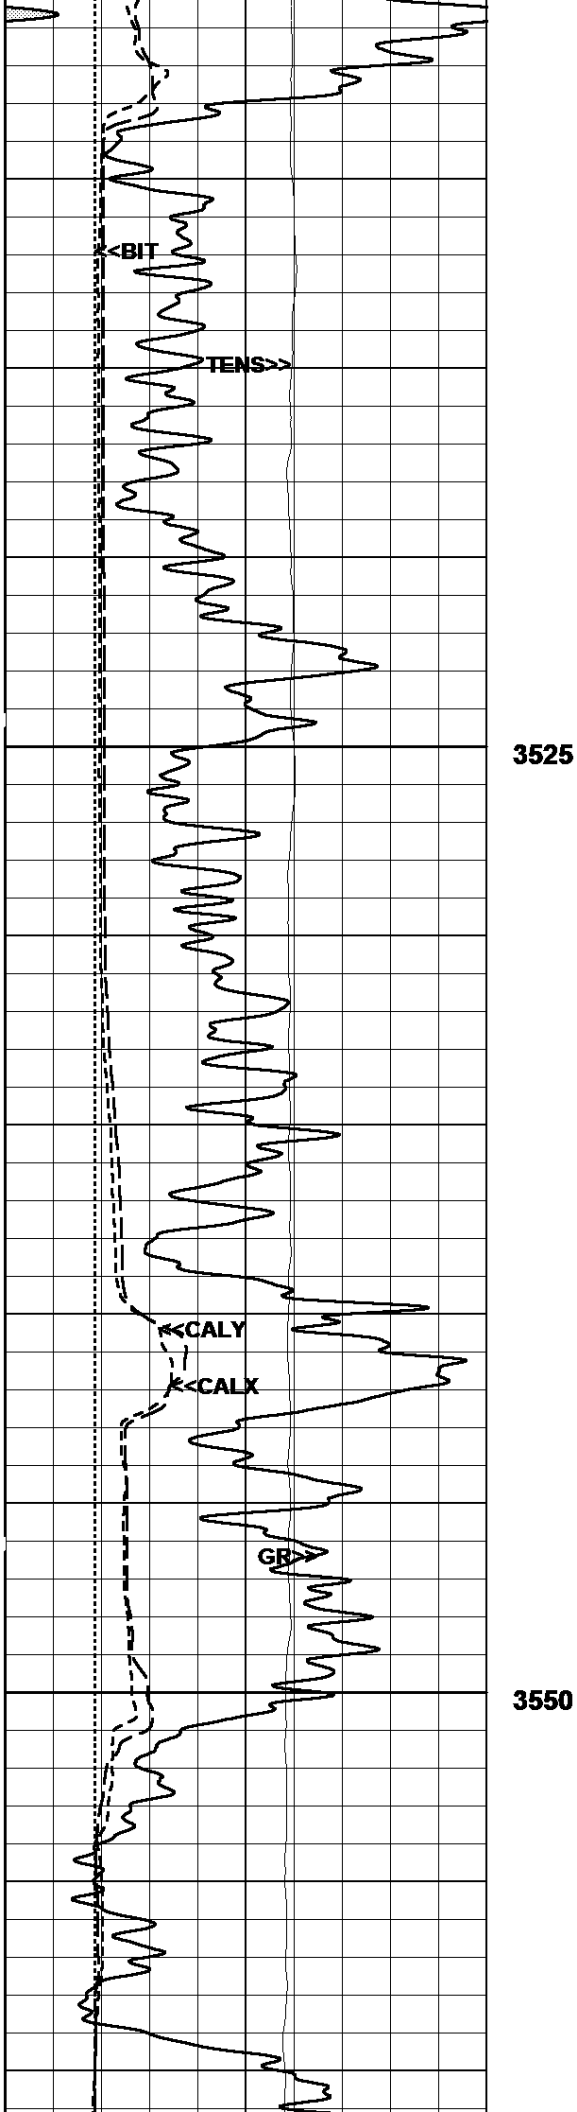


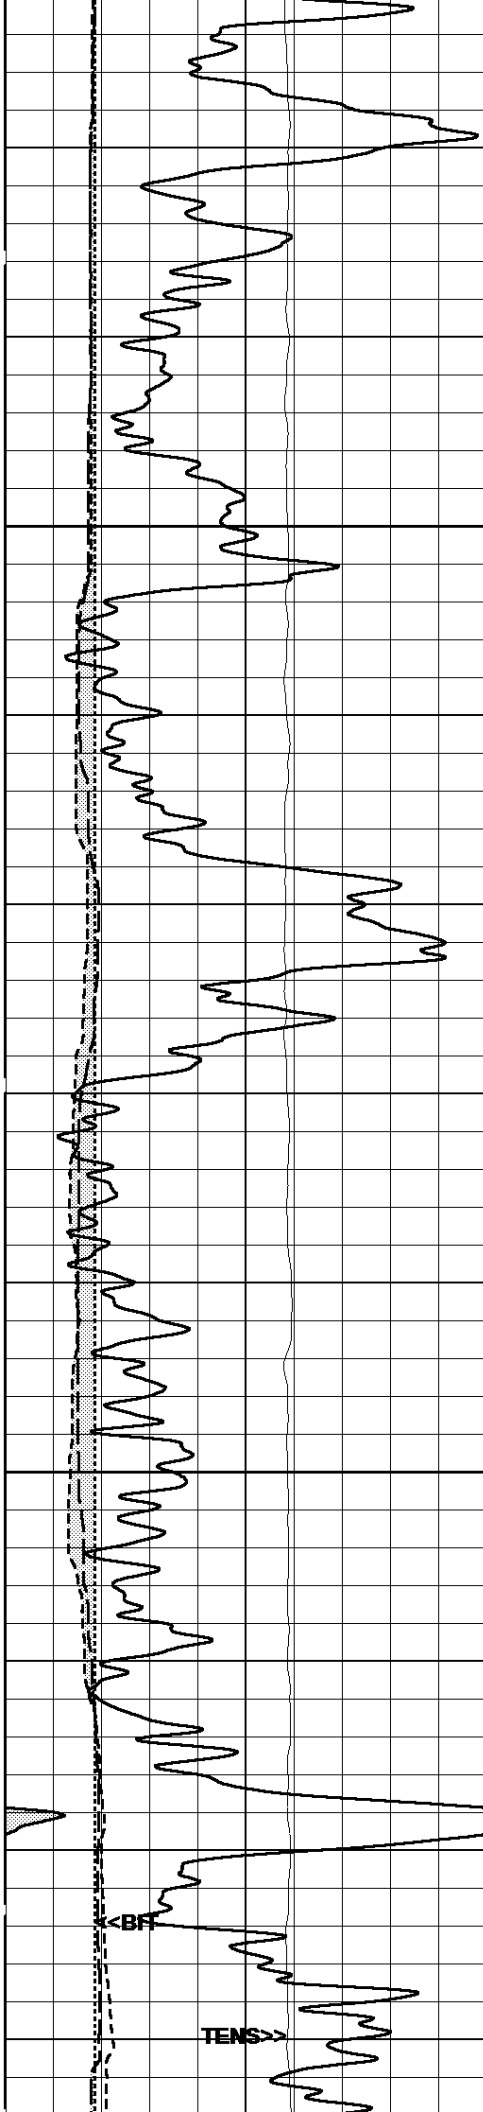

3575


3600

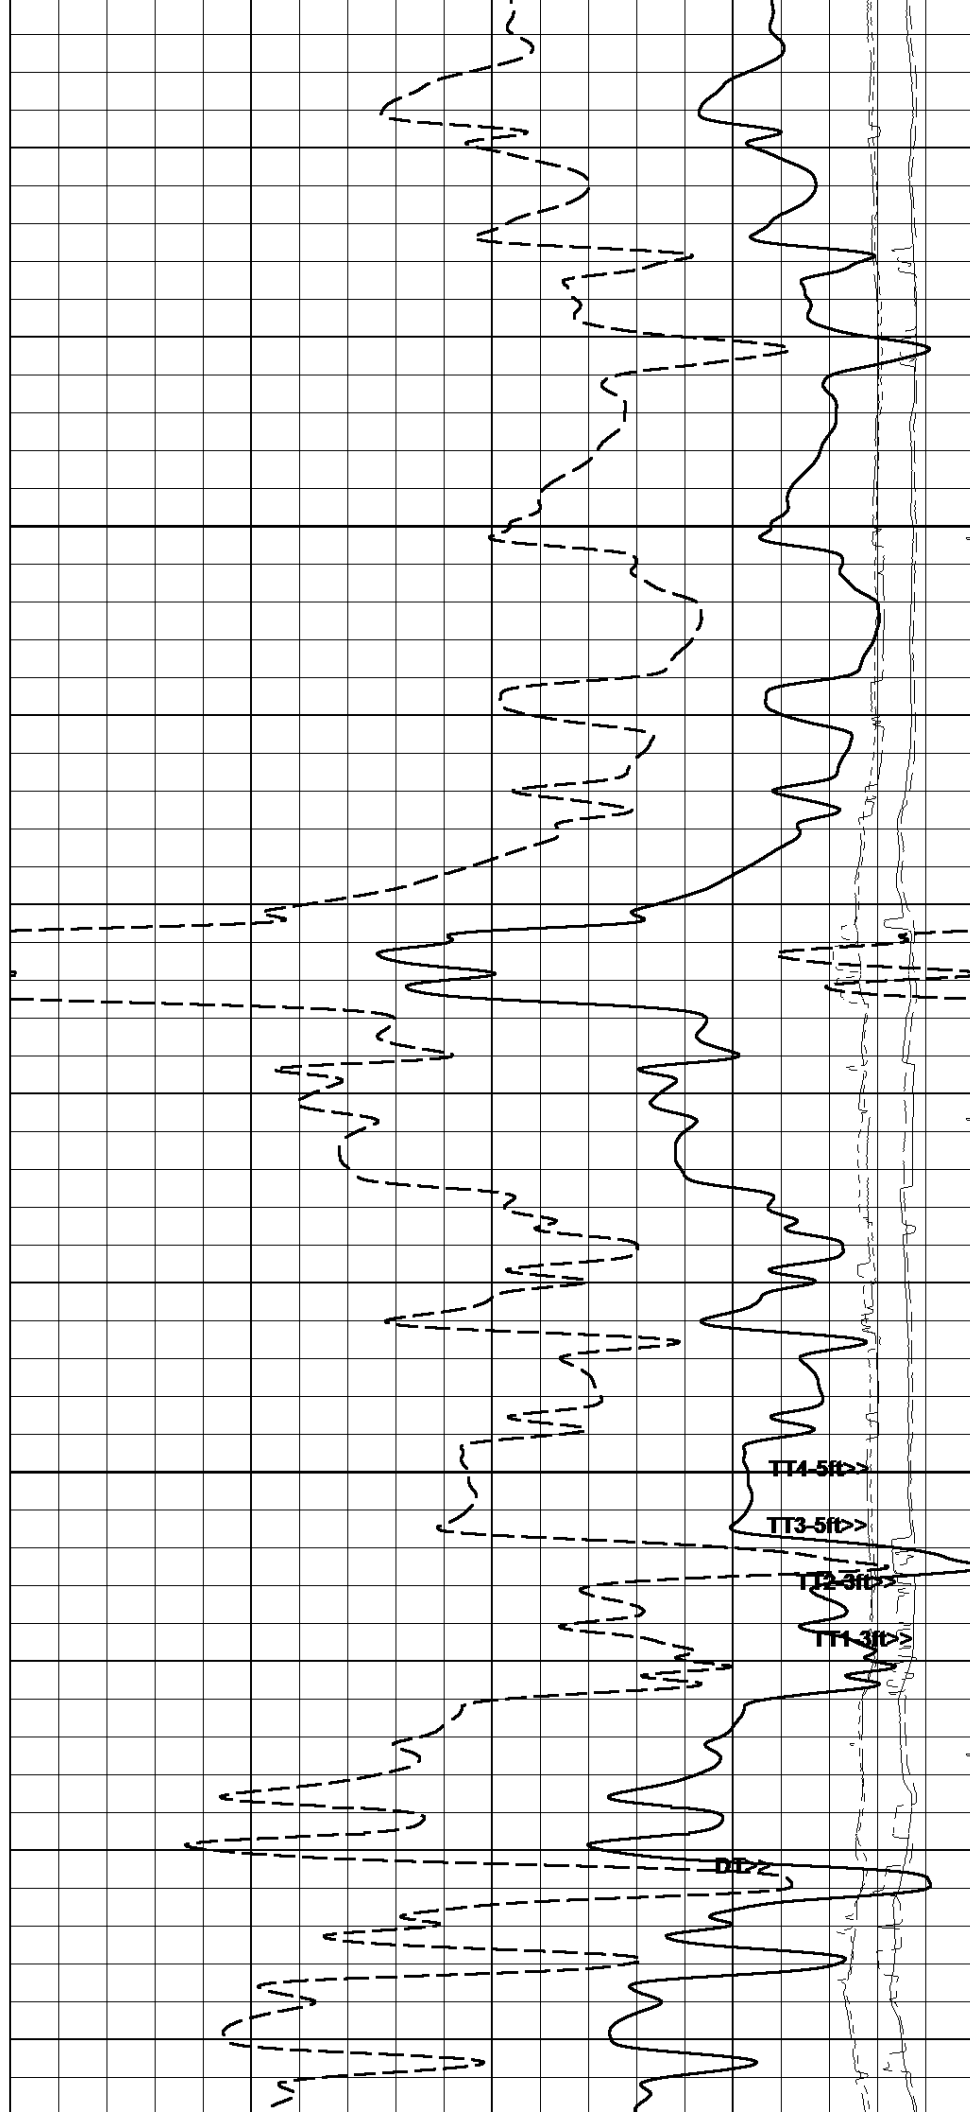


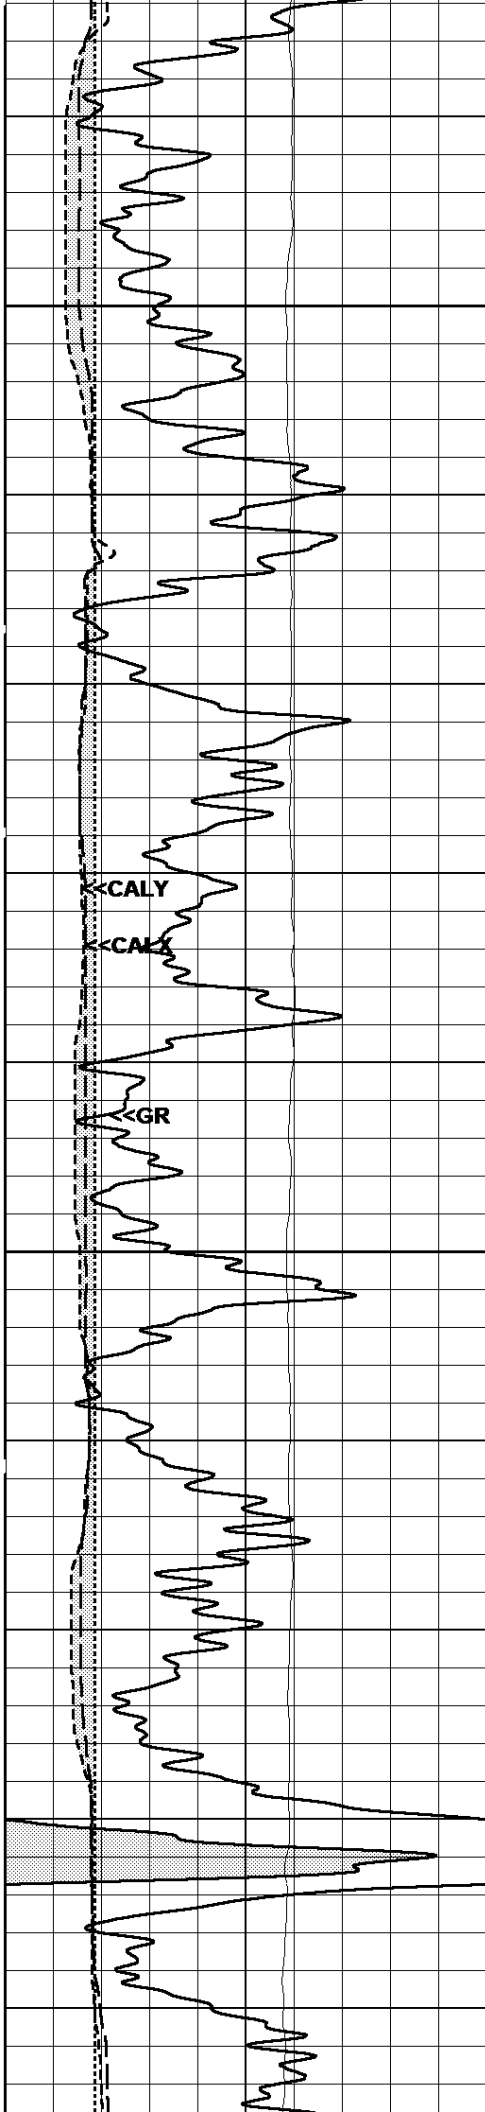

3625

3650

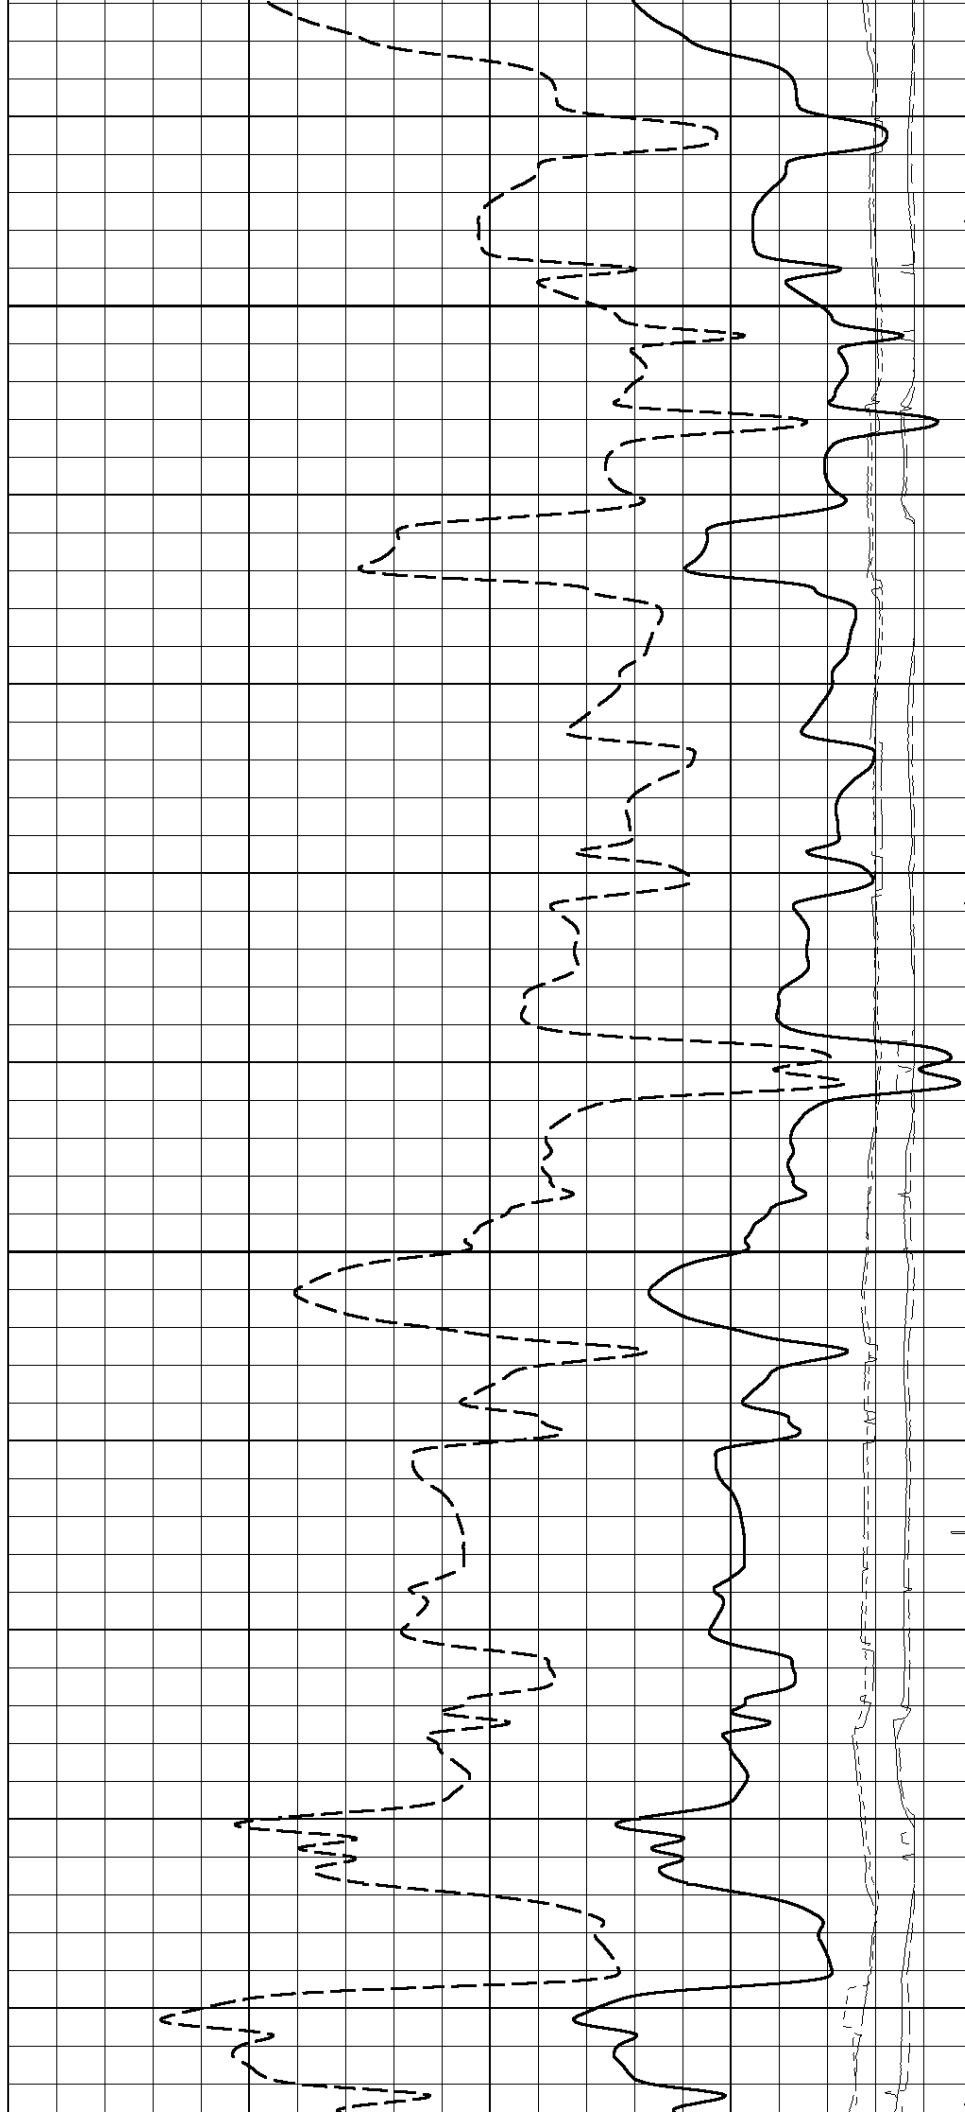


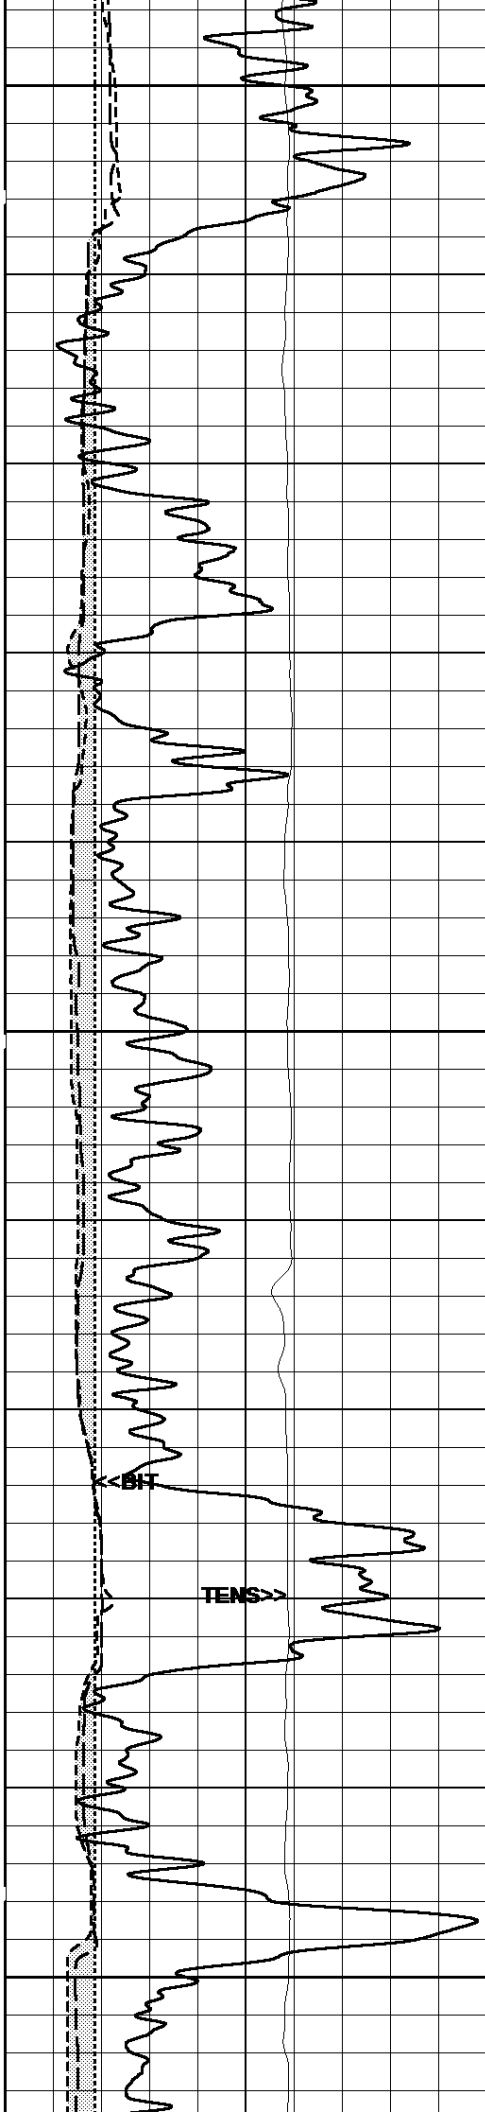


3675

3700


3725

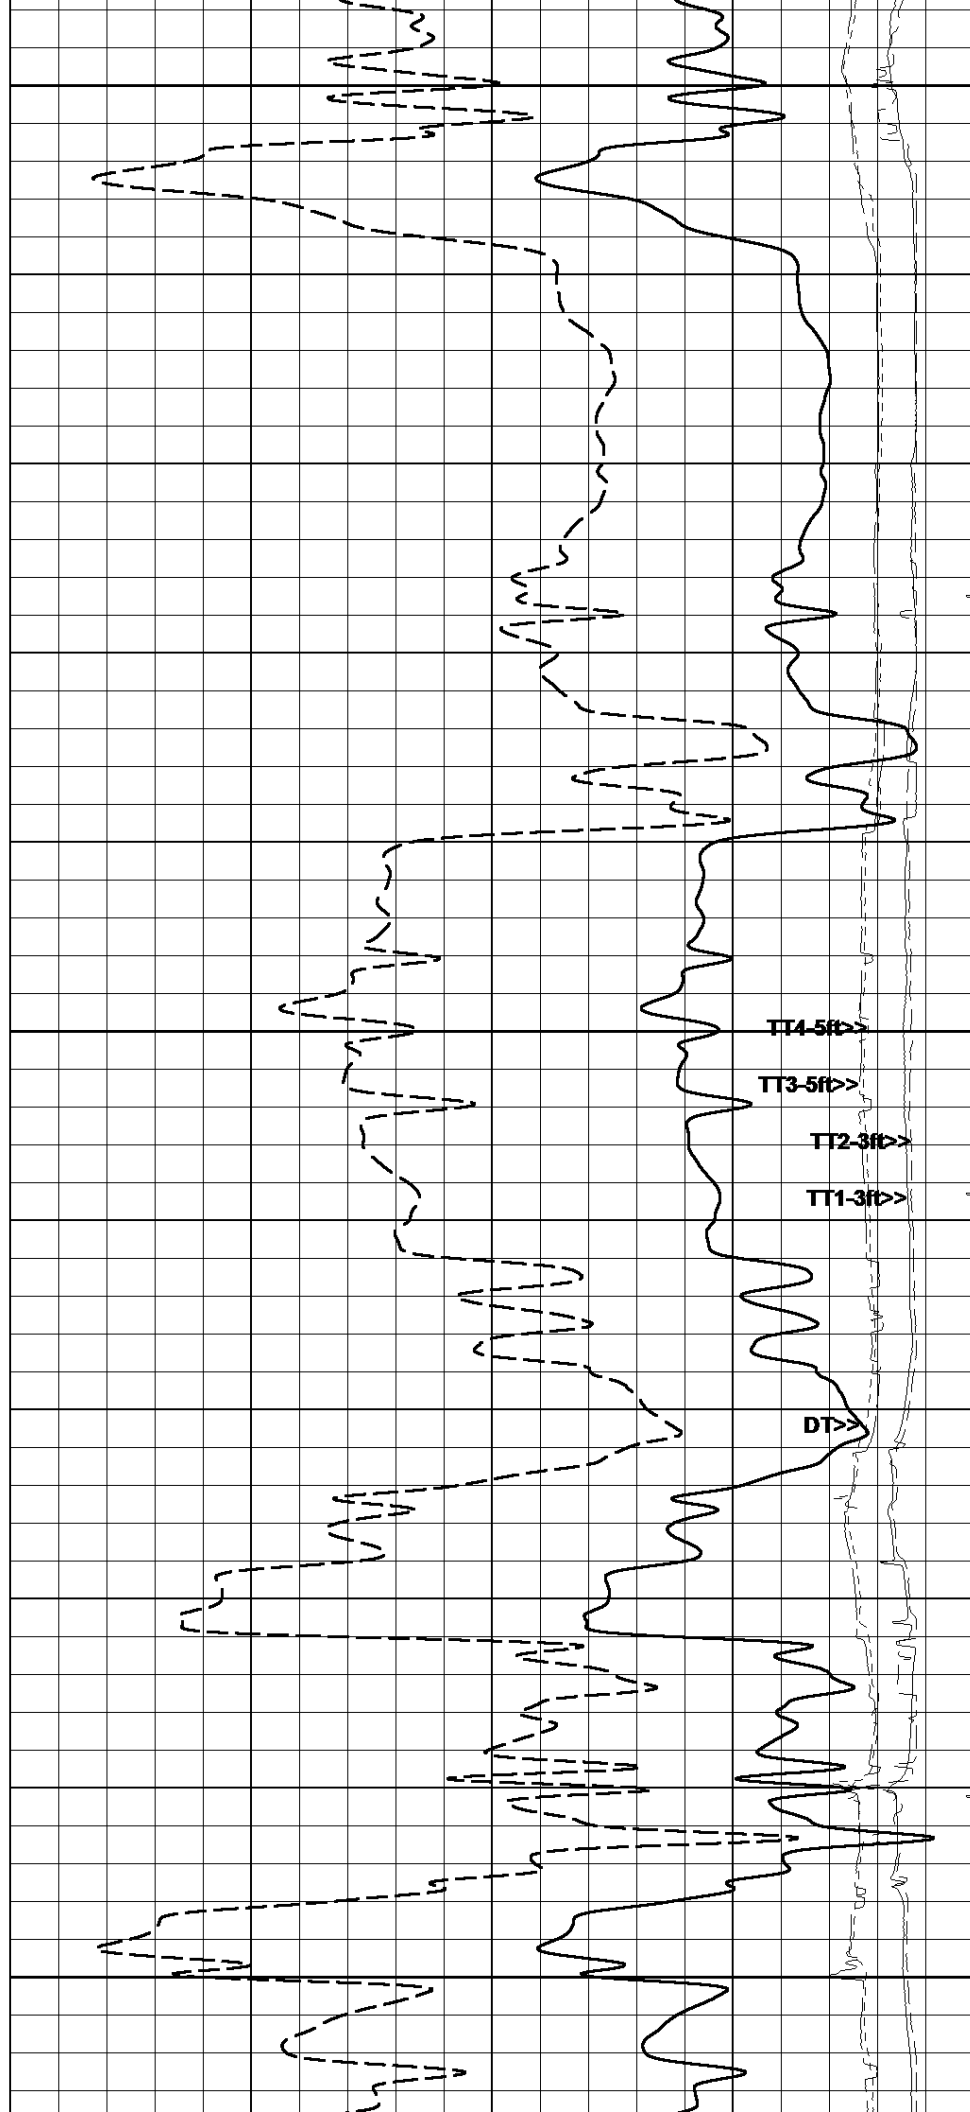


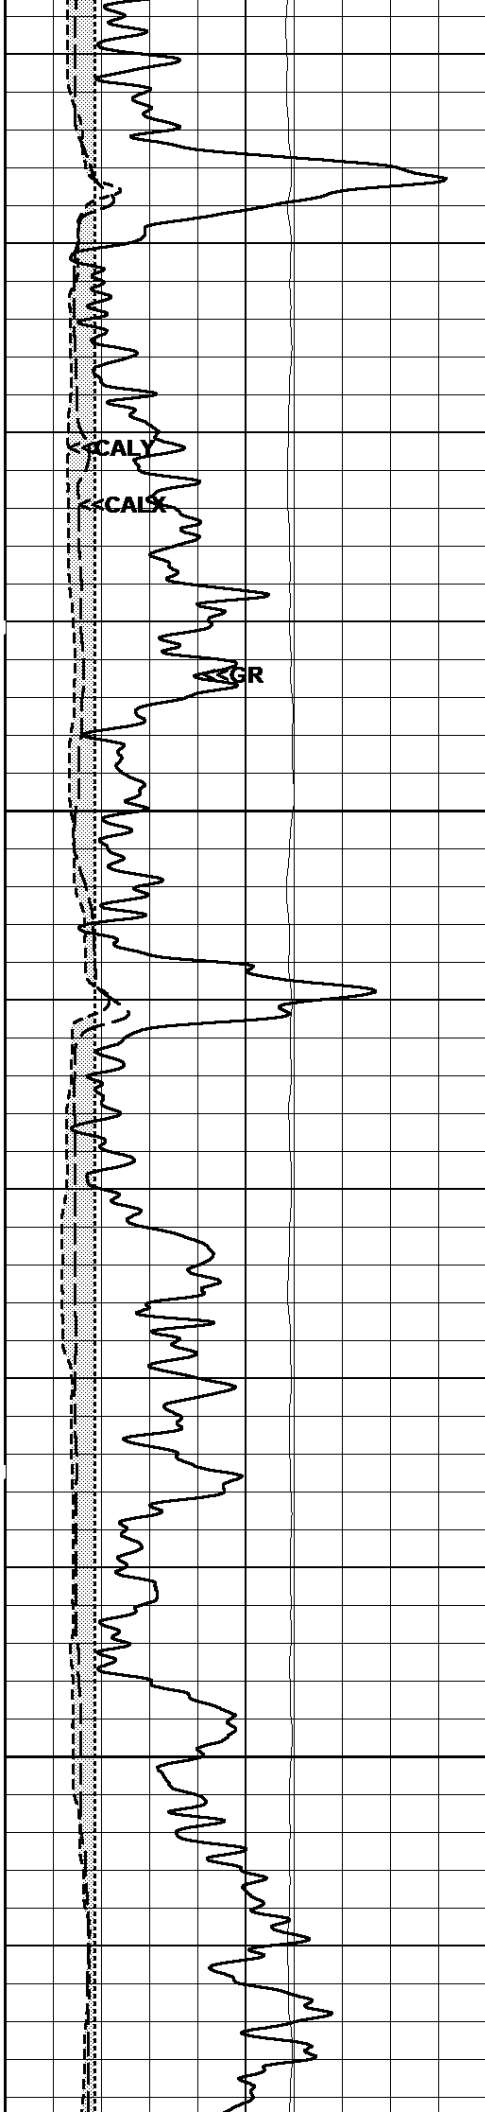

3750


3775

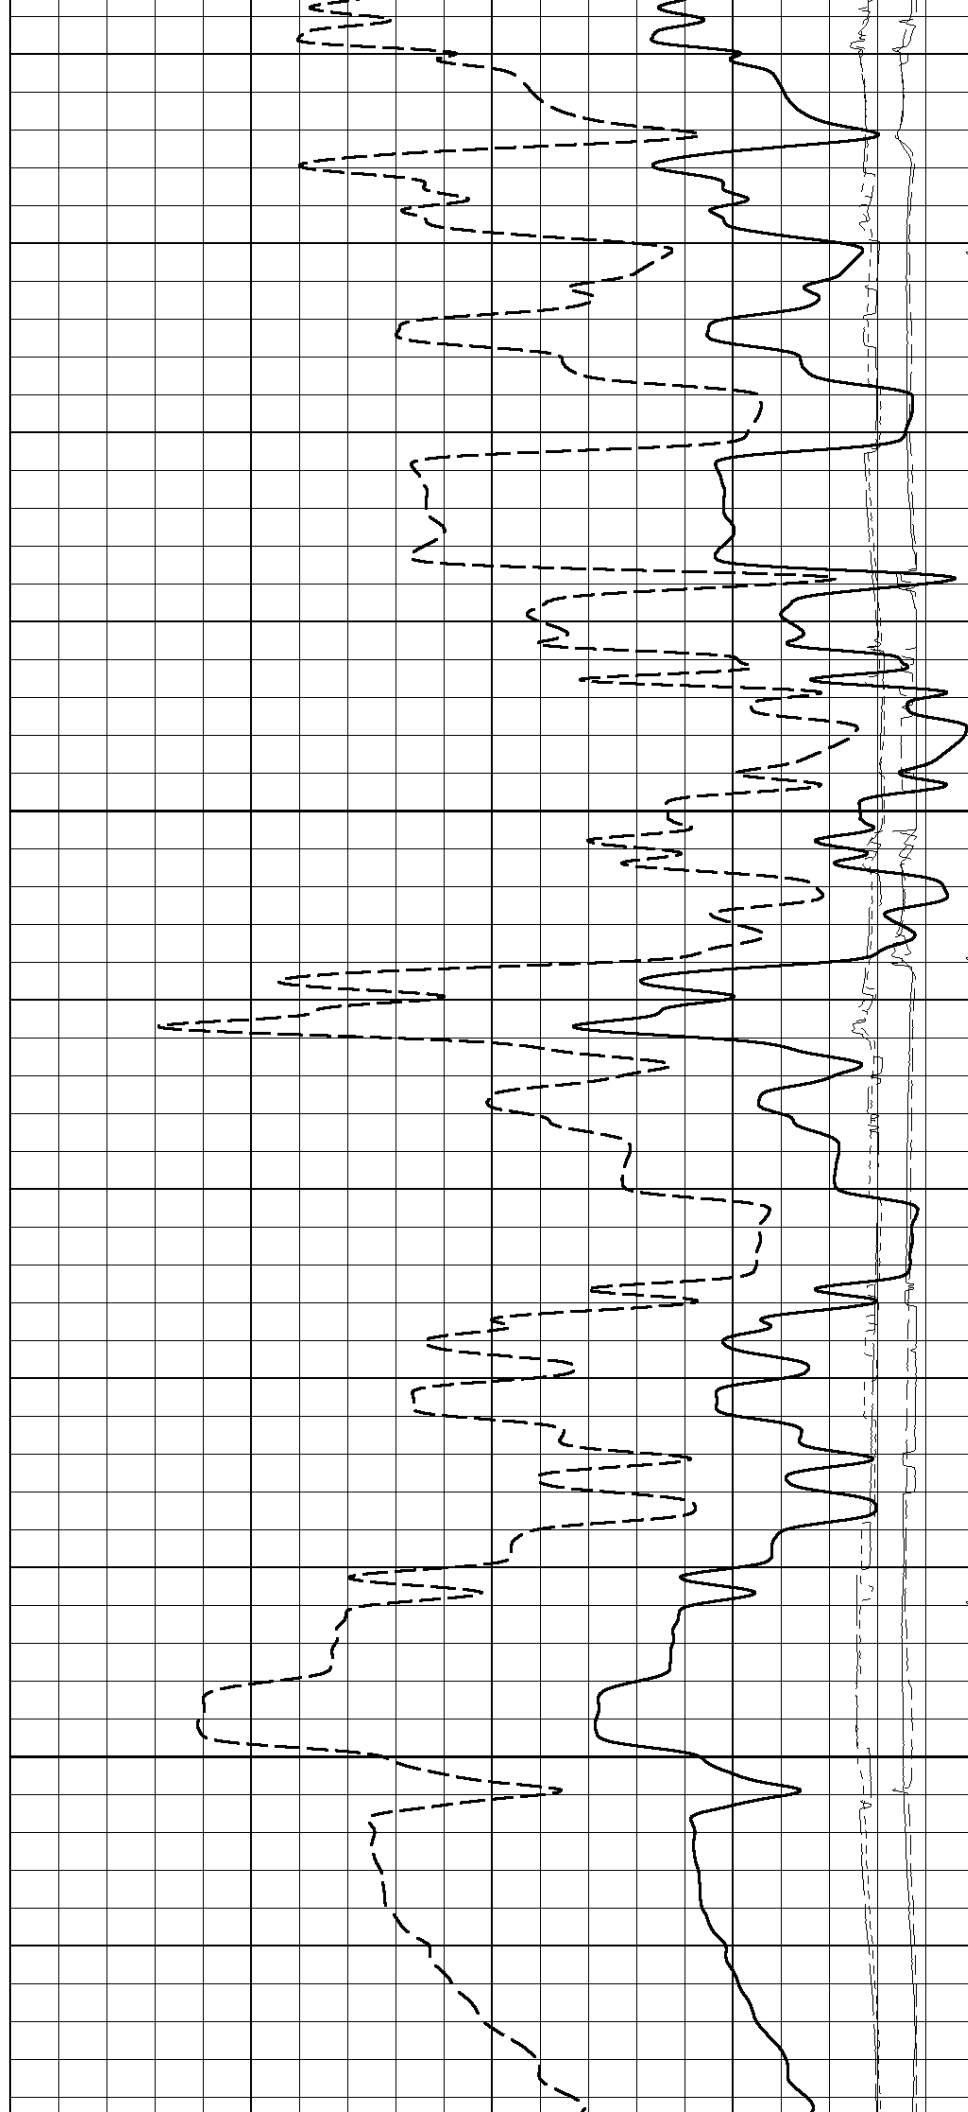

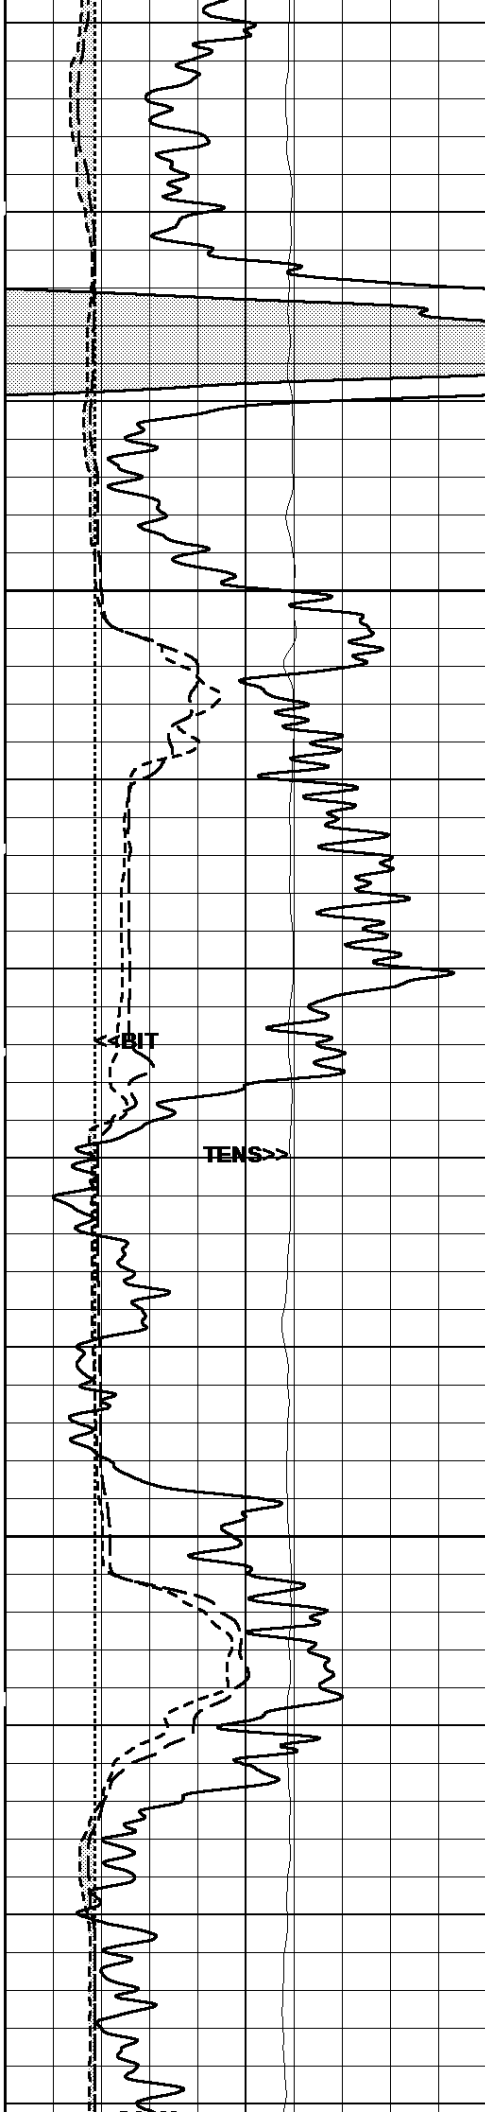

3800


3825

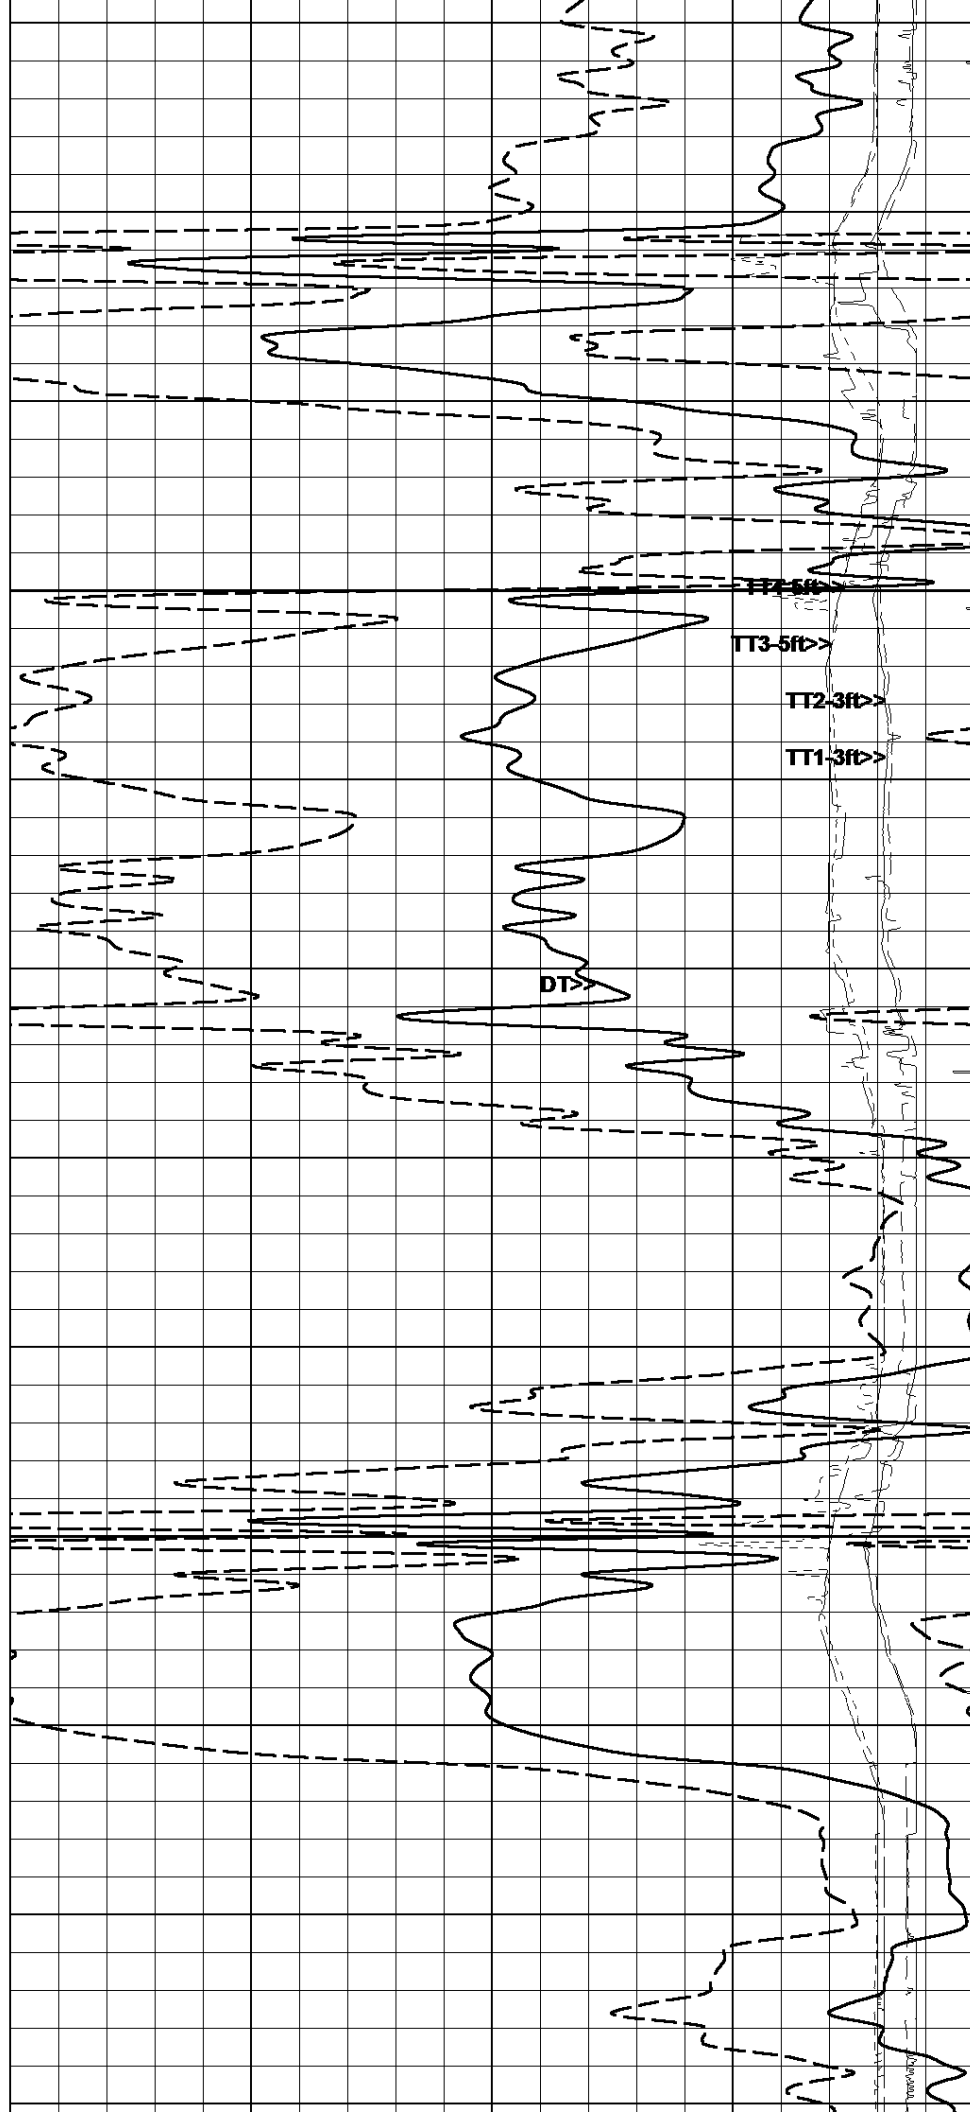




3850

3875

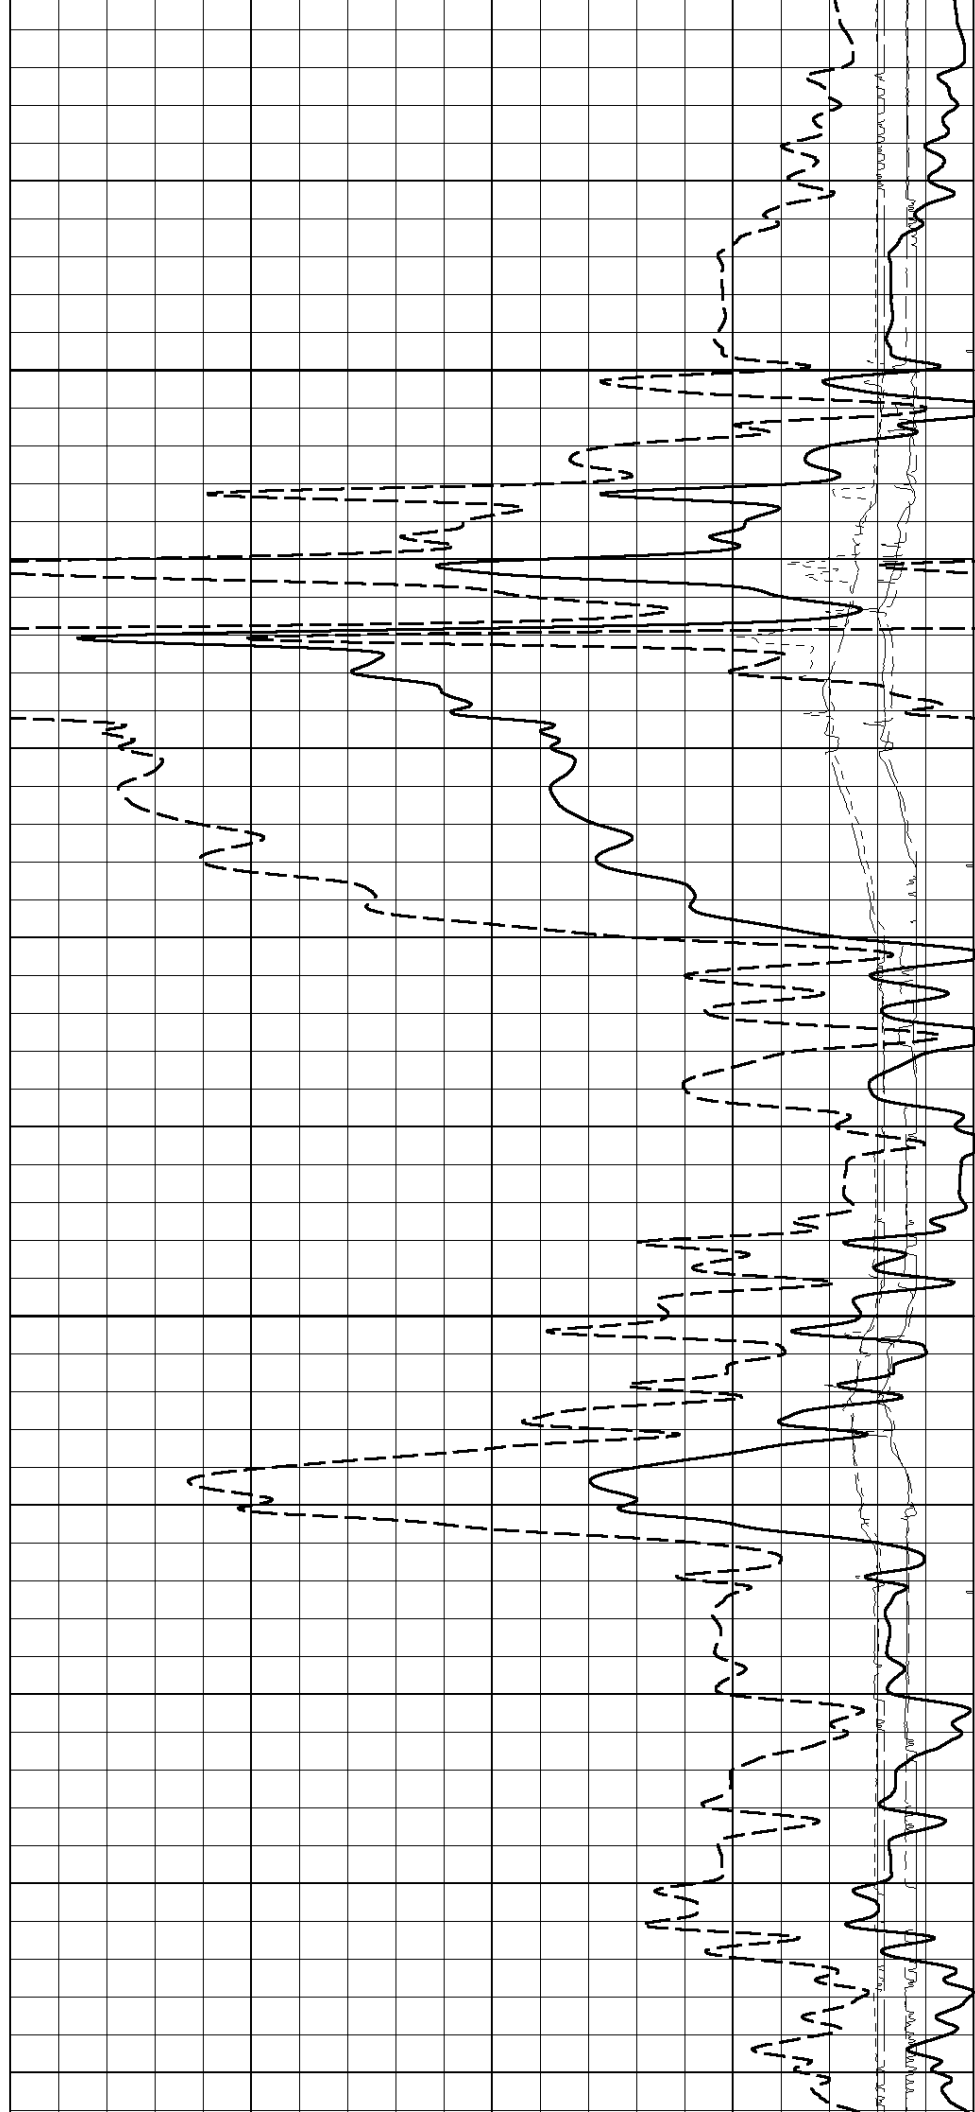


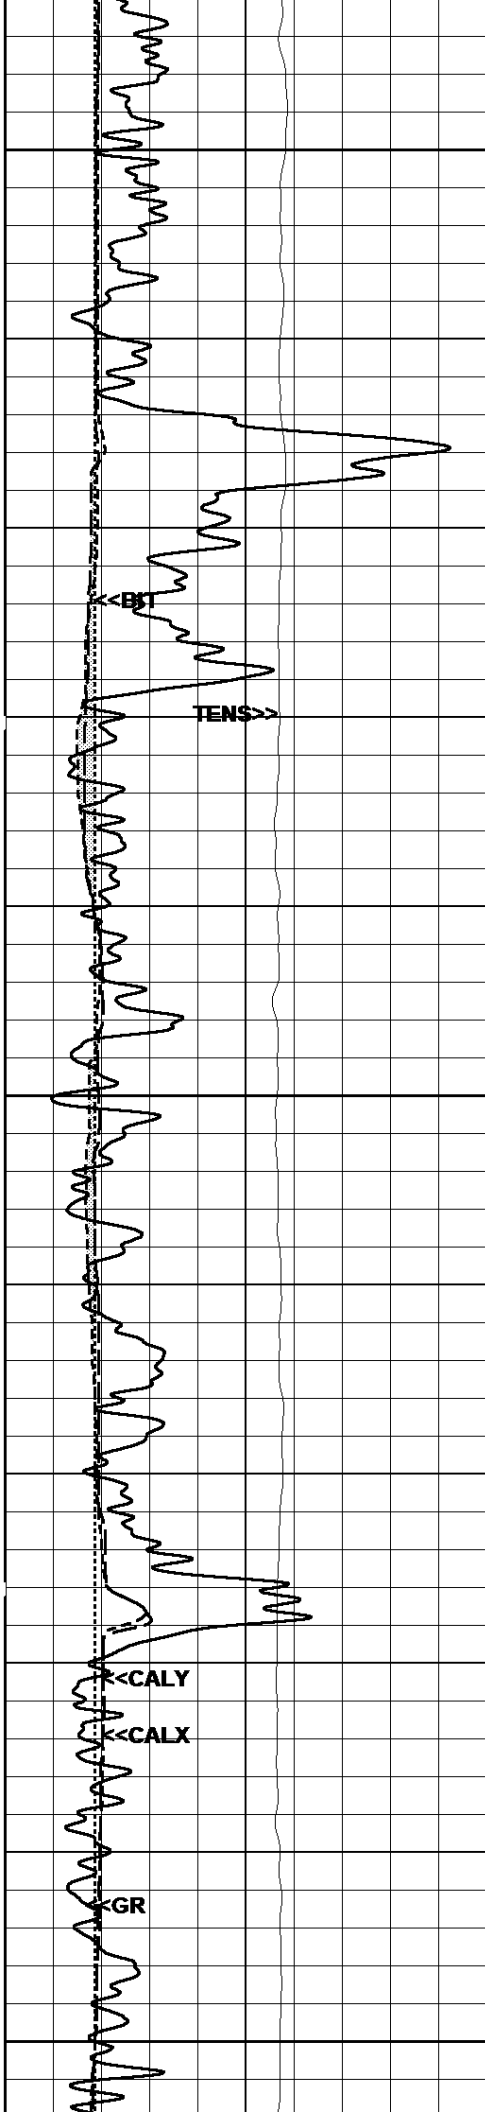


3900

3925


3950

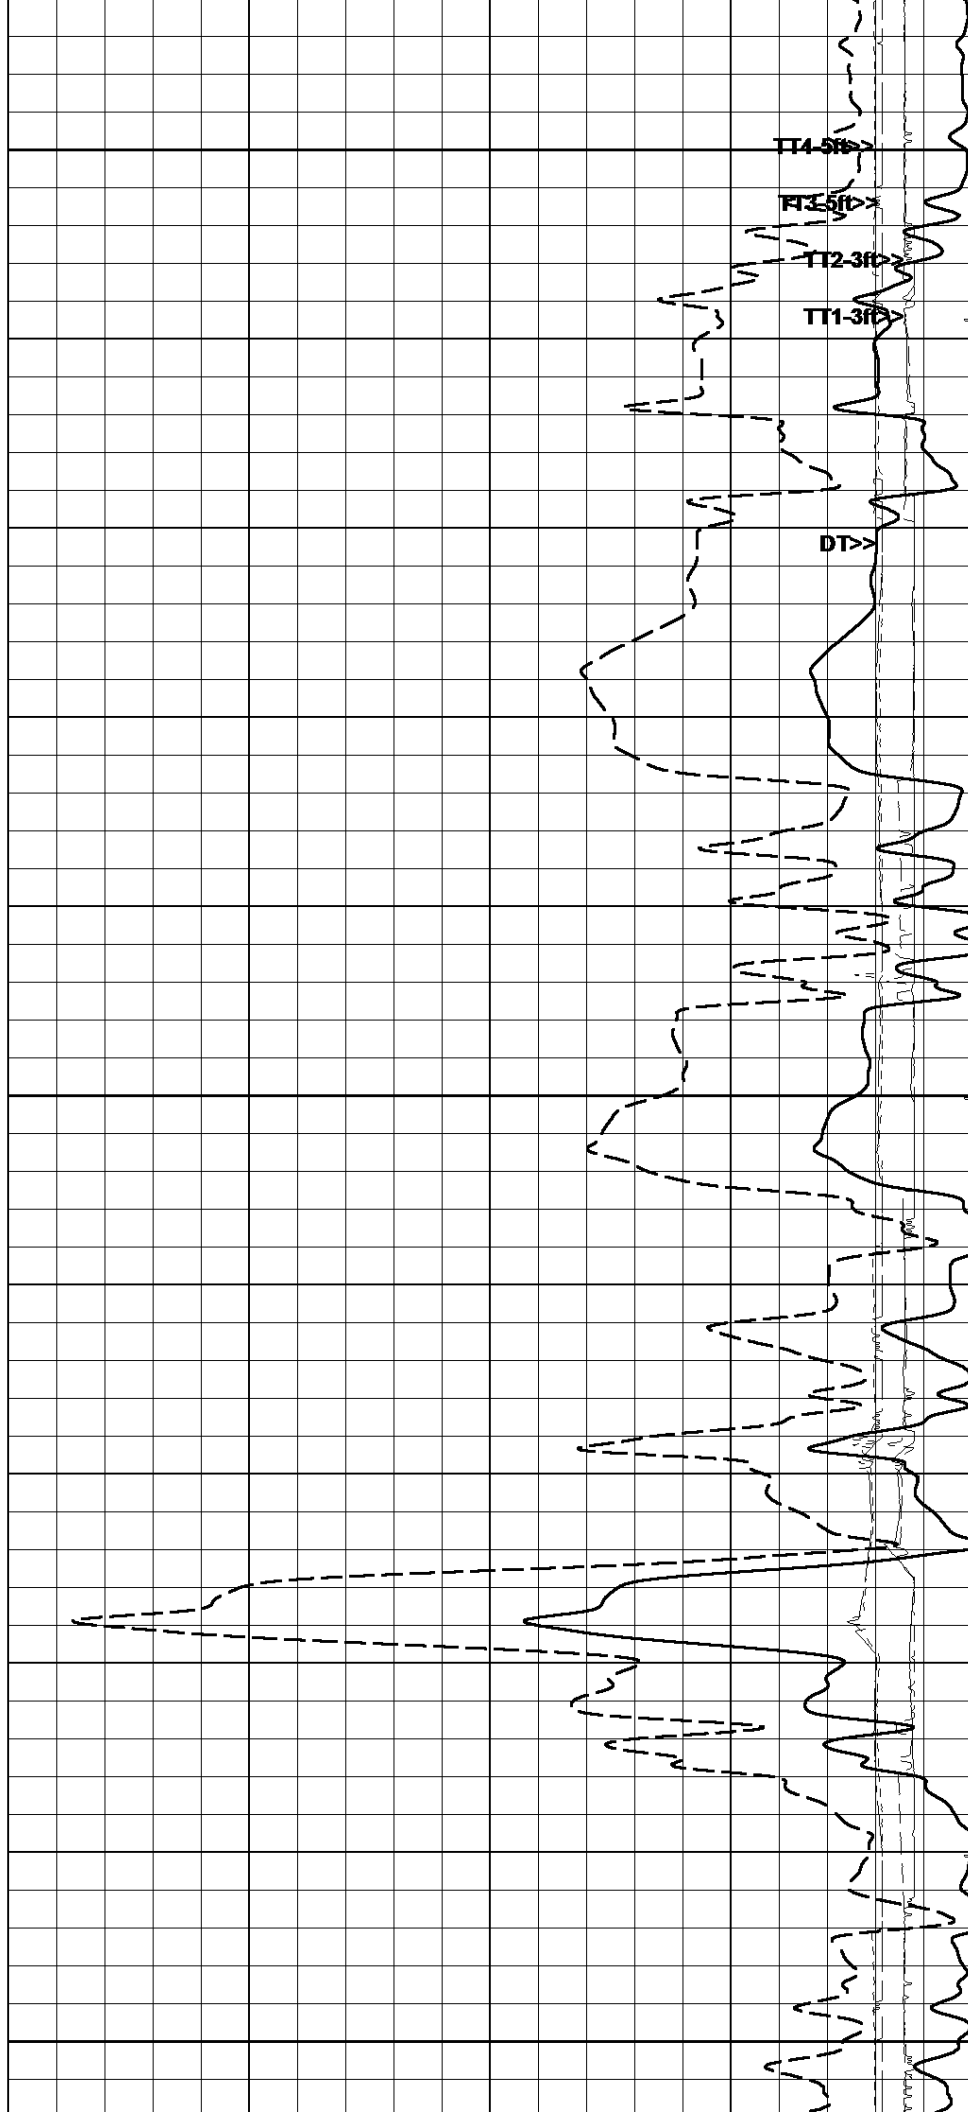


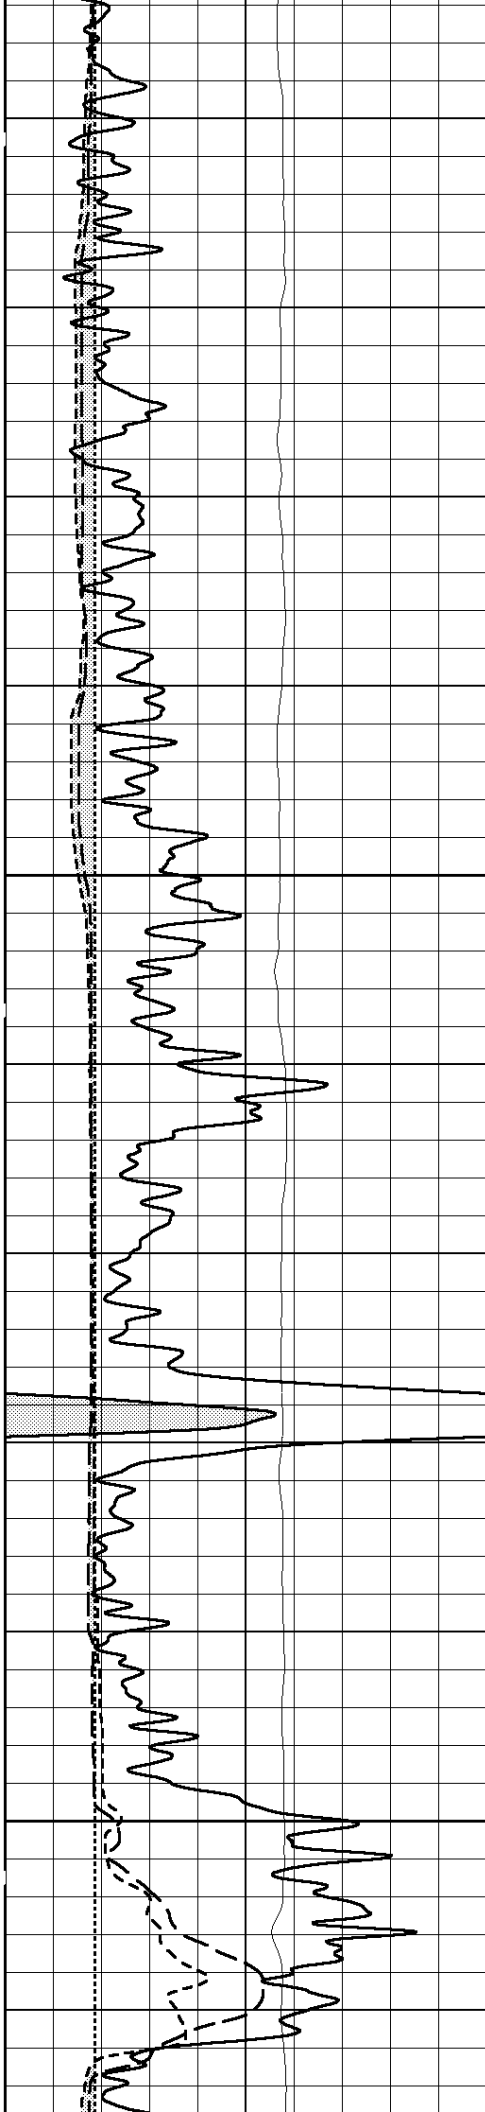

3975


4000

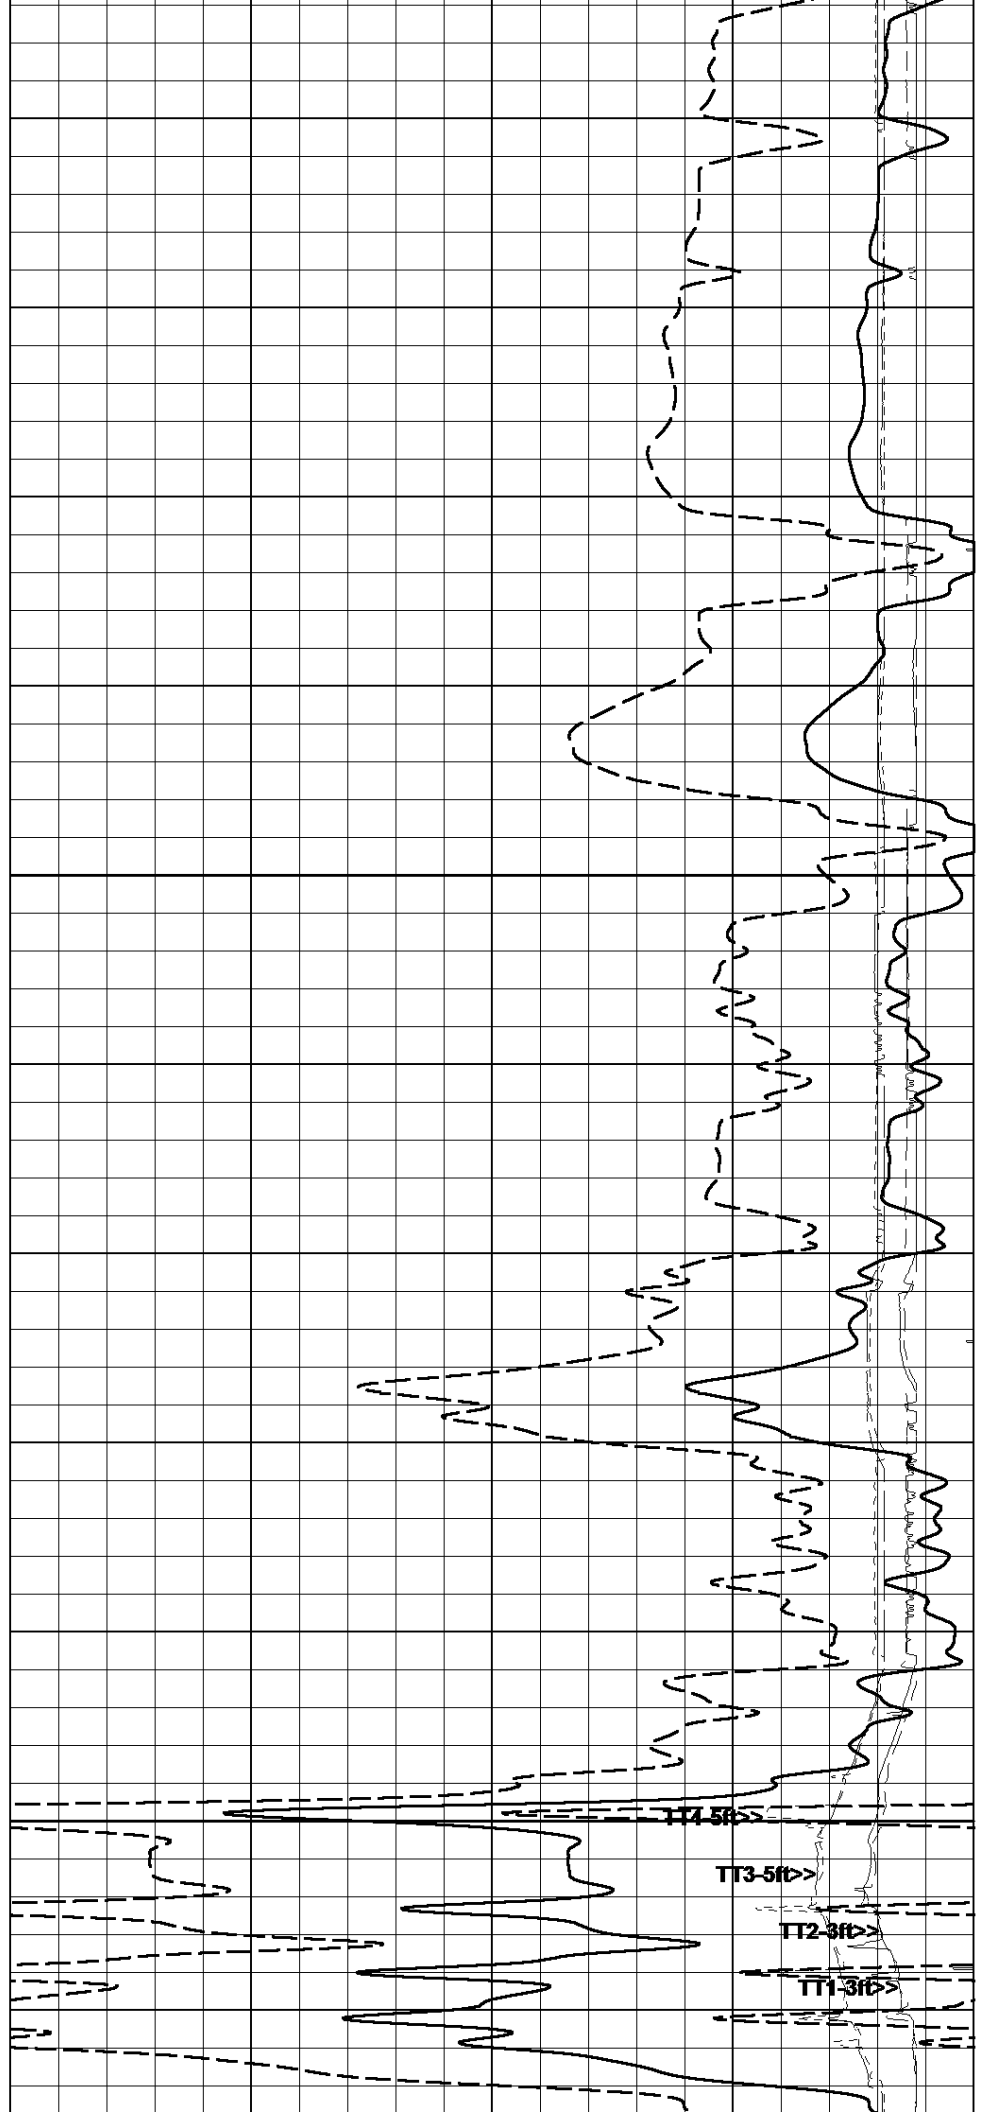


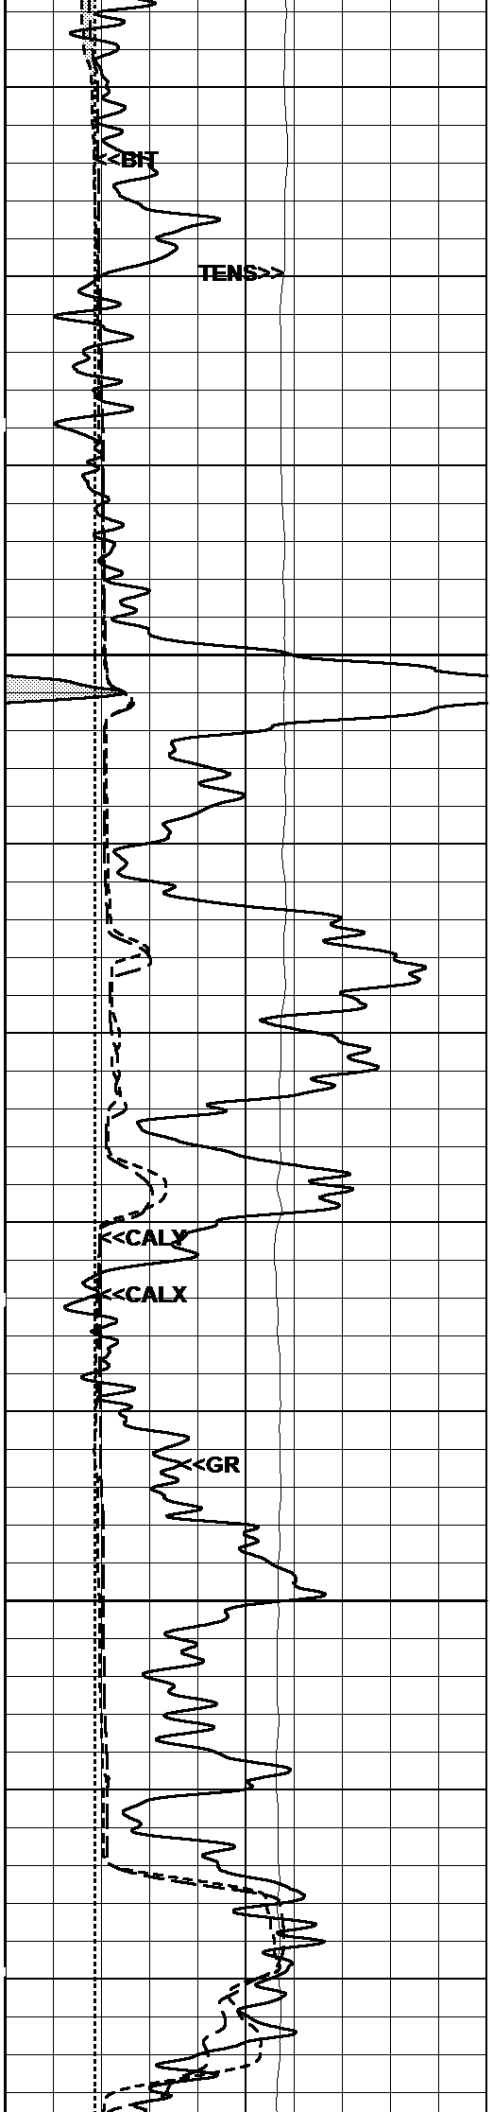

4025


4050

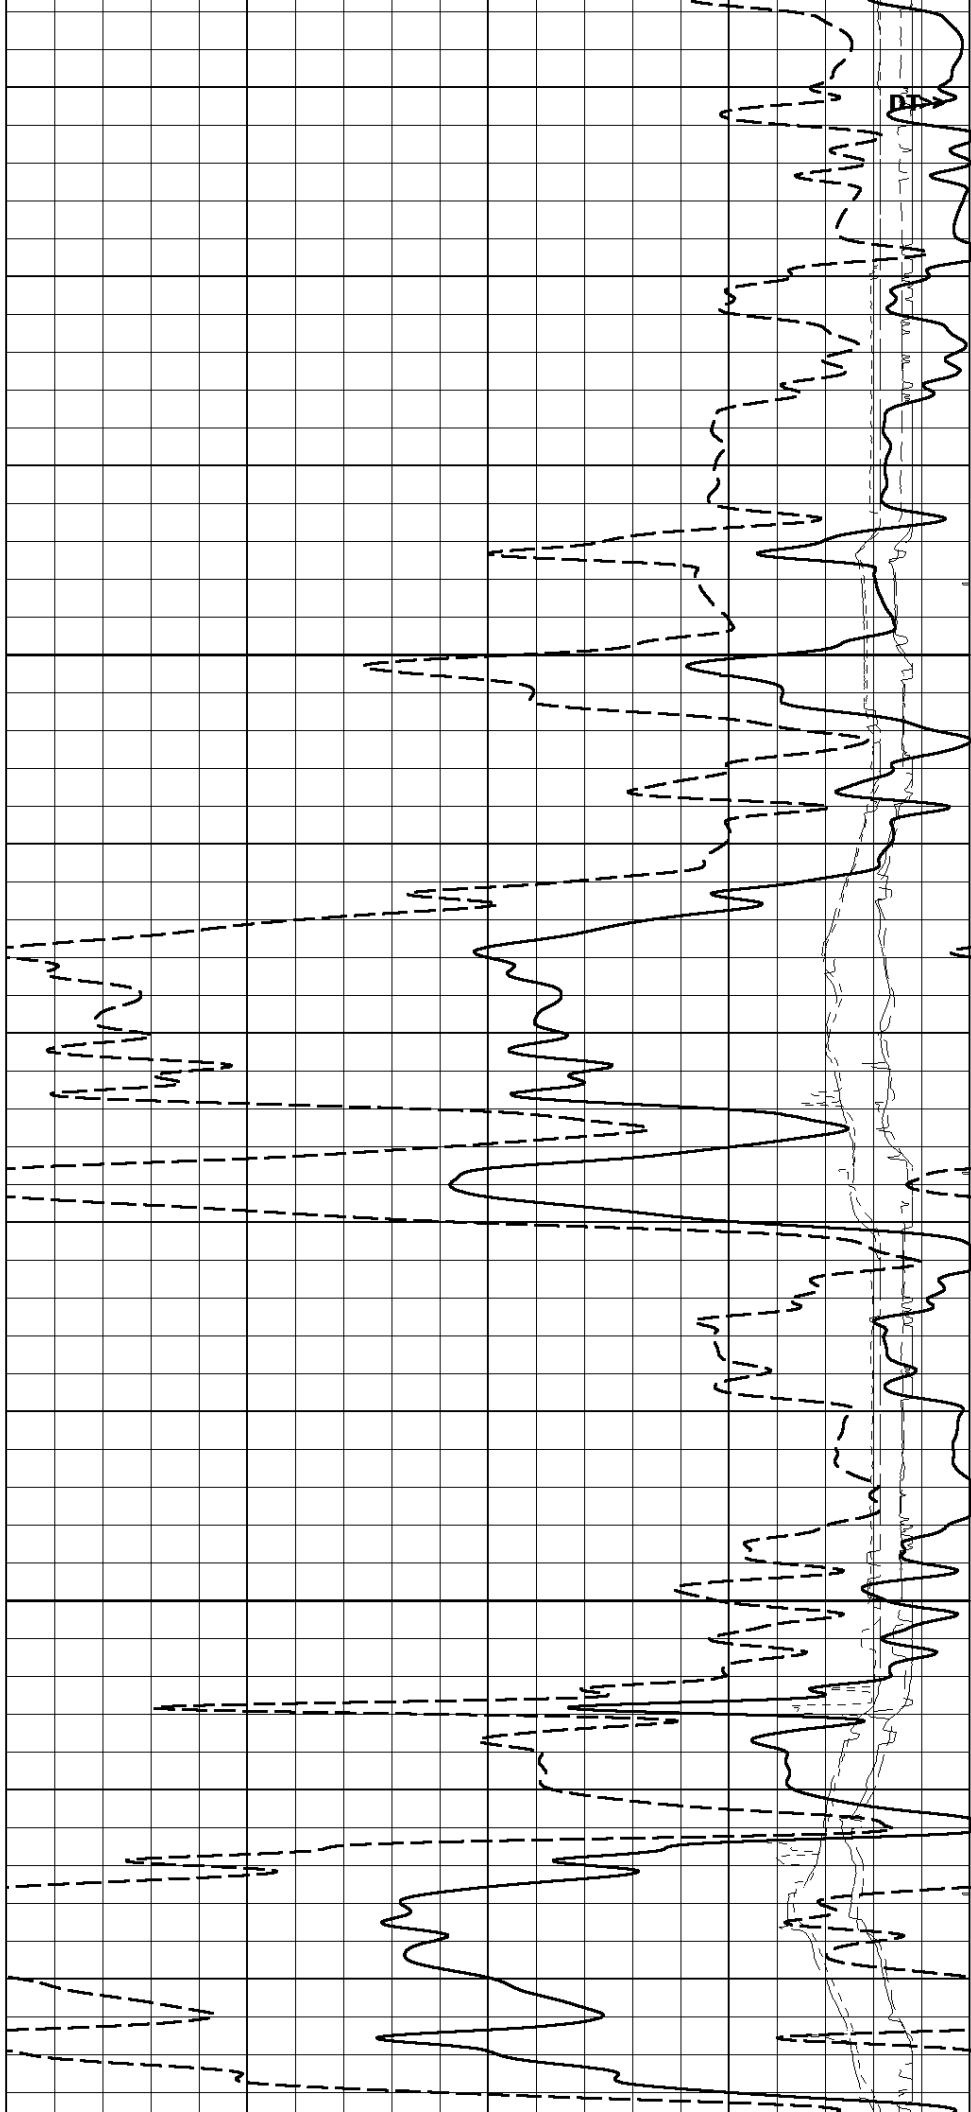


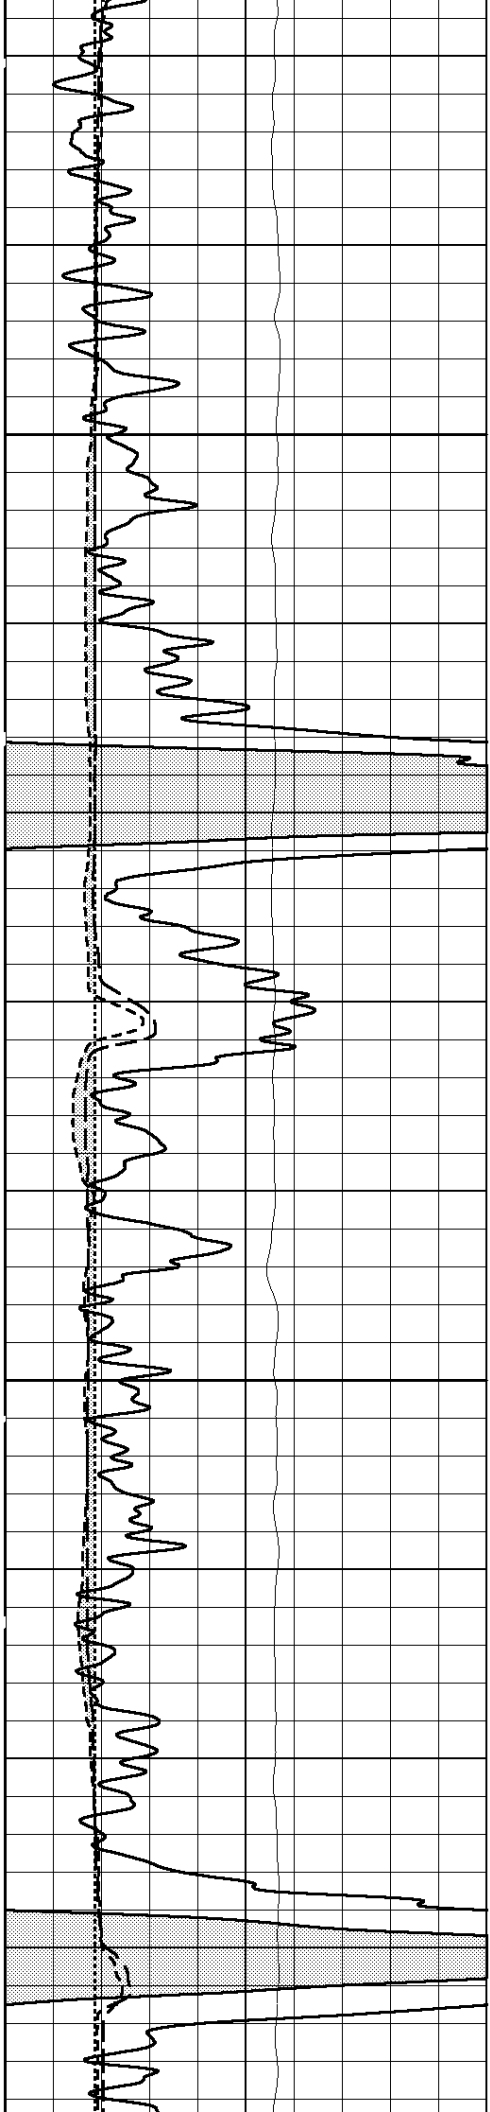

4075

4100

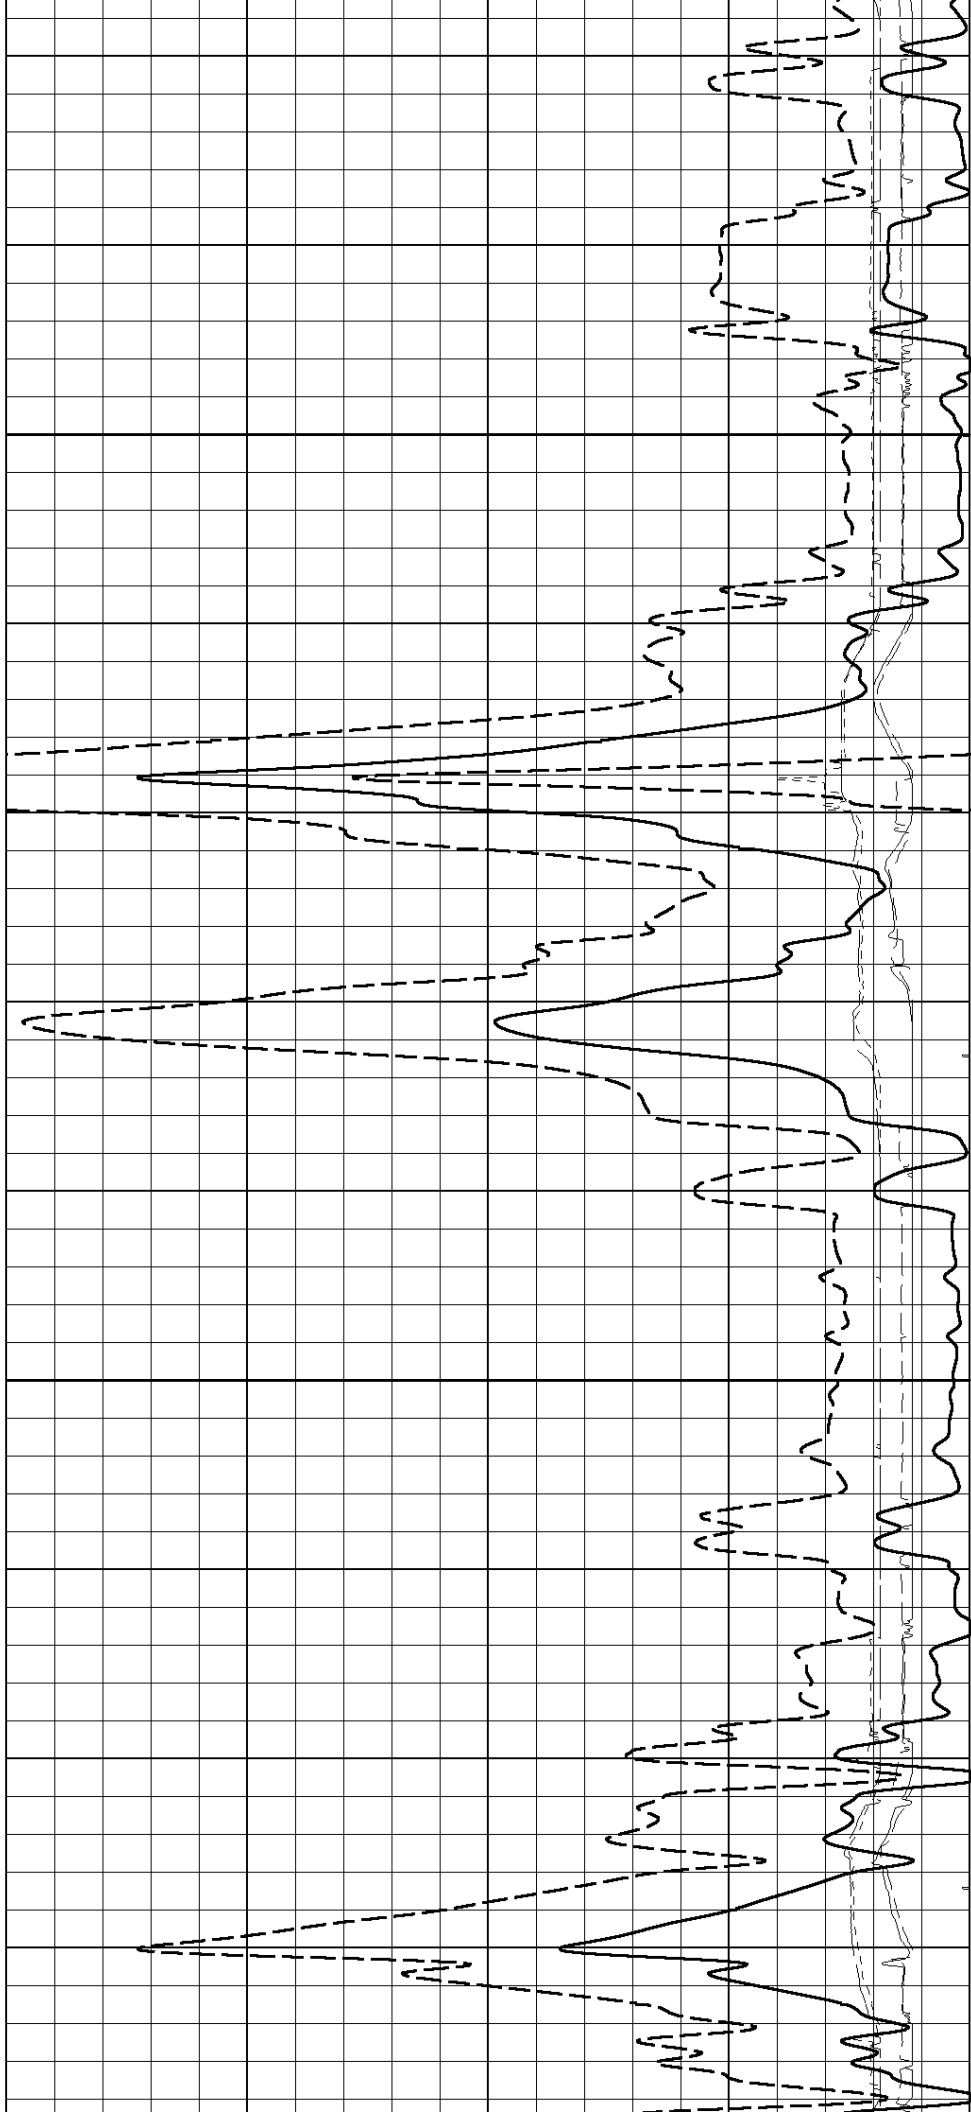


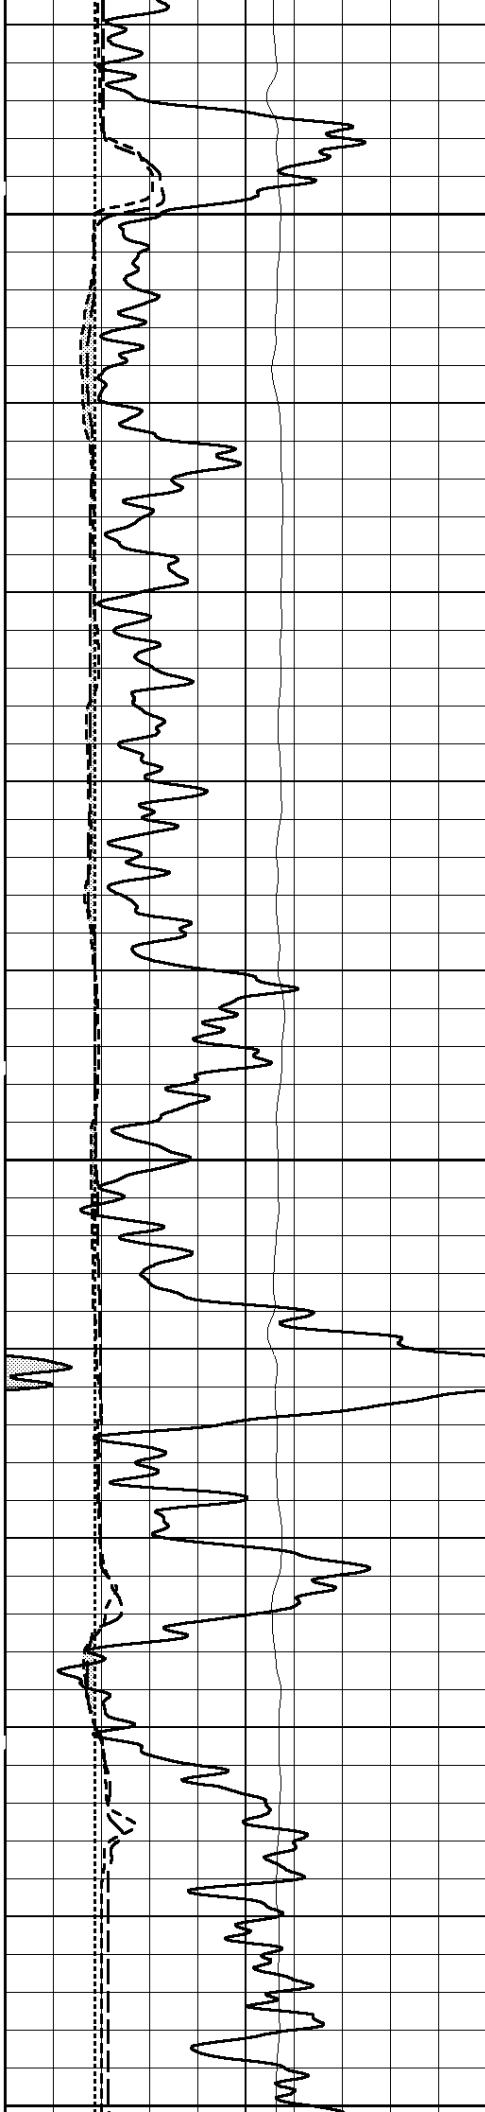


4125

4150

4175

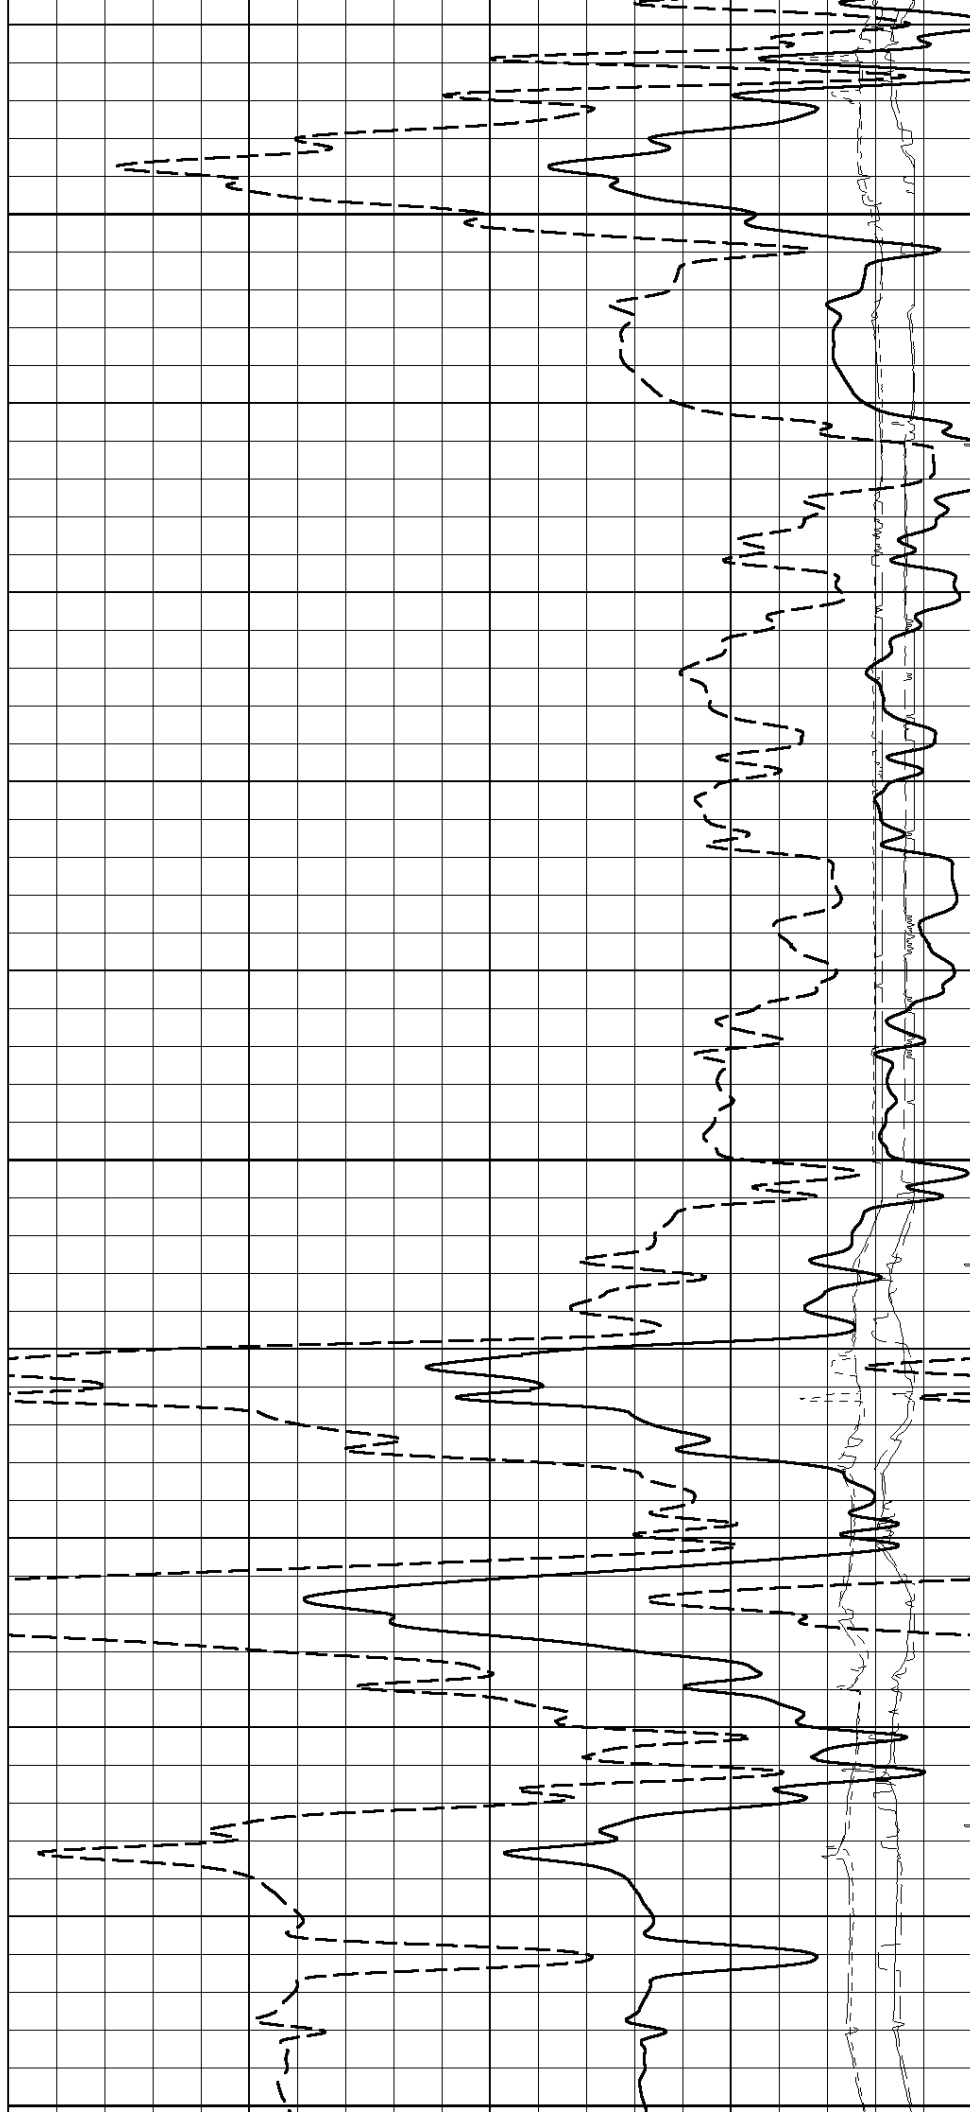


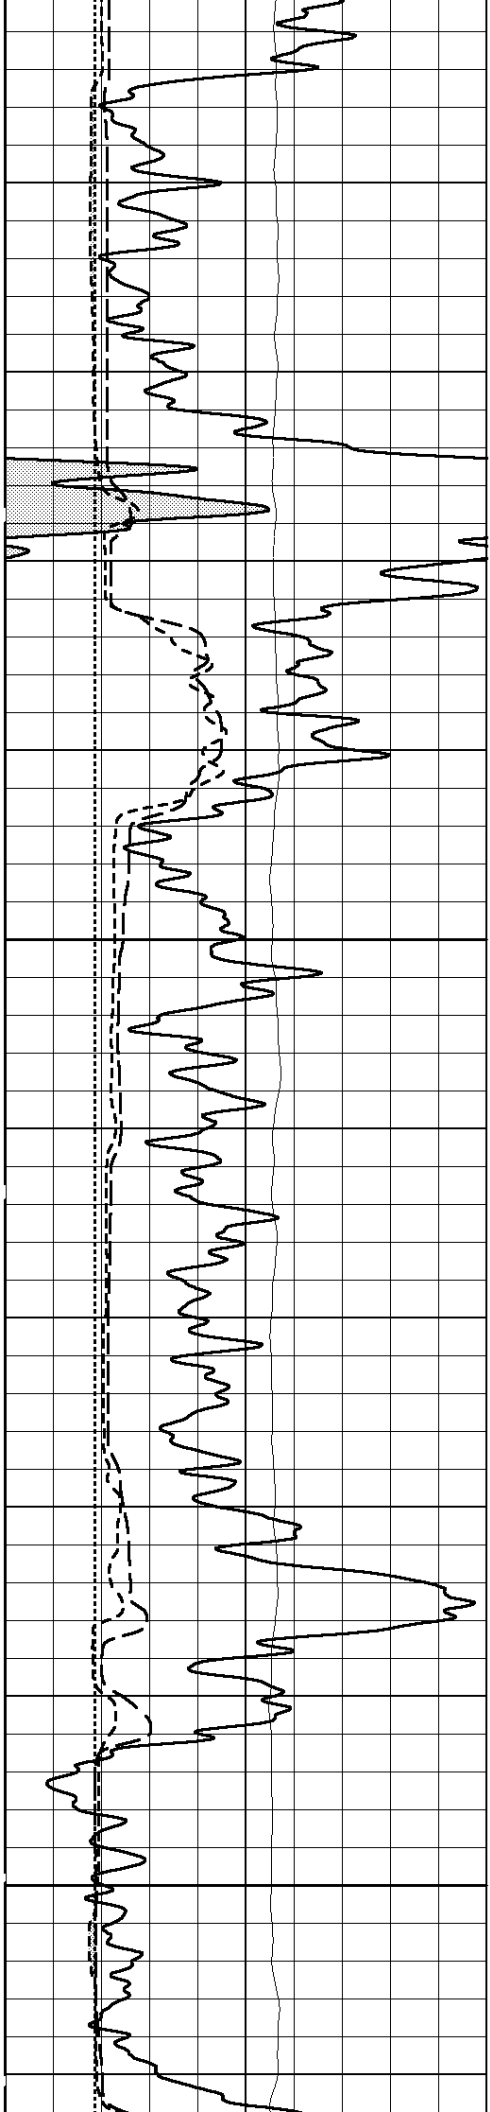


4175

4200


4225

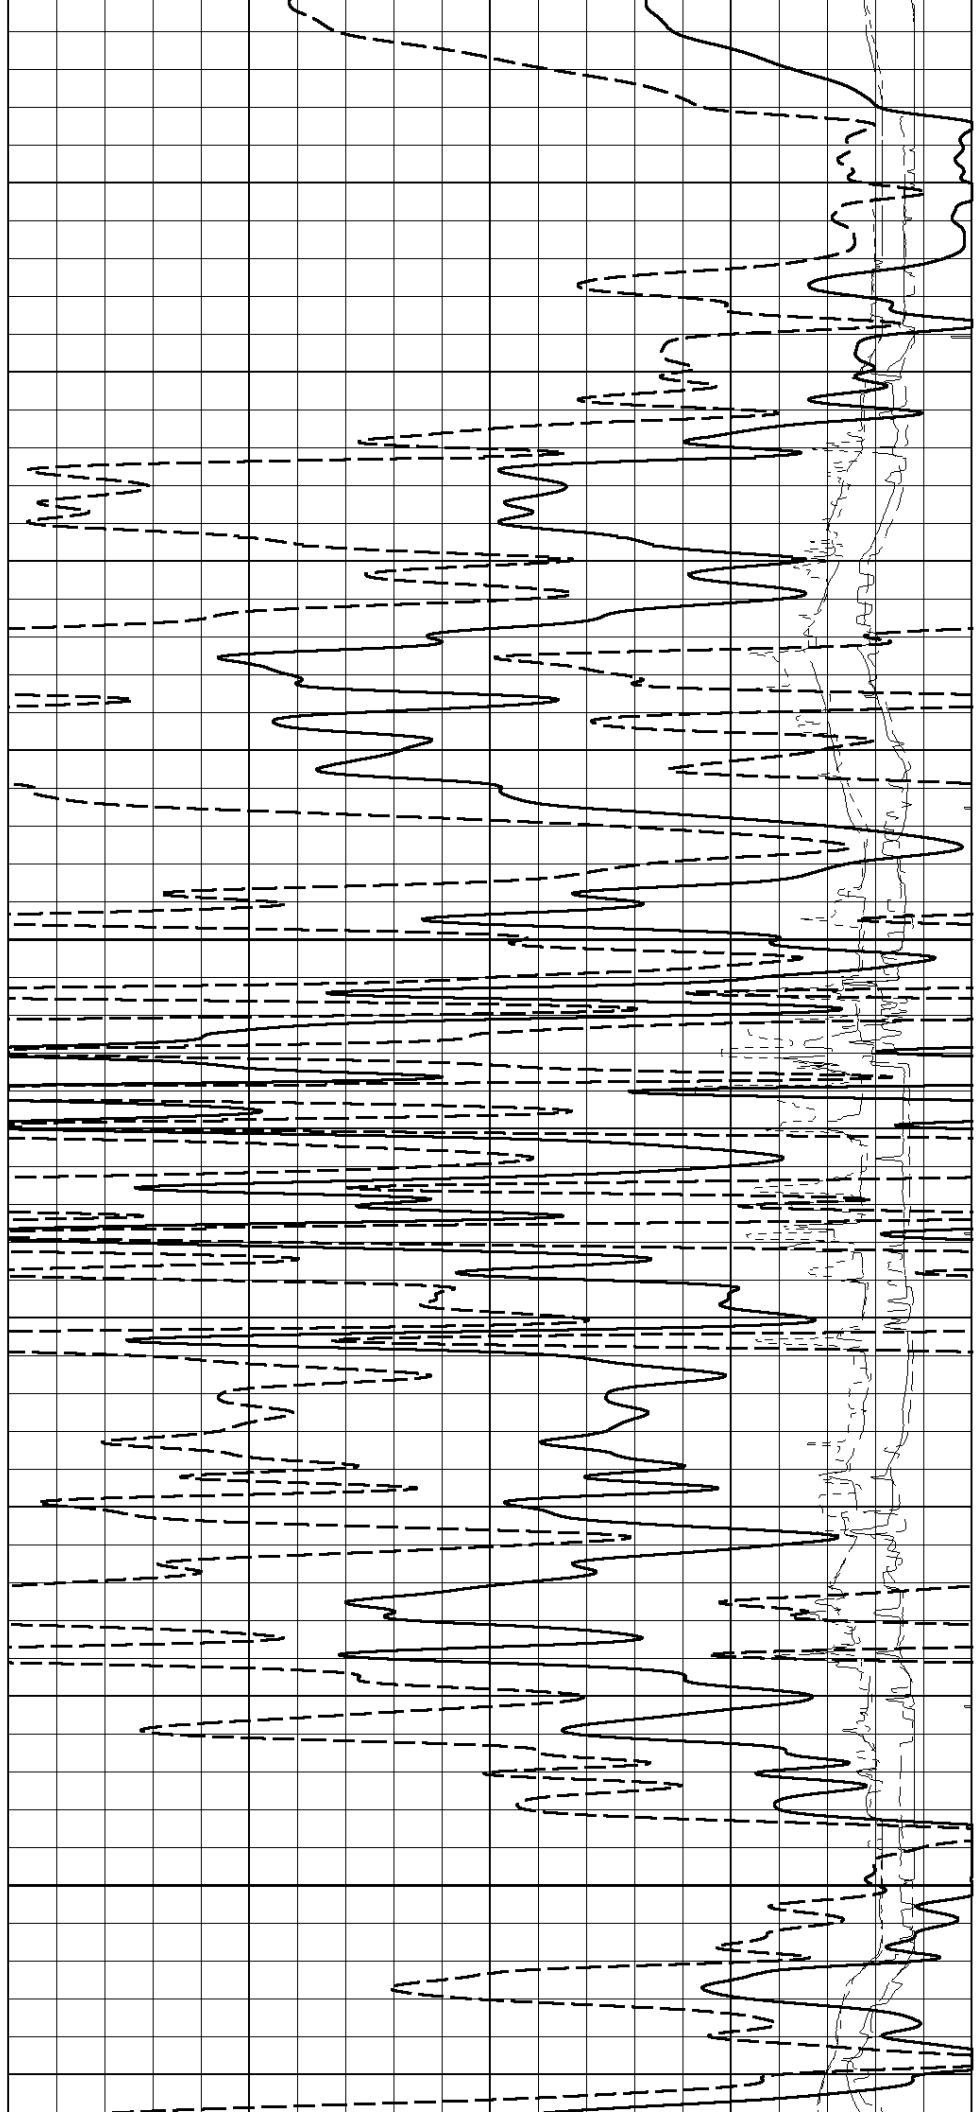


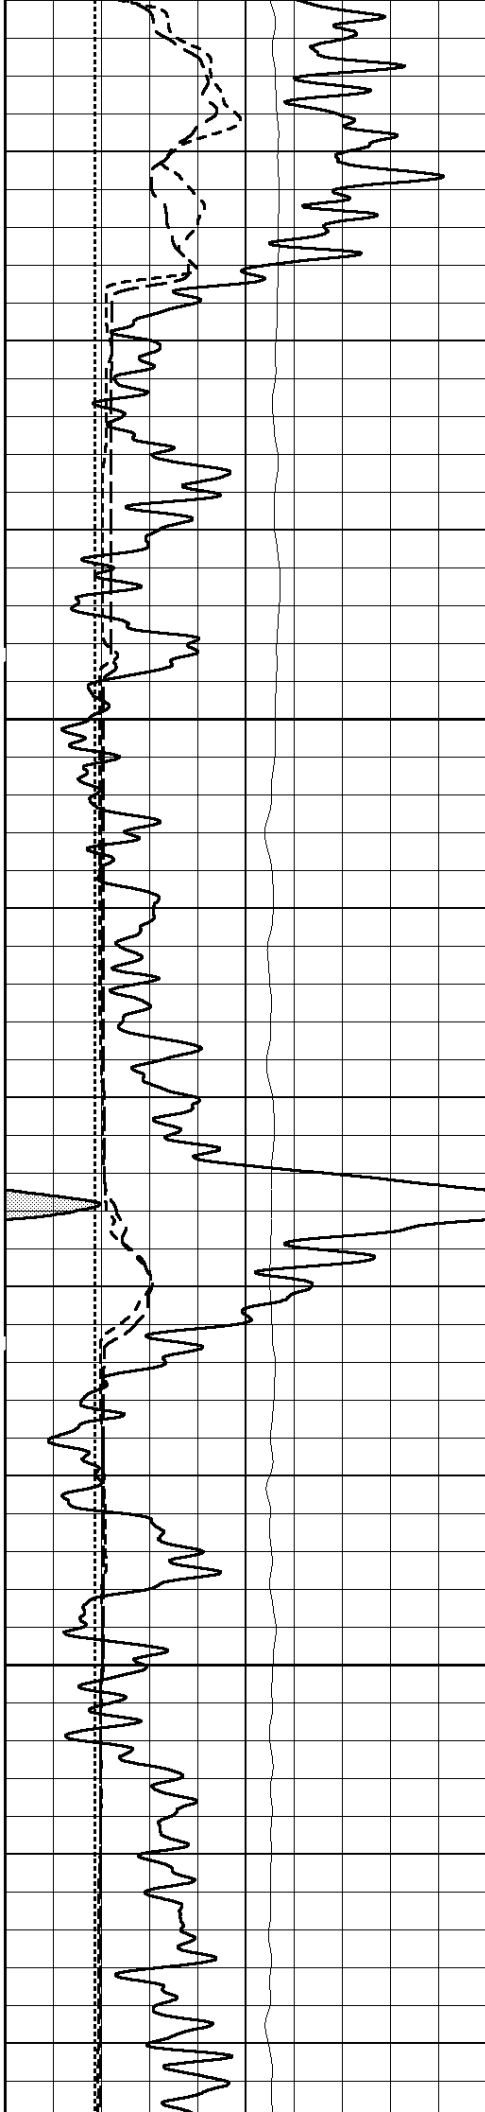

4250


4275

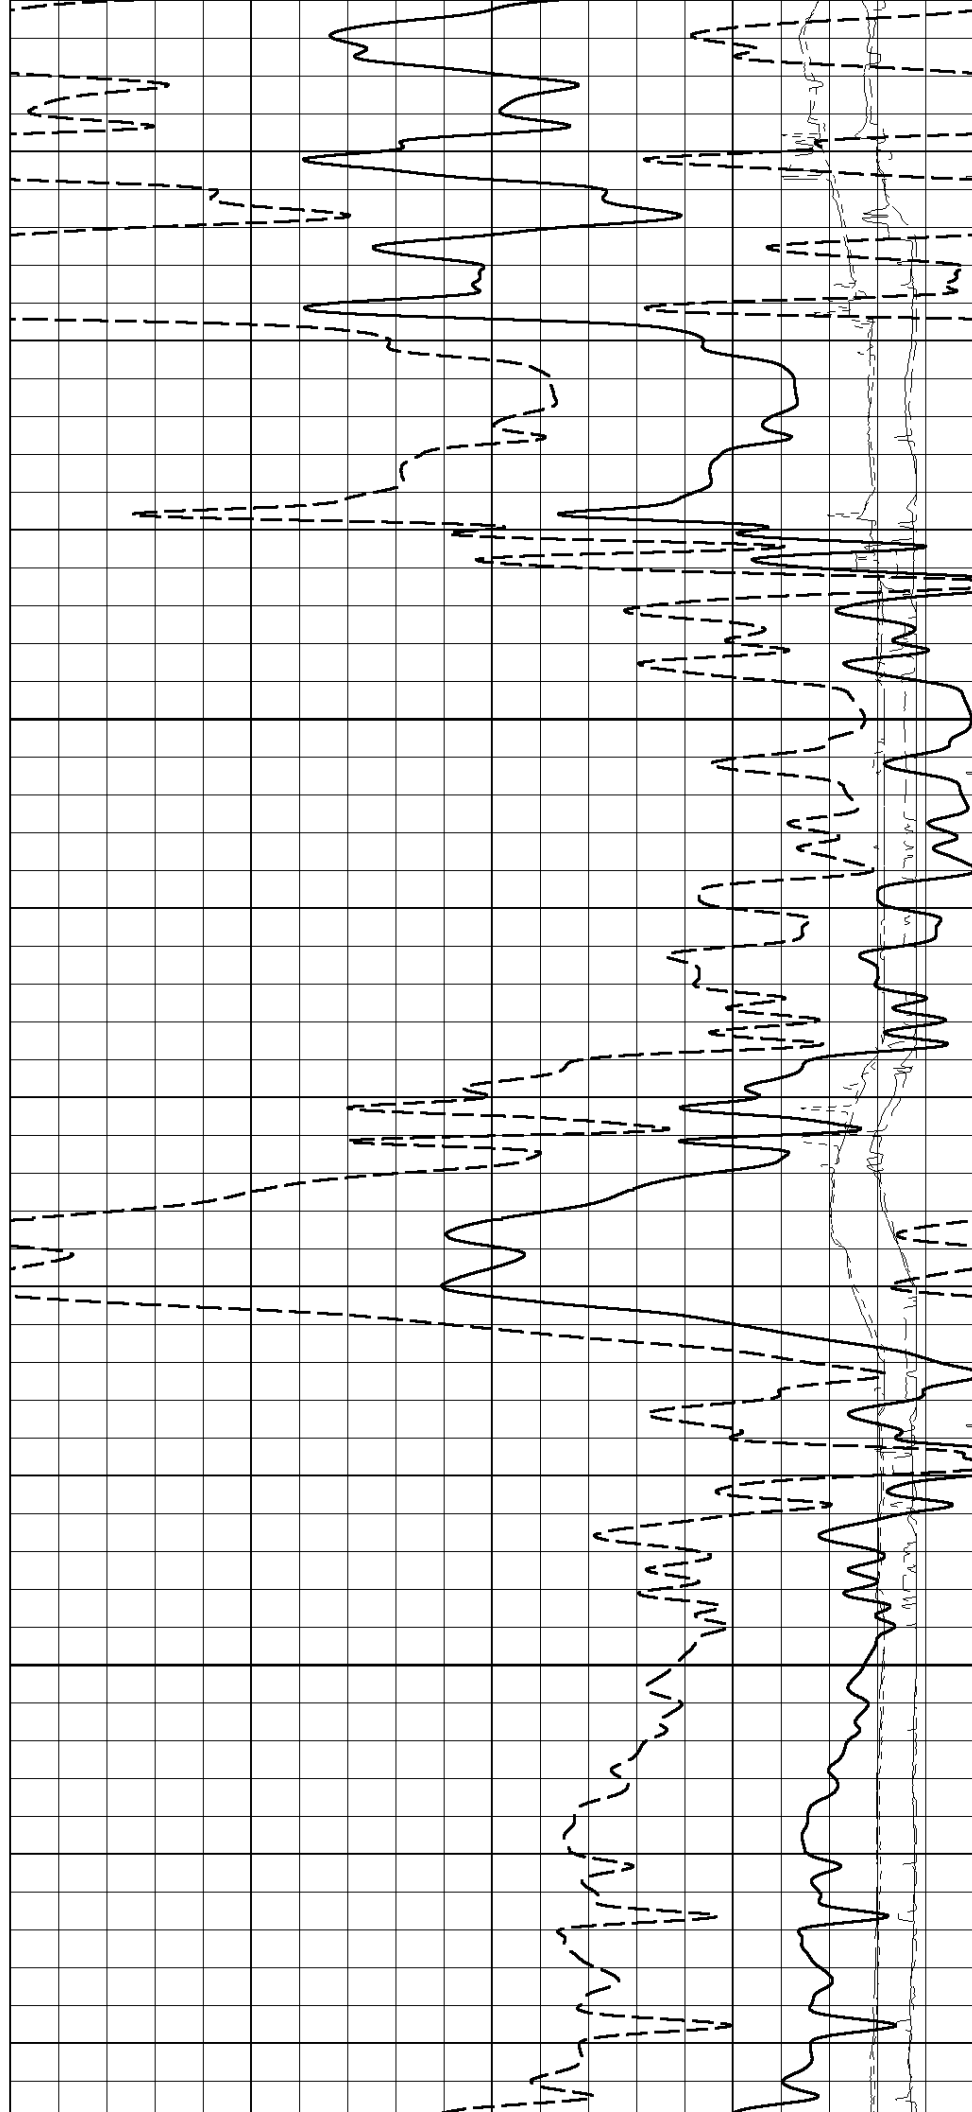


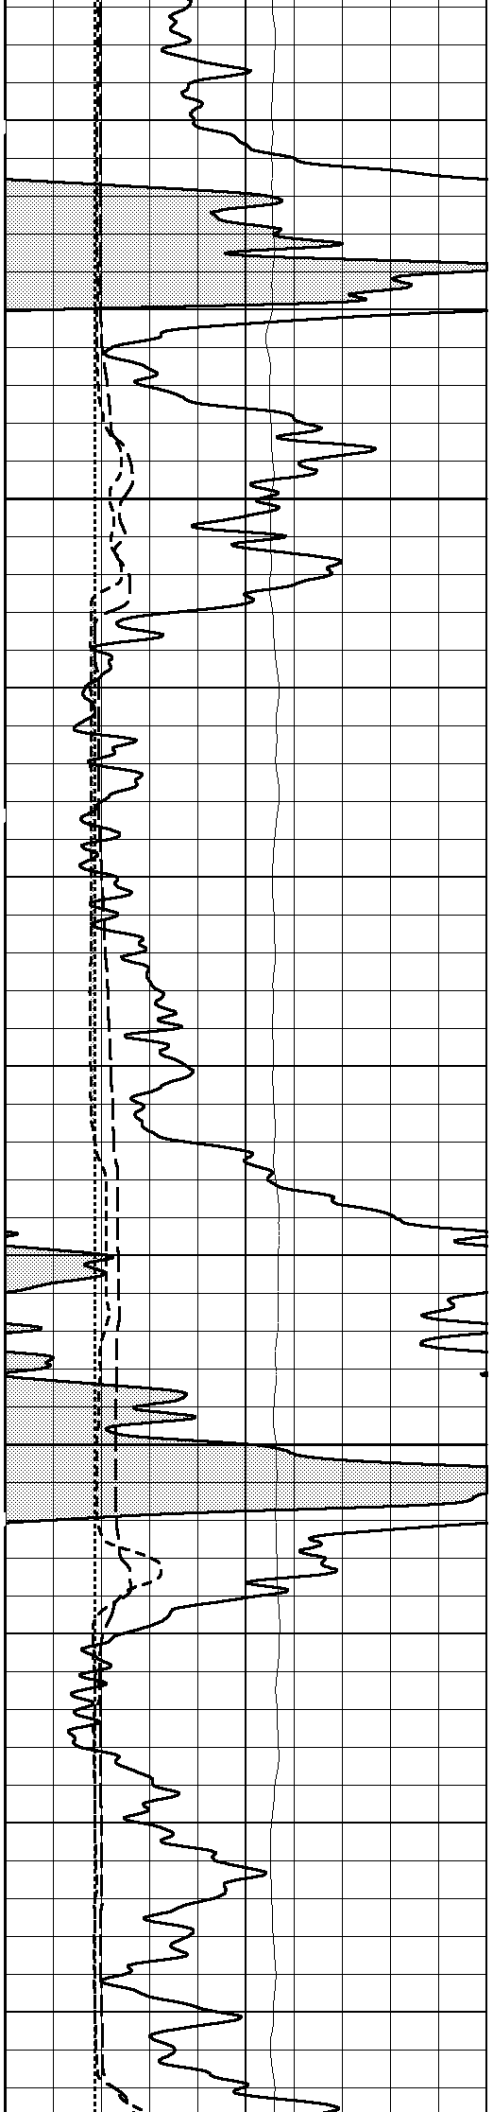

4300


4325

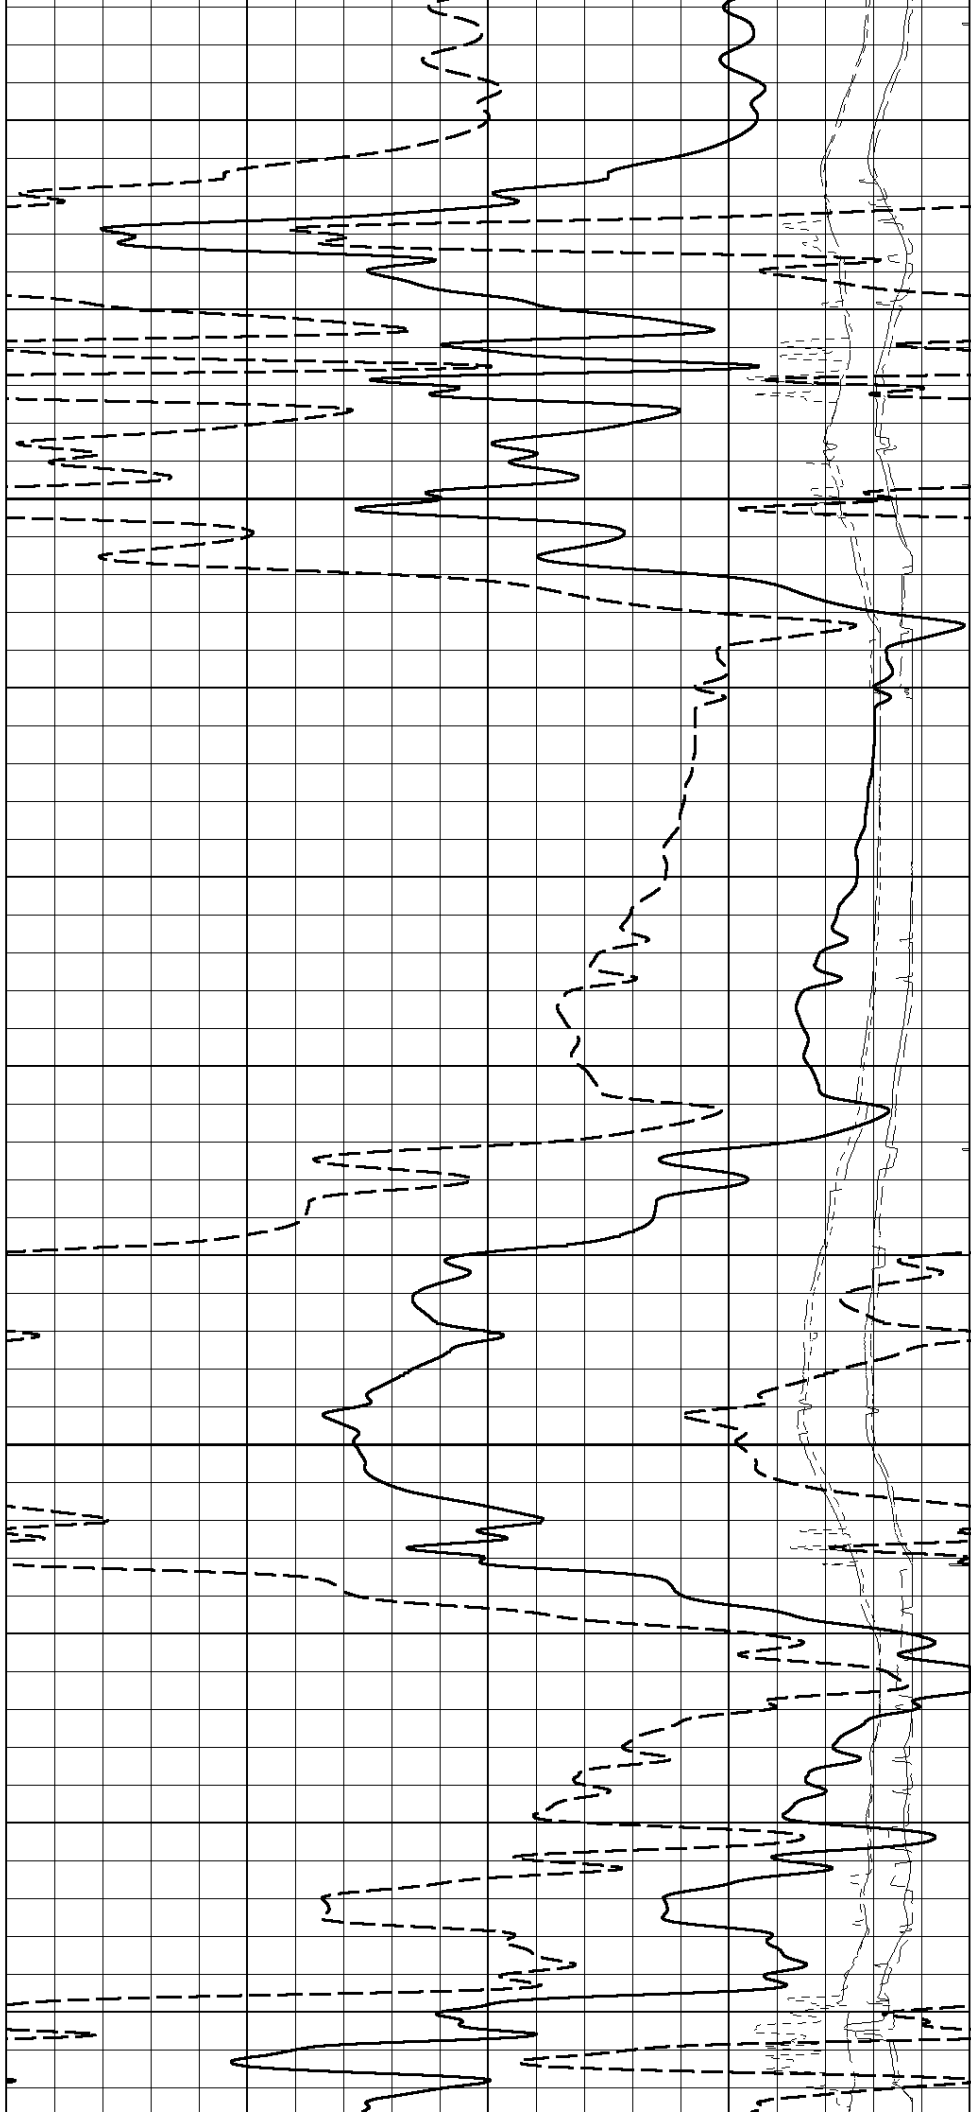


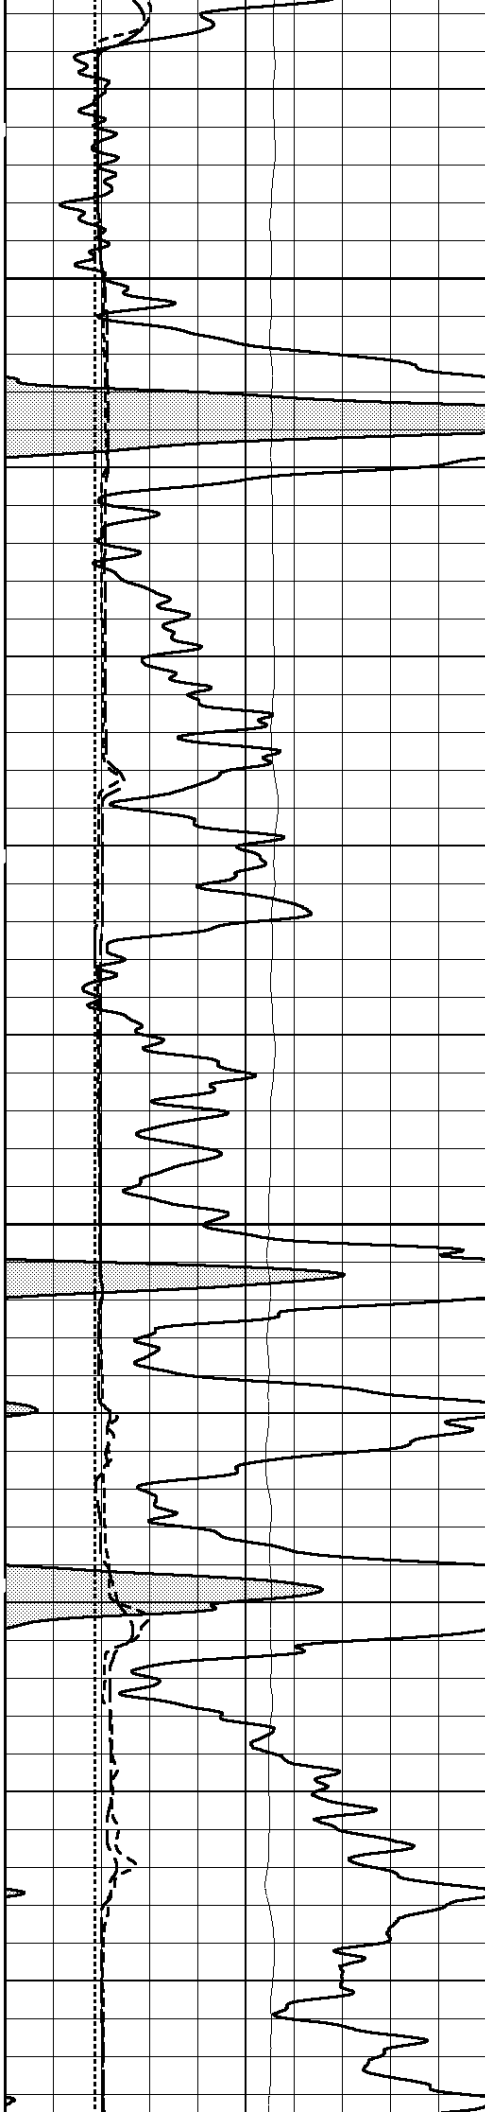

4350

4375

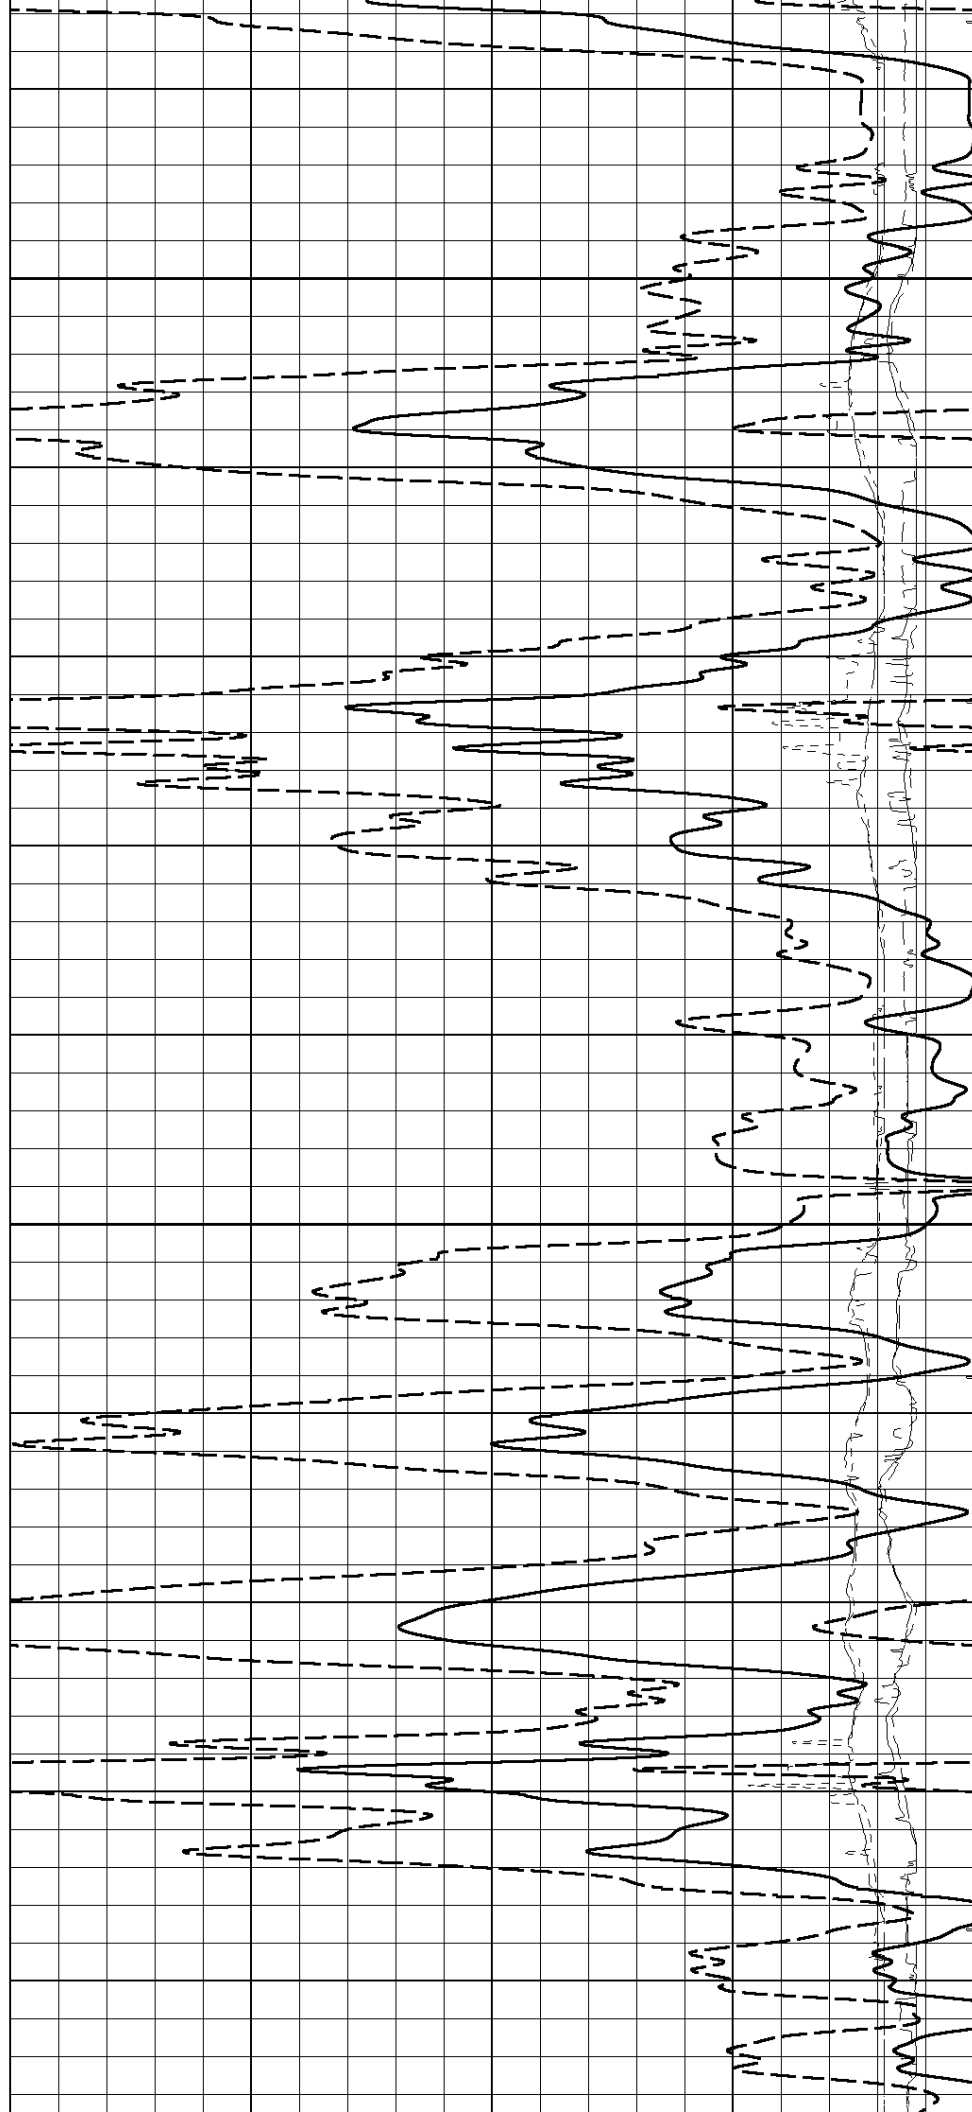


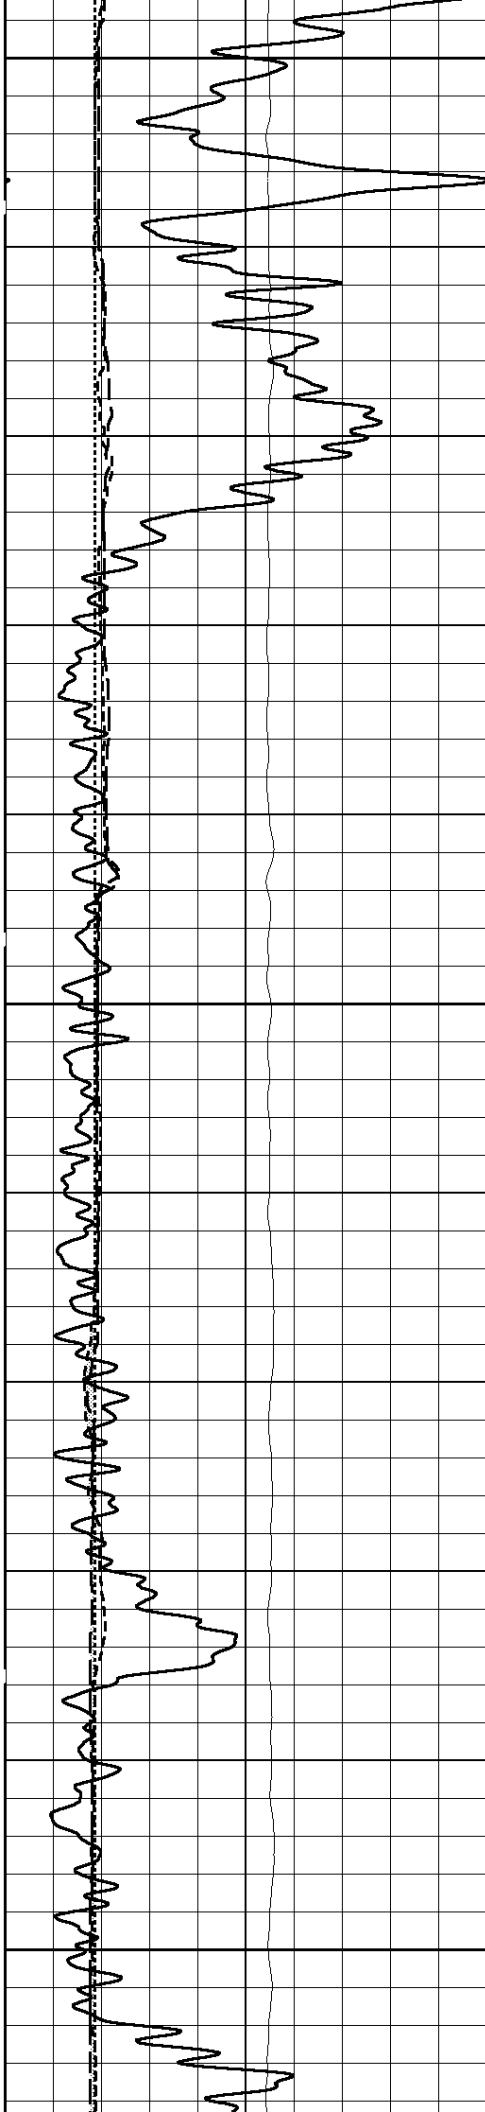


4400

4425


4450

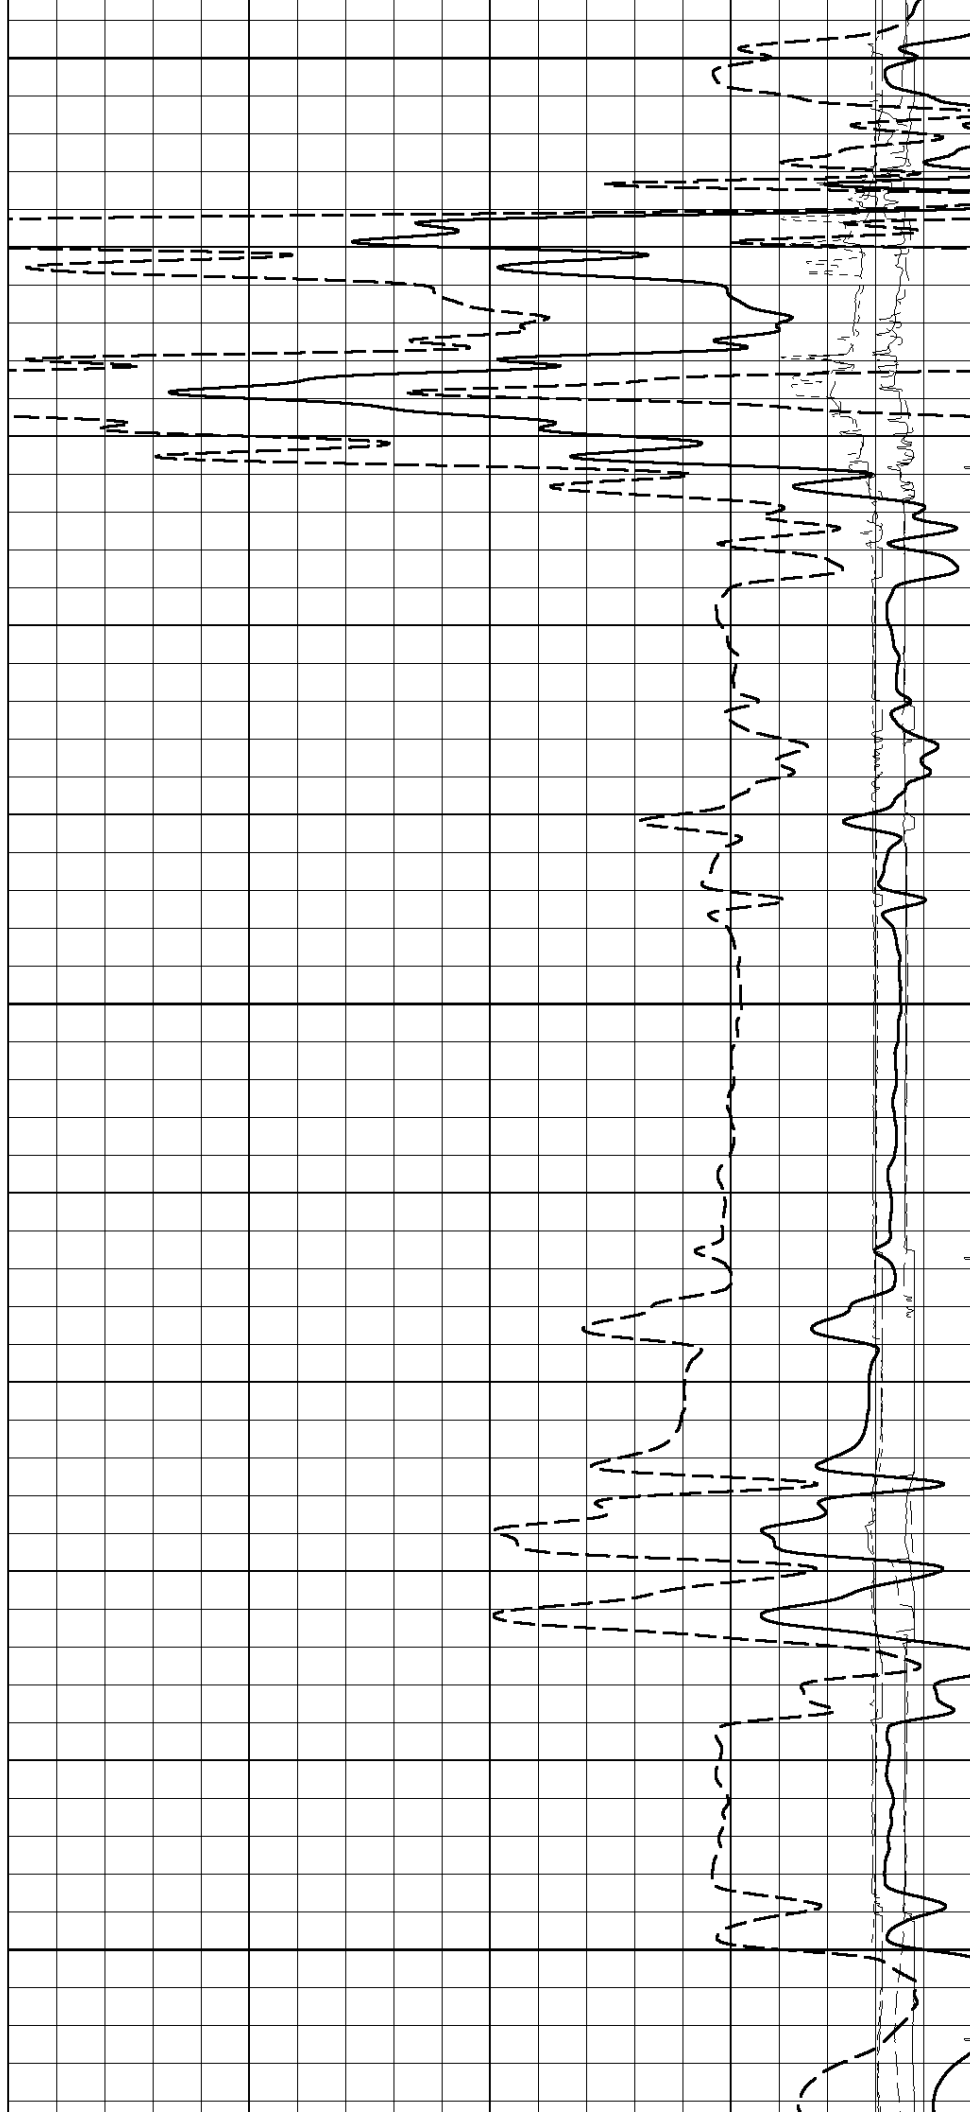

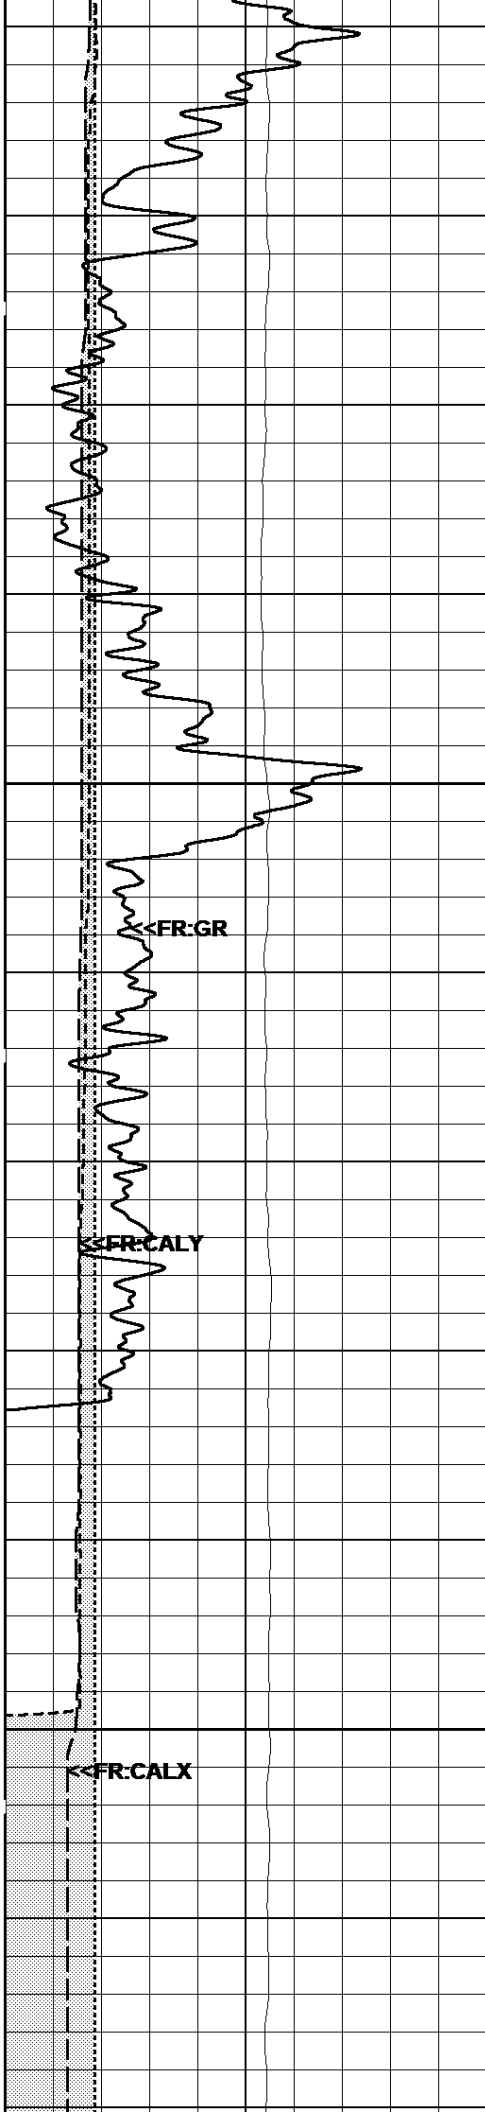

4475


4500

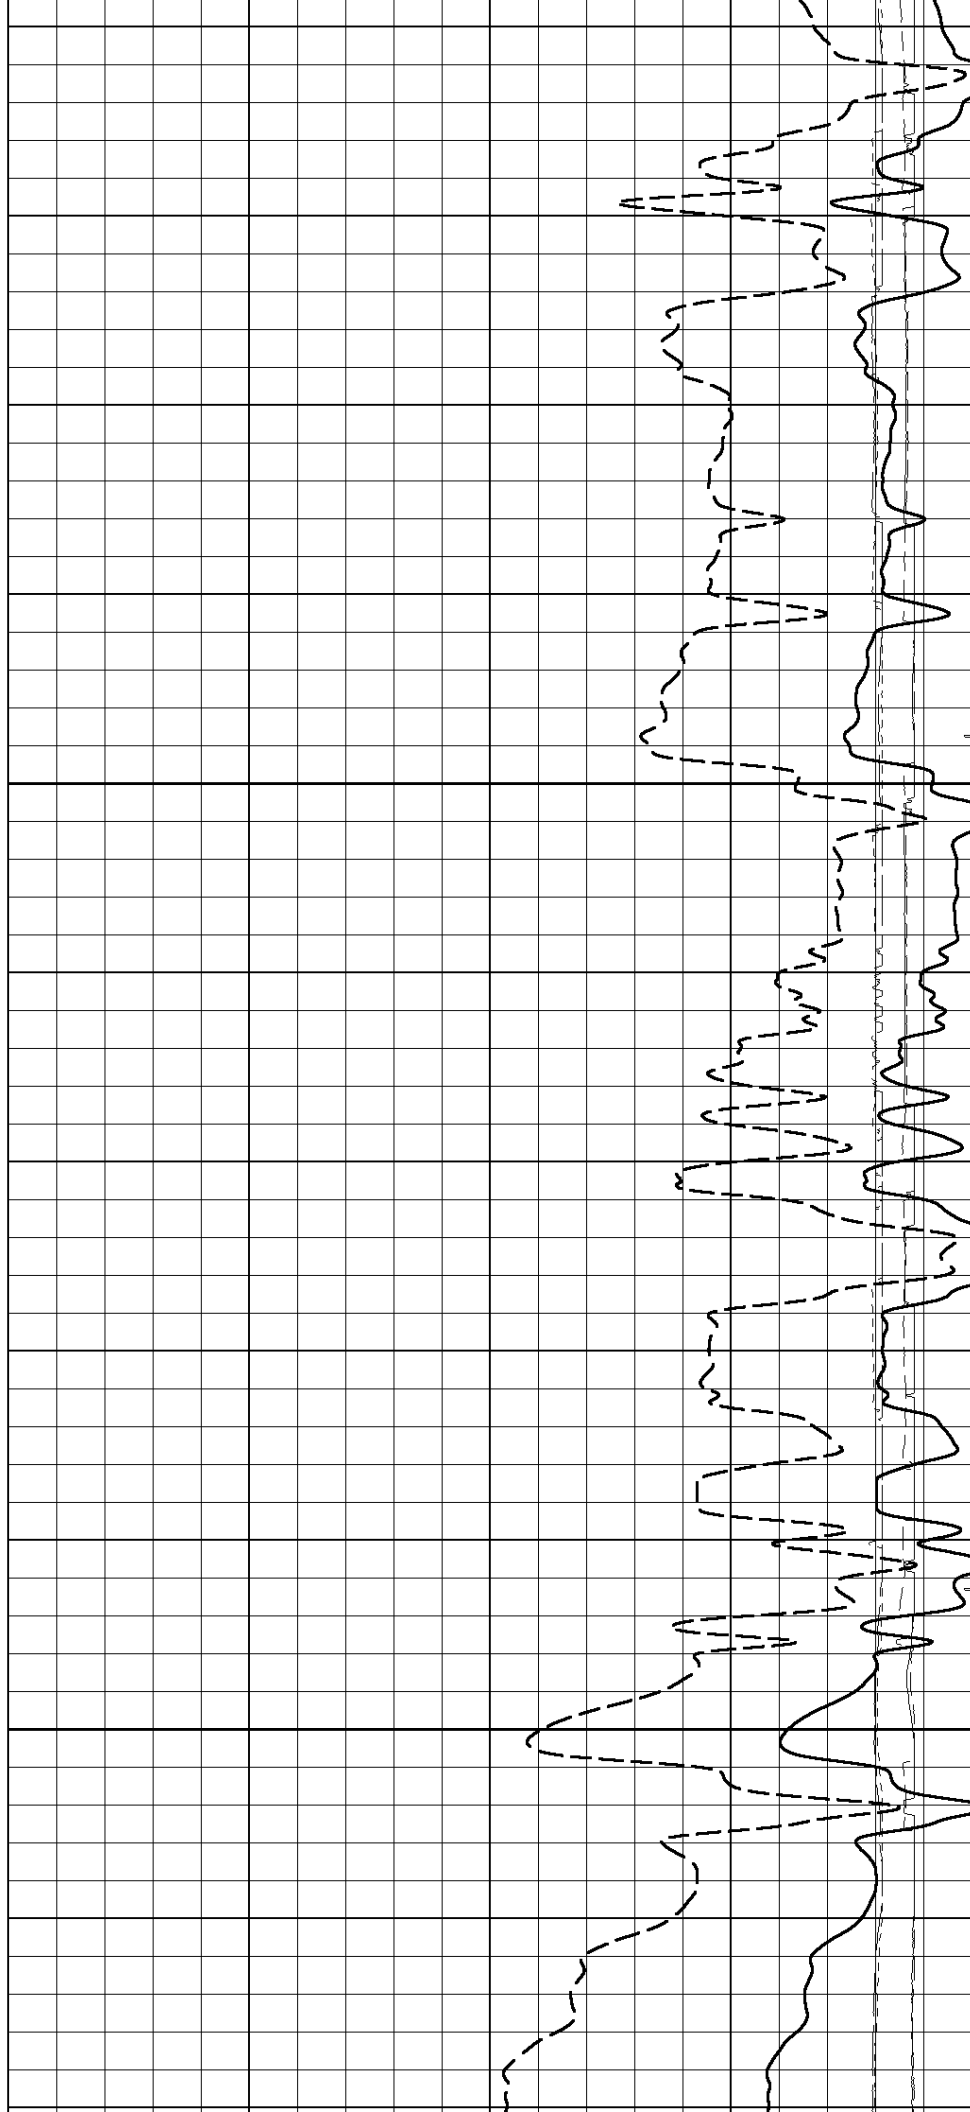

FR:GR

FR:CALY

FR:CALX

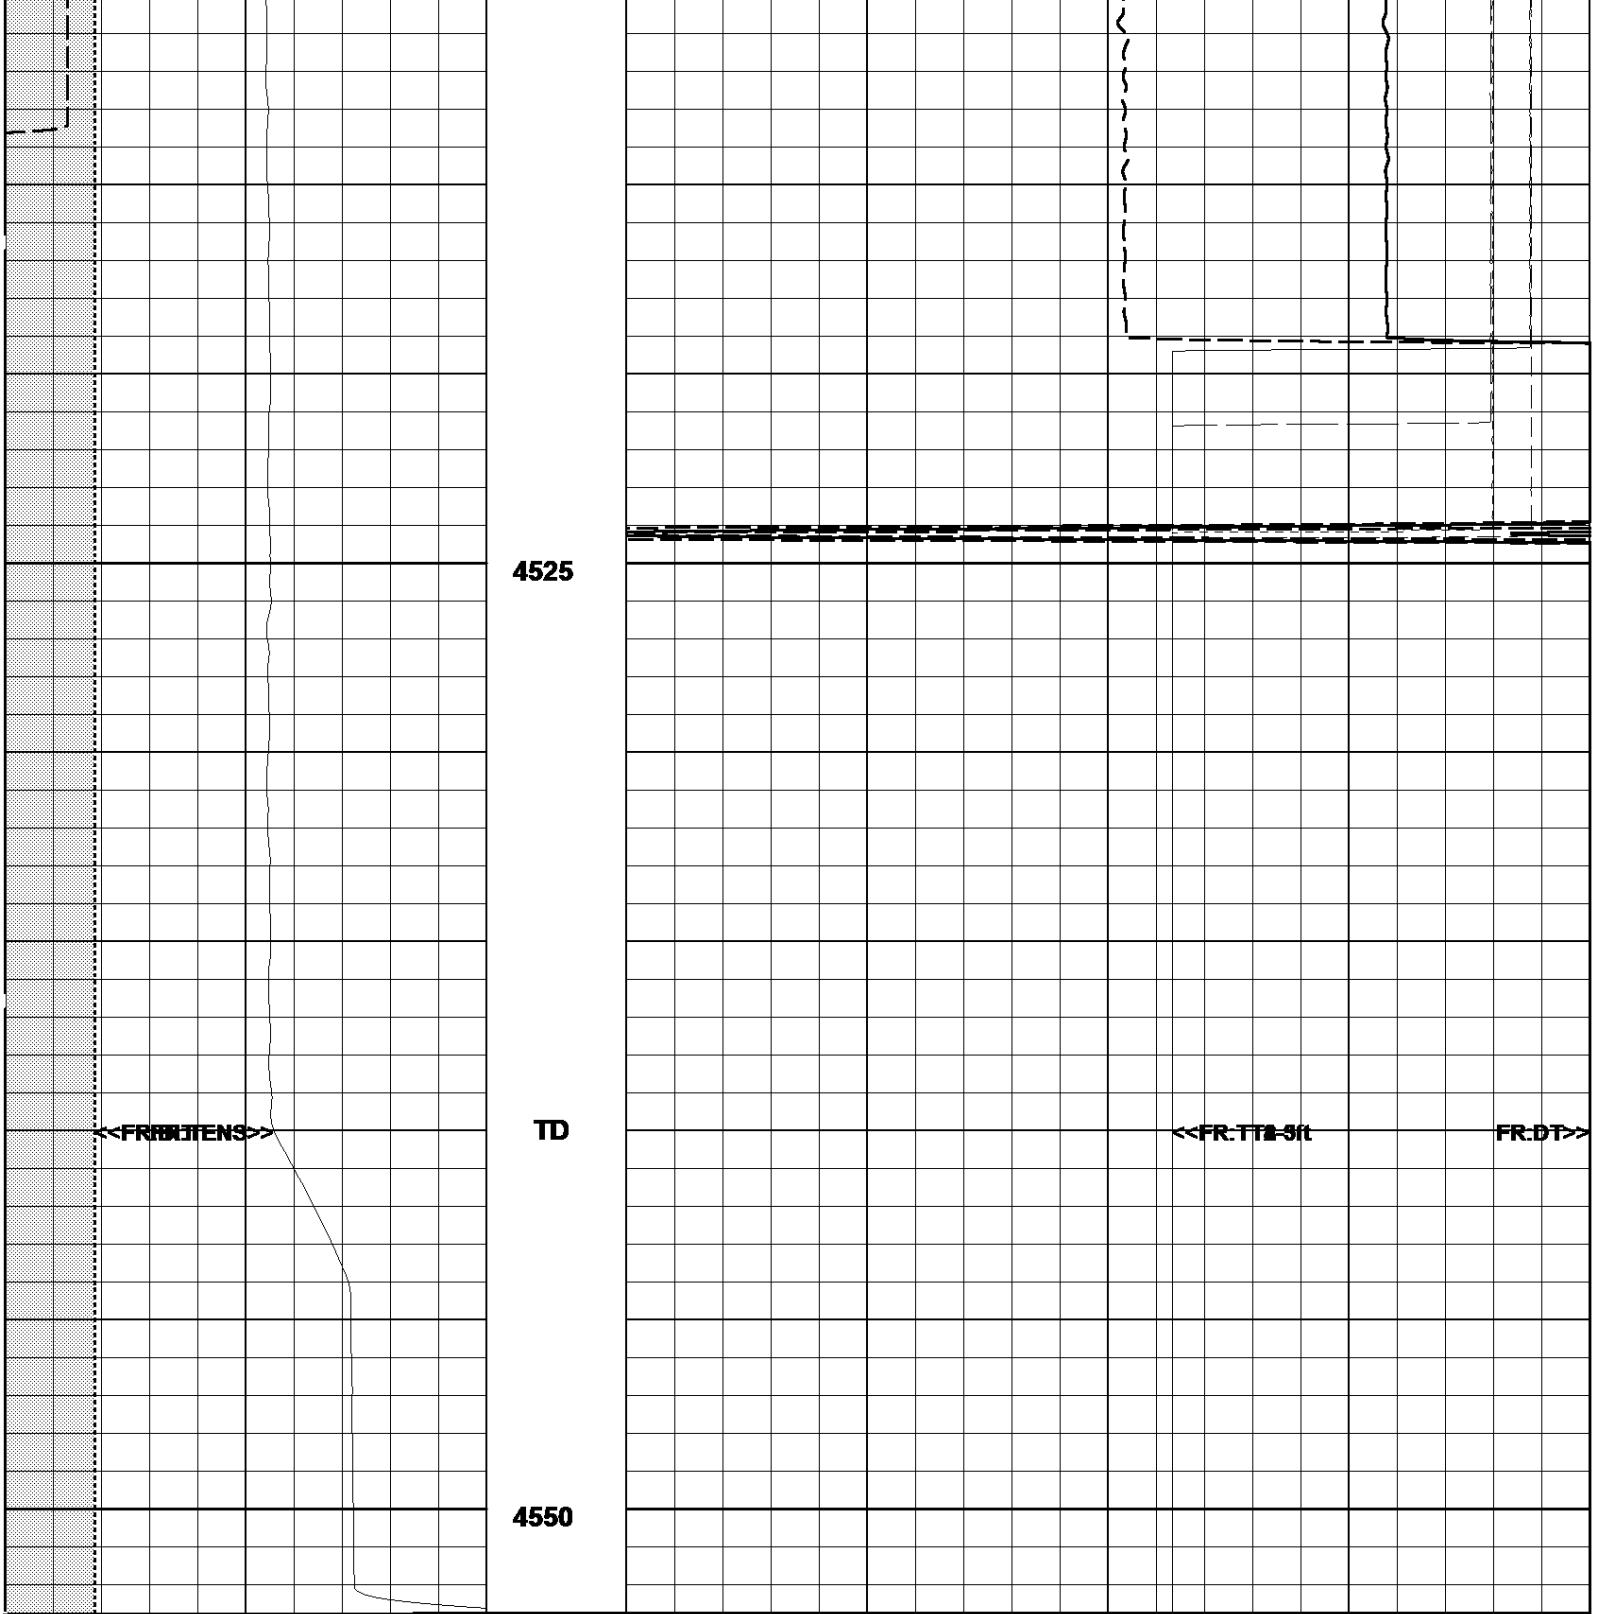

Gamma Ray (GR)			Delta T (DT)		
0.	API	150.	140.	usecs/ft	40.
X-Caliper (CALX)			Sonic-Porosity (SPHI)		
6.	in	16.	30.	Percent	-10.
Y-Caliper (CALY)			TT (TT1-3ft)		
6.	in	16.	1500.	usecs	0.
Tension (TENS)			TT (TT2-3ft)		
5000.	Lbs	0.	1500.	usecs	0.
Bit Size (BIT)			TT (TT3-5ft)		
6.	Ref in	16.	1500.	usecs	0.
			TT (TT4-5ft)		
			1500.	usecs	0.

GAMMA RAY CALIBRATION

SERIAL NUM RG3007

BLANKET NUM 1A

MASTER CALIBRATIONS

	BackGrnd	CalVal: 175.000 API	Gain/Offset	CALIBRATION DATE	CALIBRATION TIME
BASE CALS	31.235 - raw	207.385 - raw	0.993 - gain 0.000 - off	M/D/Y> 8/6/2015	H:M:S> 12:41:47

X CALIPER

SERIAL NUM RL4102

MASTER CALIBRATIONS

	ZeroVal: 6.000 in	CalVal: 10.000 in	Gain/Offset	CALIBRATION DATE	CALIBRATION TIME
BASE CALS	1969.329 - raw	4042.166 - raw	0.002 - gain 2.200 - off	M/D/Y> 7/8/2015	H:M:S> 14:25:21

Y CALIPER CALIBRATIONS

SERIAL NUM RN2016

MASTER CALIBRATIONS

	ZeroVal: 6.000 IN	CalVal: 10.000 IN	Gain/Offset	CALIBRATION DATE	CALIBRATION TIME
BASE CALS	850.111 - raw	1578.062 - raw	0.005 - gain 1.329 - off	M/D/Y> 8/6/2015	H:M:S> 13:25:17

Company	K3 OIL & GAS OPERATING COMPANY
Well	EATON #3-18
Field	WILDCAT
County	LANE
State	KANSAS

RECON

BHC SONIC
GAMMA RAY
X-Y CALIPER