

DUAL INDUCTION LOG


Company	WOOLSEY OPERATING CO. LLC.	Company	WOOLSEY OPERATING COMPANY, LLC.
Well	HUBBARD #1	Well	HUBBARD #1
Field	CRYSTAL SPRINGS N.W.	Field	CRYSTAL SPRINGS N.W.
County	HARPER	County	HARPER
State	KANSAS	State	KANSAS
Location:	AP1 # : 15-077-22175-0000 330' FNL & 330' FWL C - NW - NW - NW	Other Services CDL/CNL/PE SONIC	
Permanent Datum	GROUND LEVEL	Elevation	1498
Log Measured From	KELLY BUSHING 12' A.G.L.	K.B. 1510 D.F. 1508 G.L. 1498	
Drilling Measured From	KELLY BUSHING		
SEC 1	TWP 32S	RGE 8W	
Date	9/24/18		
Run Number	ONE		
Depth Driller	4920		
Depth Logger	4920		
Bottom Logged Interval	4918		
Top Log Interval	00		
Casing Driller	8 5/8"@225'		
Casing Logger	225		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3,000 PPM	
Density / Viscosity	9.6/55		
pH / Fluid Loss	11.0/8.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.700@100F		
Rinf @ Meas. Temp	.525@100F		
Rmc @ Meas. Temp	.840@100F		
Source of Rinf / Rmc	MEASUREMENT		
Rim @ BHT	.565@124F		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom	7:30 P.M.		
Maximum Recorded Temperature	124F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	BILL KLAVER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
HARPER, KS., 5W., 1N., W. INTO

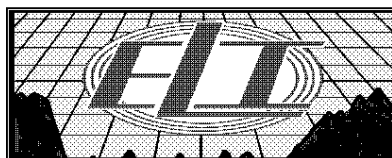

MAIN SECTION

Database File: 2936pe.db
Dataset Pathname: pass3.6
Presentation Format: dil2
Dataset Creation: Mon Sep 24 21:32:03 2018 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1


0	RLL3 (Ohm-m)	50
---	--------------	----

0	RILD (Ohm-m)	50
---	--------------	----



1000	CILD (mmho/m)	0
------	---------------	---


50	RILD X10 (Ohm-m)	500
----	------------------	-----

50	RLL3 X10 (Ohm-m)	500
----	------------------	-----

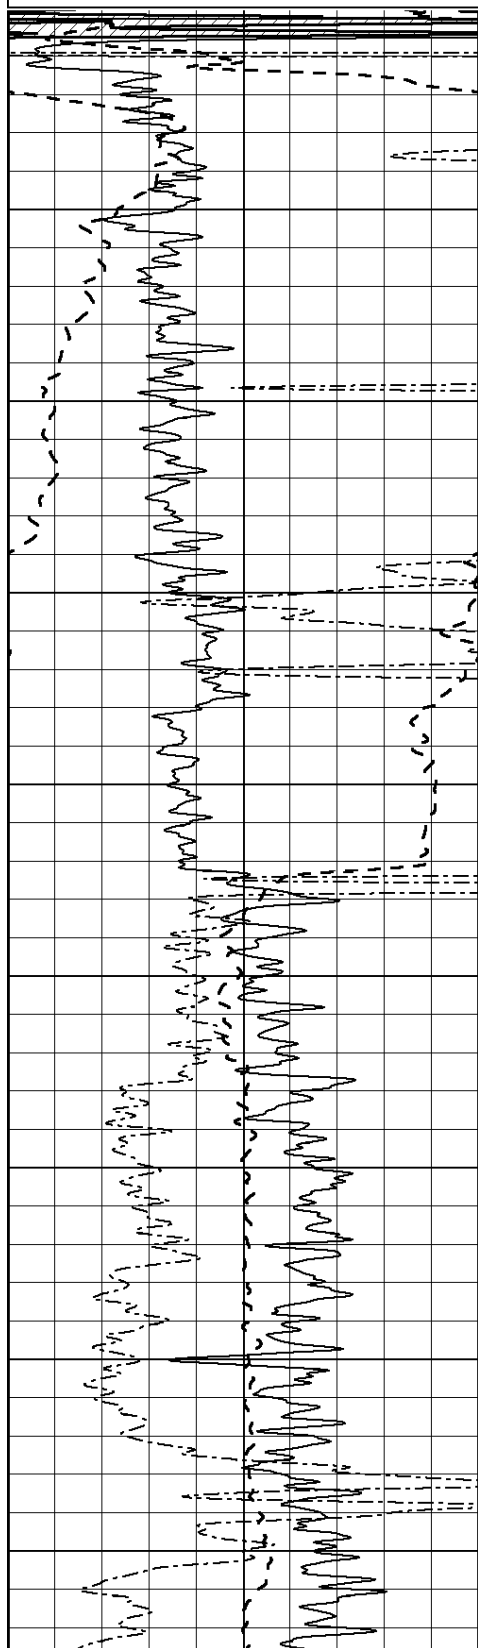

0
50
100
150
200
250
300
350
400

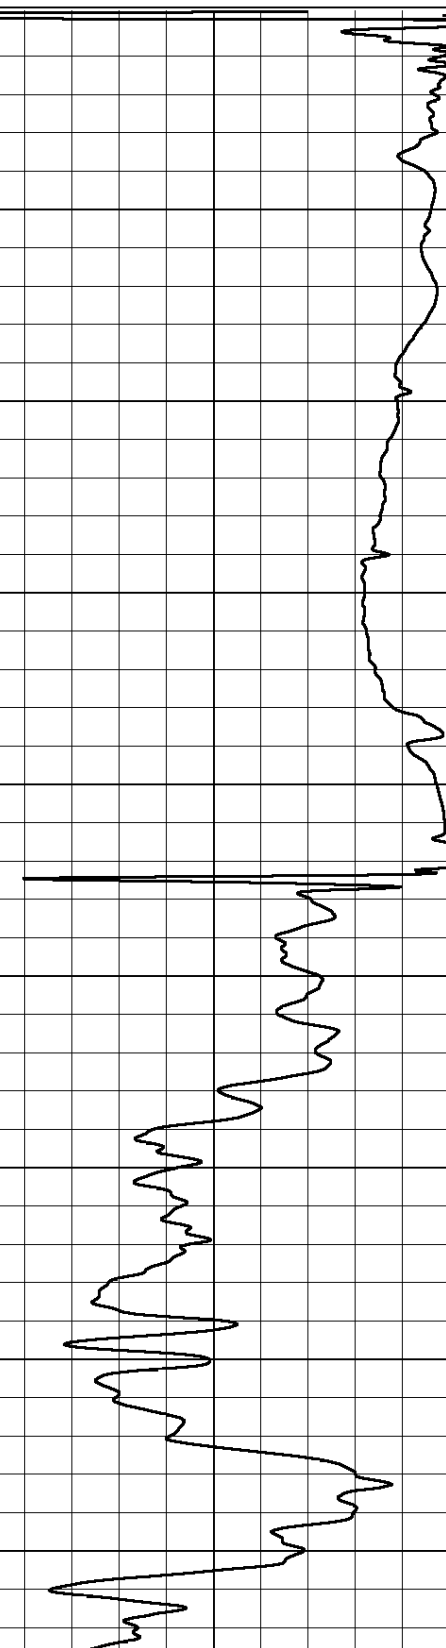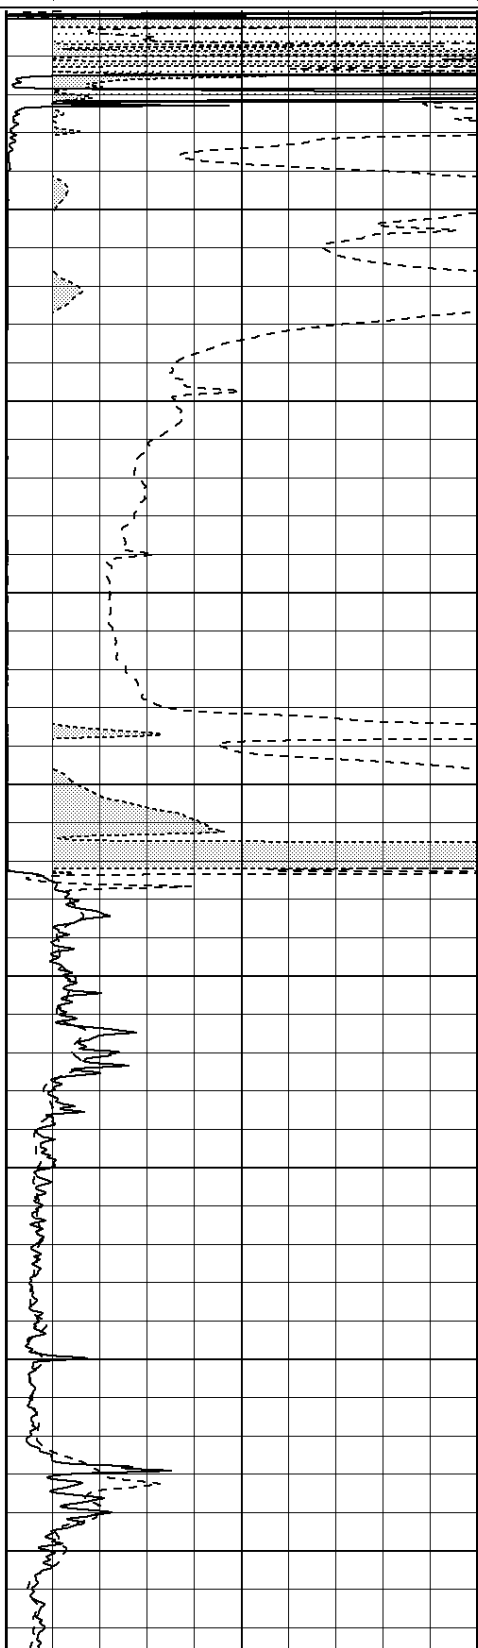

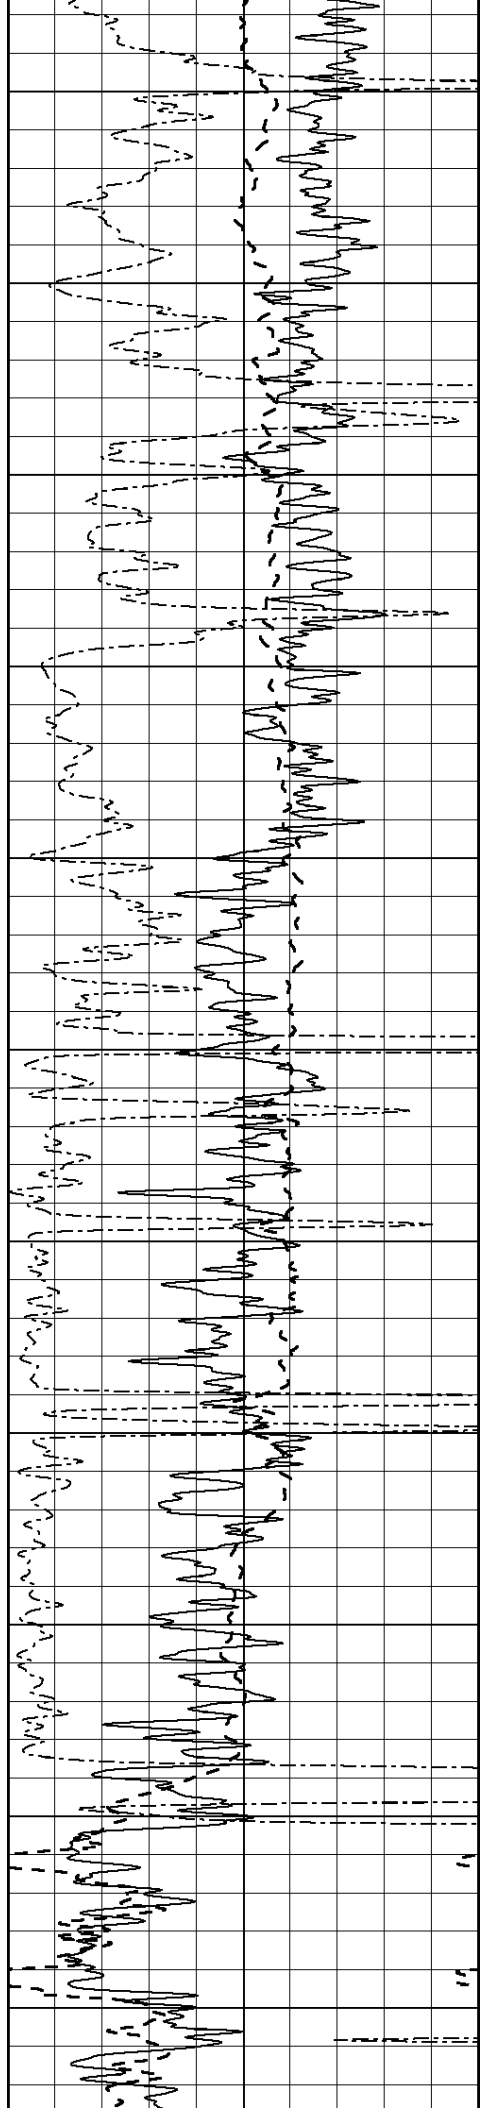

450

500

550

600

650

700


750


800

850

900

950

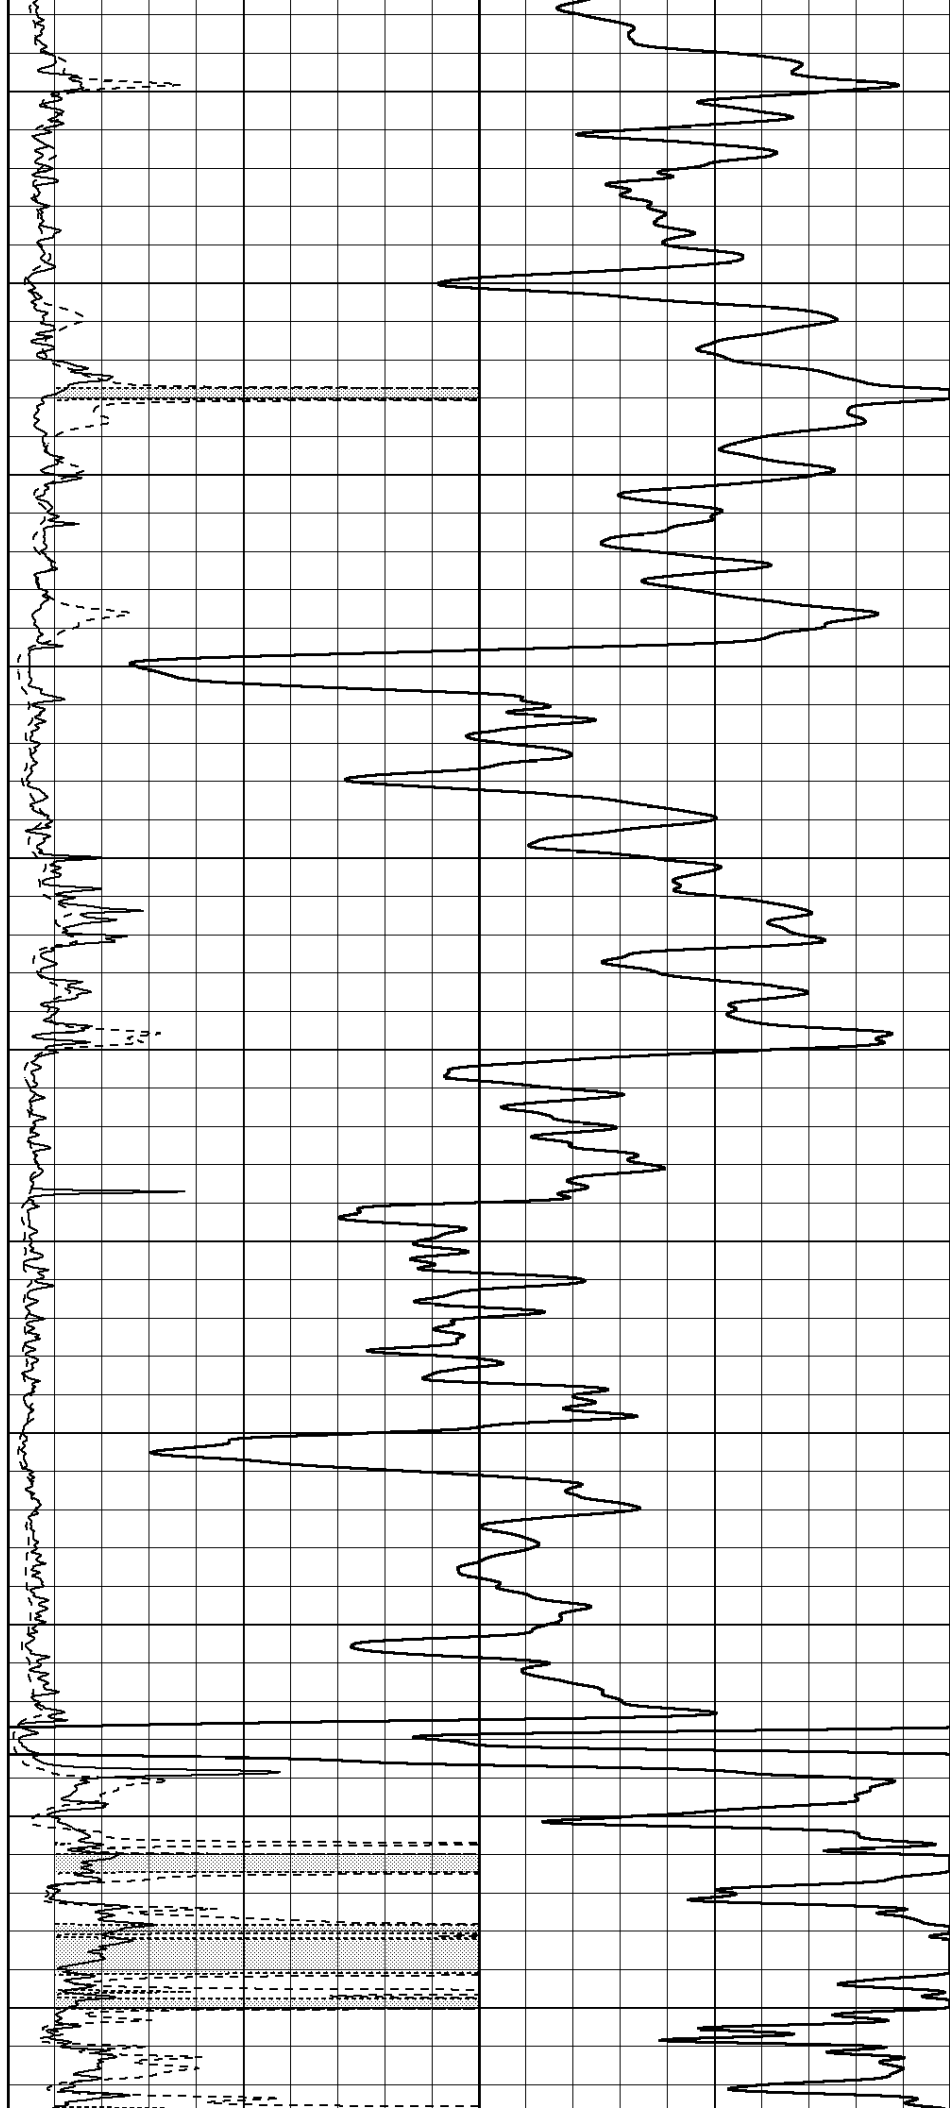

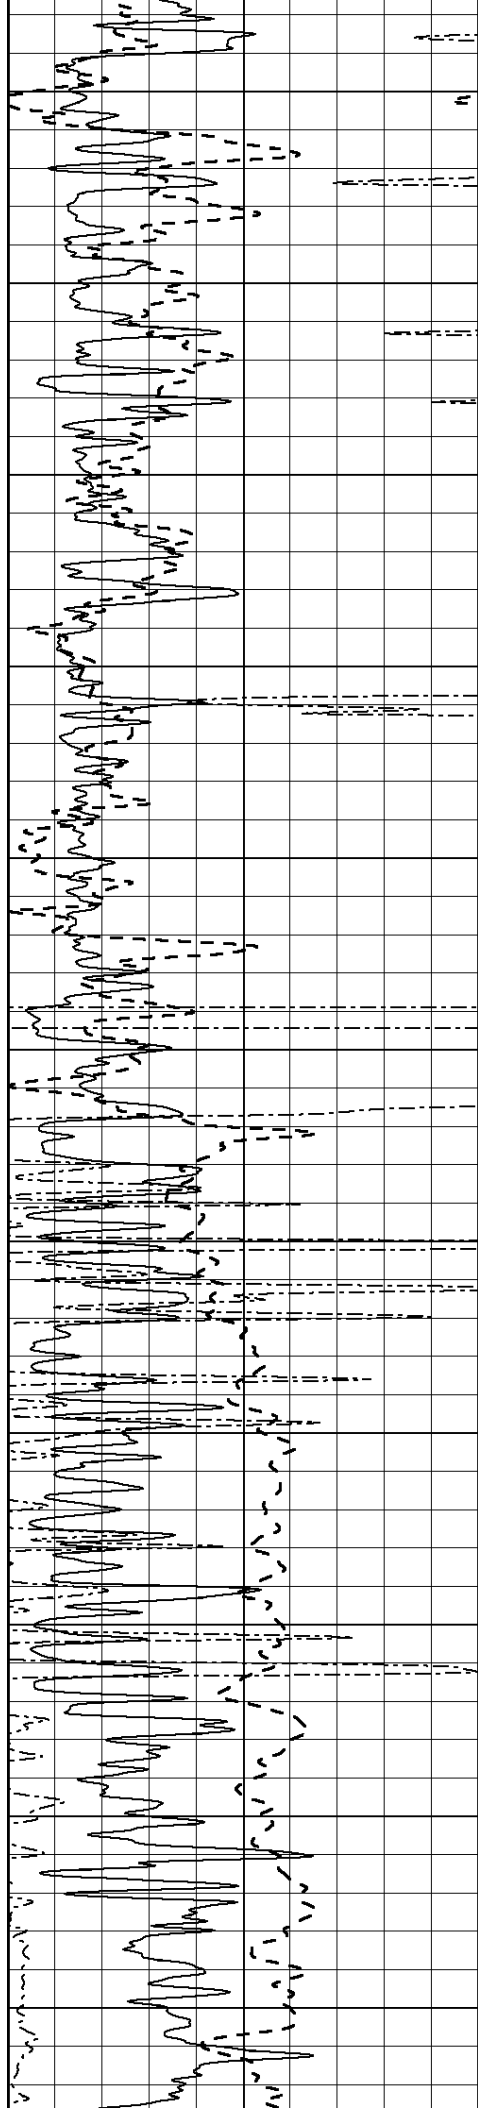

1000

1050

1100

1150

1200

1250


1300


1350

1400

1450

1500

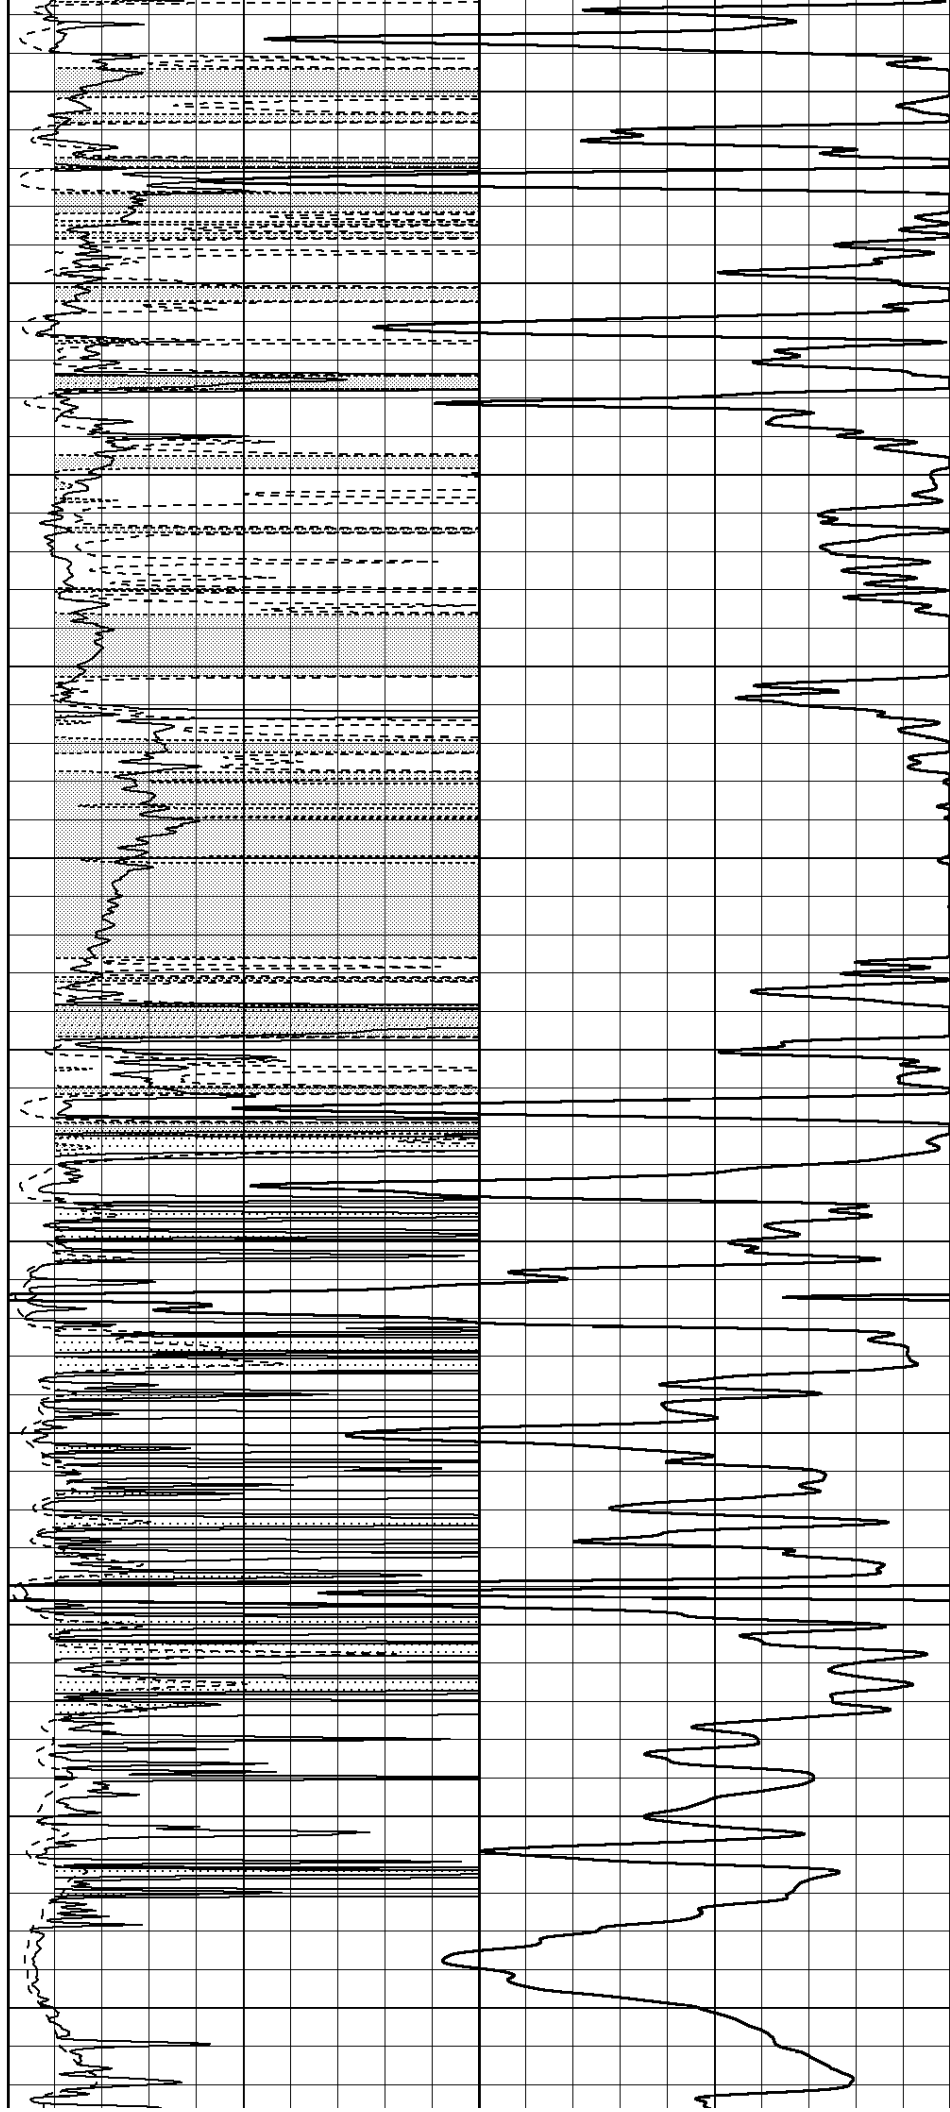

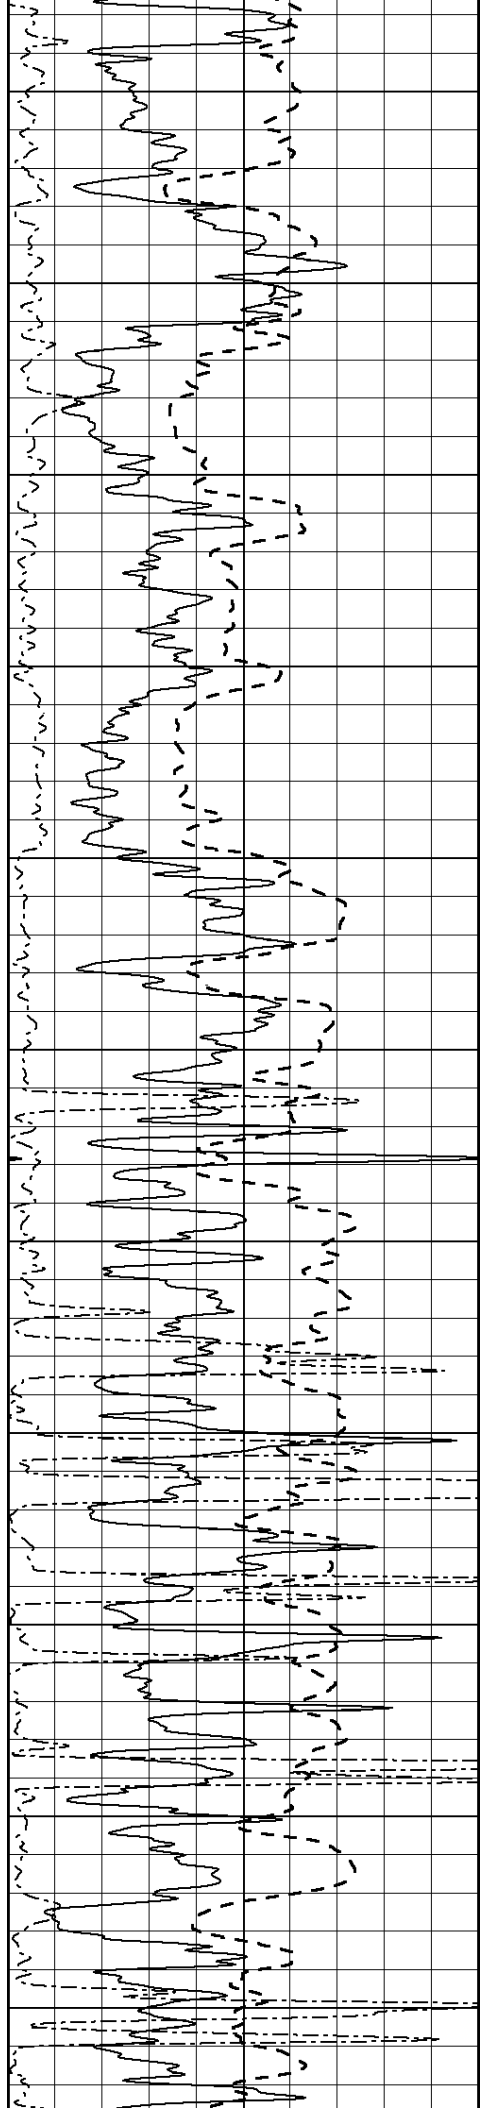

1550

1600

1650

1700

1750

1800


1850


1900

1950

2000

2050

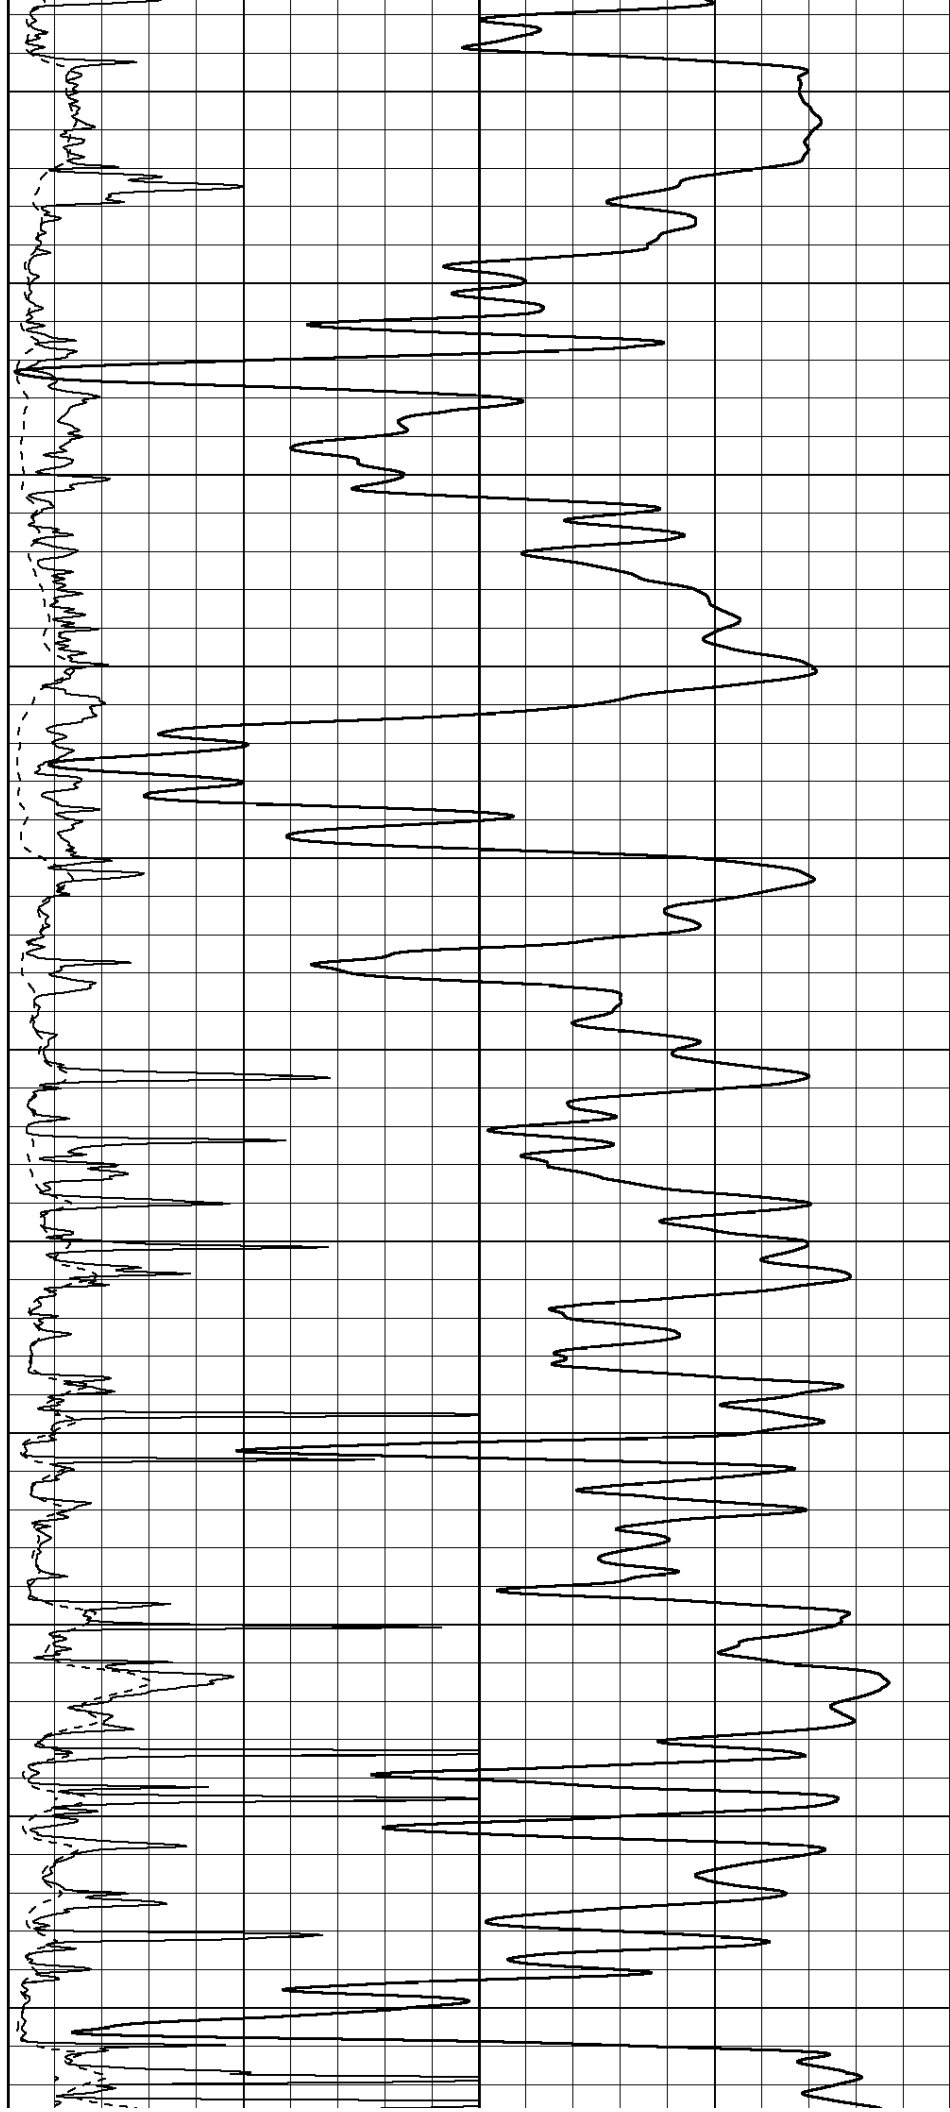

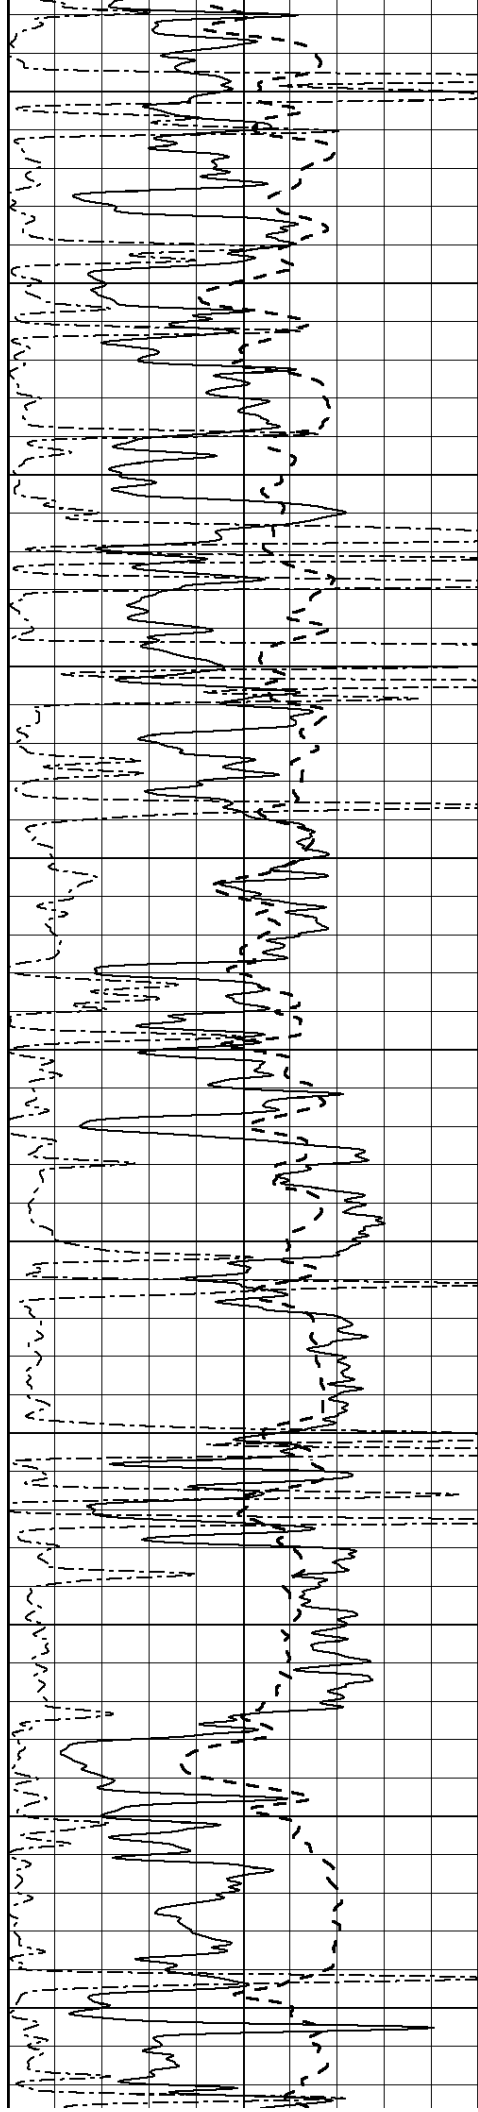

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

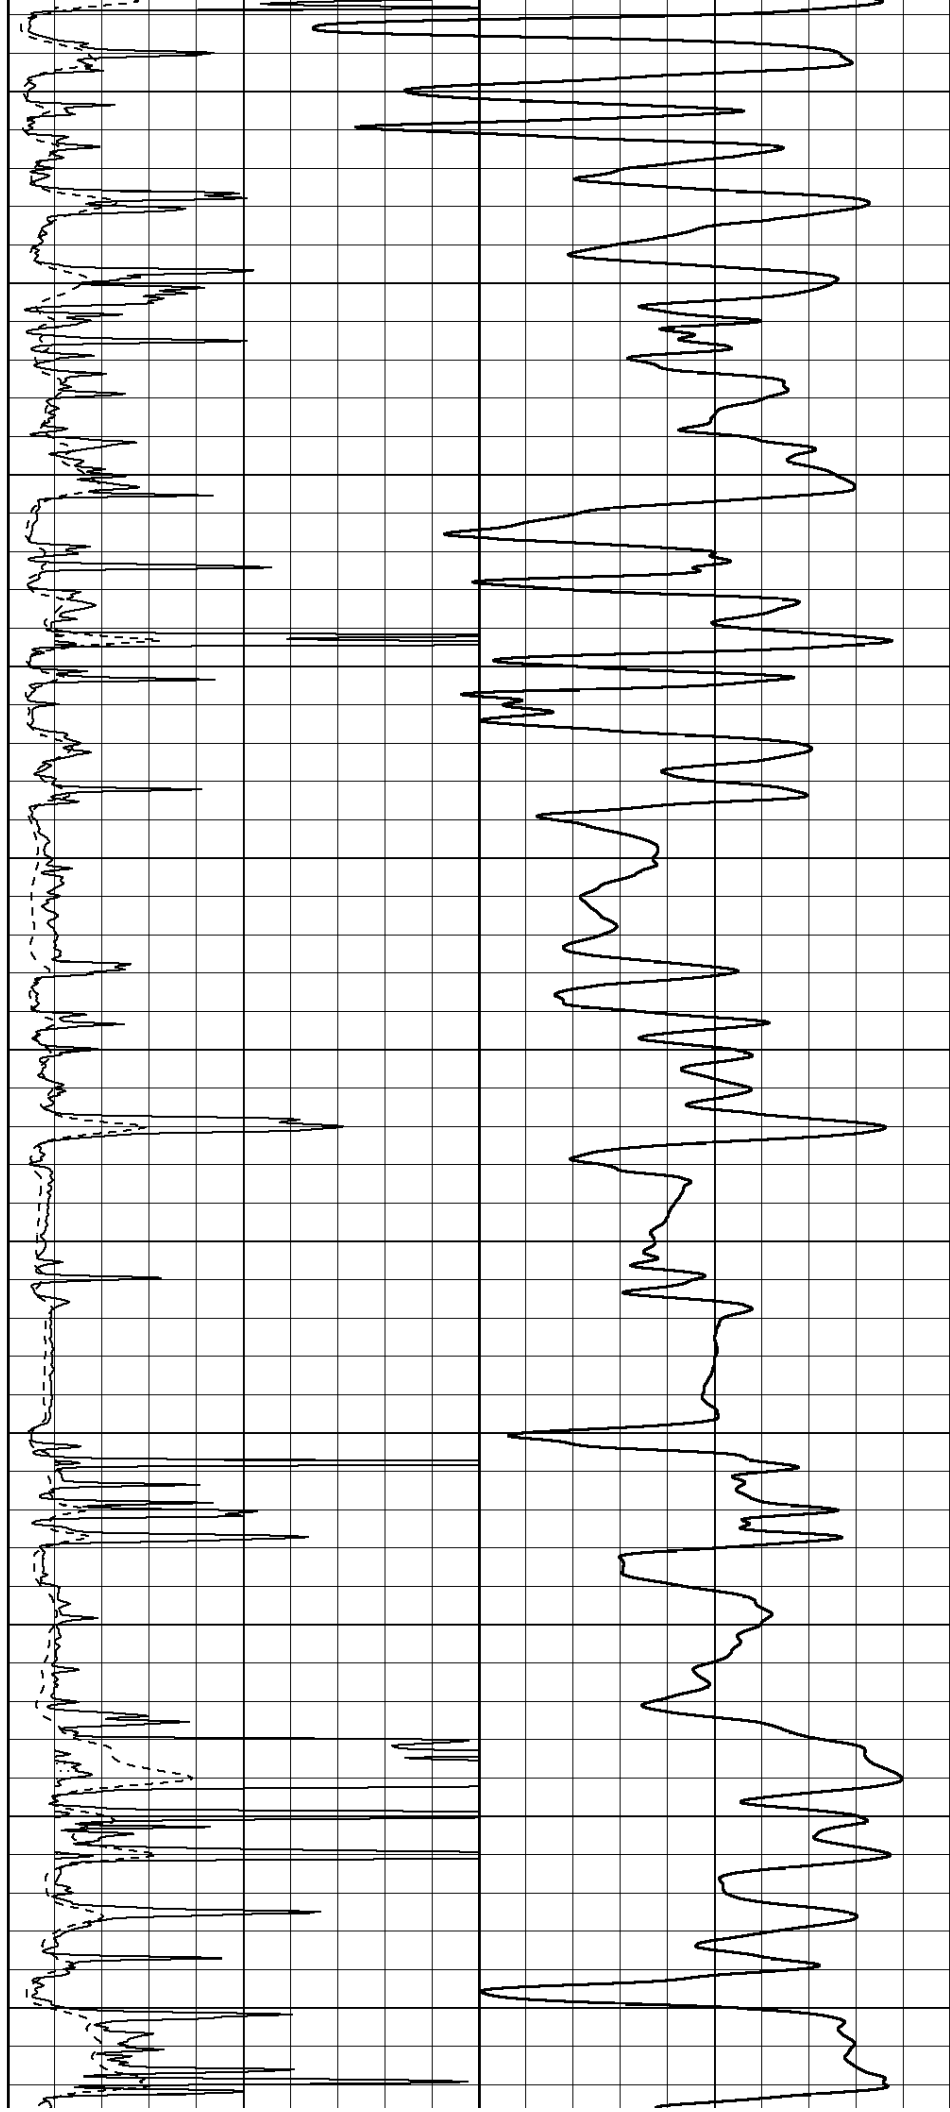

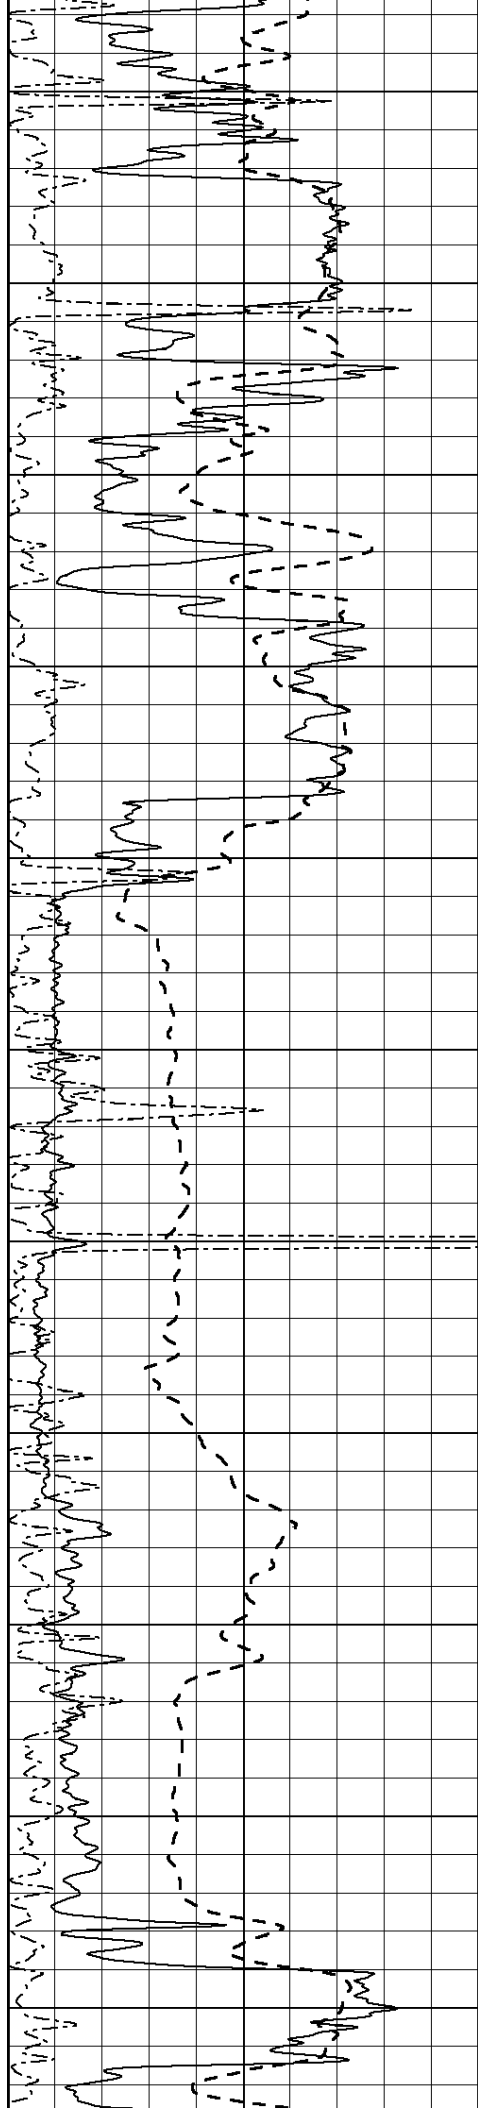

2650

2700

2750

2800

2850

2900



2950


3000

3050

3100

3150

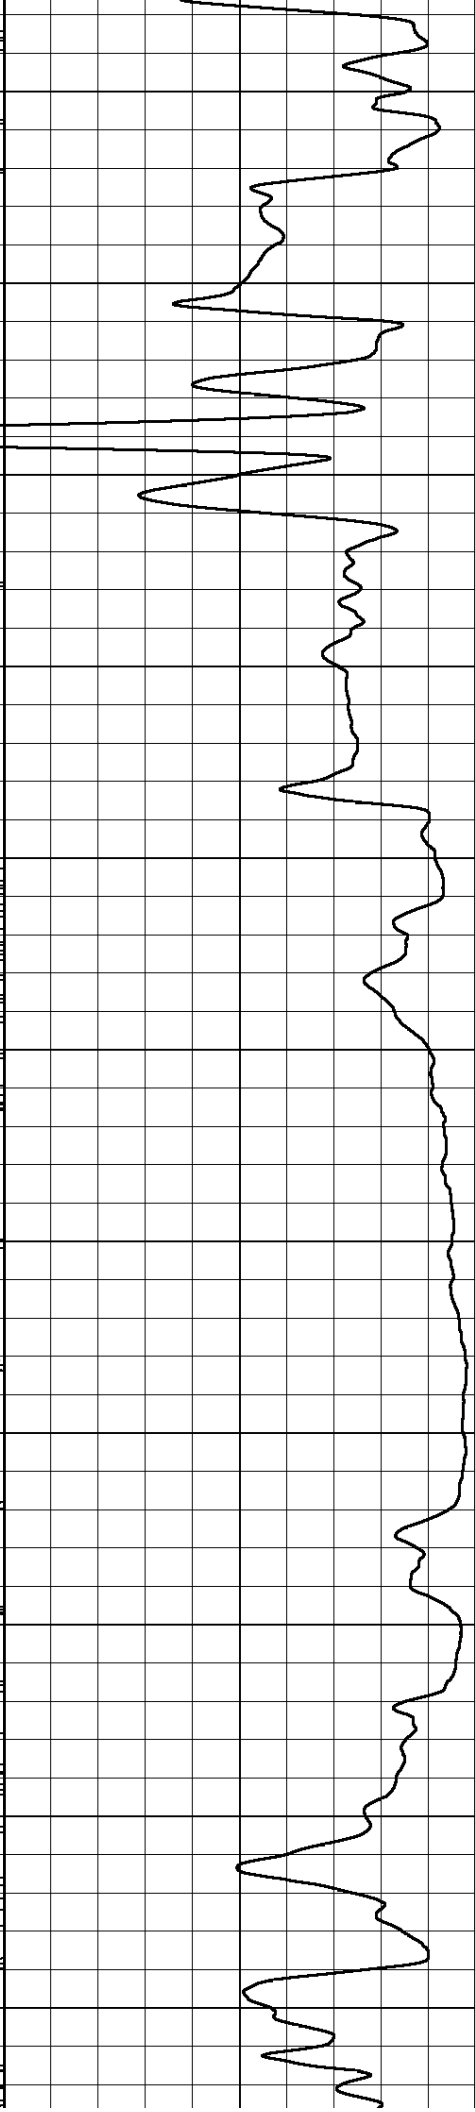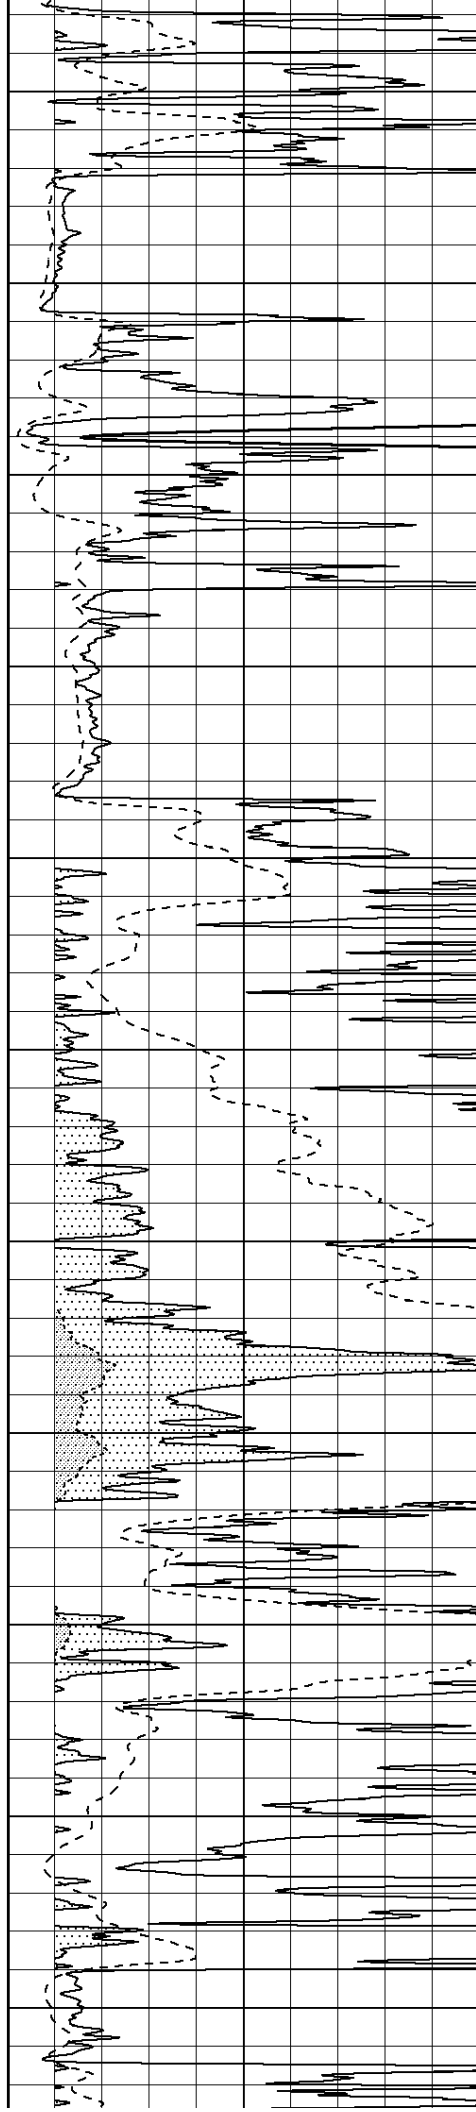

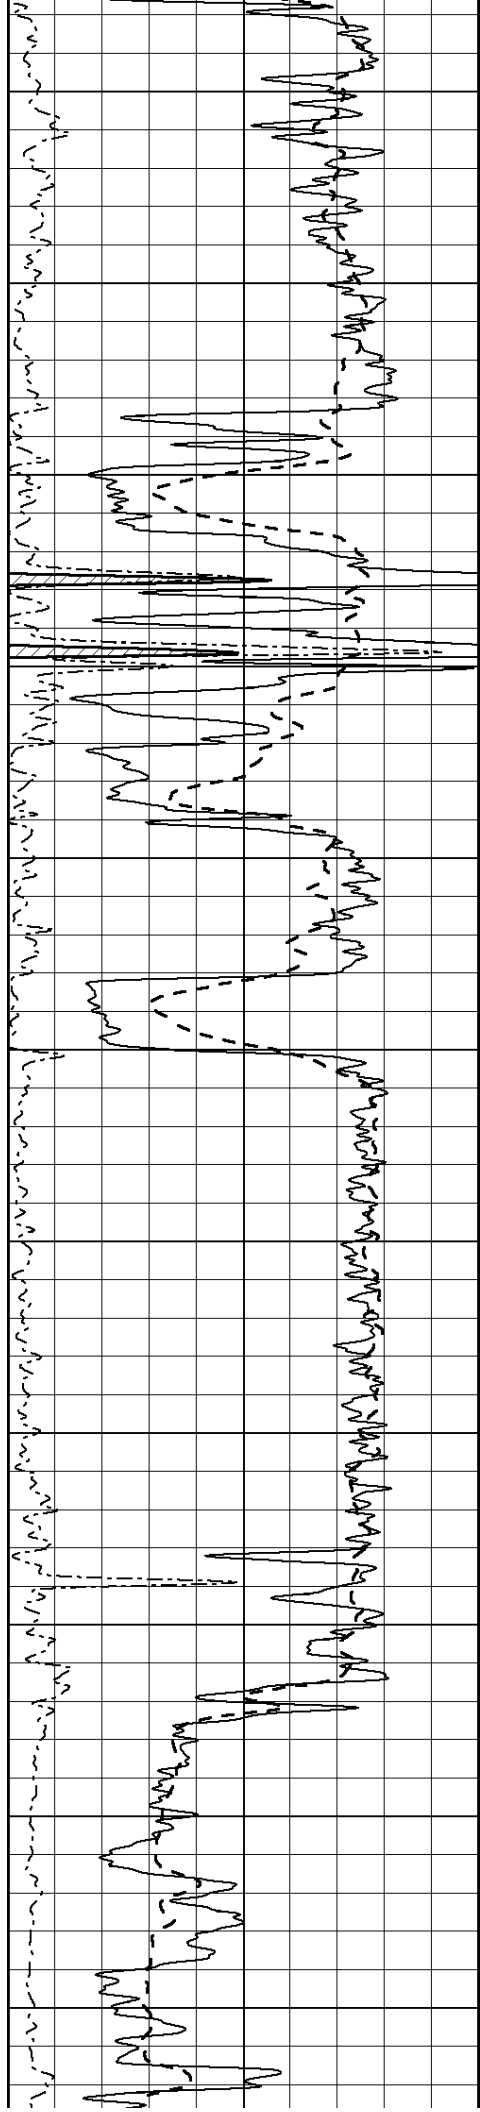

3200

3250

3300

3350

3400

3450


3500


3550

3600

3650

3700

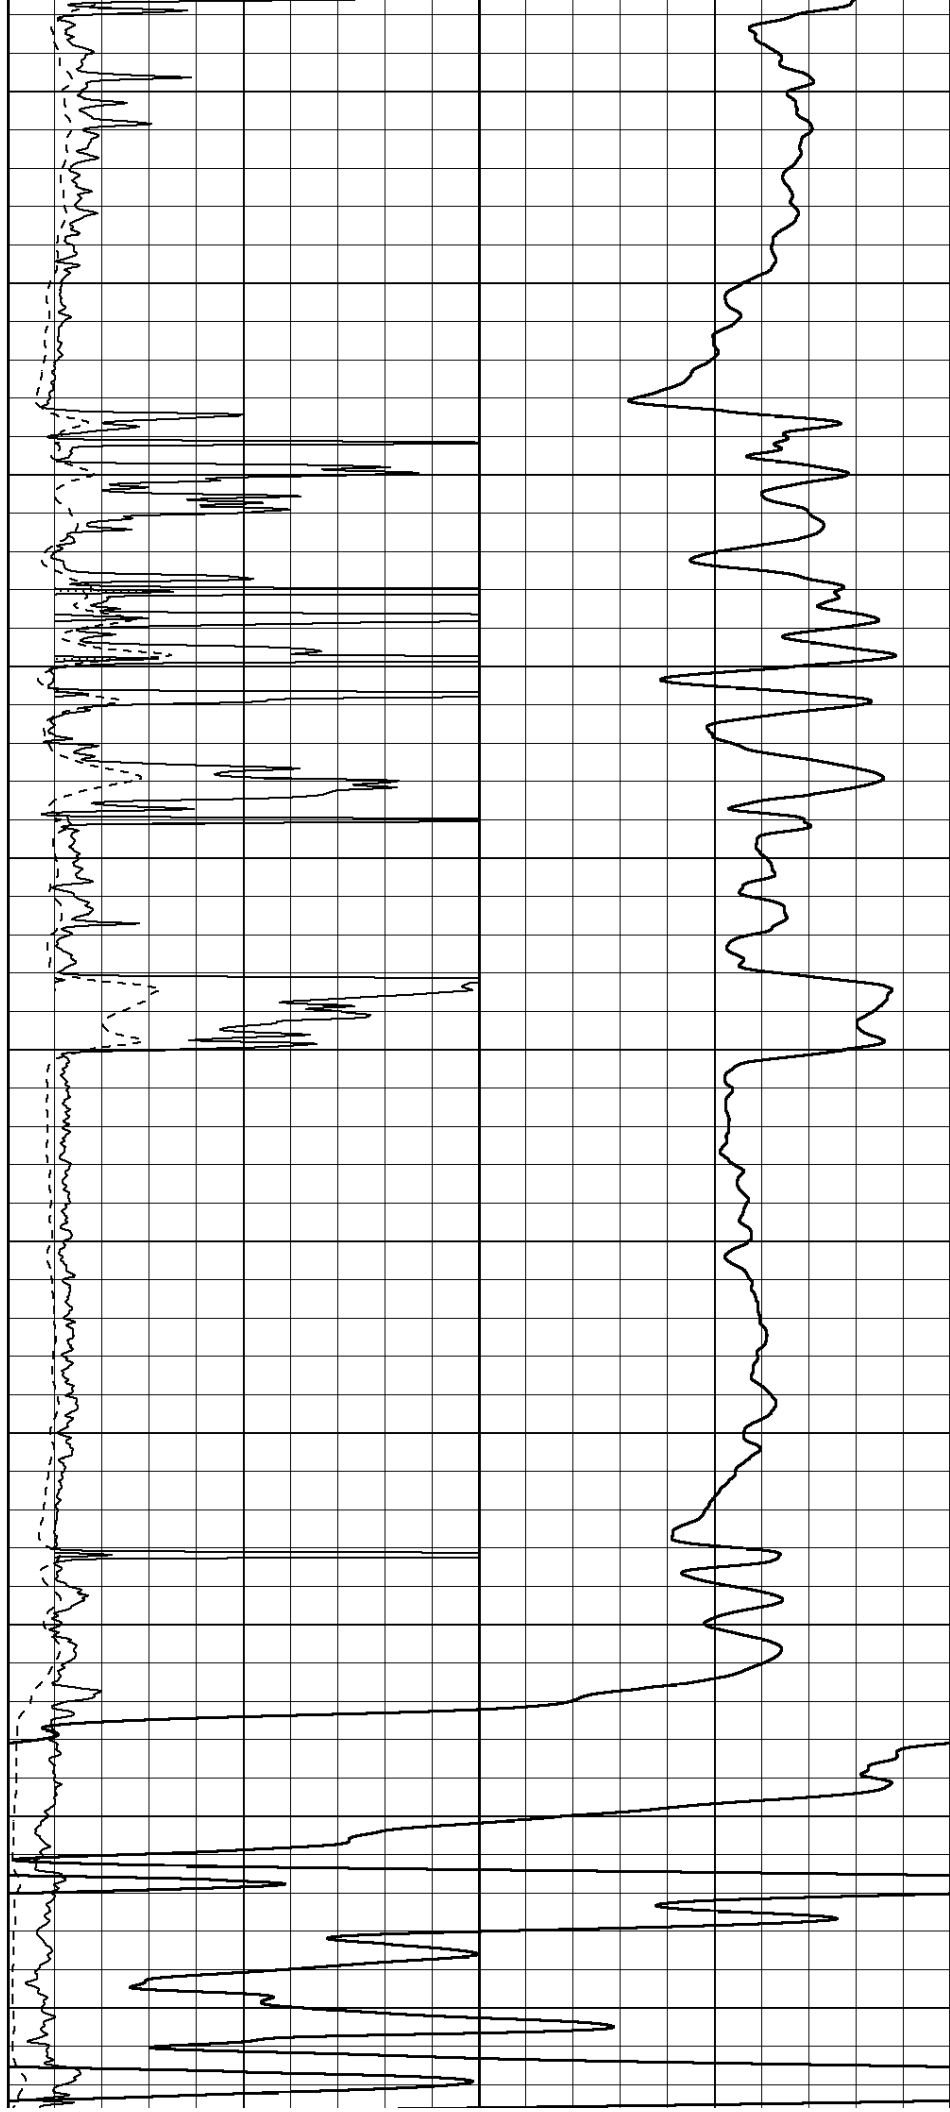

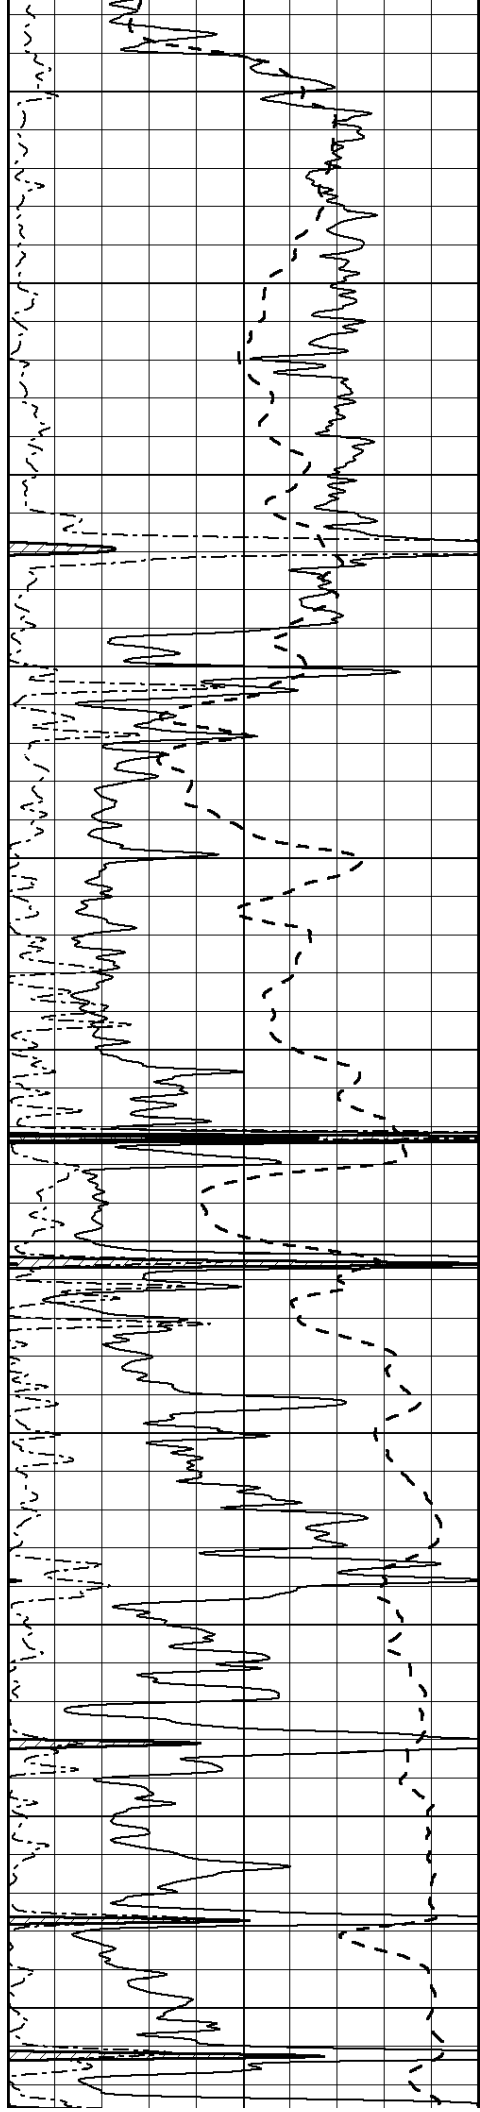

3750

3800

3850

3900

3950

4000


4050


4100

4150

4200

4250

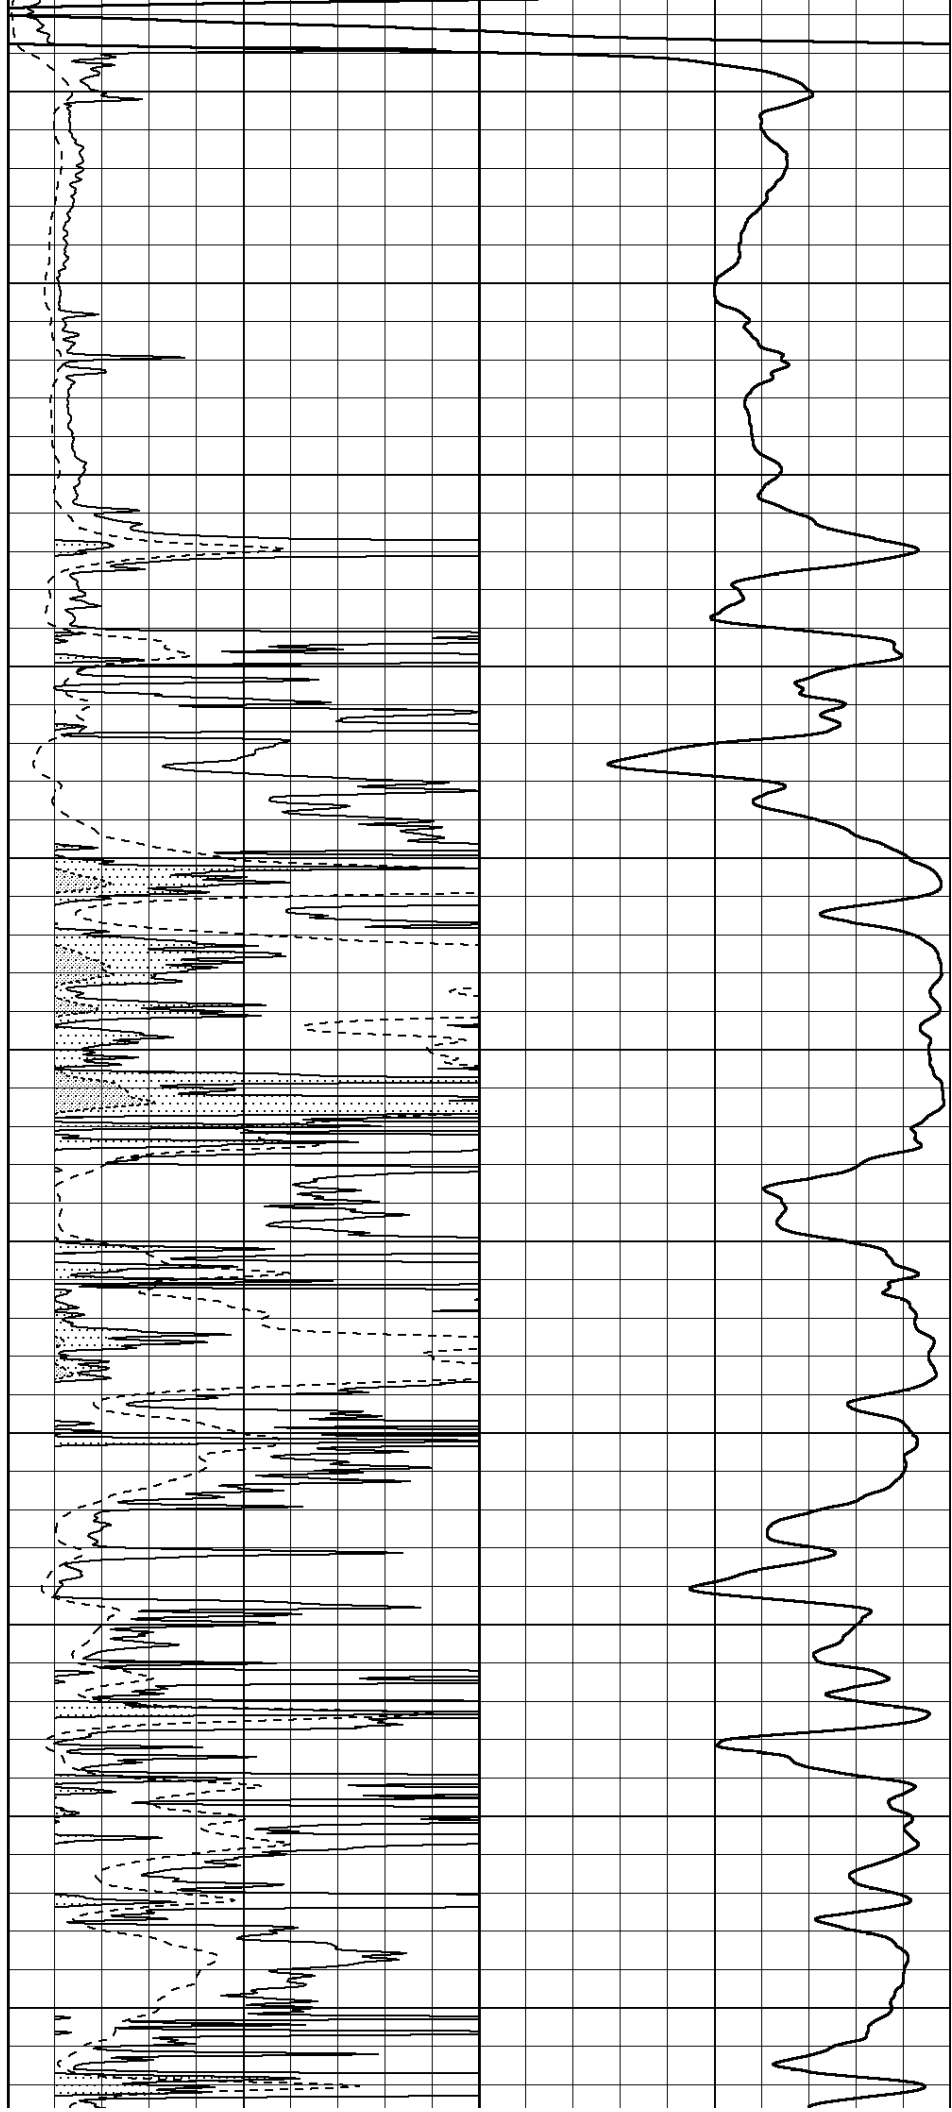

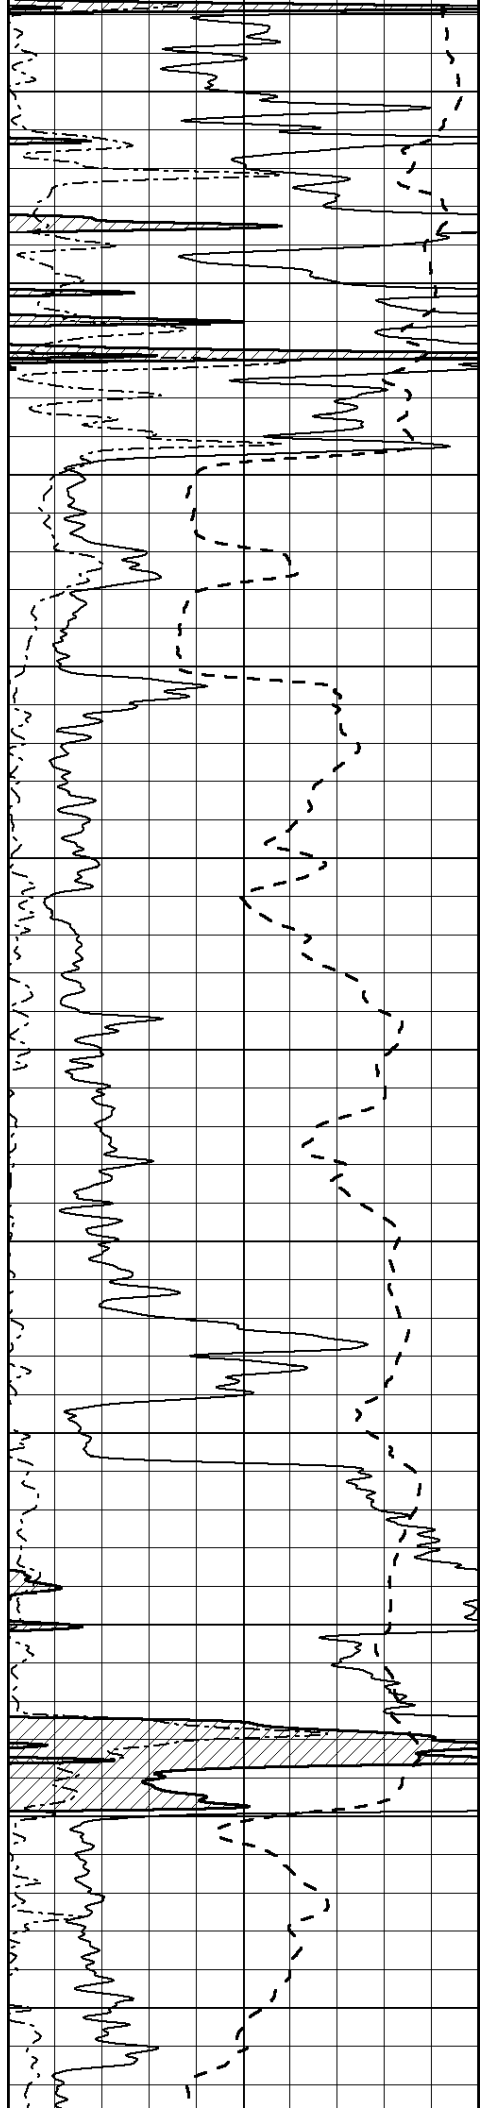

4300

4350

4400

4450

4500

4550


4600



4650

4700

4750

4800

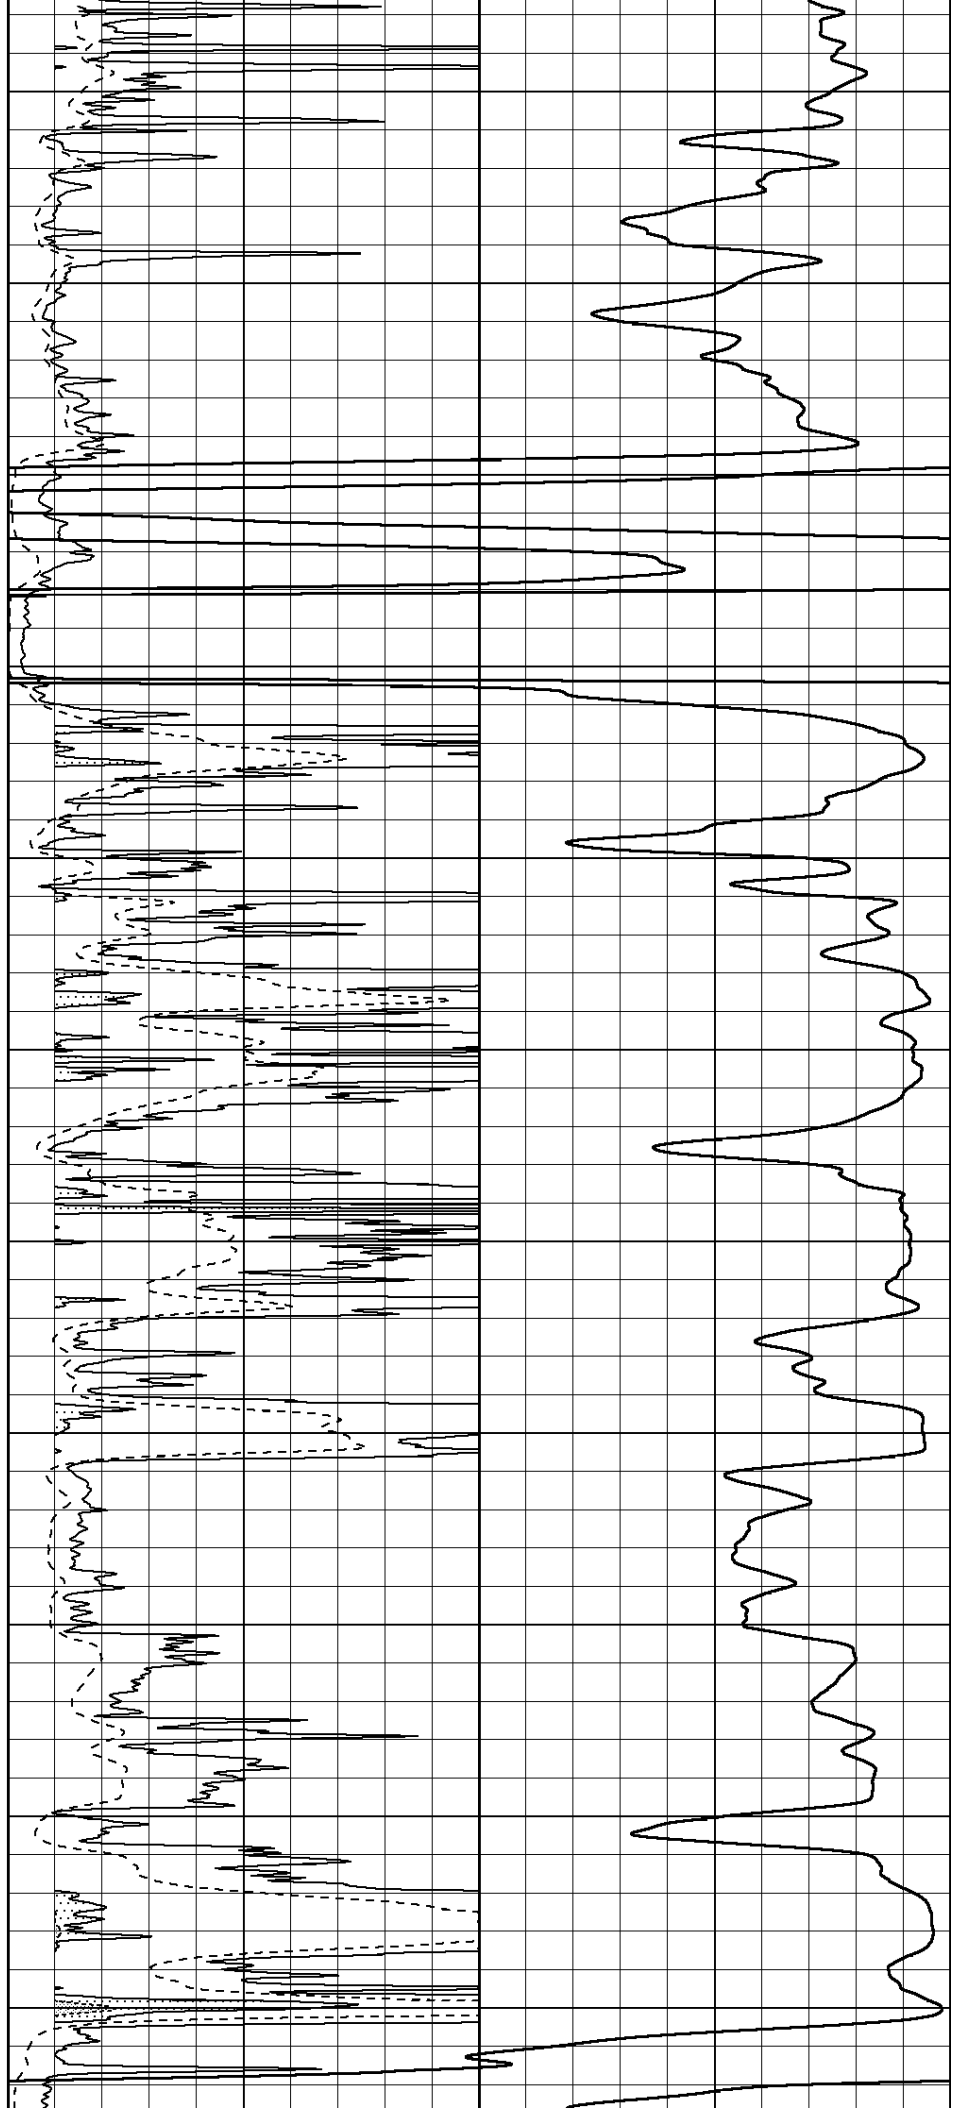


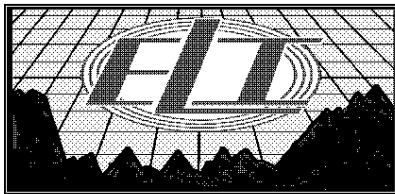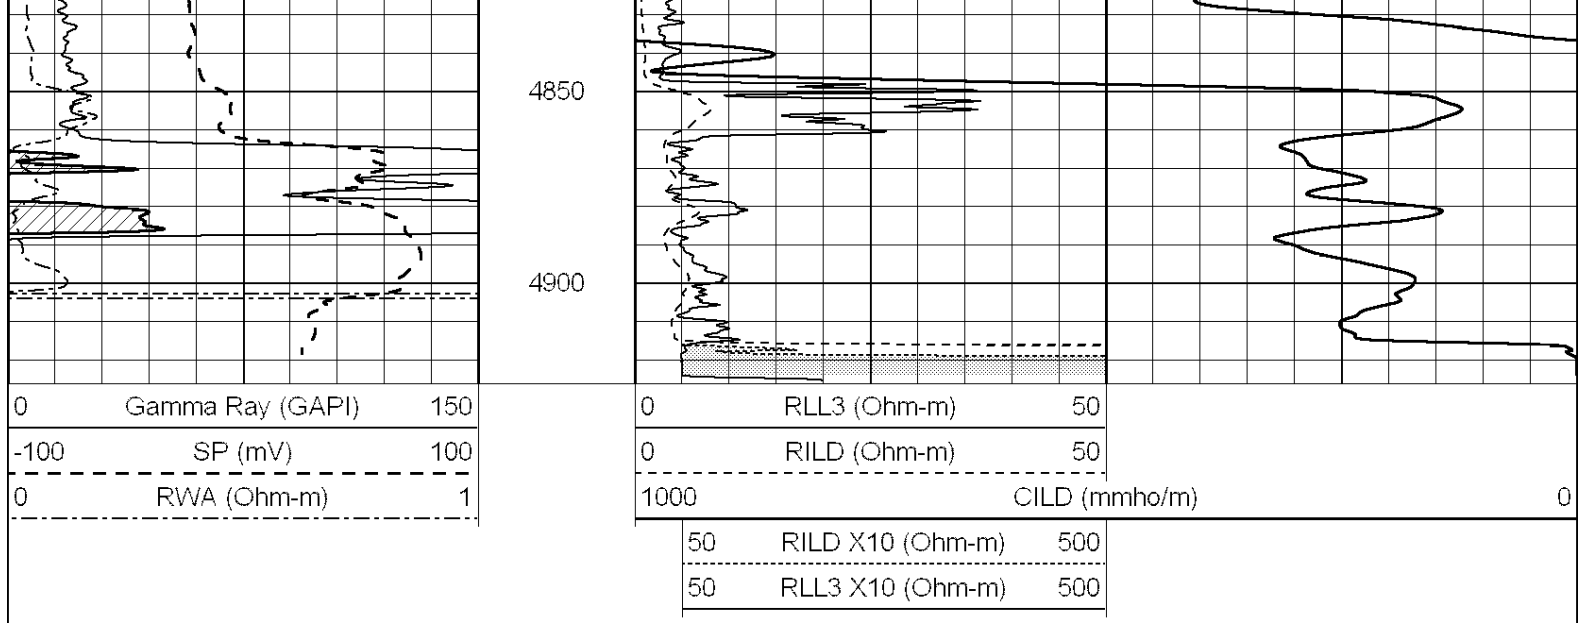


MAIN SECTION

Database File: 2936pe.db
 Dataset Pathname: pass3.6
 Presentation Format: _dil
 Dataset Creation: Mon Sep 24 21:32:03 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	DEEP INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	MEDIUM INDUCTION (Ohm-m)	2000
0	MINMK	20			

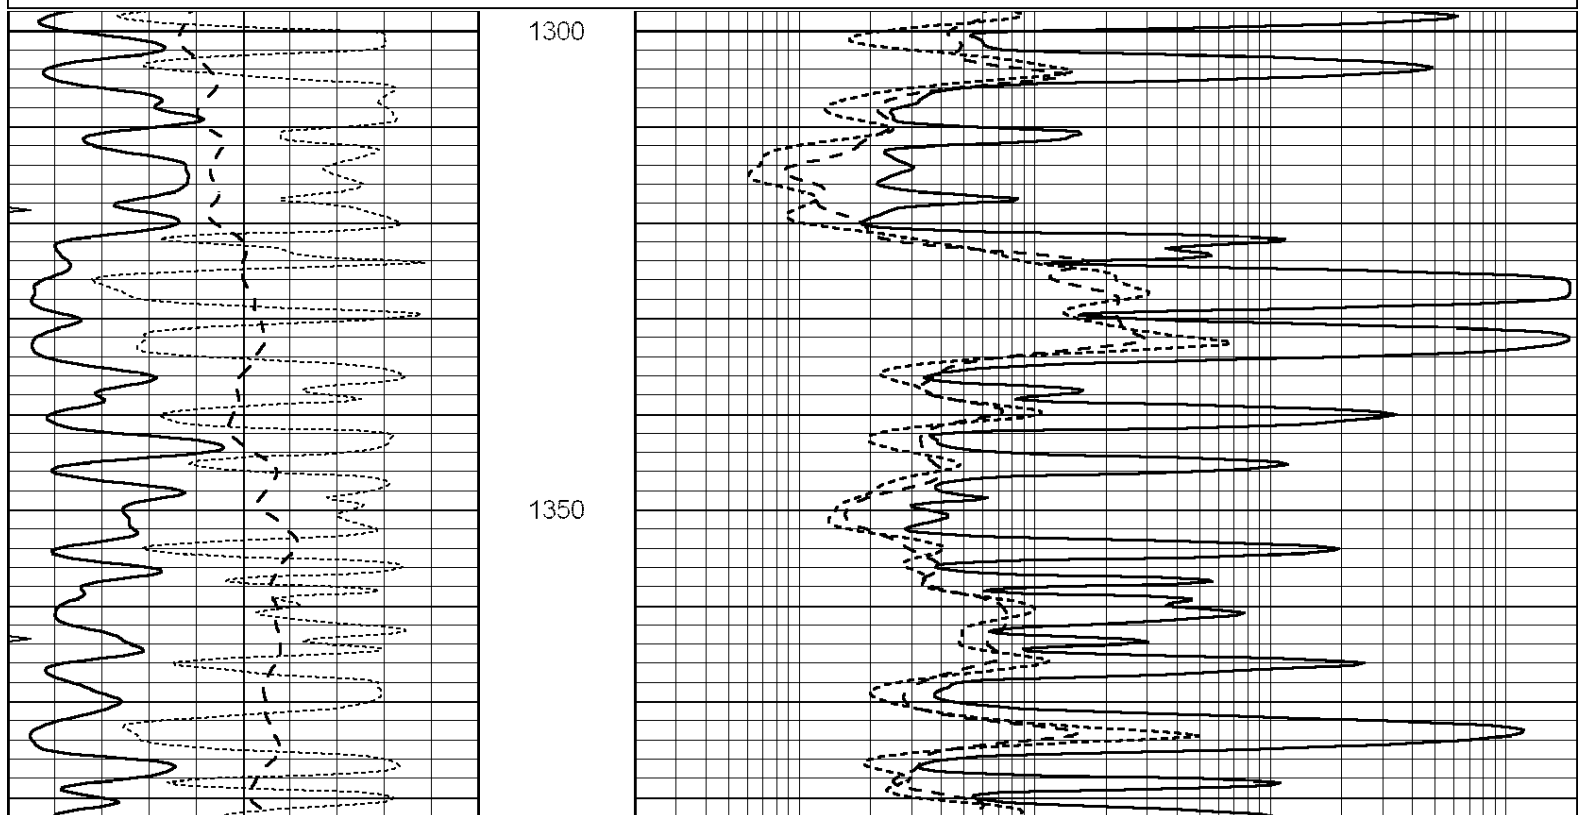

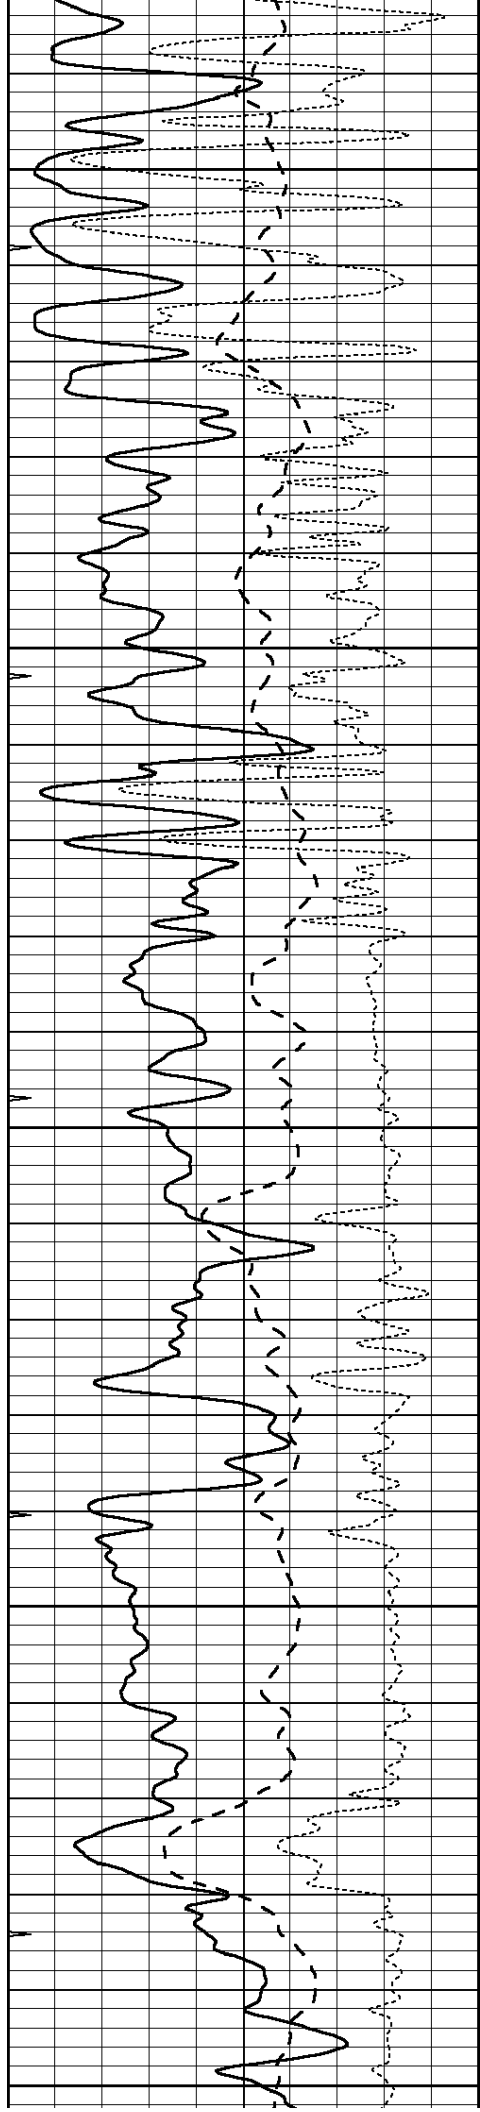


1400


1450

1500

1550

1600

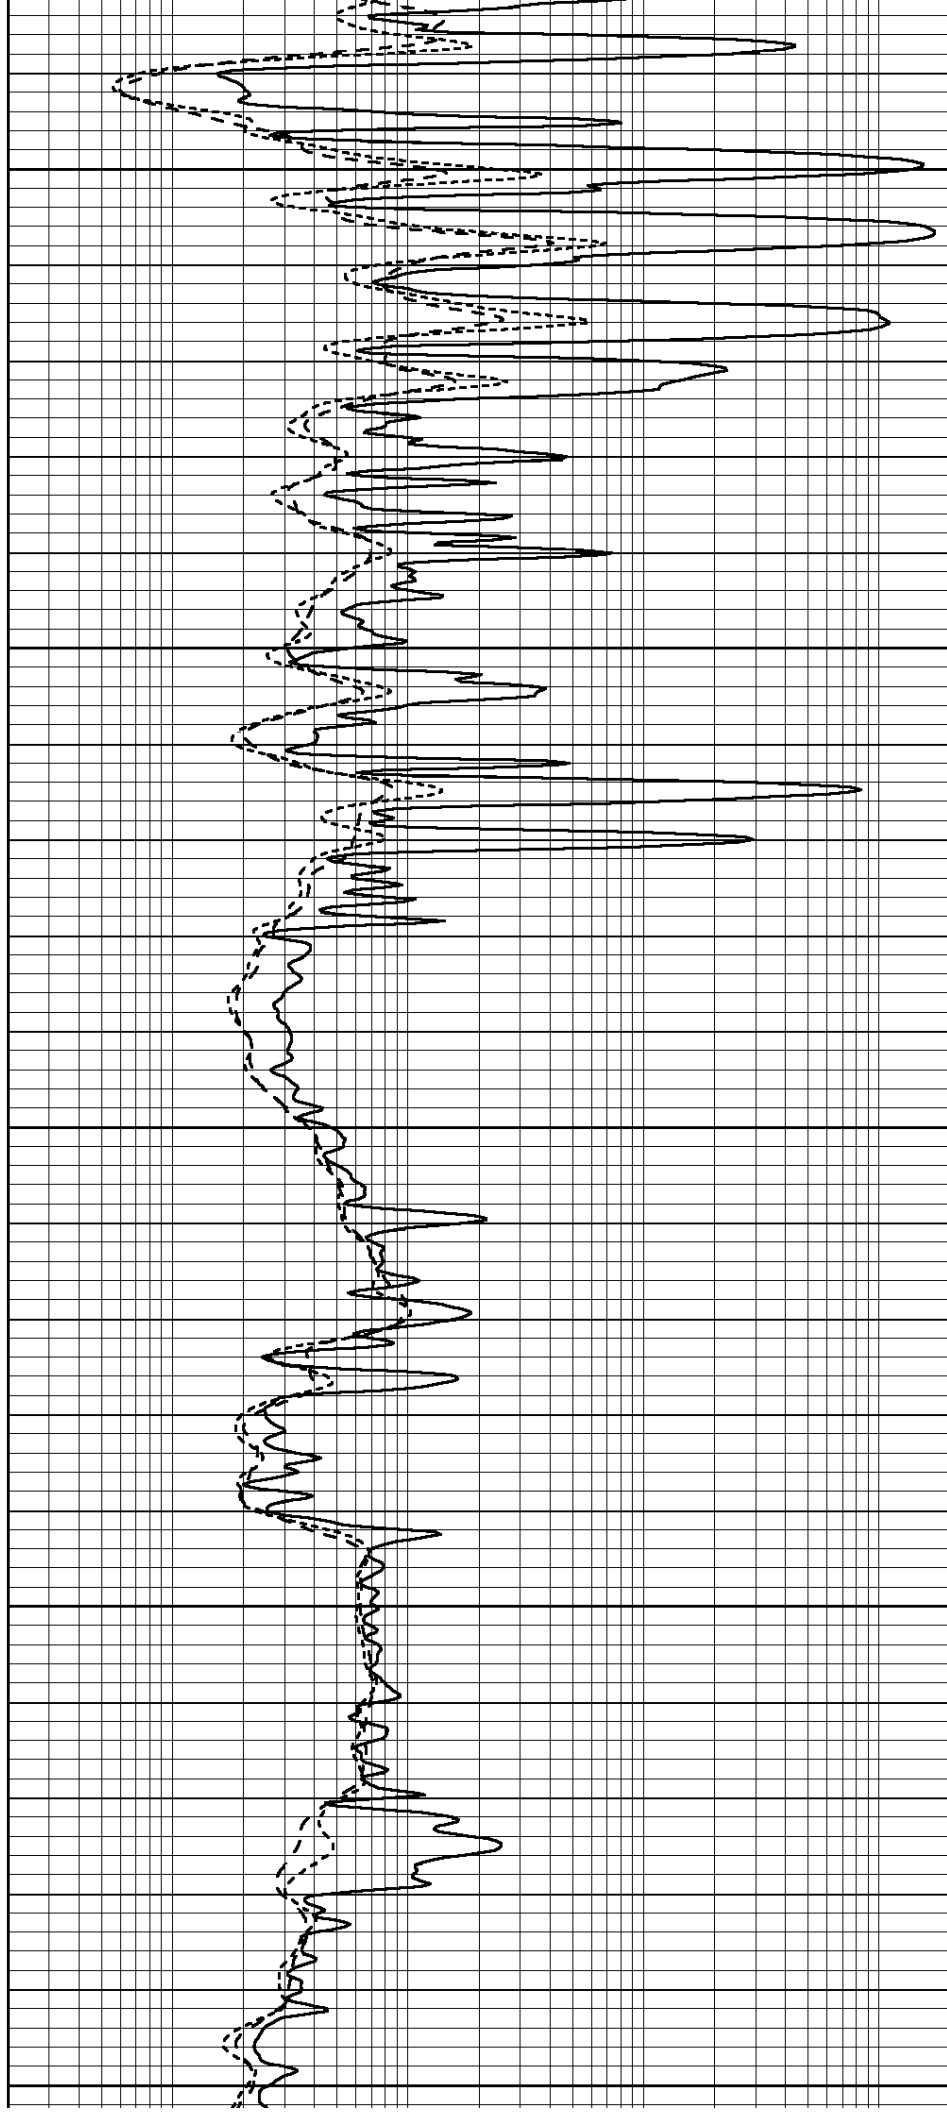

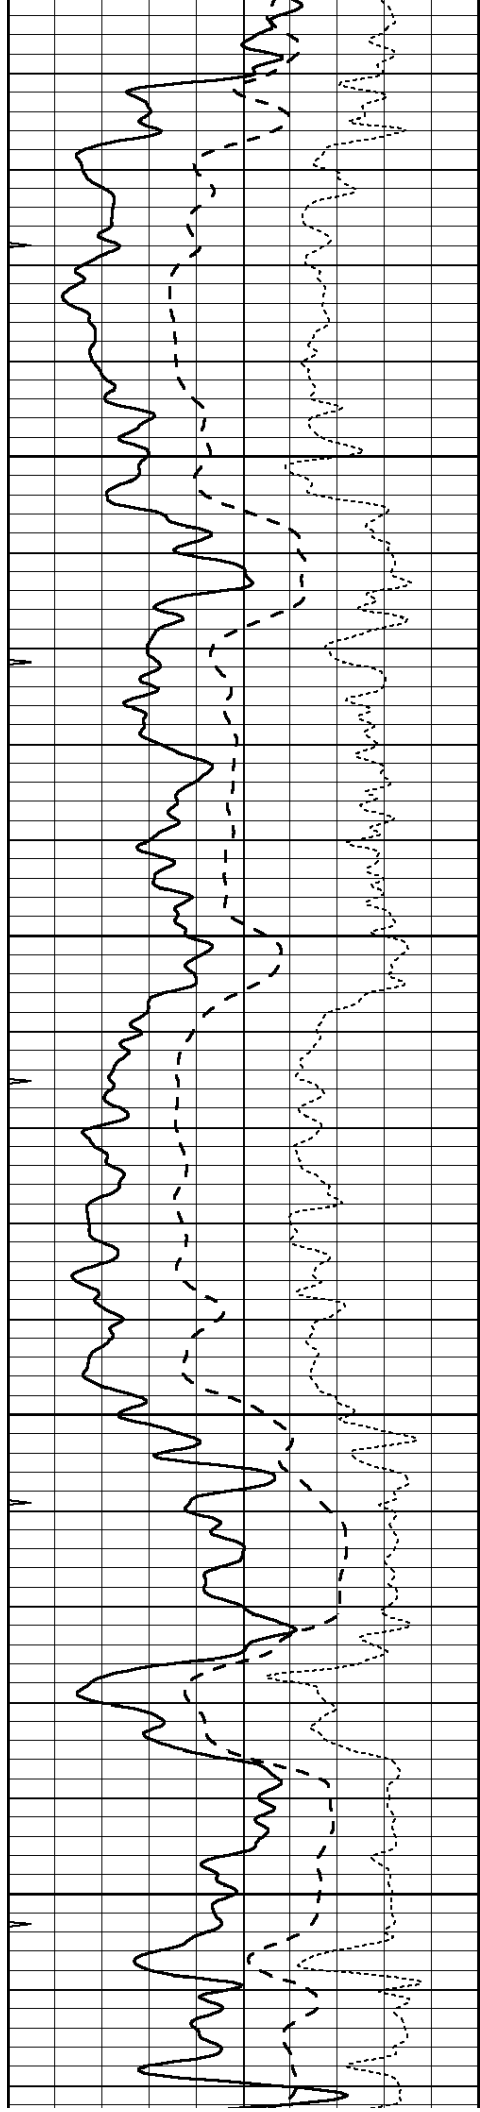



1650

1700

1750

1800

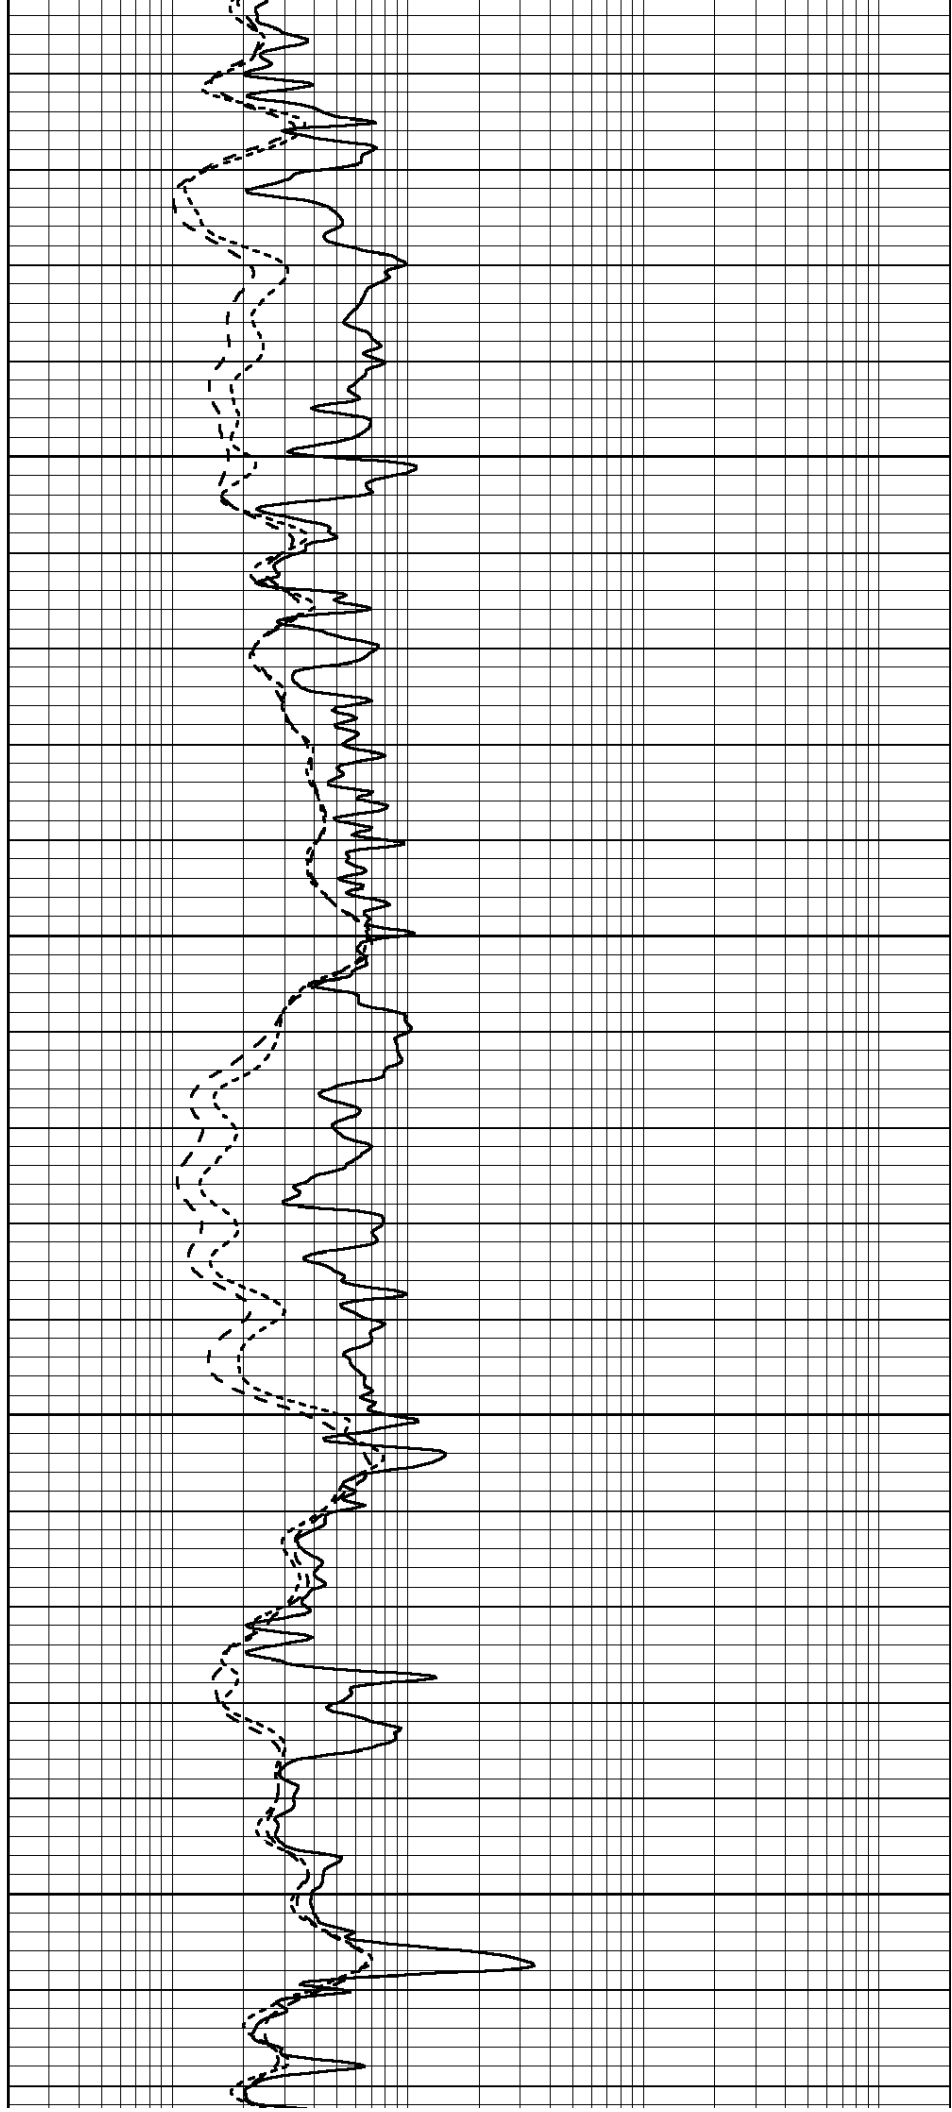

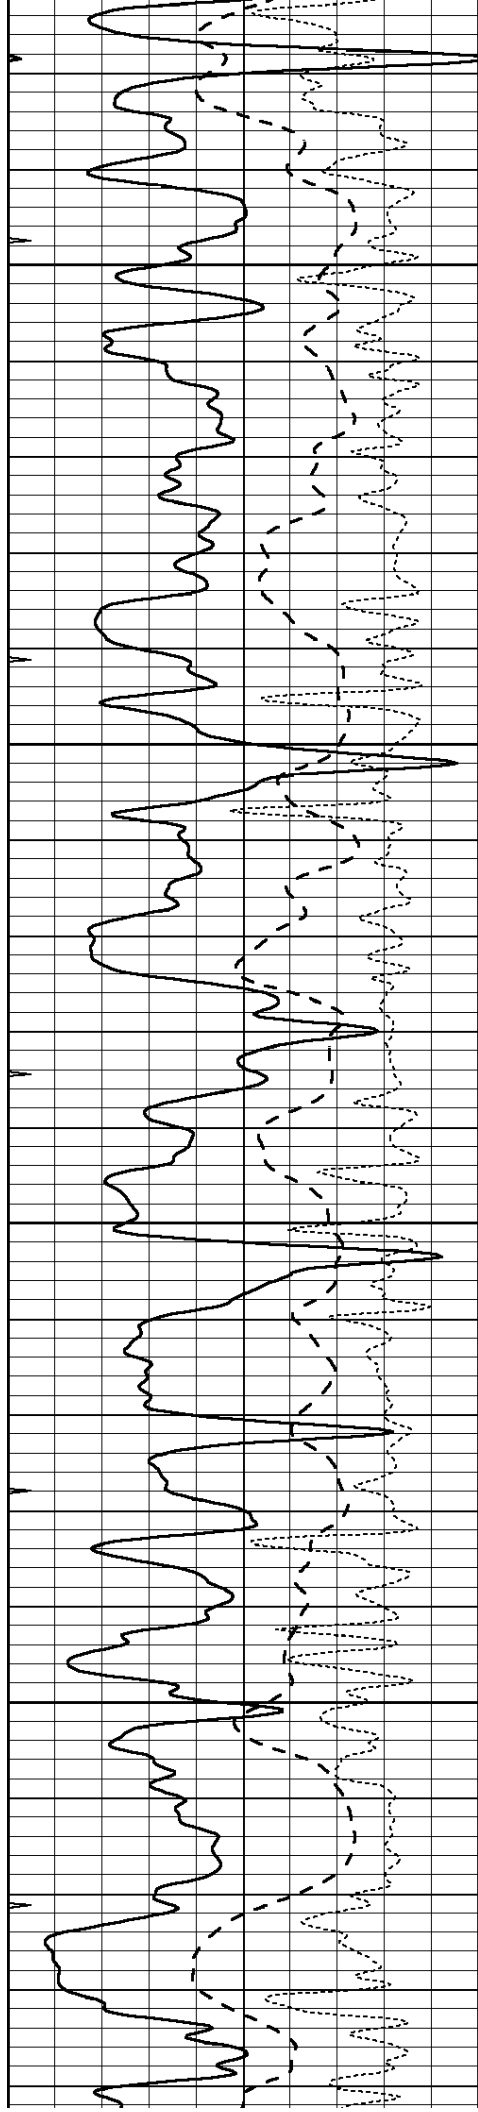



1850

1900

1950

2000

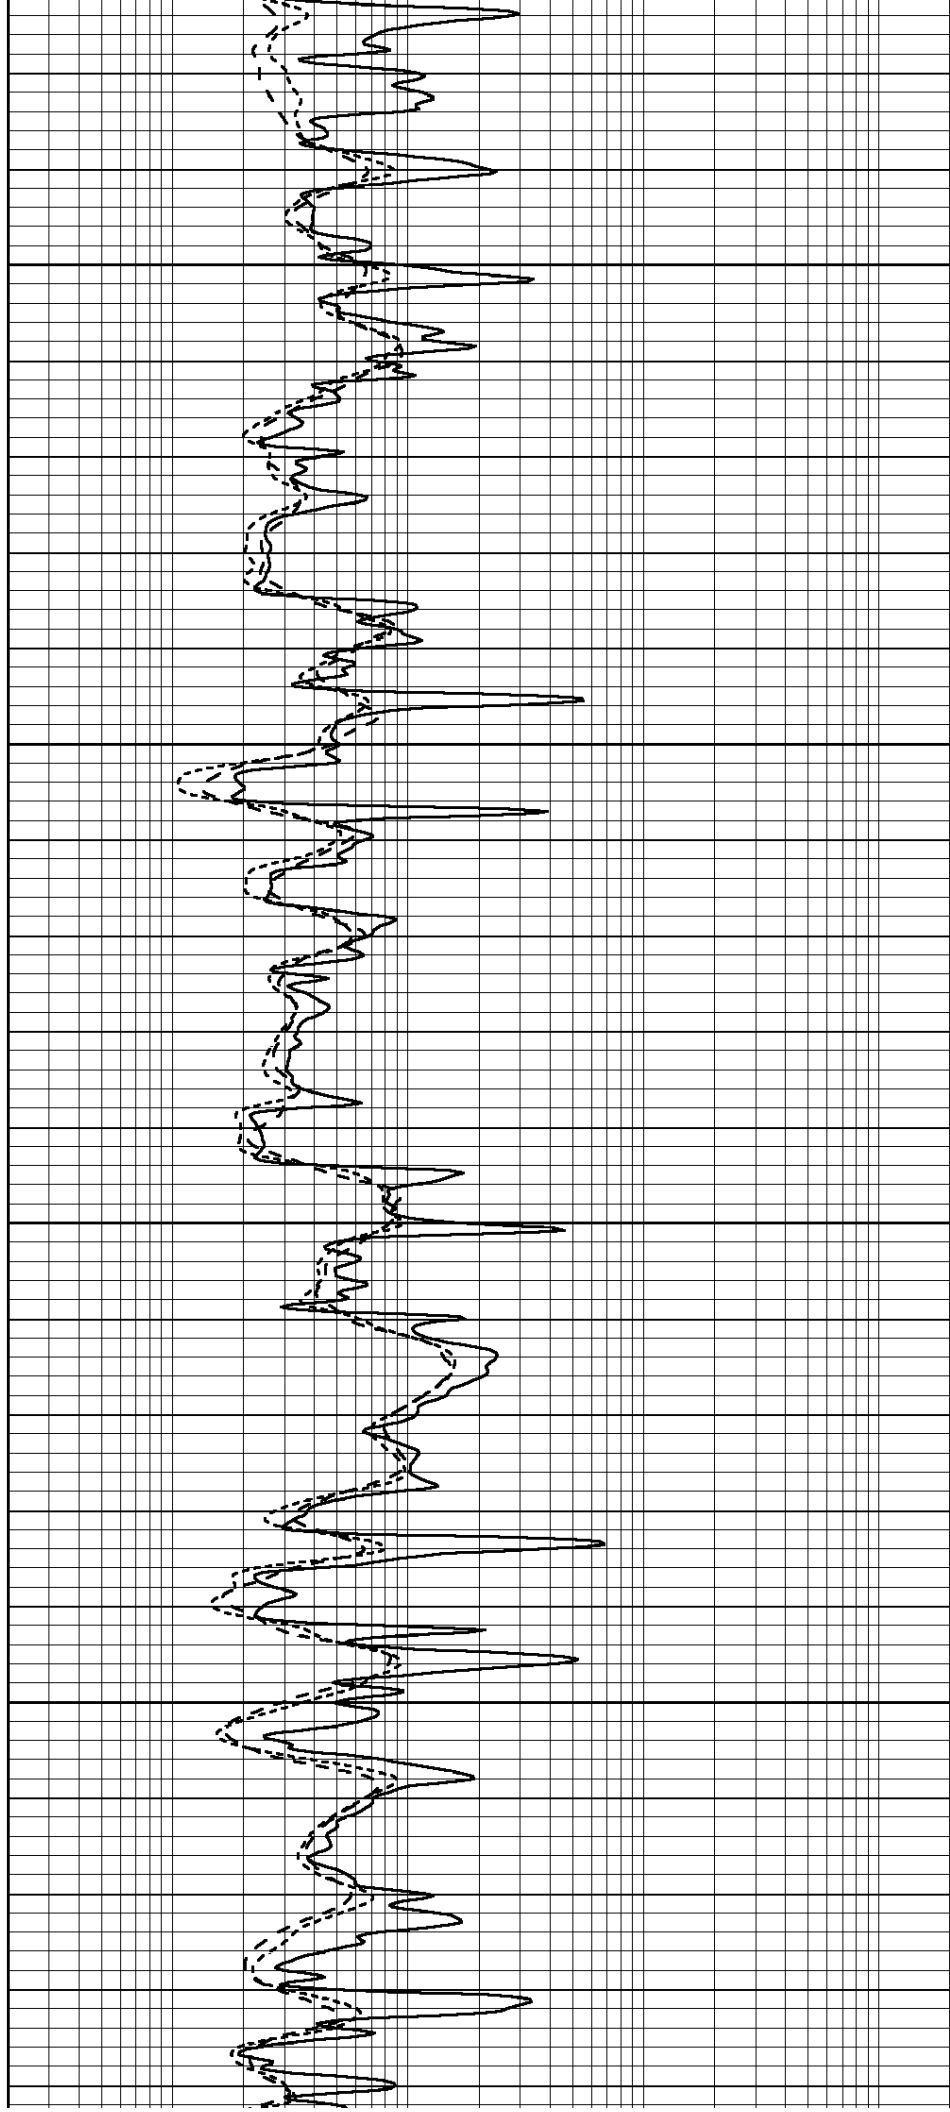

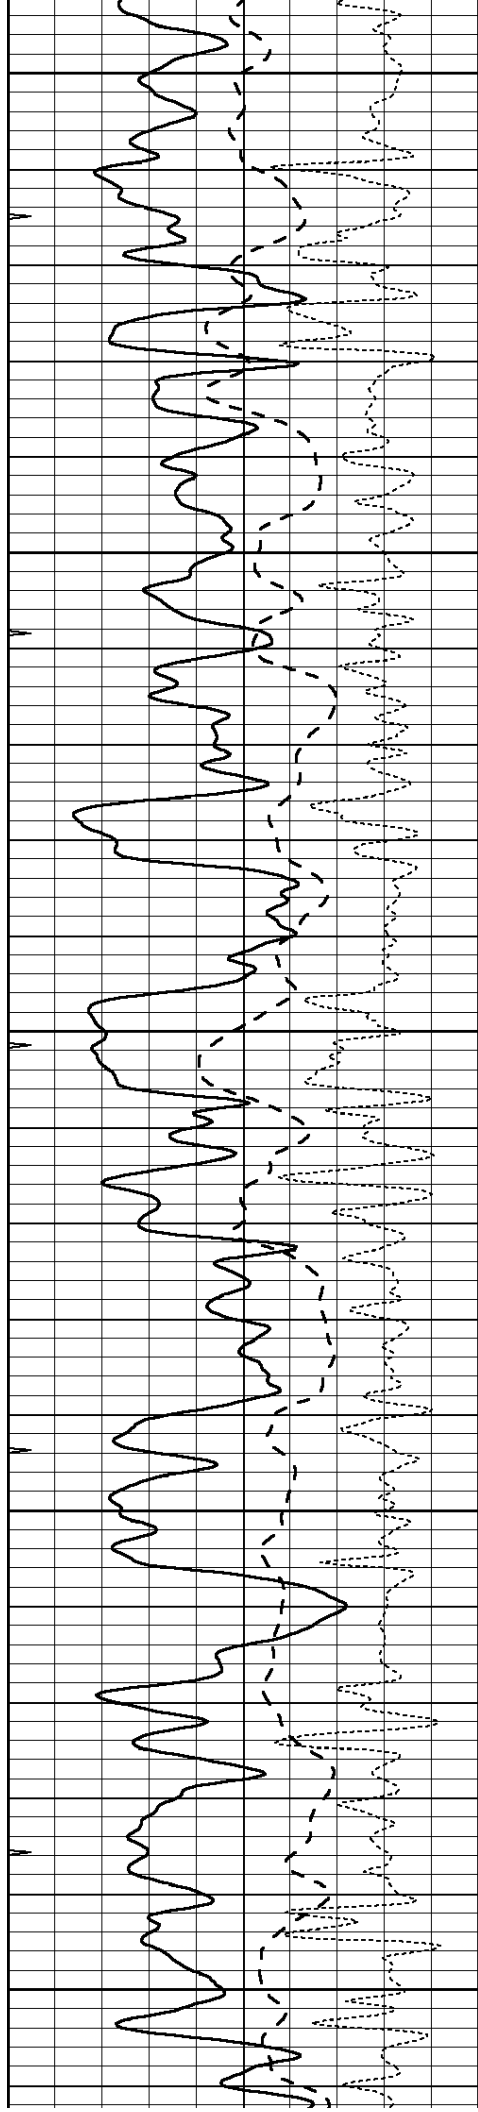


2050


2100

2150

2200

2250

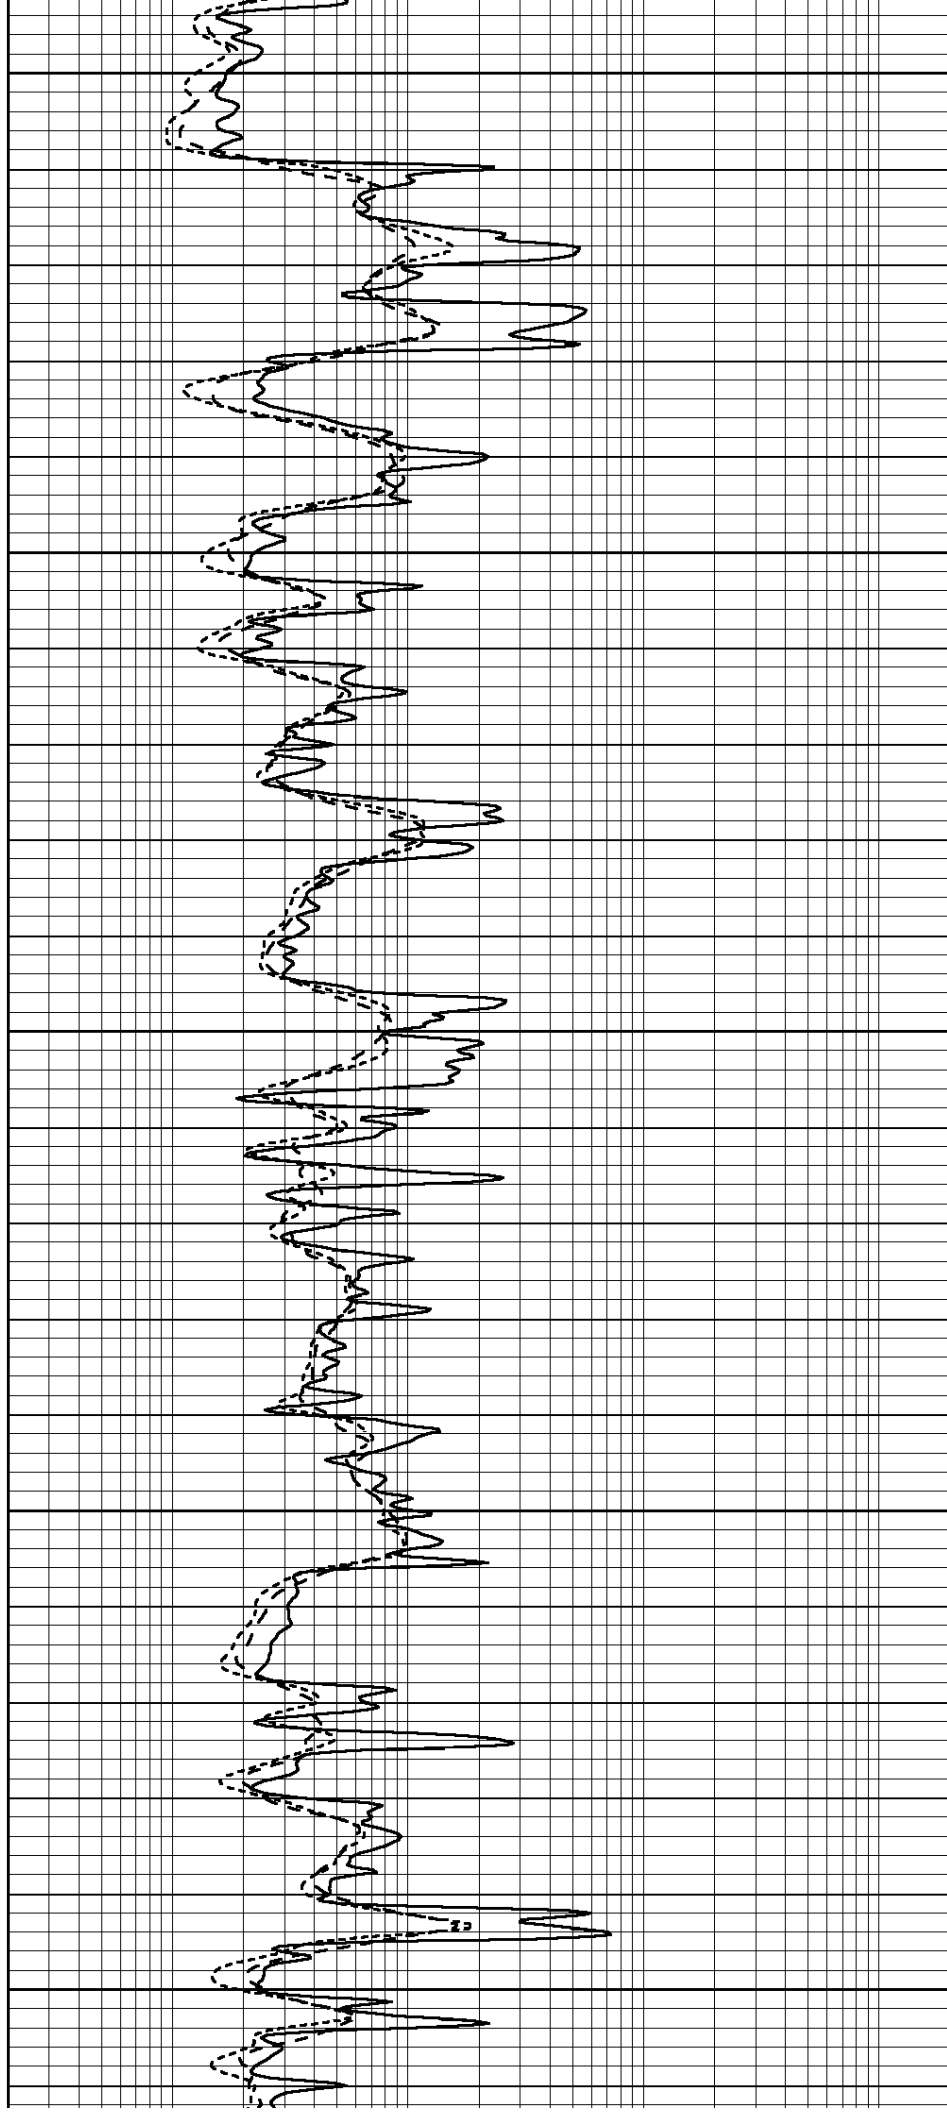

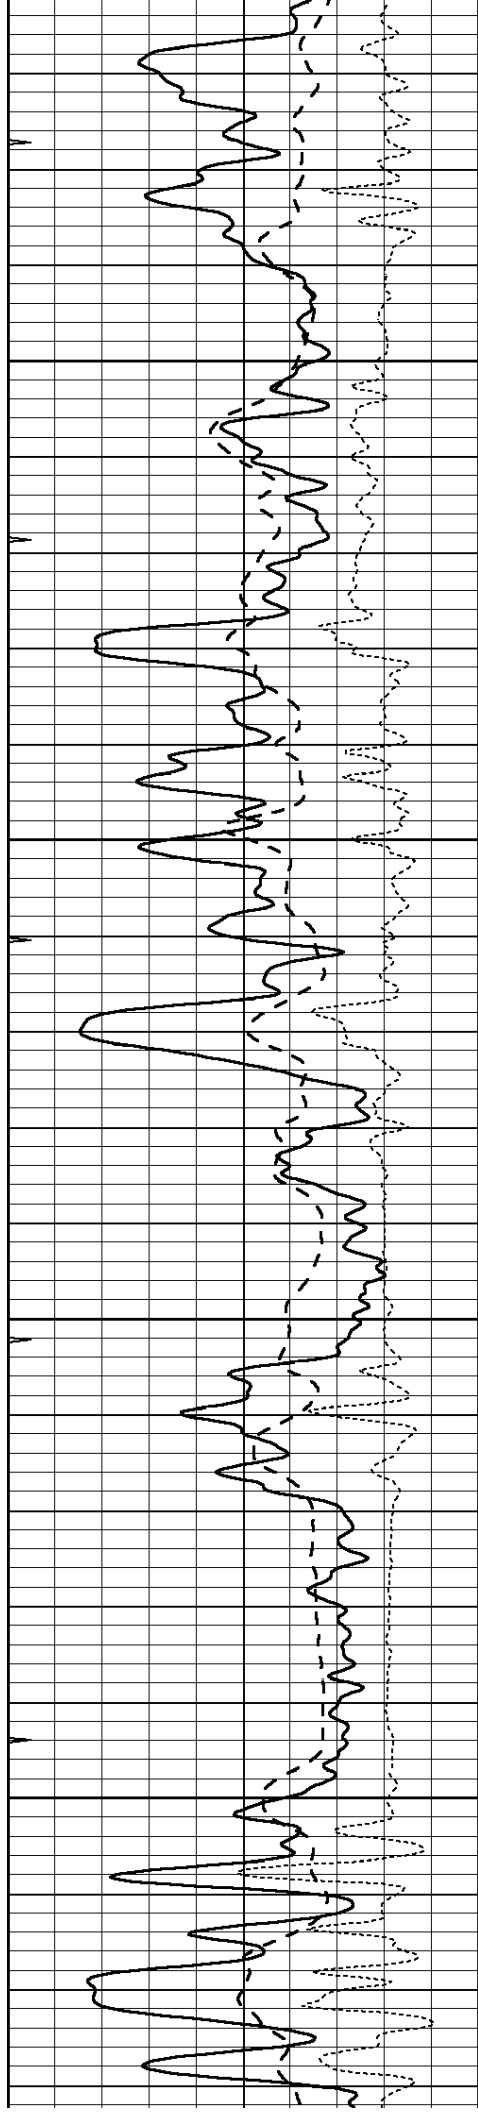



2300

2350

2400

2450

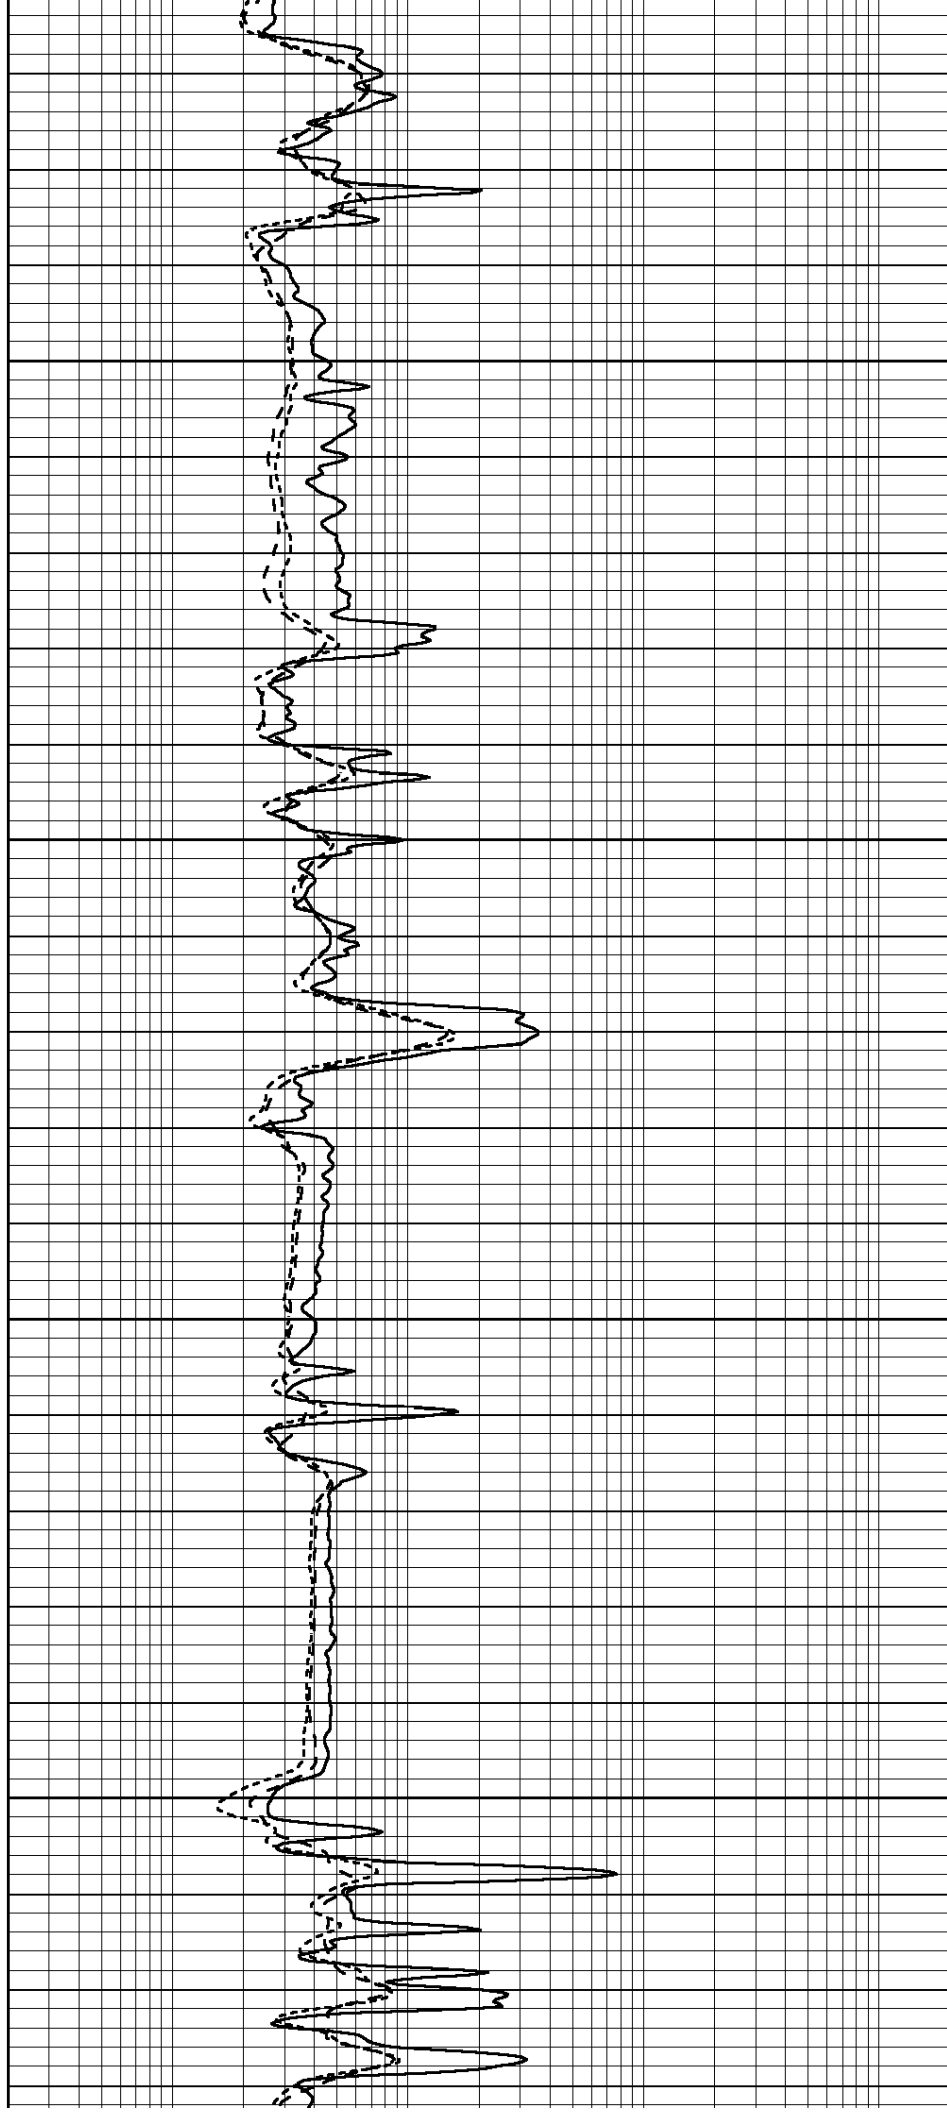

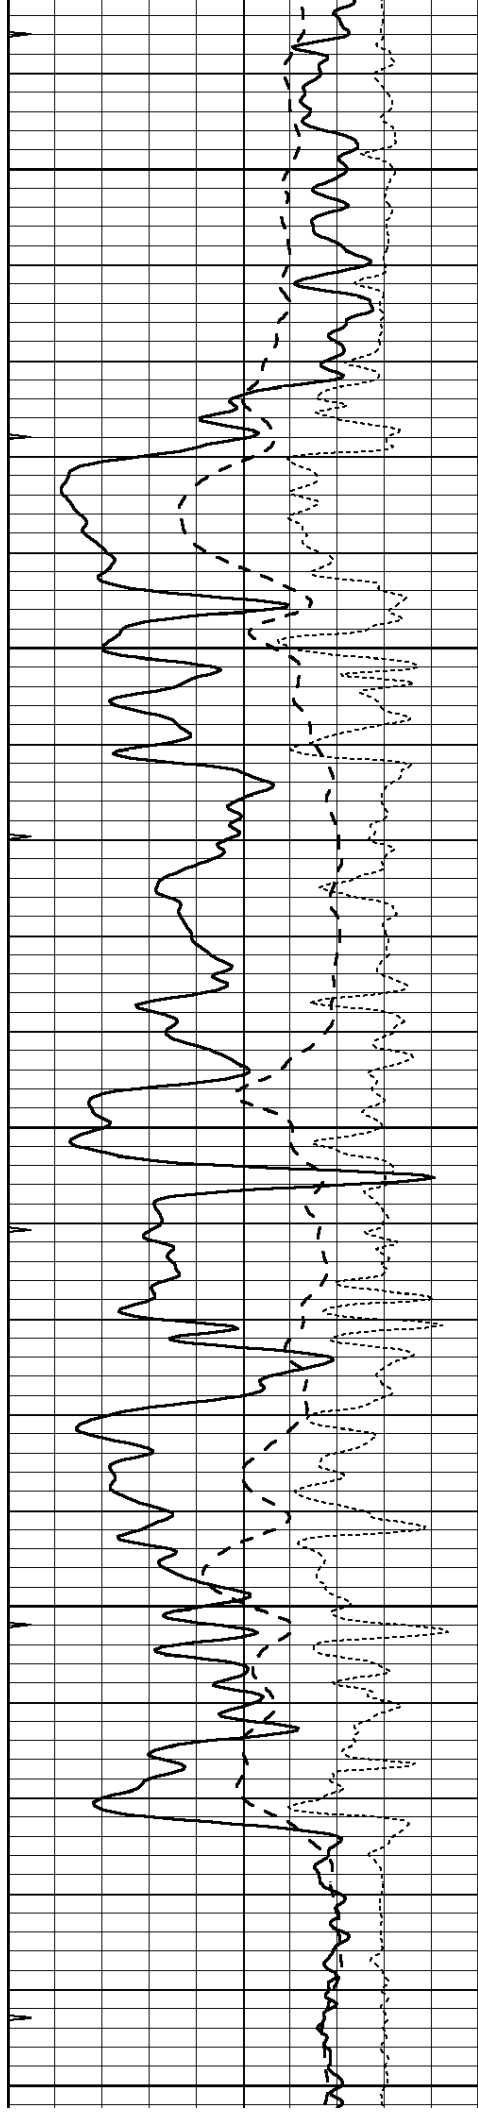


2500


2550

2600

2650

2700

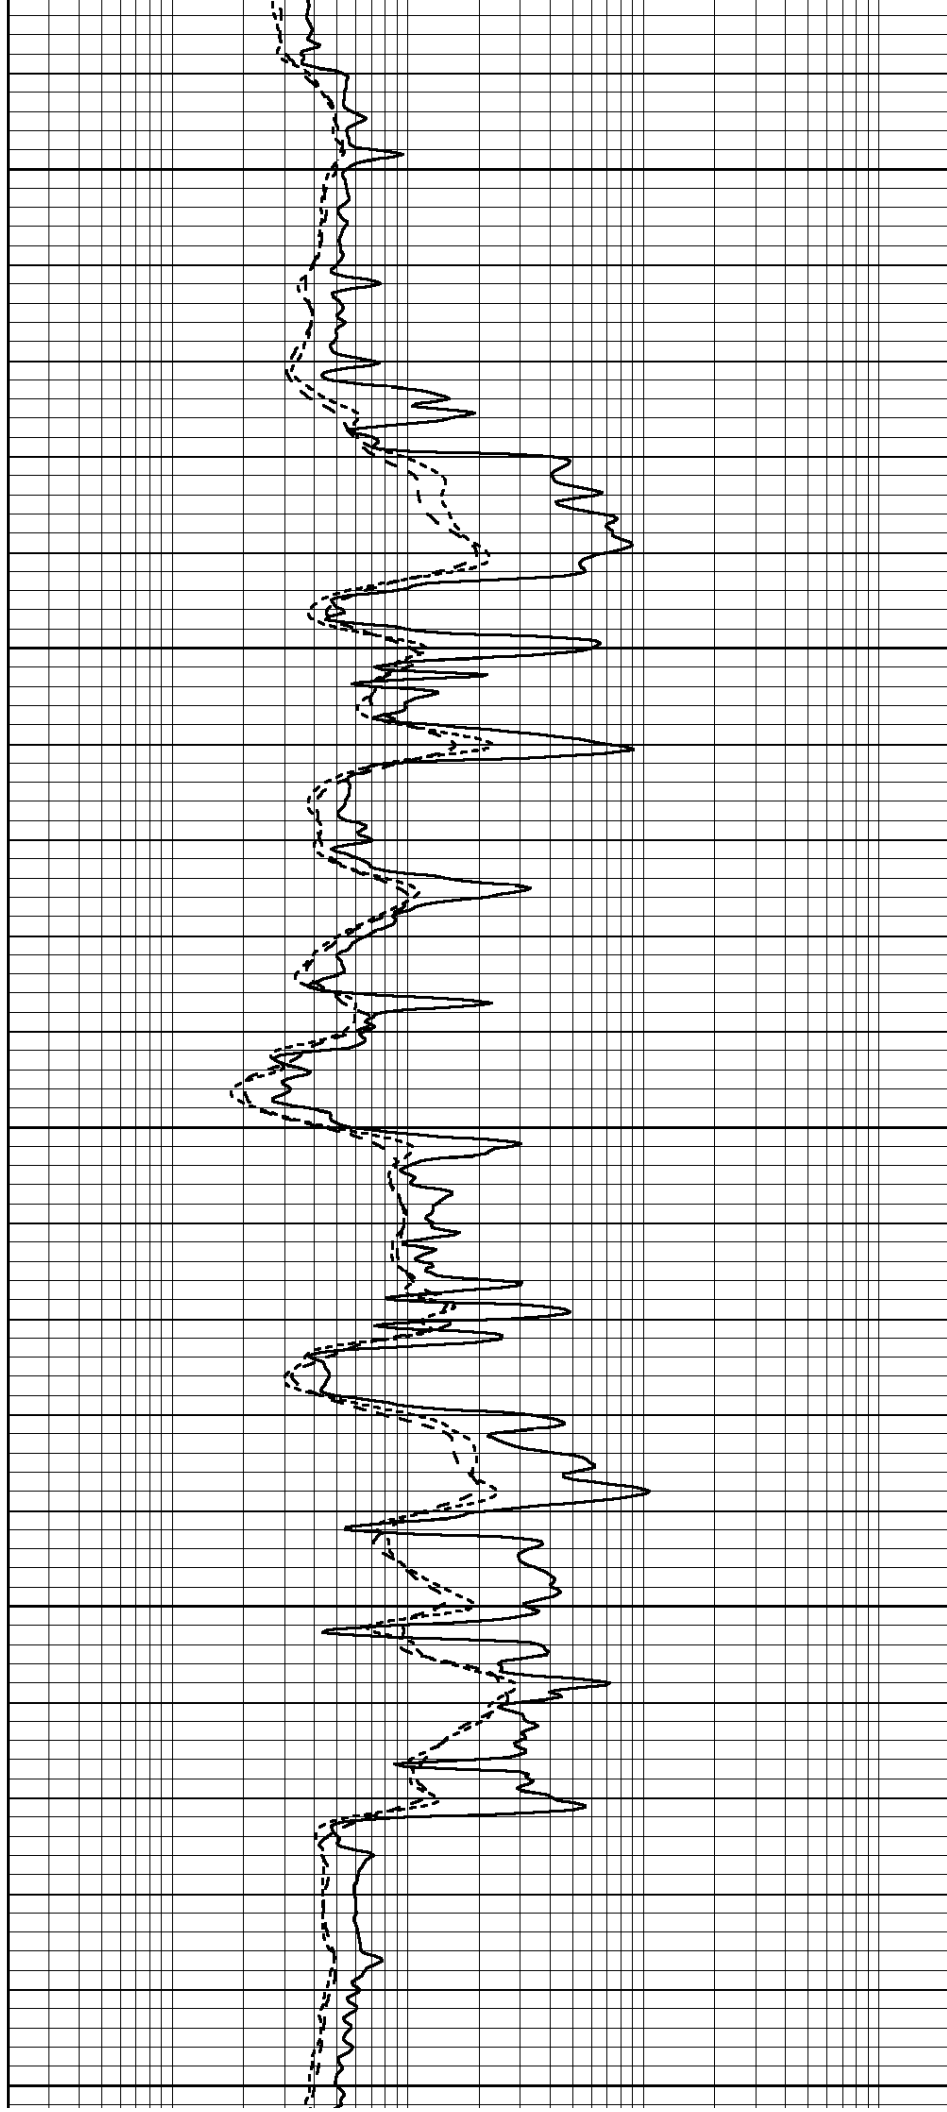

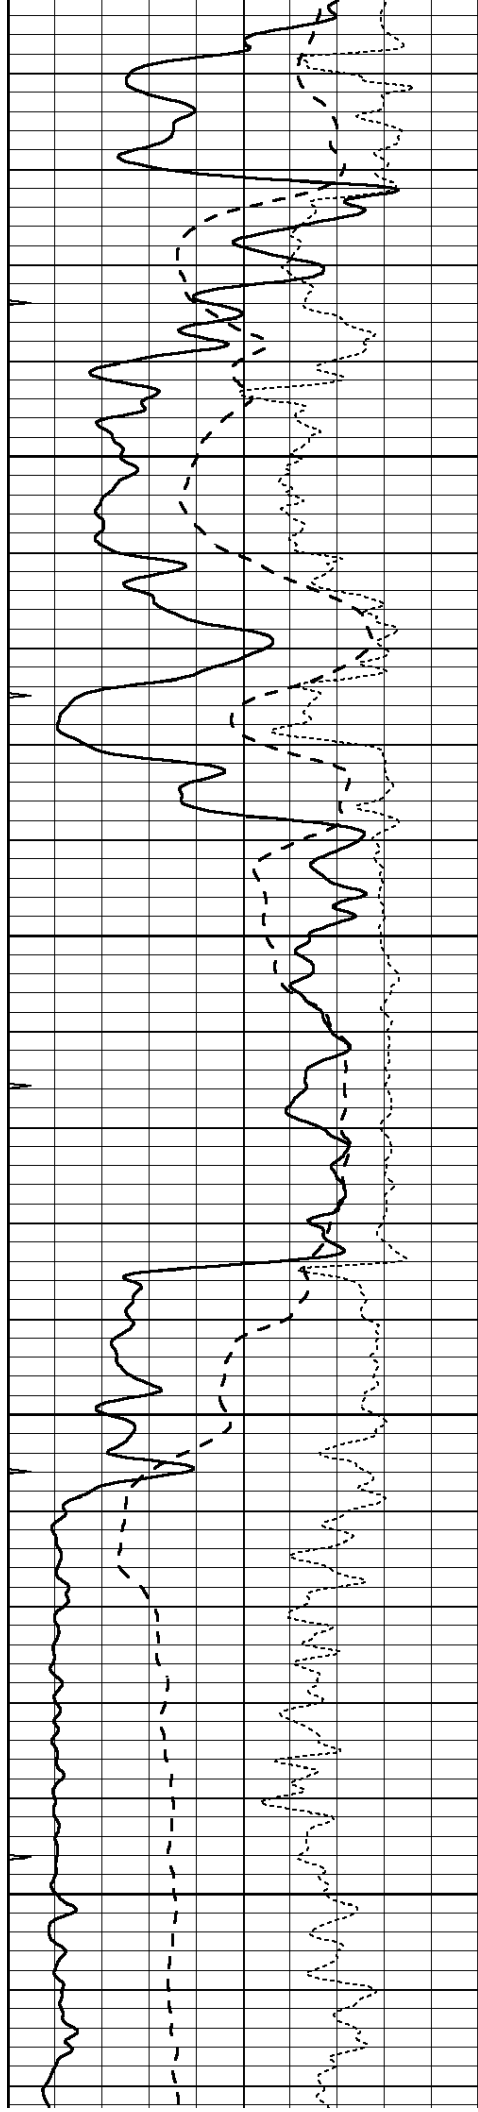



2750

2800

2850

2900

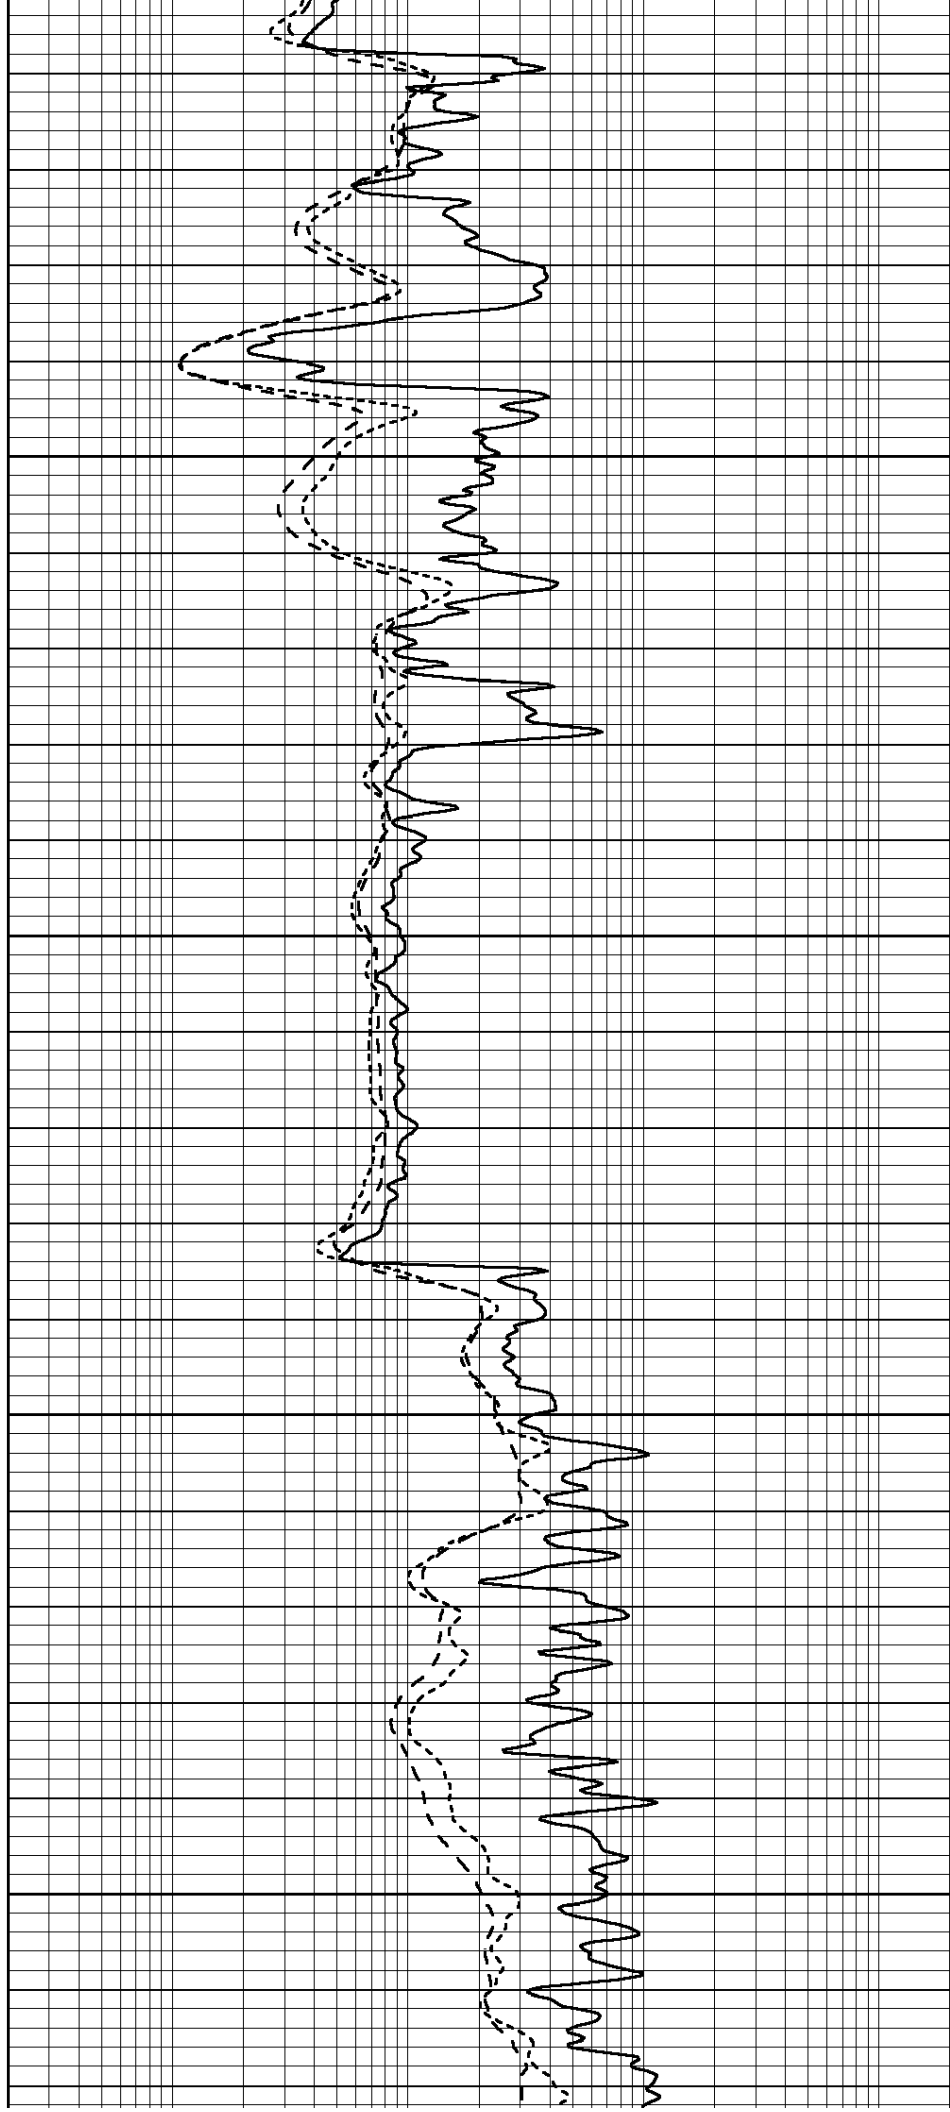


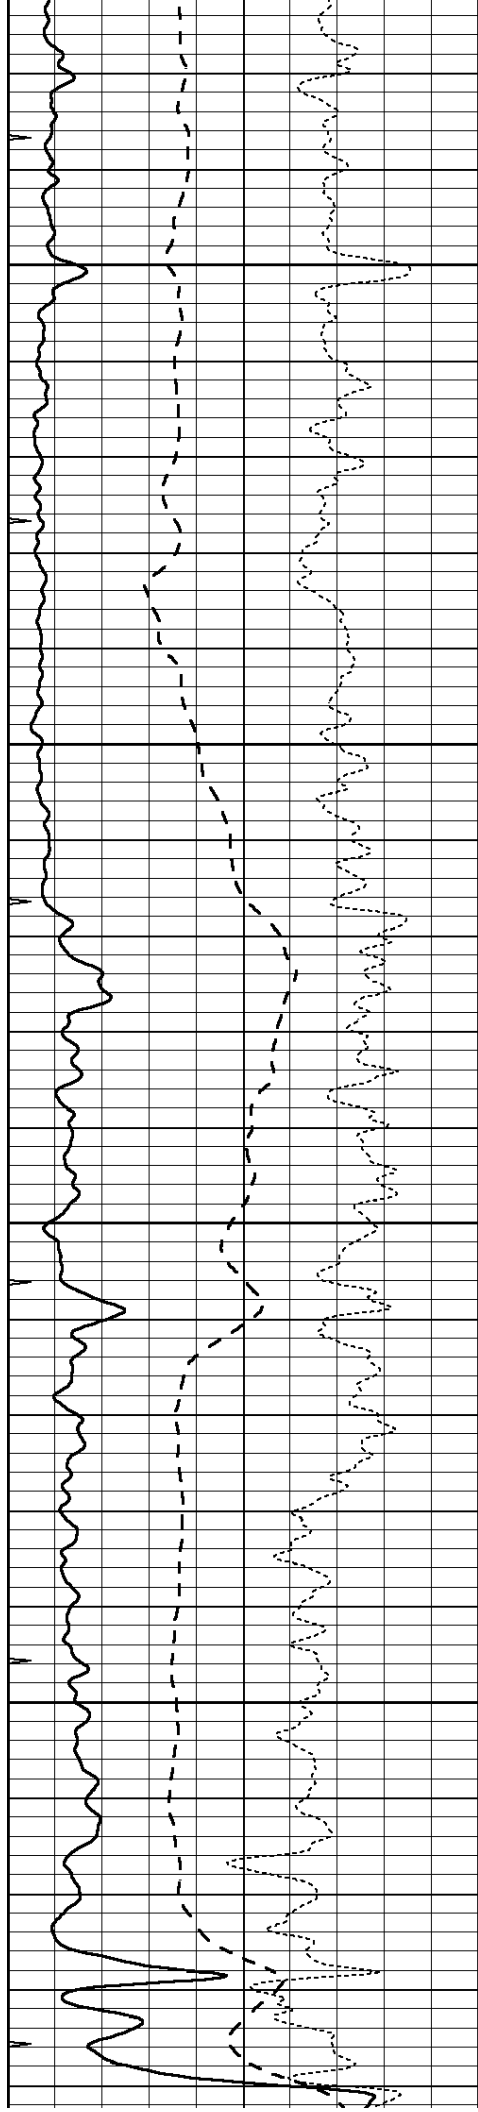



2950

3000

3050

3100

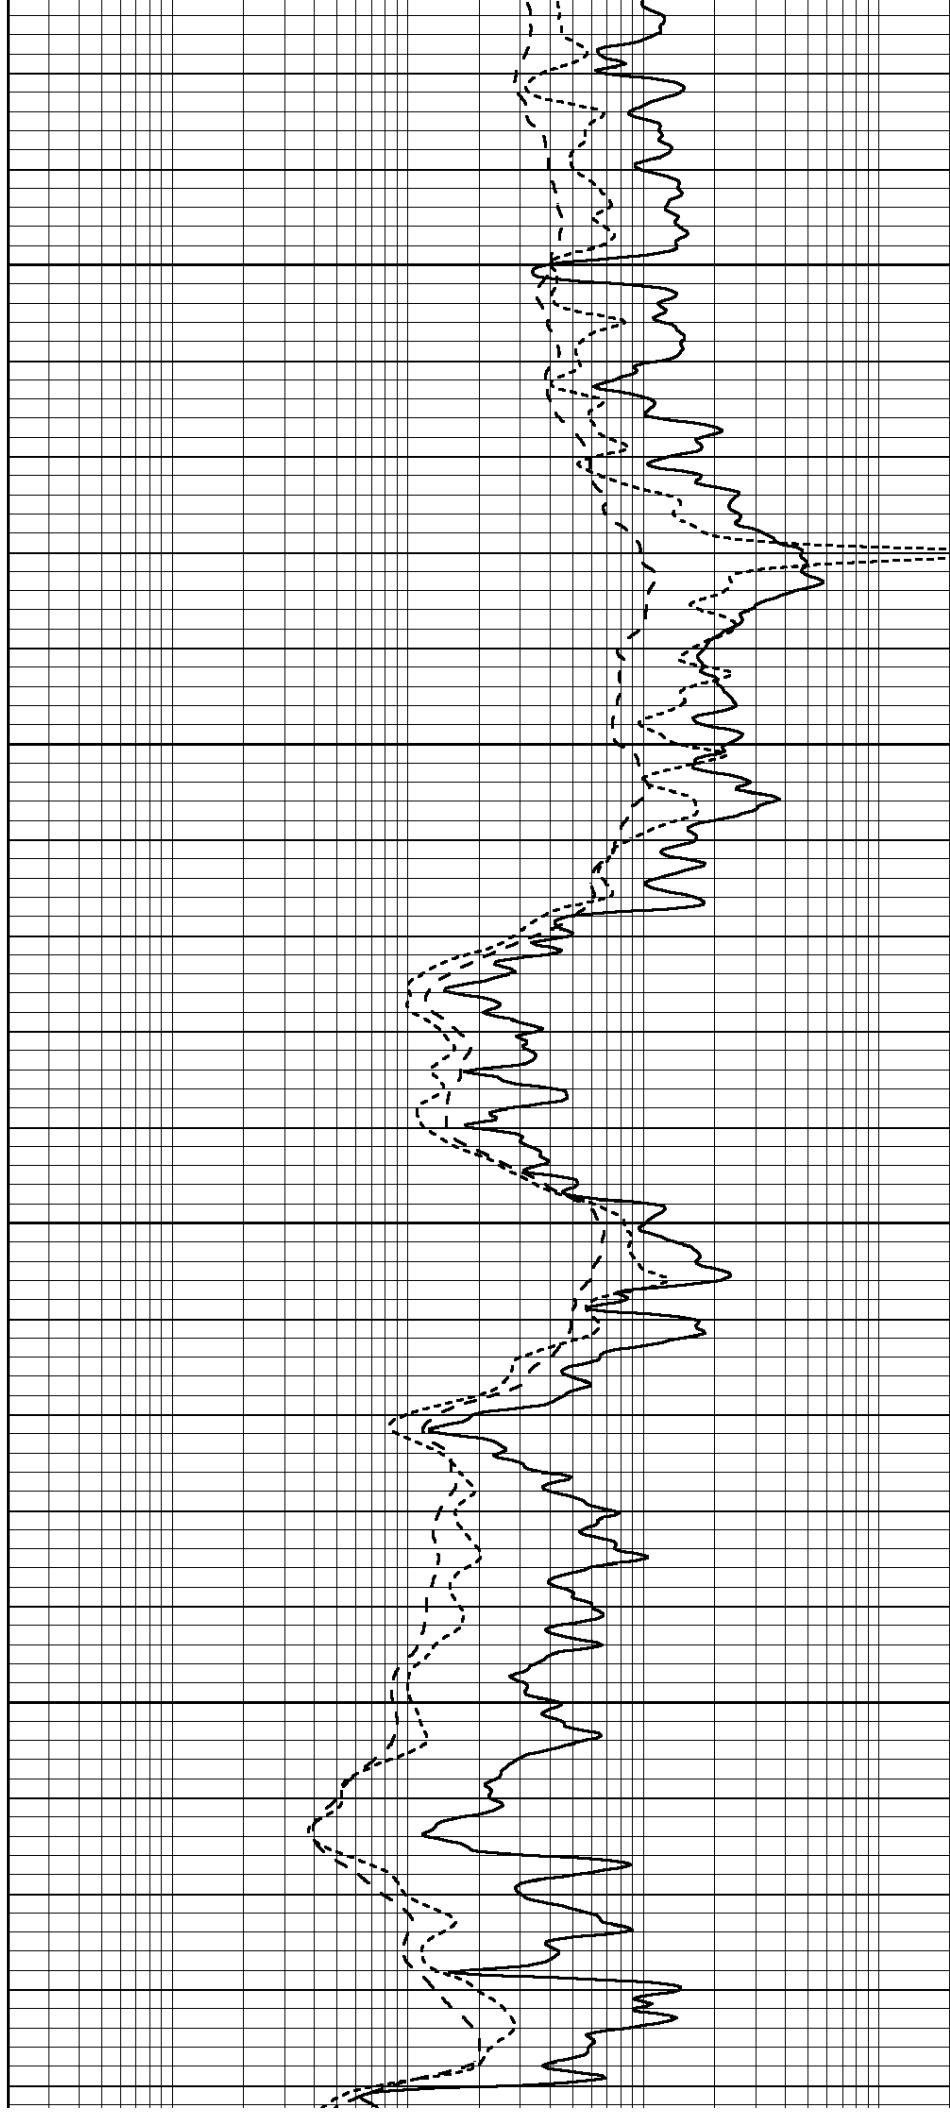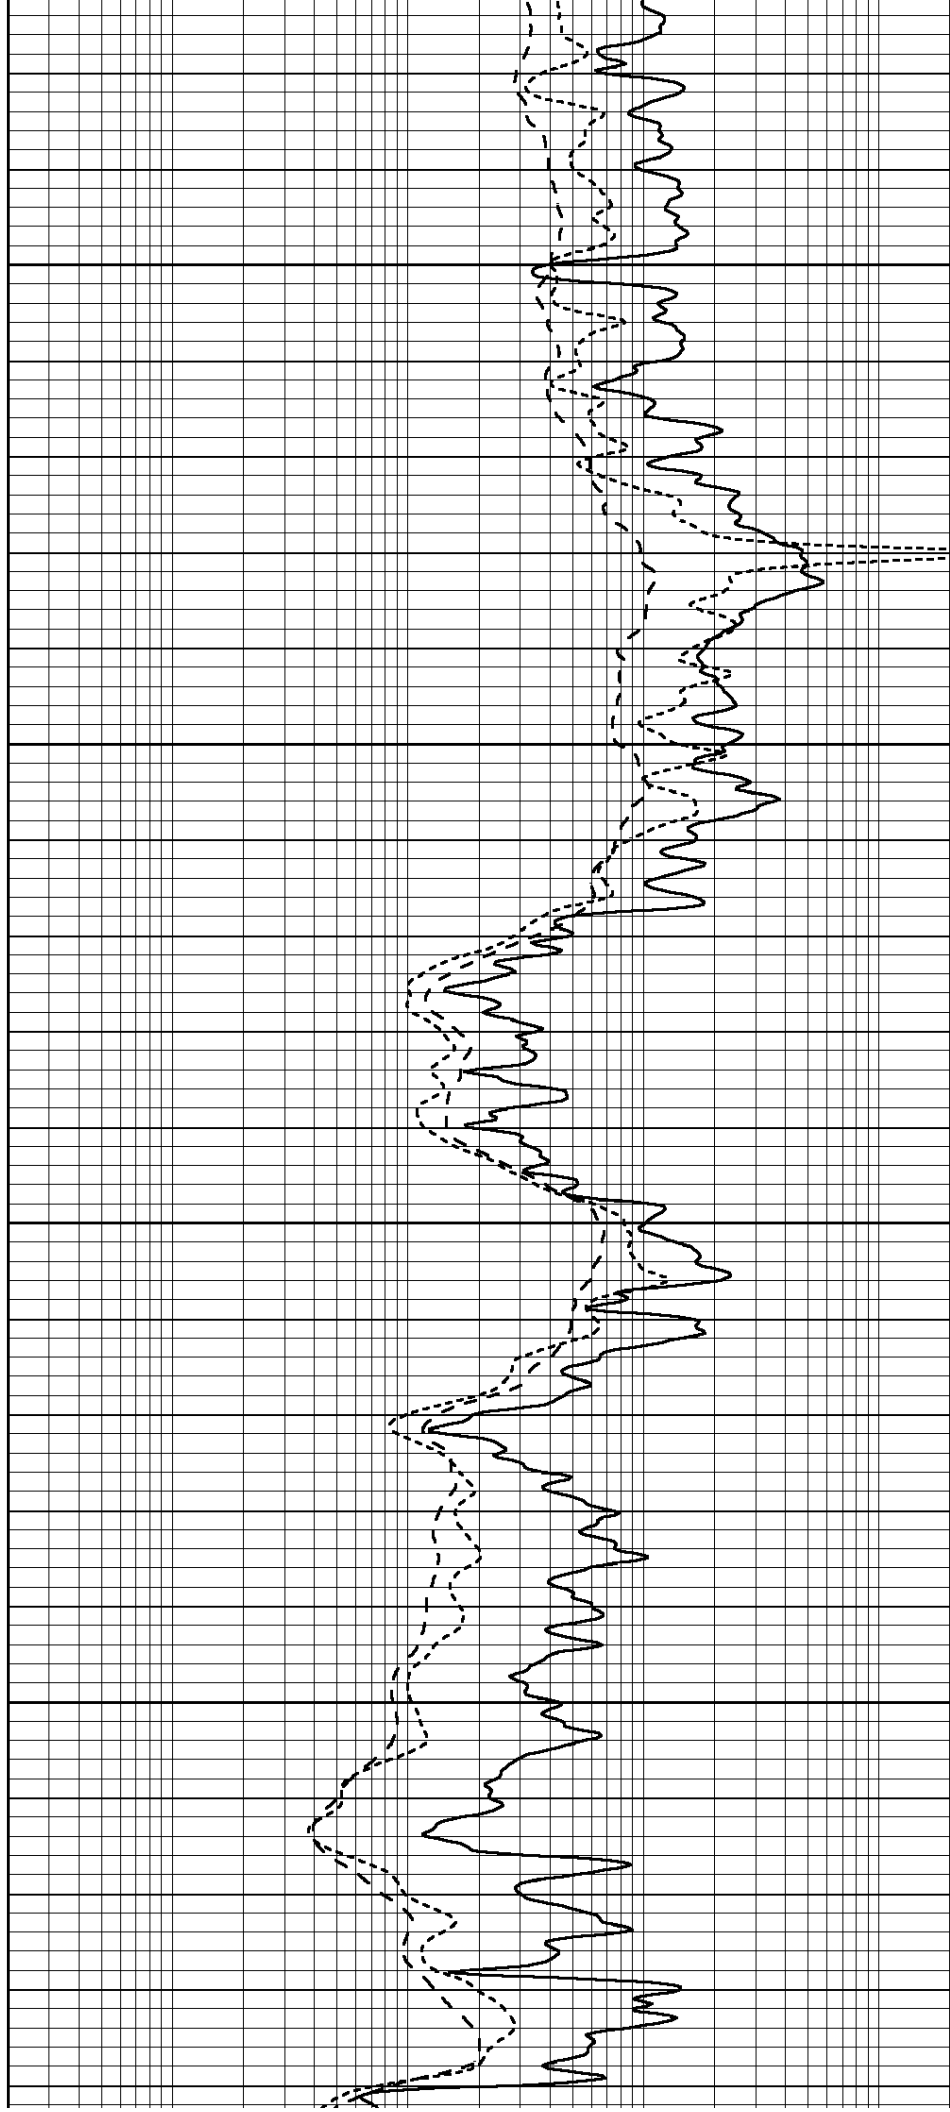

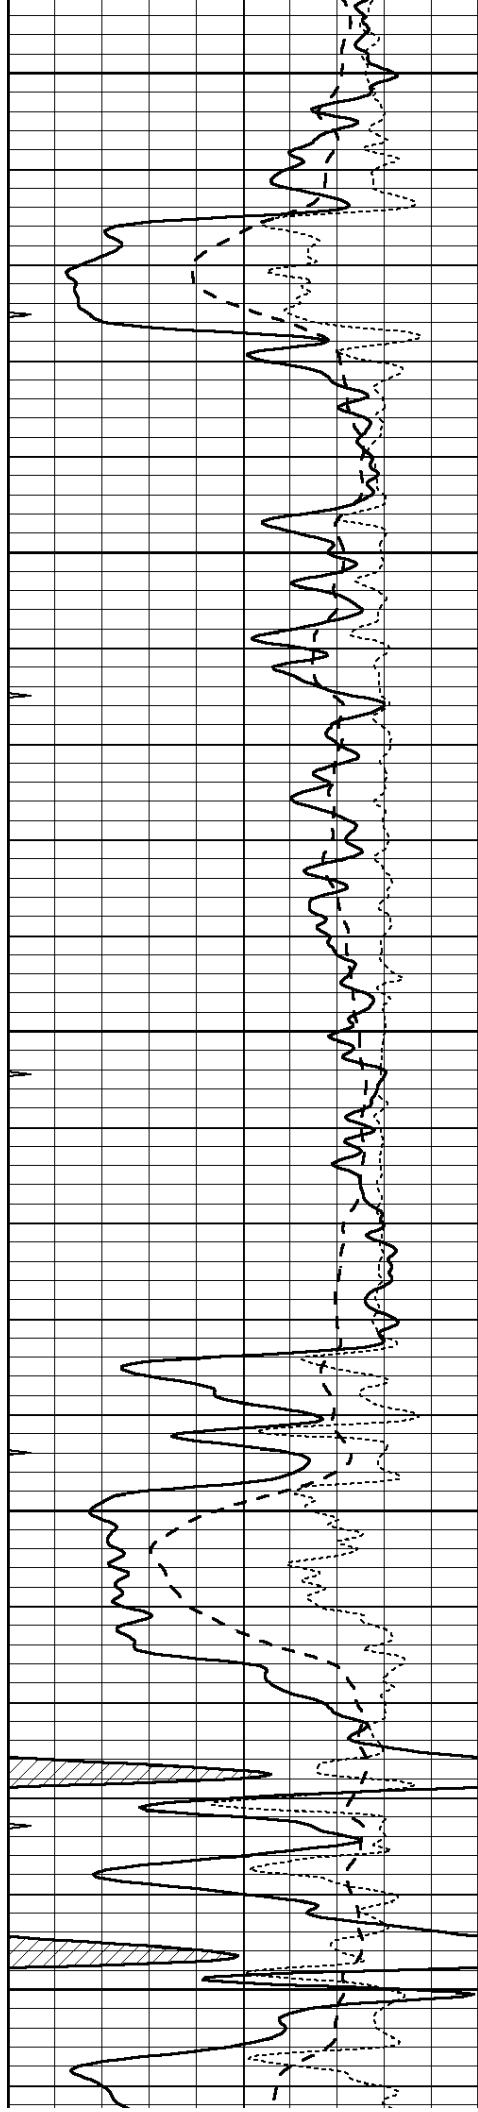


3150


3200

3250

3300

3350

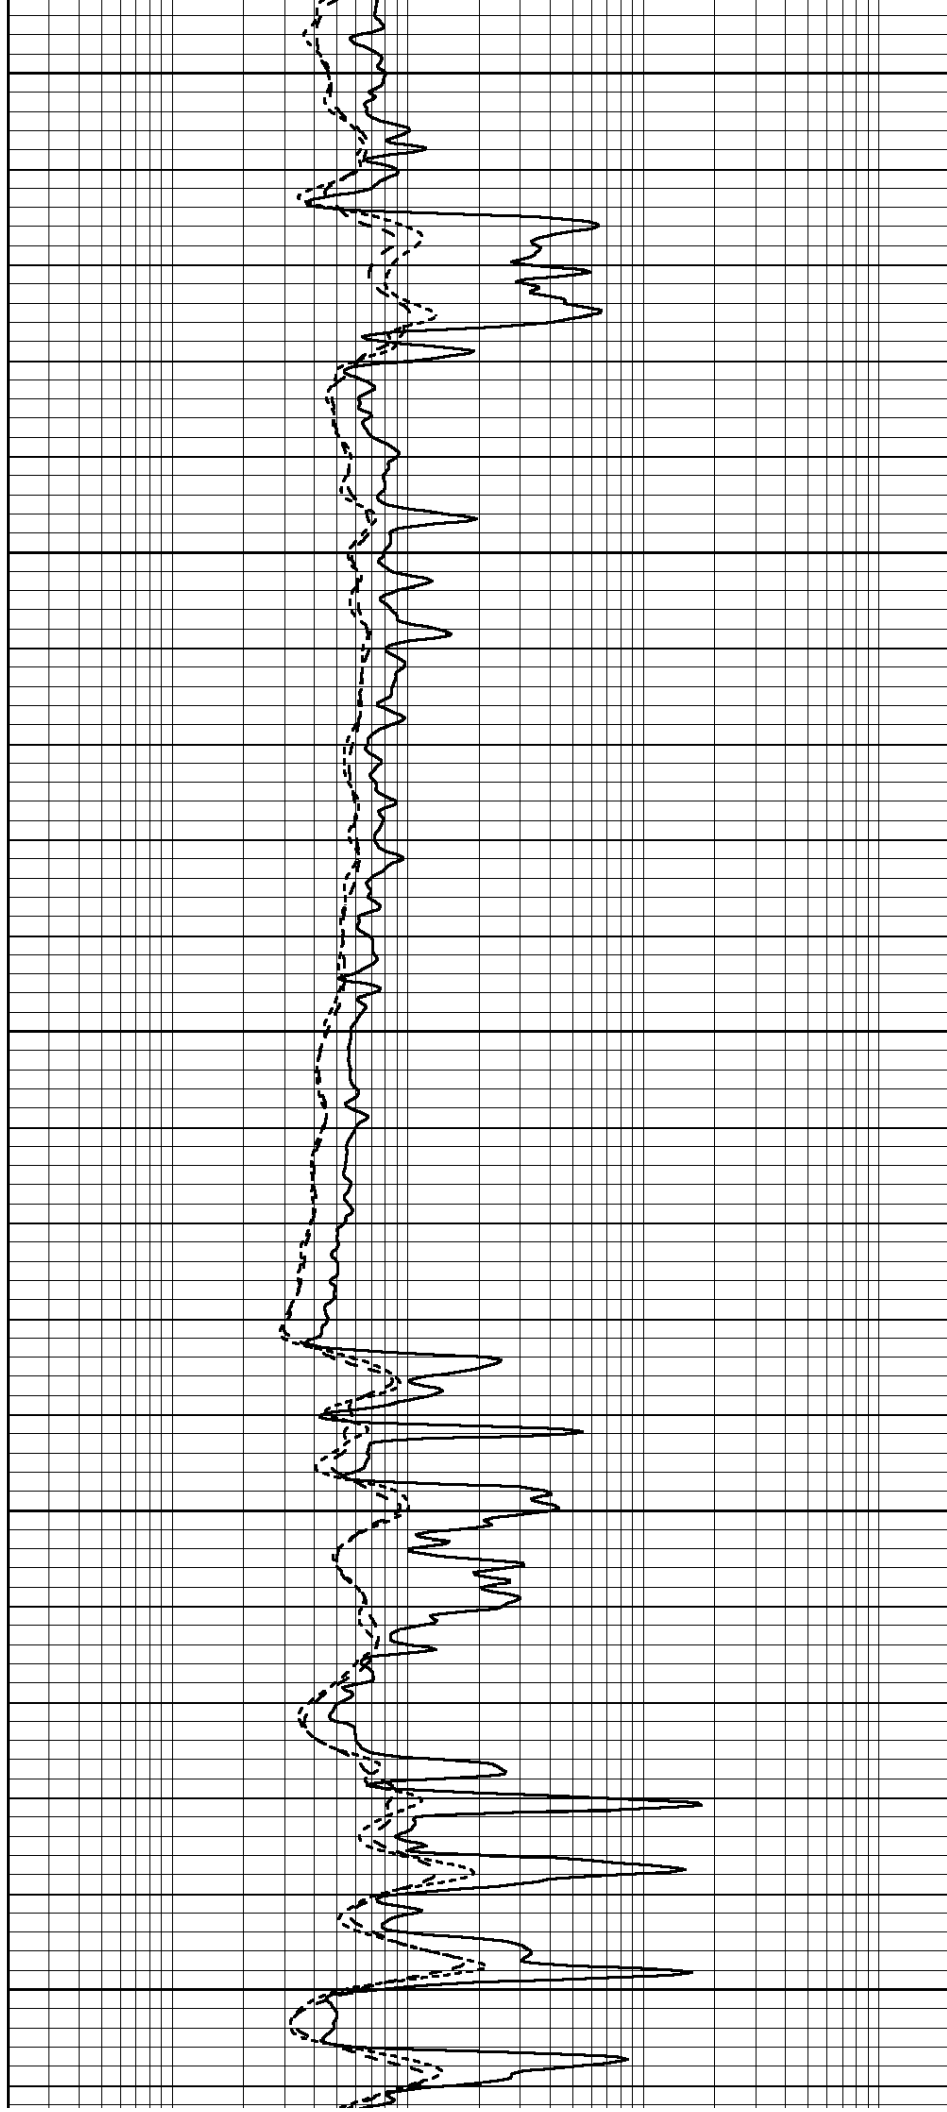

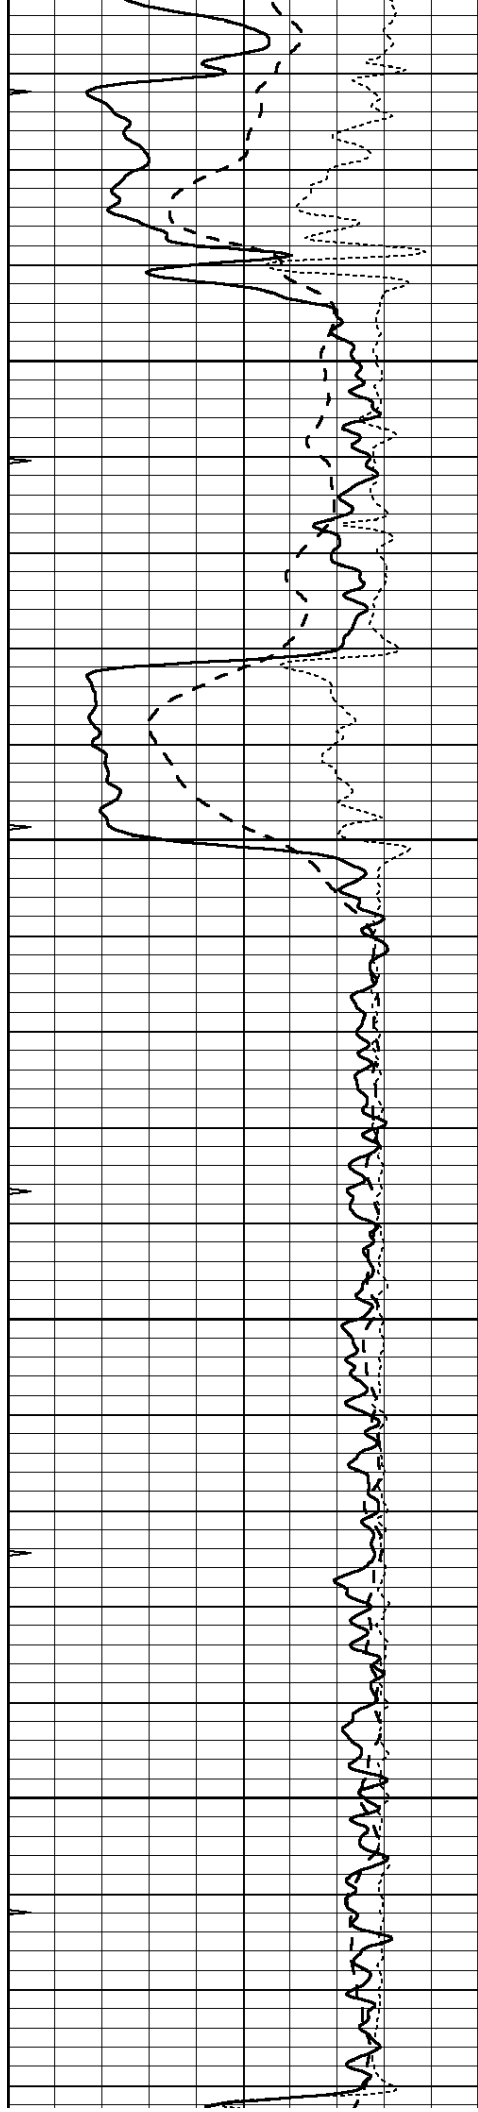



3400

3450

3500

3550

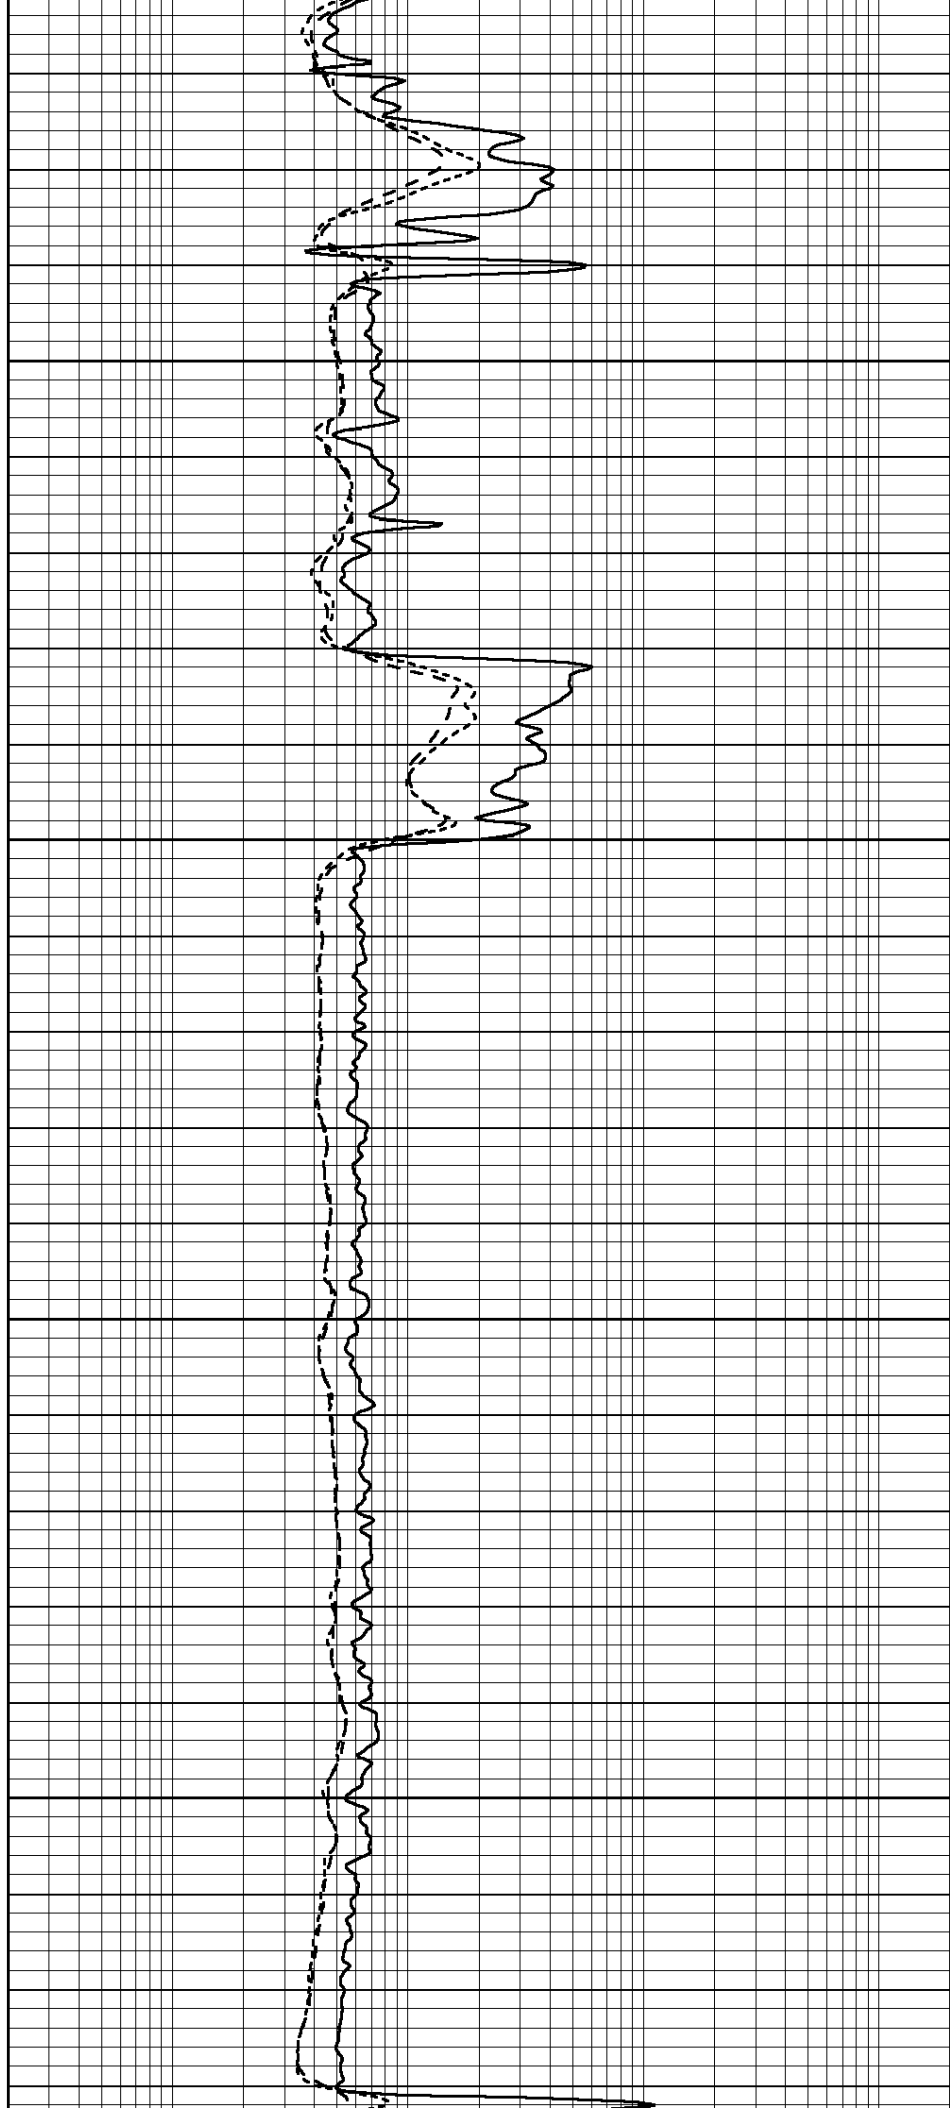

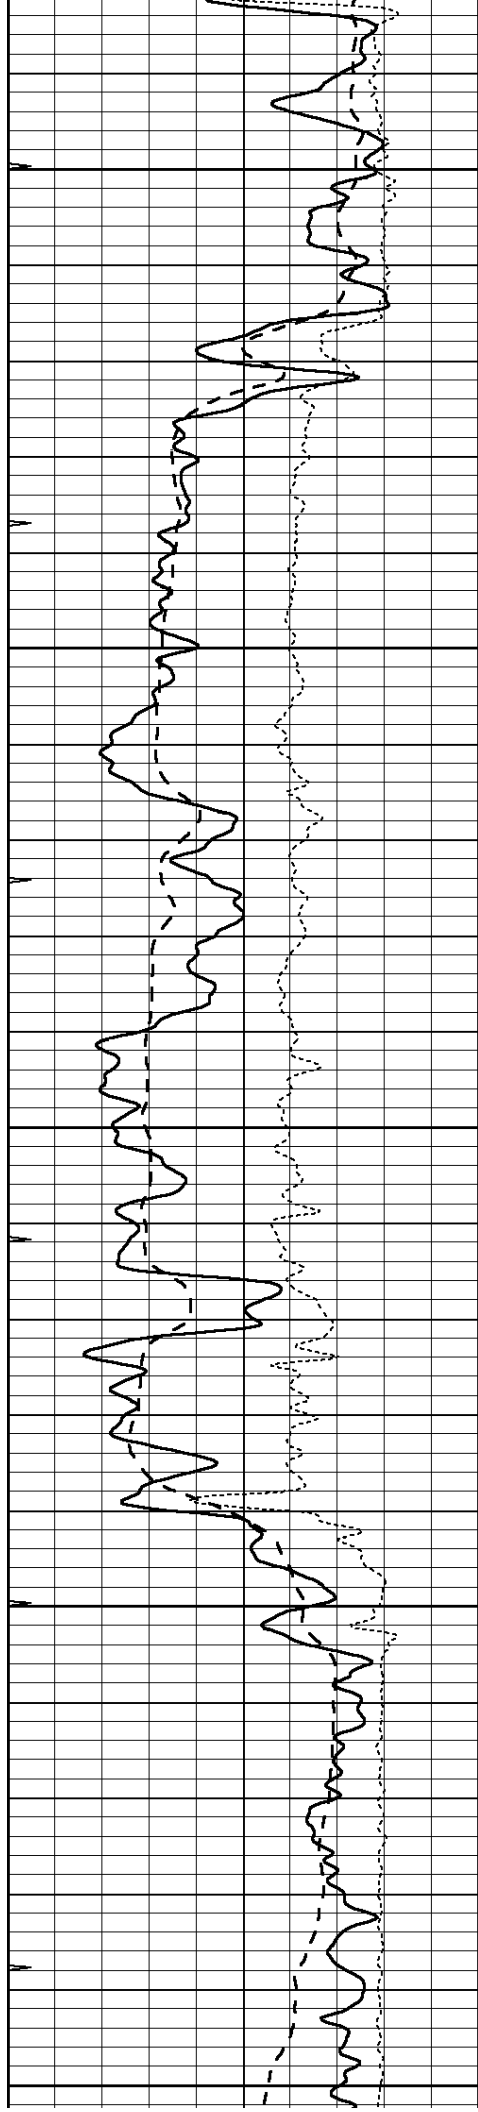


3600


3650

3700

3750

3800

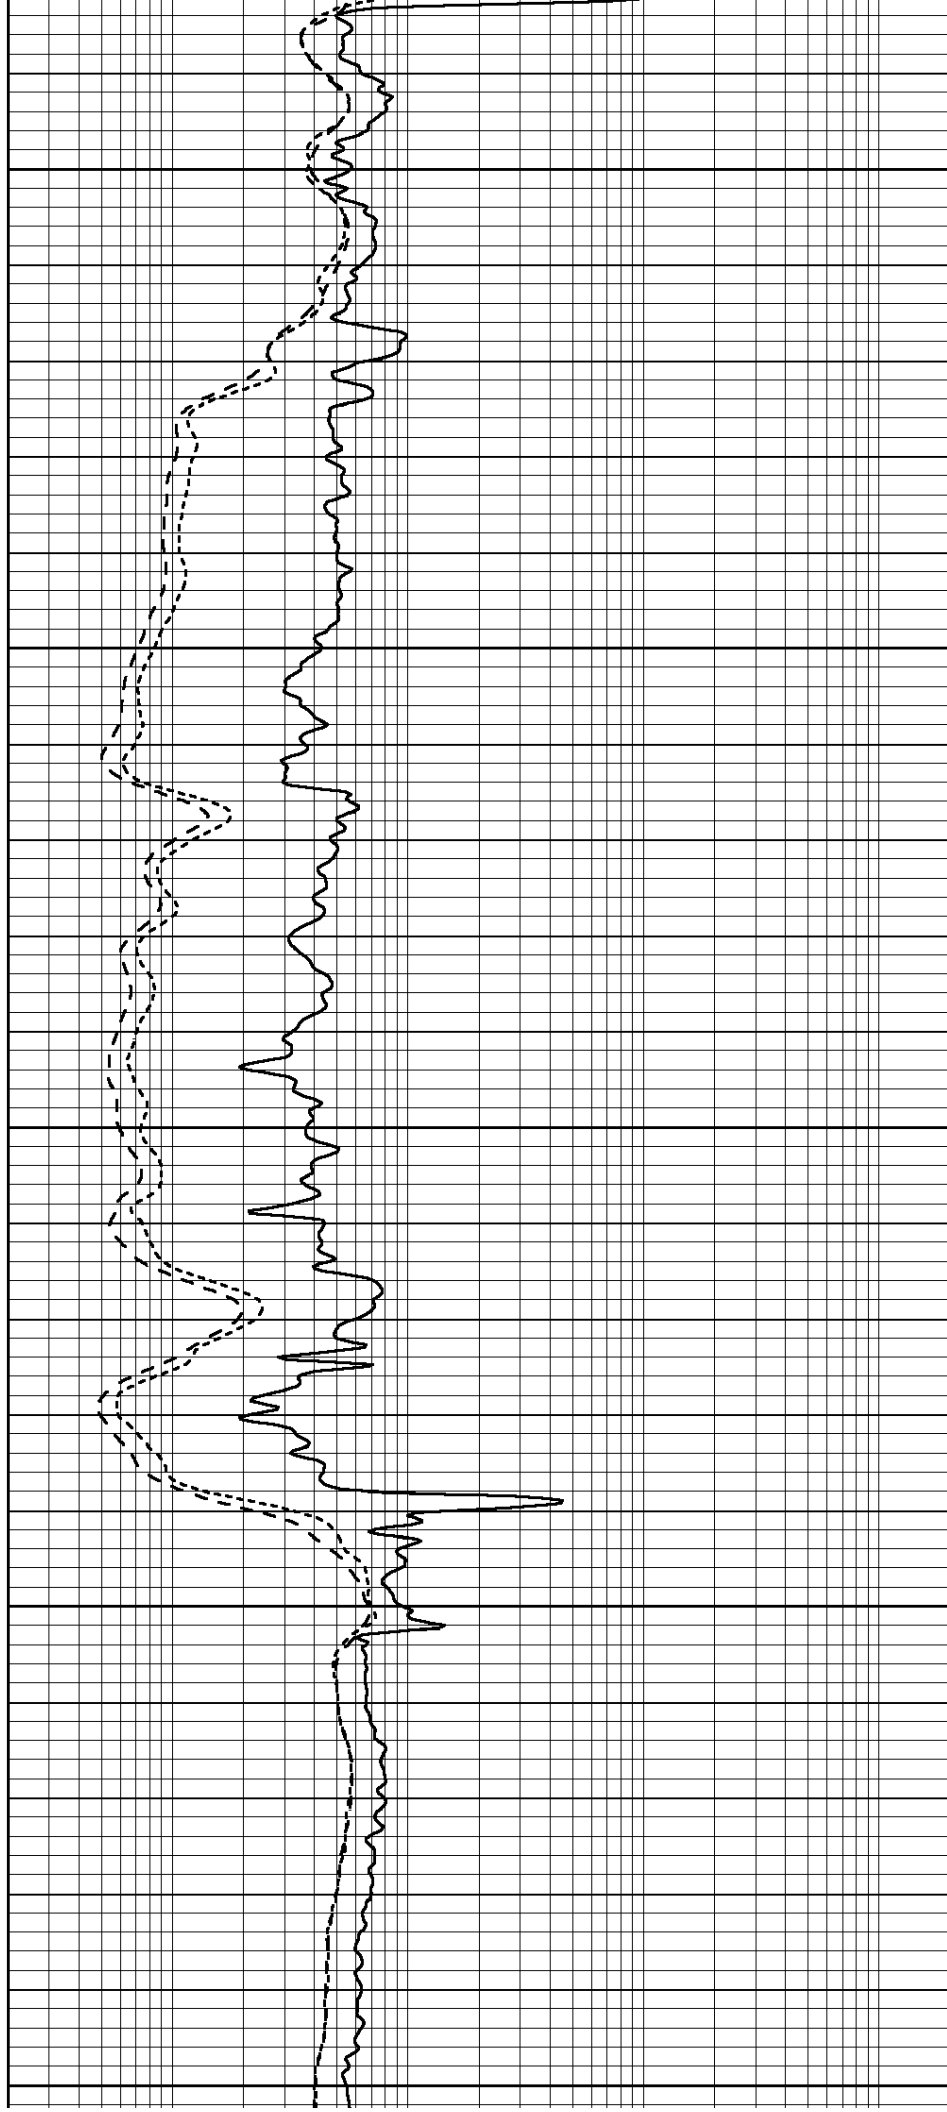

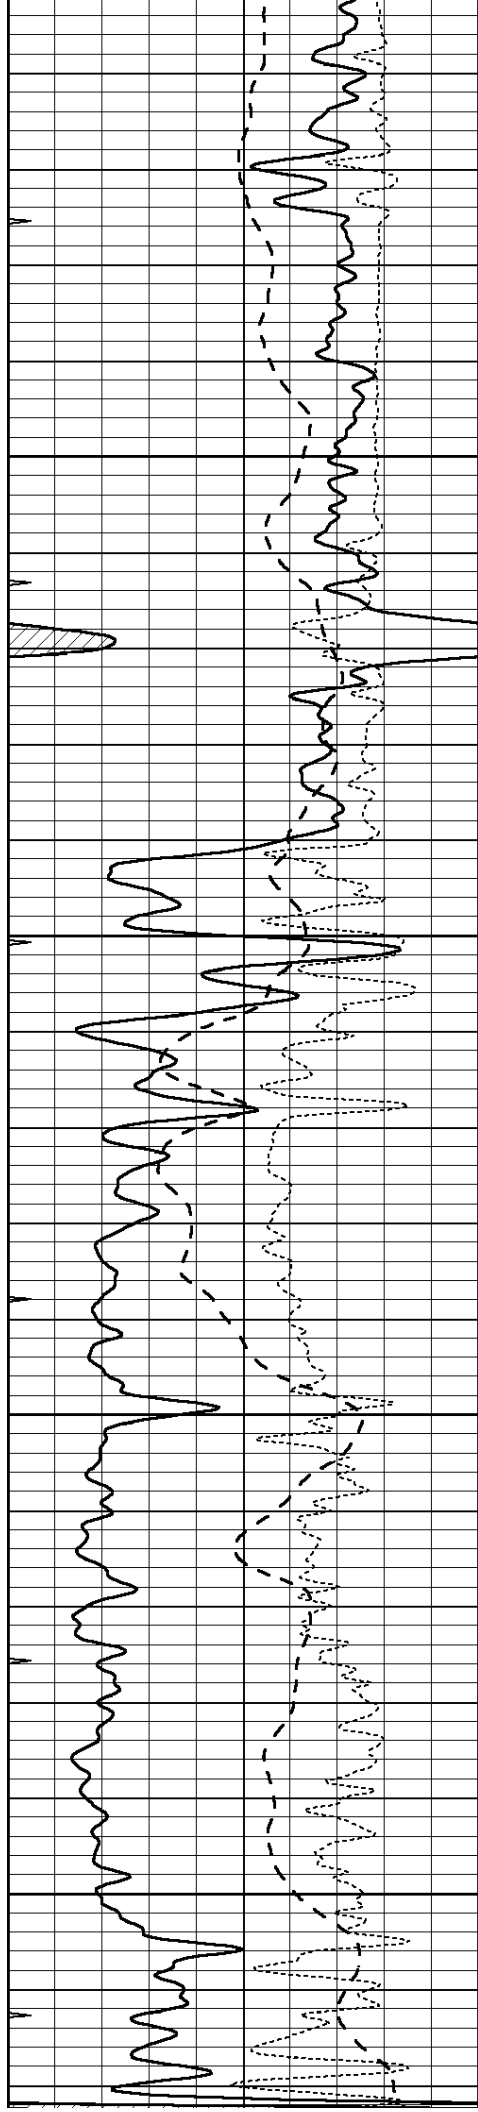



3850

3900

3950

4000

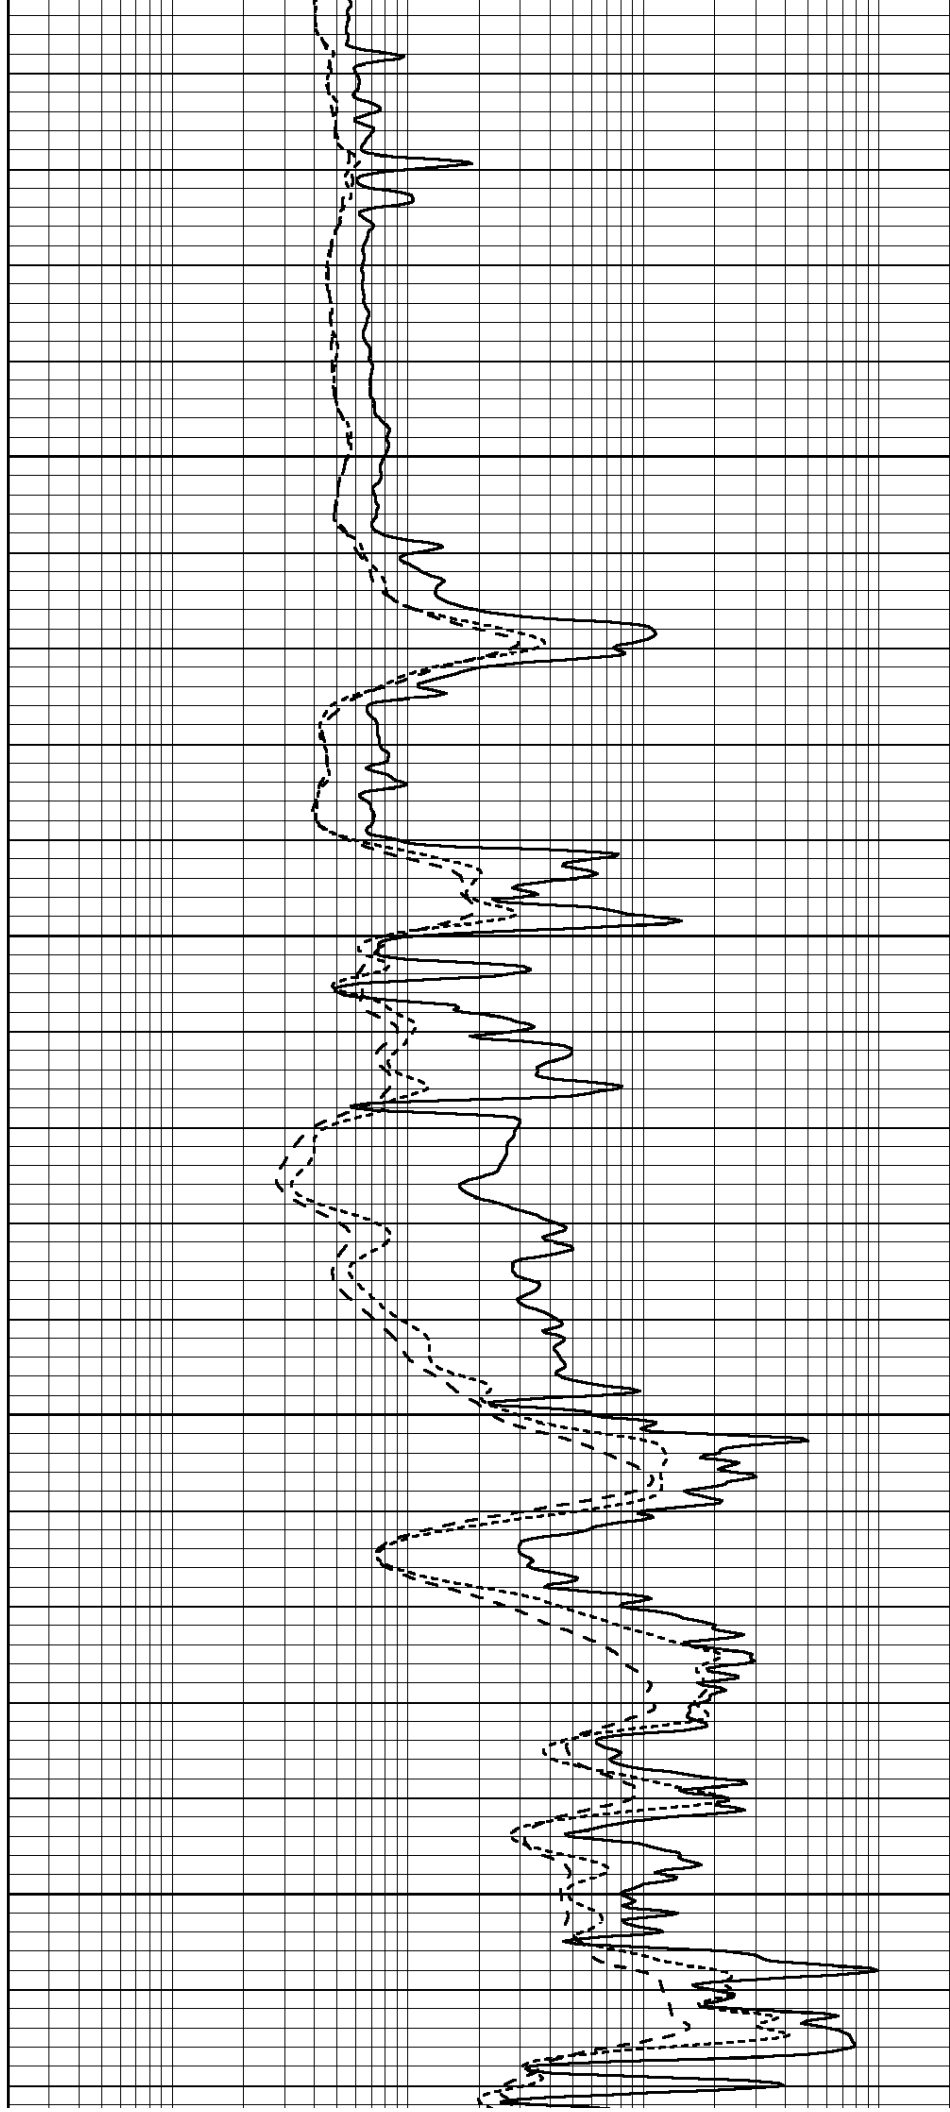

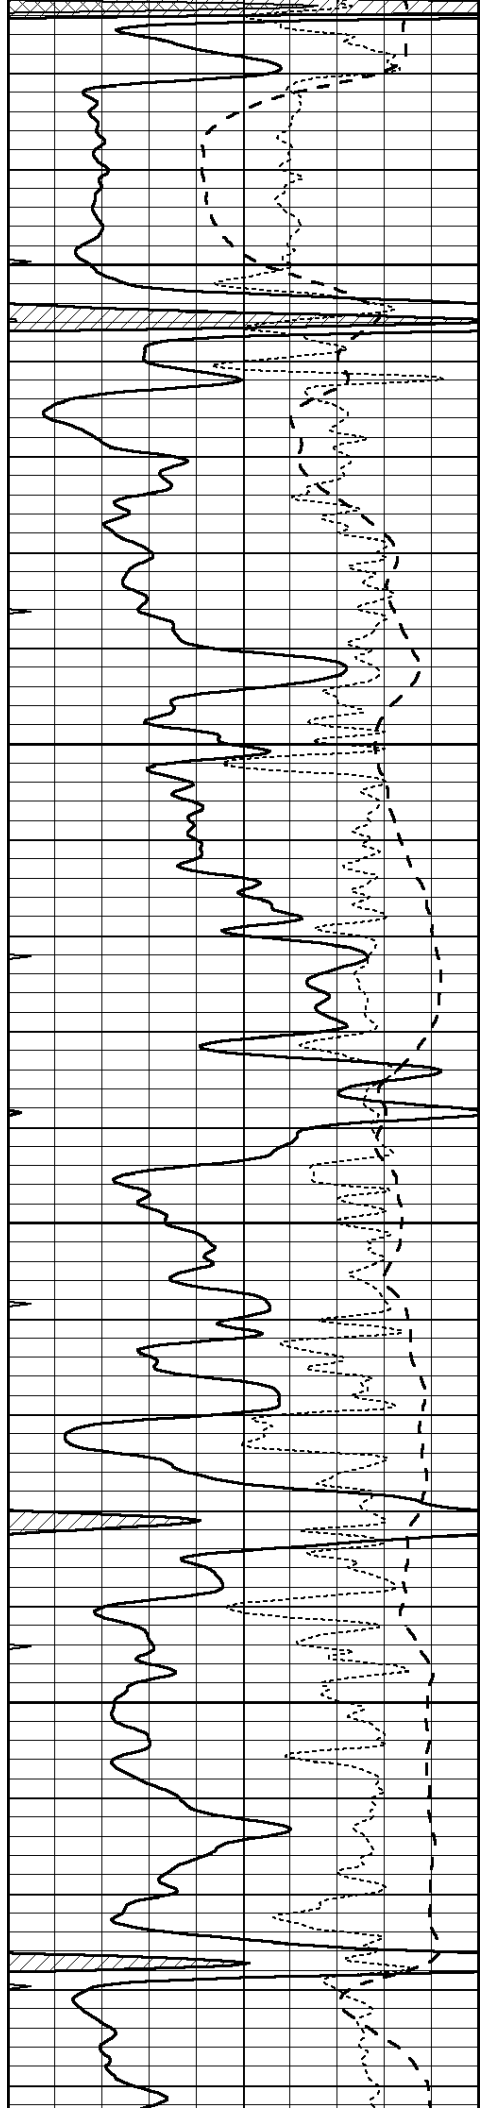



4050

4100

4150

4200

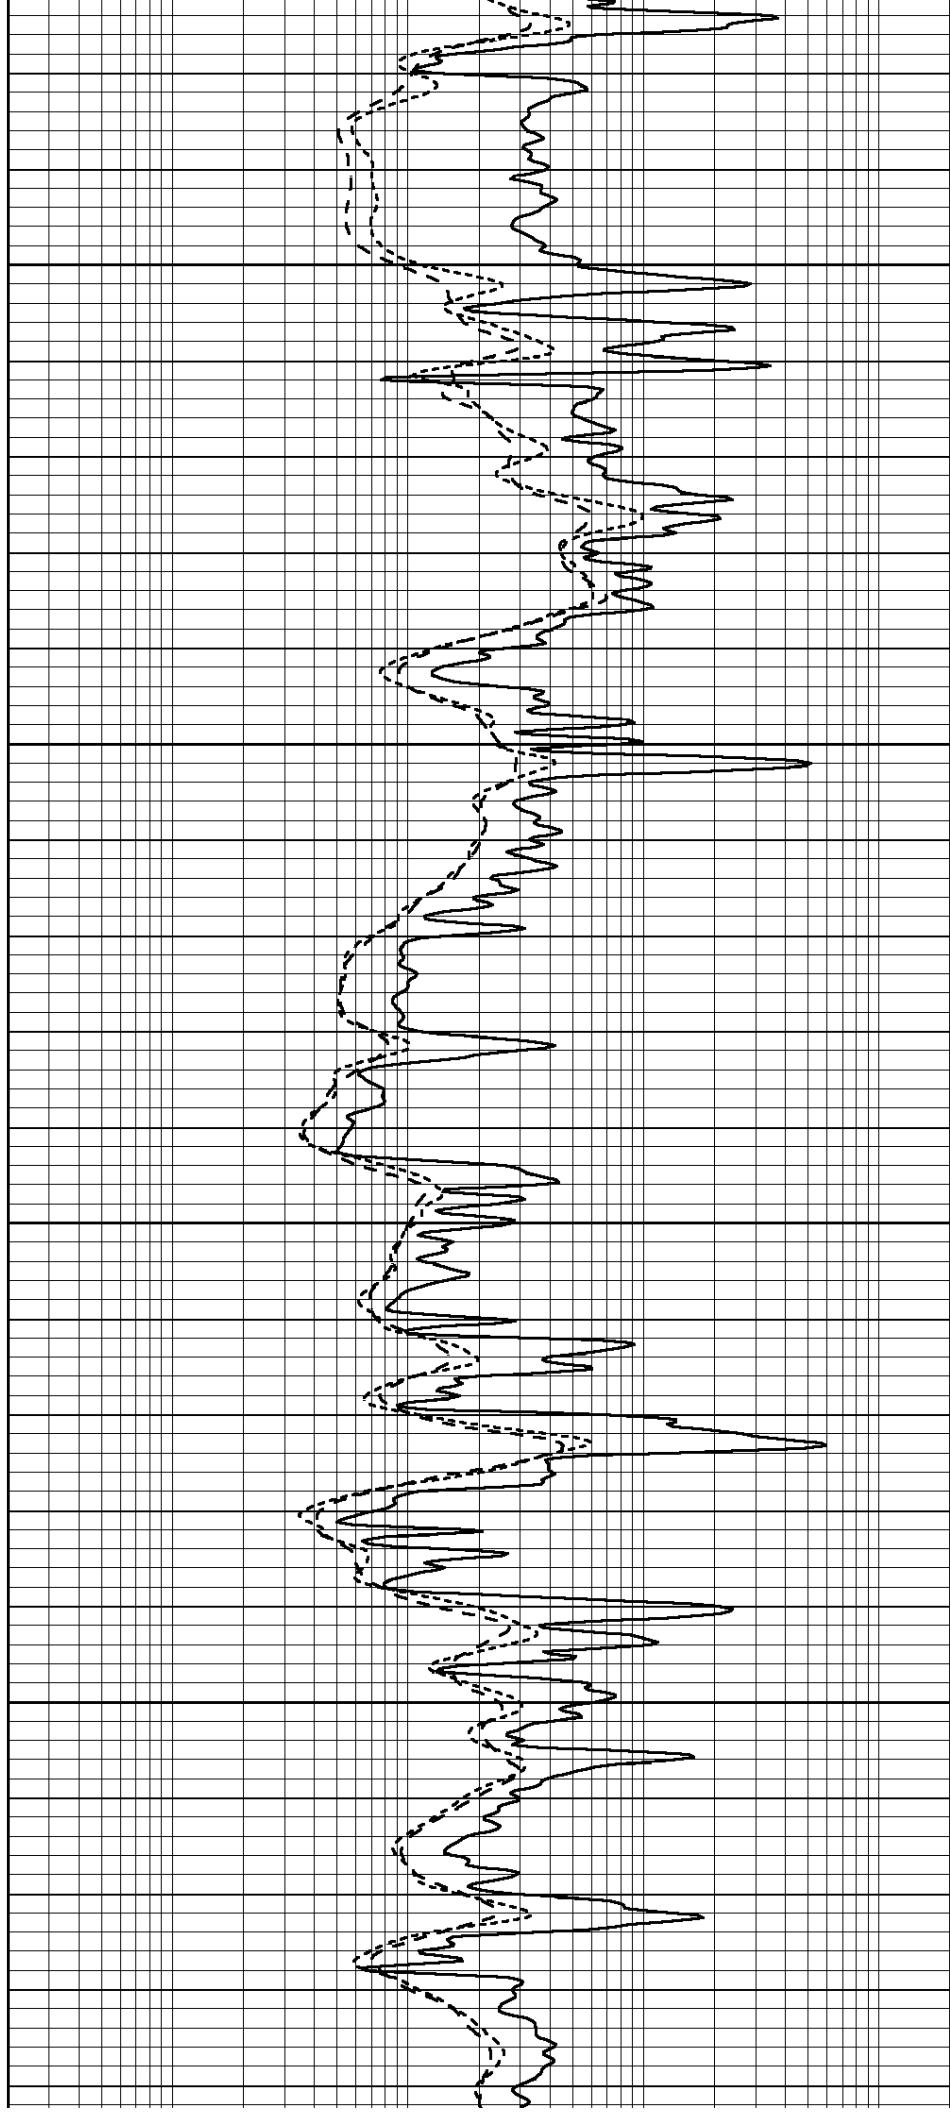

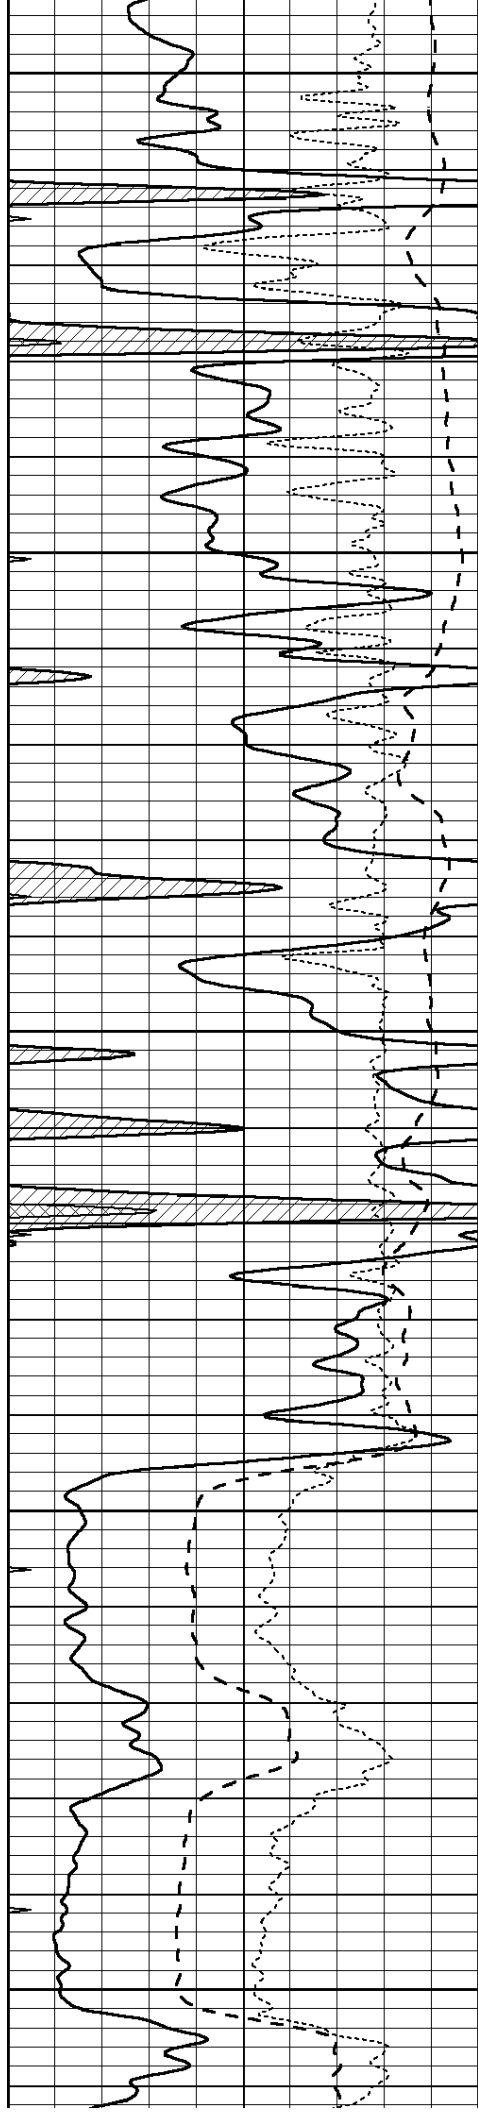


4250


4300

4350

4400

4450

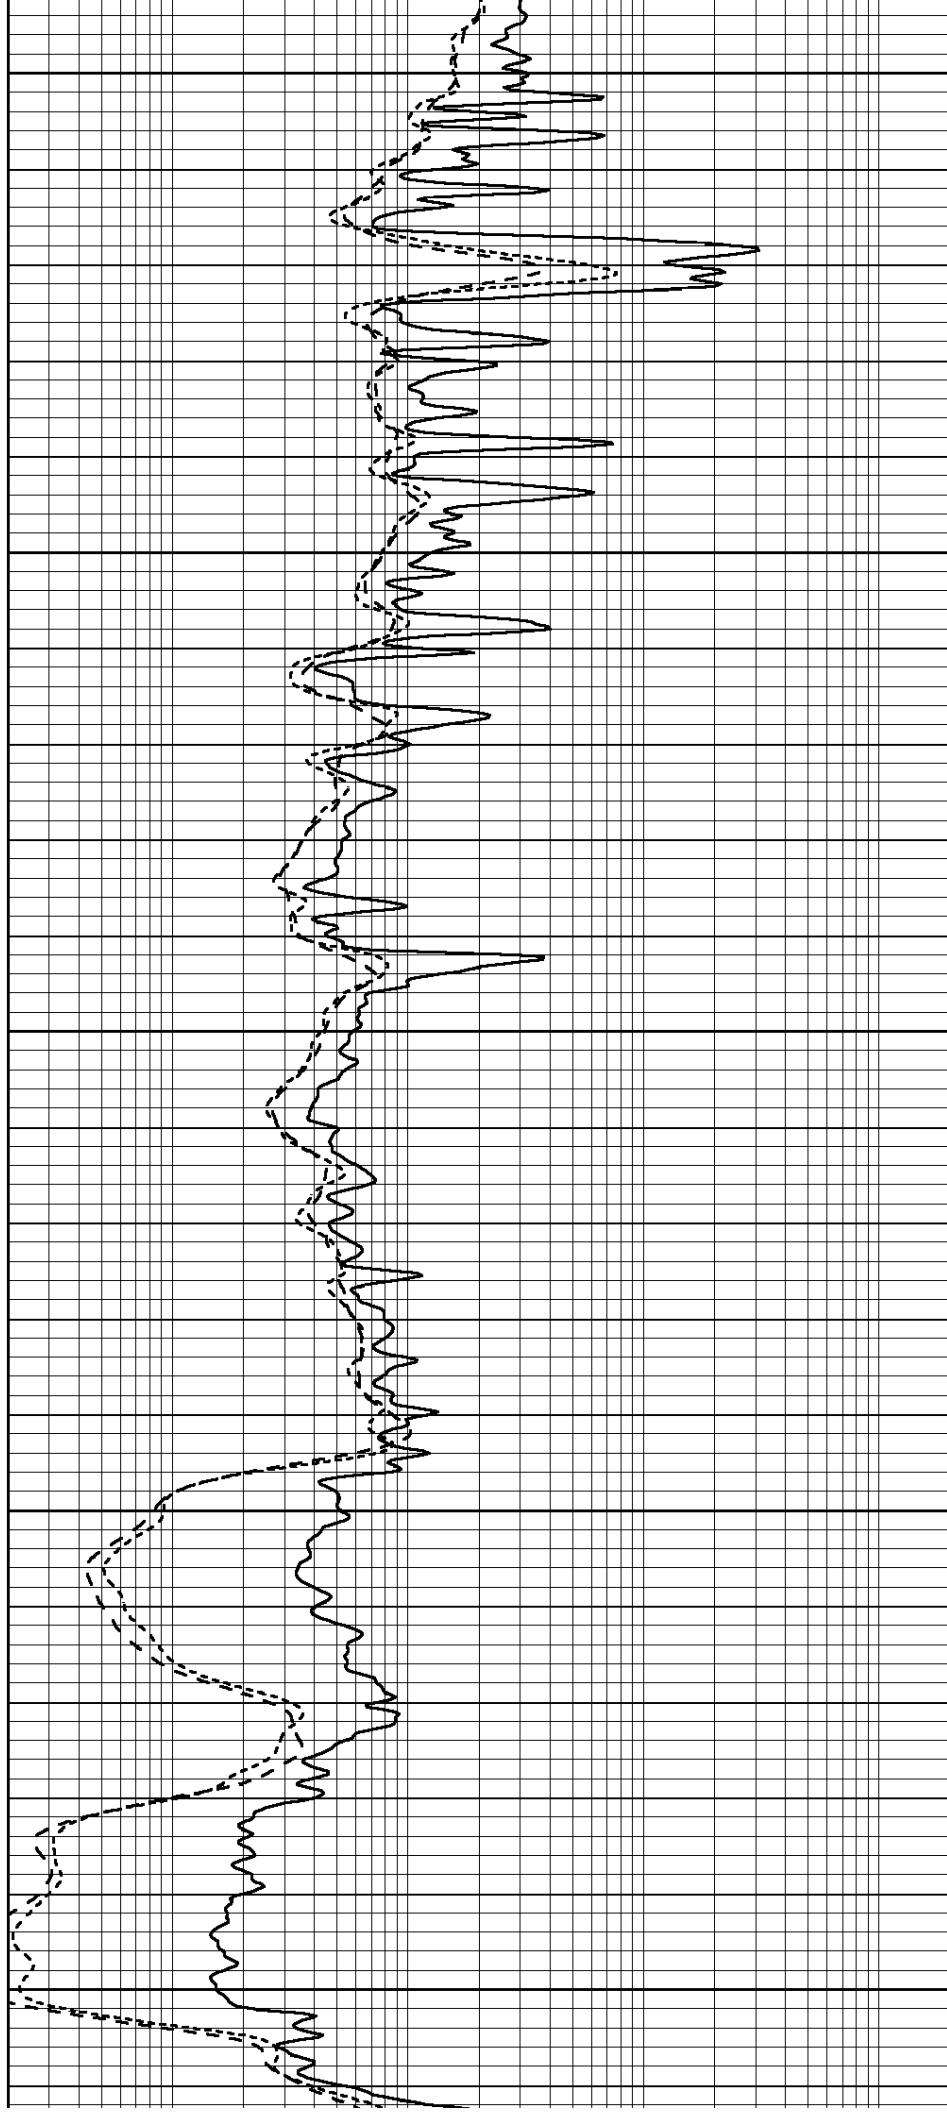

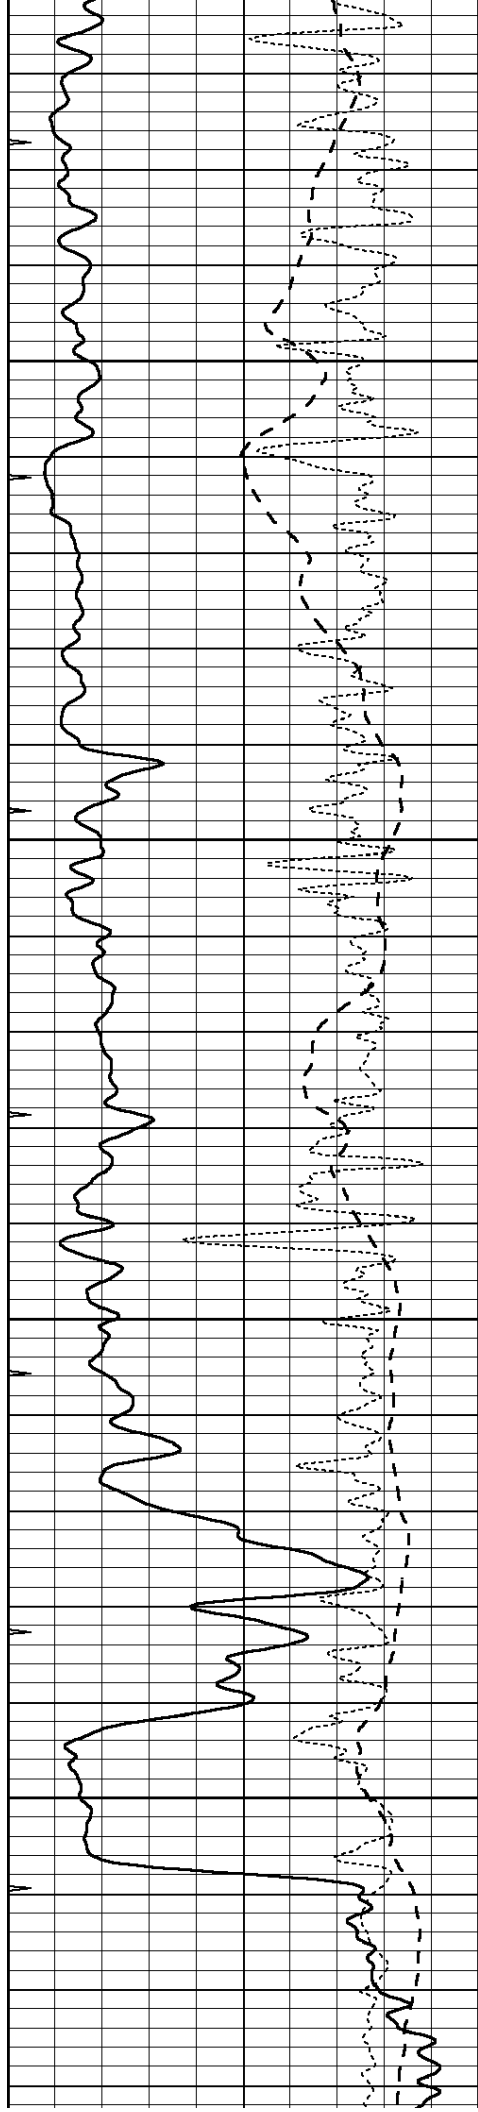



4500

4550

4600

4650

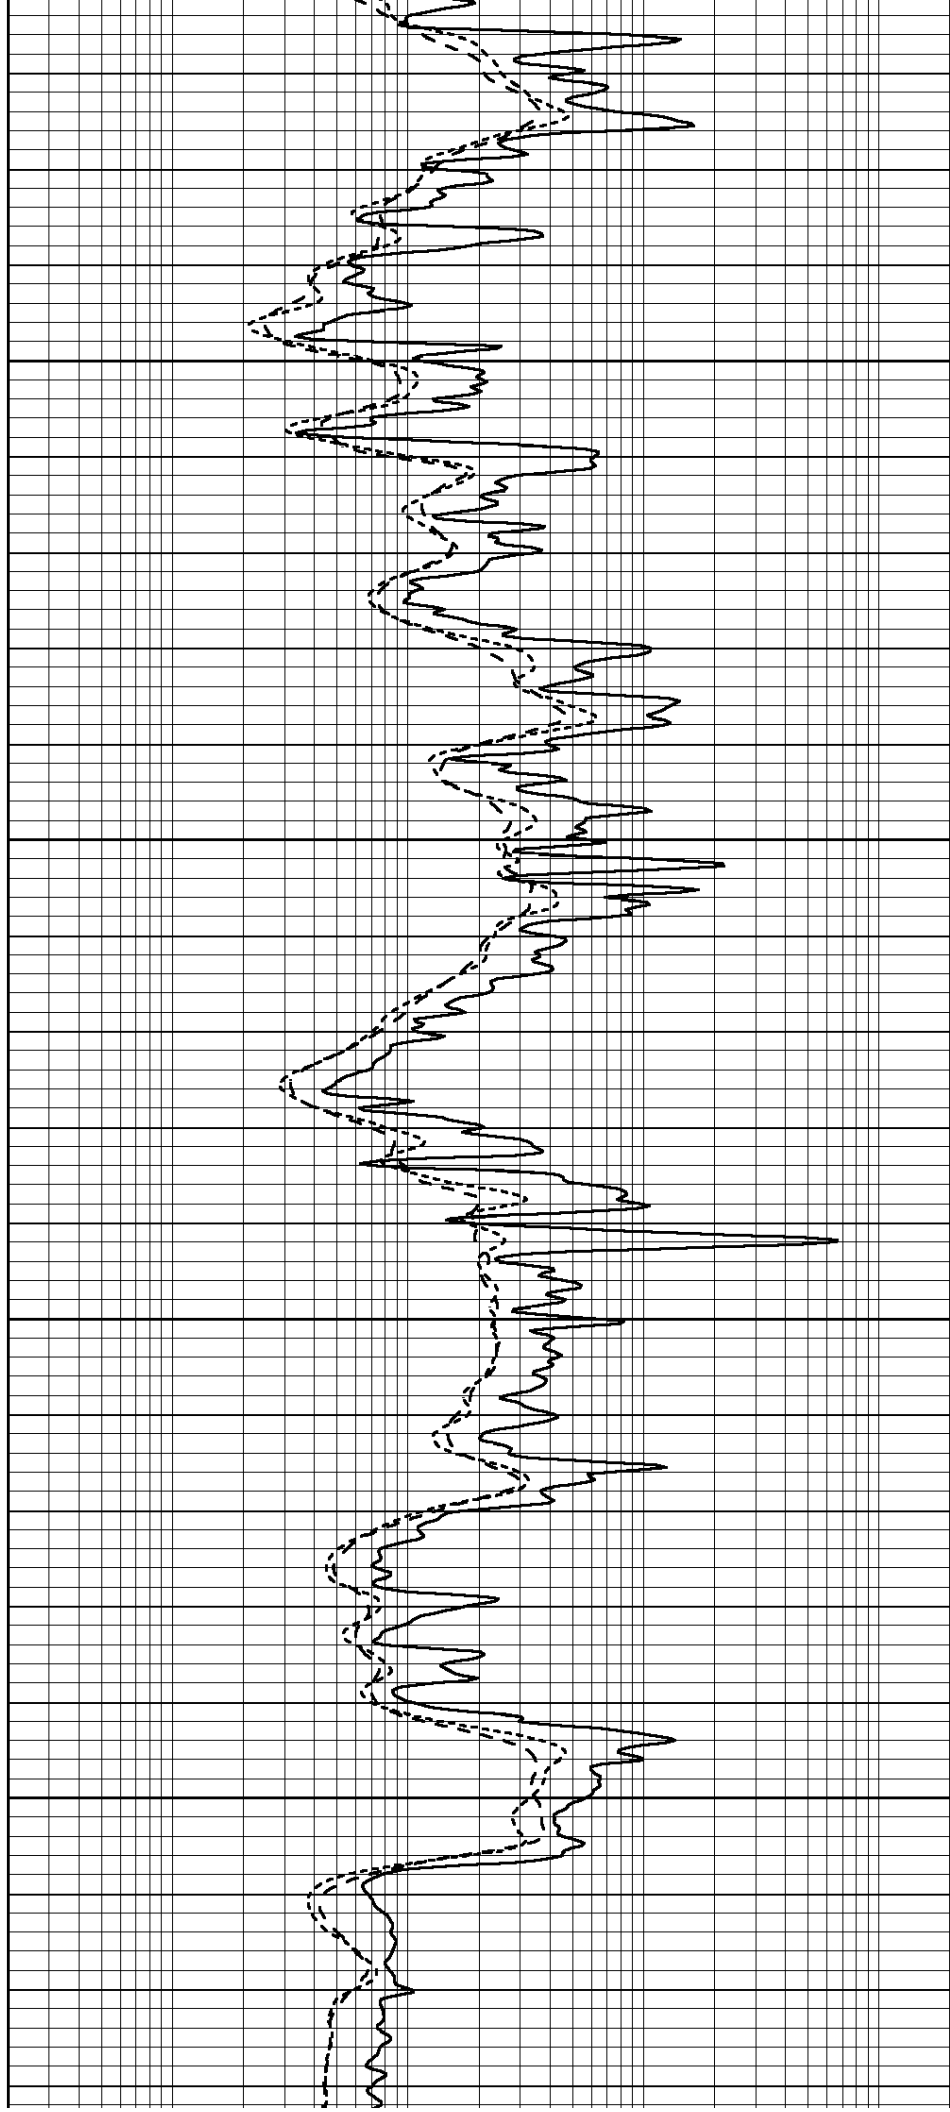

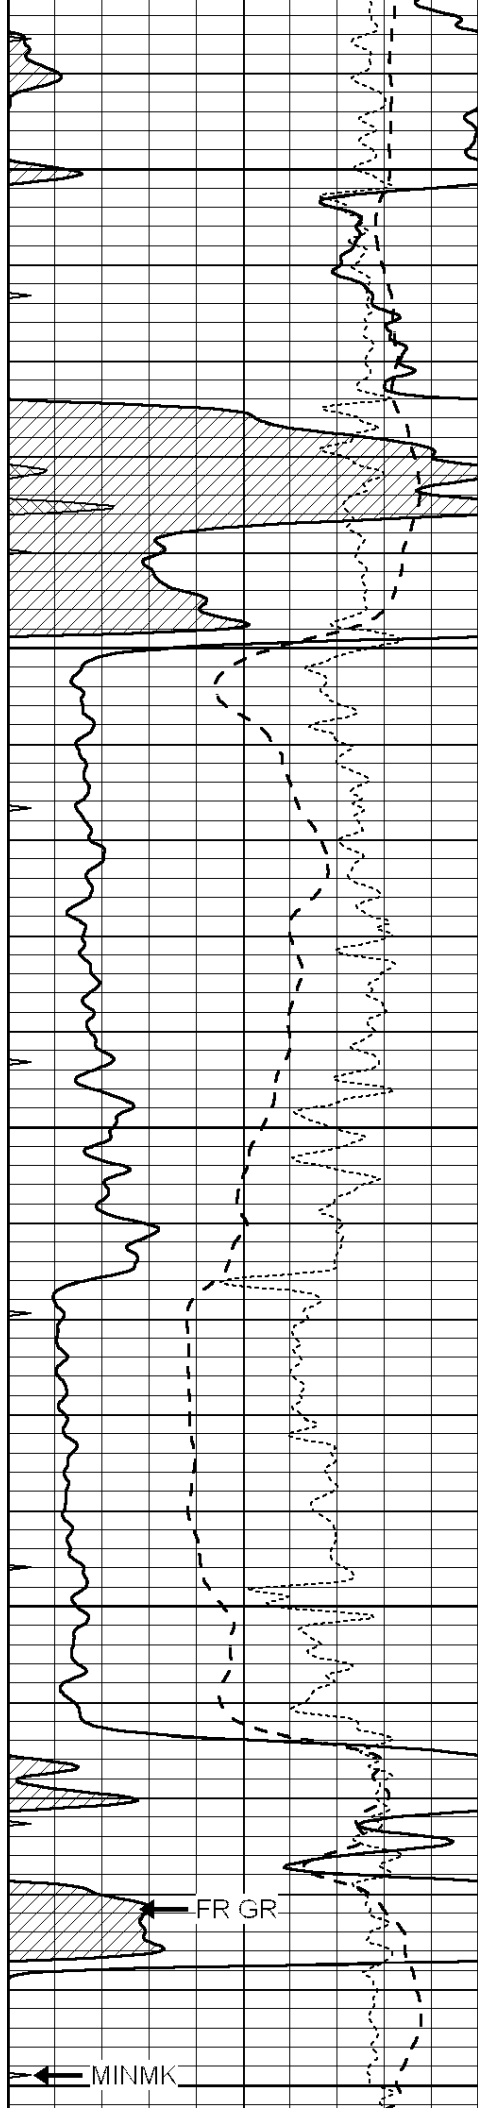


4700




4750

4800

4850





4900


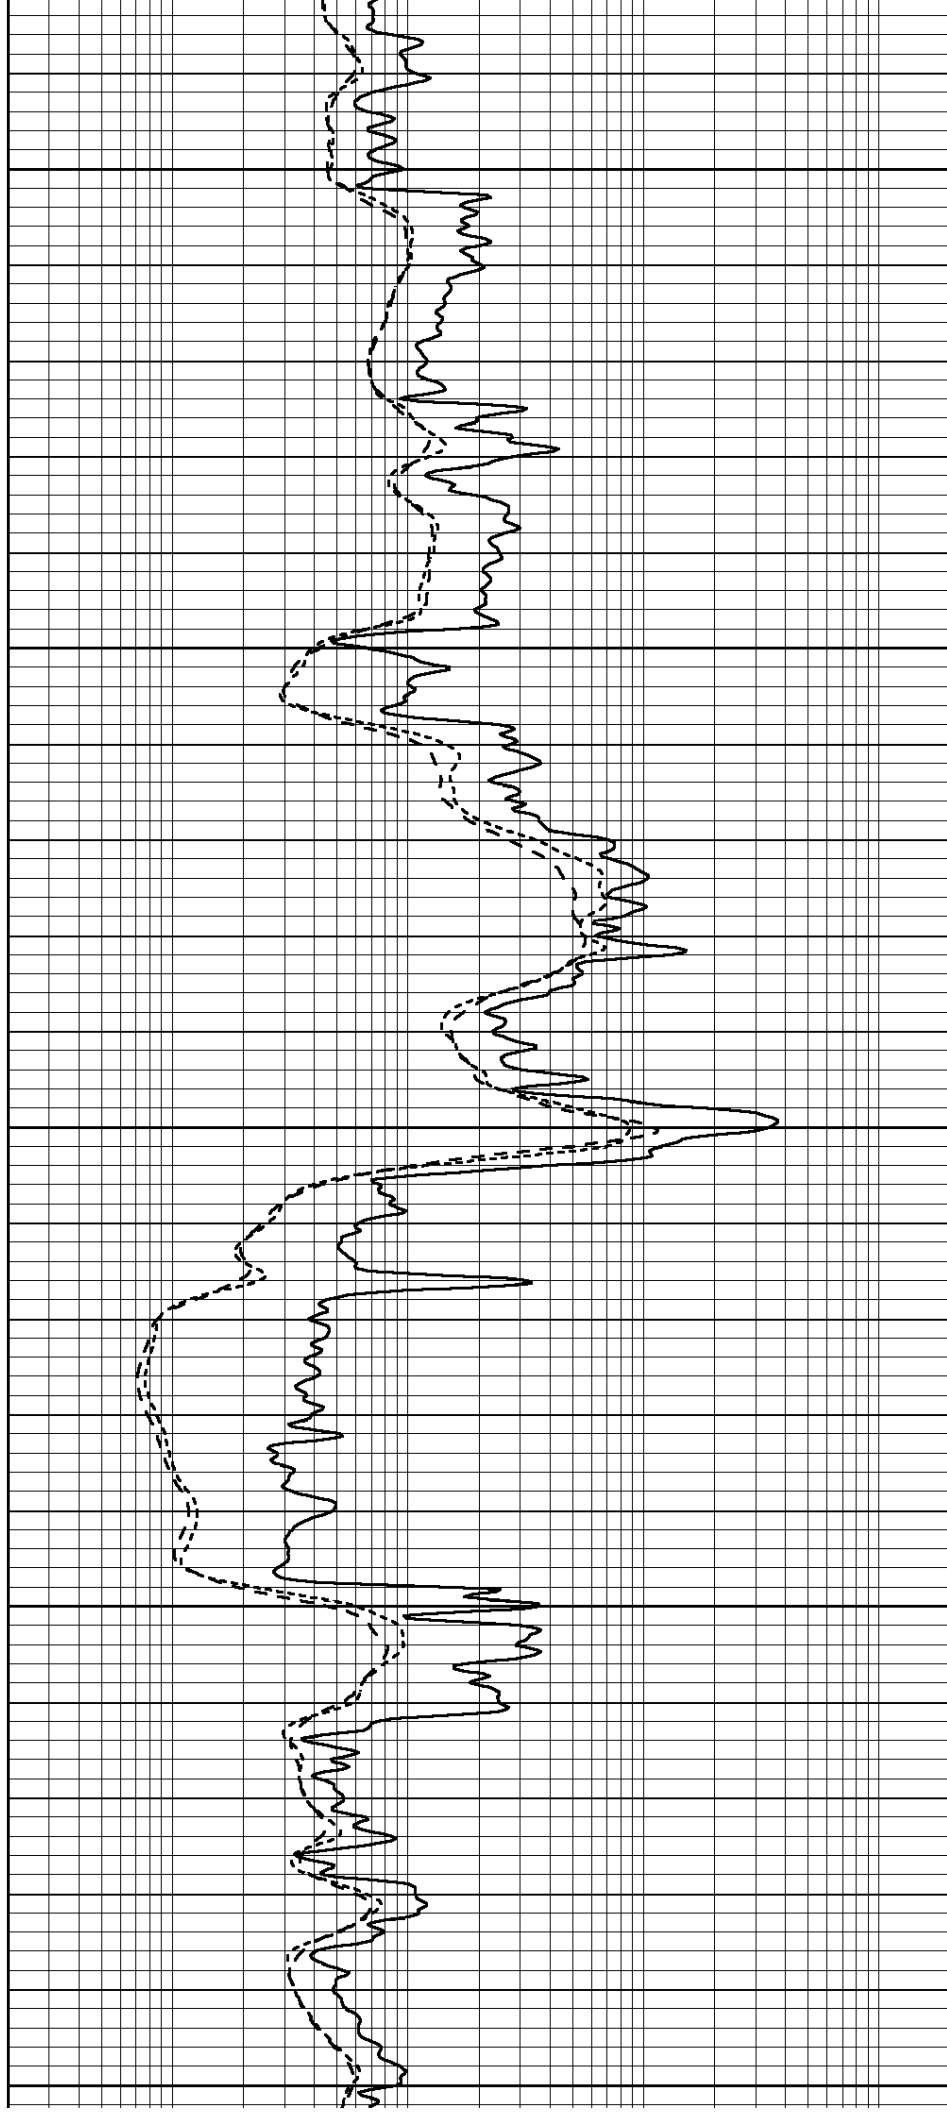


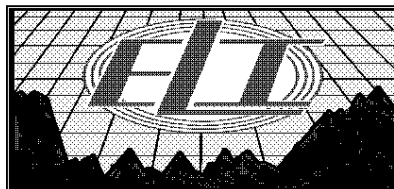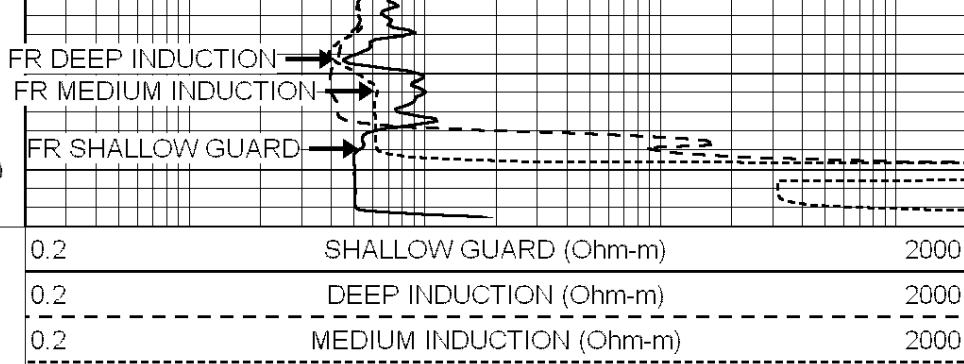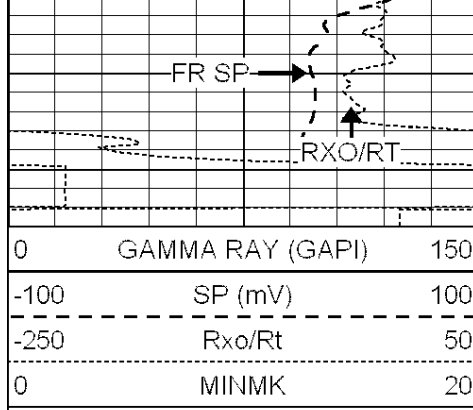

REPEAT SECTION

Database File: 2936pe.db
 Dataset Pathname: pass2.6
 Presentation Format: _dil
 Dataset Creation: Mon Sep 24 20:12:20 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

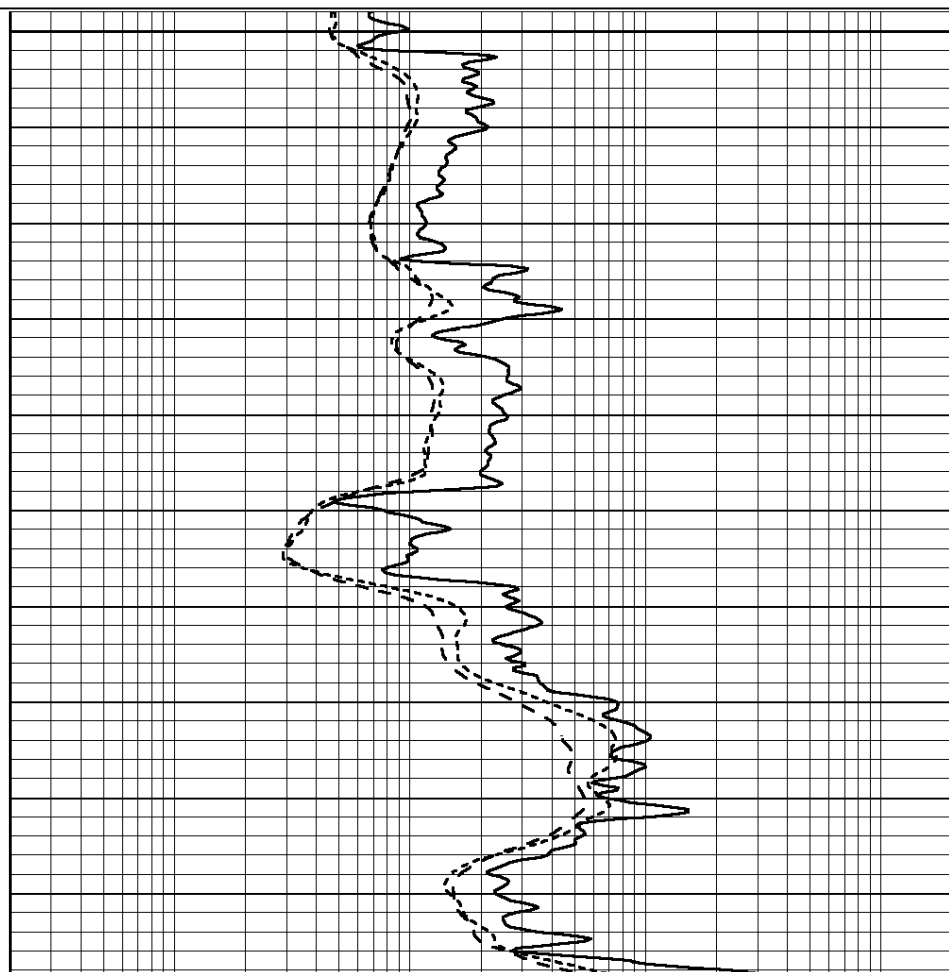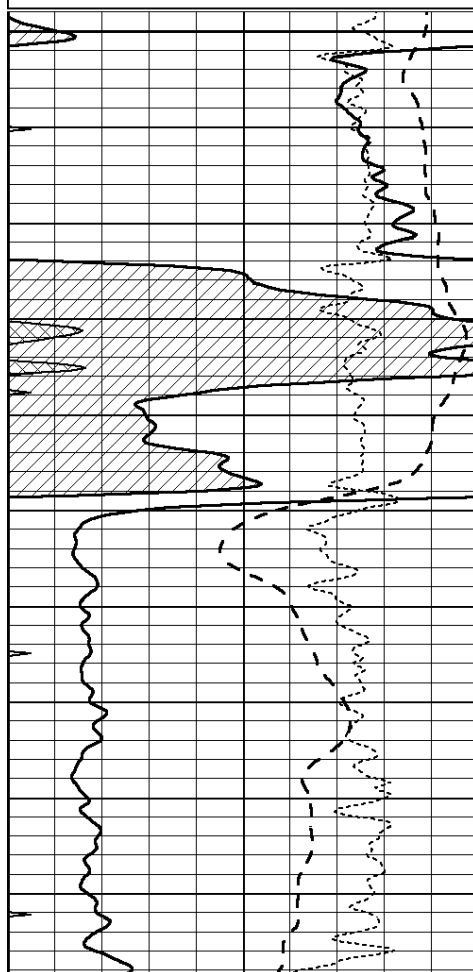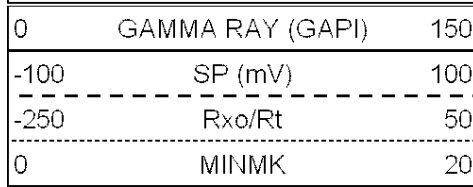

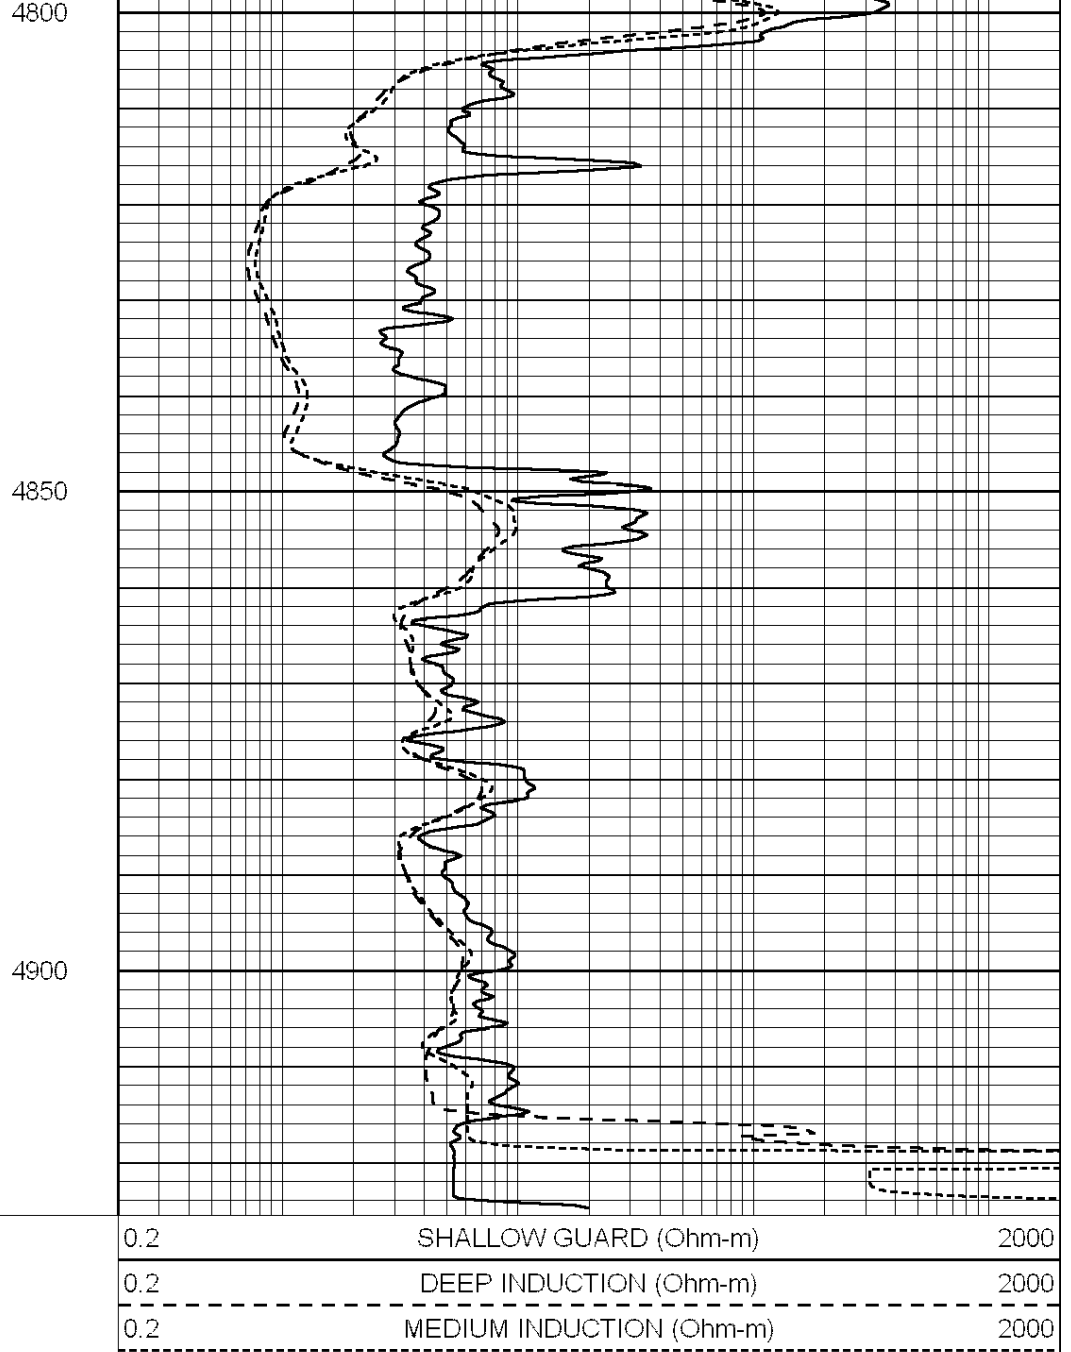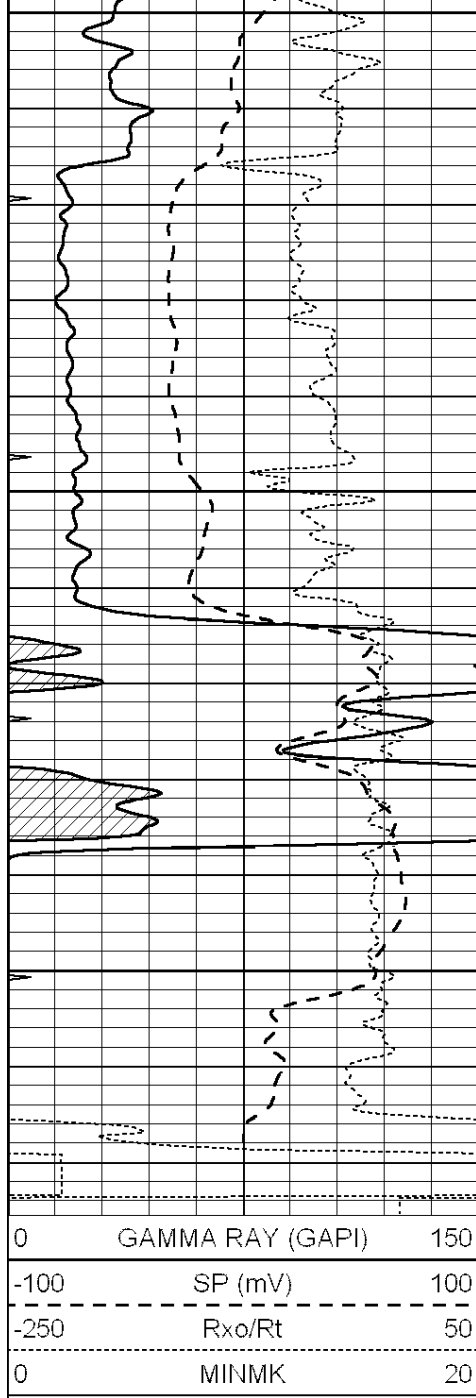

Calibration Report

Database File: 1598ddn.db
 Dataset Pathname: pass4
 Dataset Creation: Wed Aug 30 02:13:00 2017 by Log SOC 120430

Dual Induction Calibration Report

Serial-Model: PROBE7-DILG
 Surface Cal Performed: Wed Aug 30 00:06:33 2017
 Downhole Cal Performed: Mon Jul 28 12:02:56 2008
 After Survey Verification Performed: Mon Jul 28 12:02:56 2008

Surface Calibration

Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-44.000

Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102
Downhole Calibration								
Readings			References			Results		
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		
After Survey Verification								
Readings			Targets			Results		
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		
Litho Density Calibration Report Serial: 002 Model: PRB								
Master Calibration			Performed Mon Aug 21 11:27:42 2017					
	Background	Magnesium		Aluminum	Sandstone			
Window 1	837.1	10632.5		2945.1	12110.1			cps
Window 2	772.0	9117.4		2570.1	10197.3			cps
Window 3	631.7	4669.0		1481.9	5042.9			cps
Window 4	187.0	187.5		185.9	189.9			cps
Long Space	0.0	8345.4		1798.1	9425.3			cps
Short Space	1.1	1927.9		1285.9	2050.2			cps
Rho		1.7100		2.5960	1.3800			g/cc
Pe		0.0000		2.5700	1.5500			
Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio			: 0.558	
Spine Angle	: 75.2	Spine Slope	: 3.790	Spine Intercept			: -19.6	
Before Survey Verification								
Performed Wed Dec 31 18:00:00 1969								
Window 1	0.0	0.0		0.0	0.0			cps
Window 2	0.0	0.0		0.0	0.0			cps
Window 3	0.0	0.0		0.0	0.0			cps
Window 4	0.0	0.0		0.0	0.0			cps
Long Space	0.0	0.0		0.0	0.0			cps
Short Space	0.0	0.0		0.0	0.0			cps
Measured Rho		0.0000		0.0000	0.0000			g/cc
Measured Correction		0.0000		0.0000	0.0000			g/cc
Measured Pe				0.0000	0.0000			
After Survey Verification								
Performed Wed Dec 31 18:00:00 1969								
Window 1	0.0	0.0		0.0	0.0			cps
Window 2	0.0	0.0		0.0	0.0			cps
Window 3	0.0	0.0		0.0	0.0			cps

Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

--

Compensated Neutron Calibration Report
--

Serial Number:	070808
Tool Model:	Probe

PRE-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	

POST-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	OPEN_GR	
Performed:	Wed May 31 00:09:32 2017	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2800	GAPI/cps