



MICRO LOG

Company		TRIPLE CROWN OPERATING, LLC.	
Well		EPSILON #1-24	
Field		LEIGHTON NORTH	
County		GOVE	
State		KANSAS	
Location:		APL # : 15-063-22342-0000 2227' FSL & 630' FEL SW - NE - NE - SE	
Permanent Datum		GROUND LEVEL	
Log Measured From		KELLY BUSHING 5' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 24 TWP 14S RGE 28W		Elevation K.B. 2526 D.F. 2524 G.L. 2521	
Date	10/26/18		
Run Number	TWO		
Depth Driller	4410		
Depth Logger	4402		
Bottom Logged Interval	4386		
Top Log Interval	3500		
Casing Driller	8 5/8"@225'		
Casing Logger	225		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2,000 PPM	
Density / Viscosity	9.1/53		
pH / Fluid Loss	8.5/9.6		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.900@80F		
Rmf @ Meas. Temp	.675@80F		
Rmc @ Meas. Temp	1.08@80F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.600@120F		
Time Circulation Stopped	4.5 HOURS		
Time Logger on Bottom	11:45 P.M.		
Maximum Recorded Temperature	120F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	SEAN DEENIHAN	CARLY COX	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
PARK, KS, & I-70., 19S., W. INTO




MAIN SECTION

Database File: 2948pe.db
 Dataset Pathname: pass6.2
 Presentation Format: micro
 Dataset Creation: Sat Oct 27 00:05:36 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

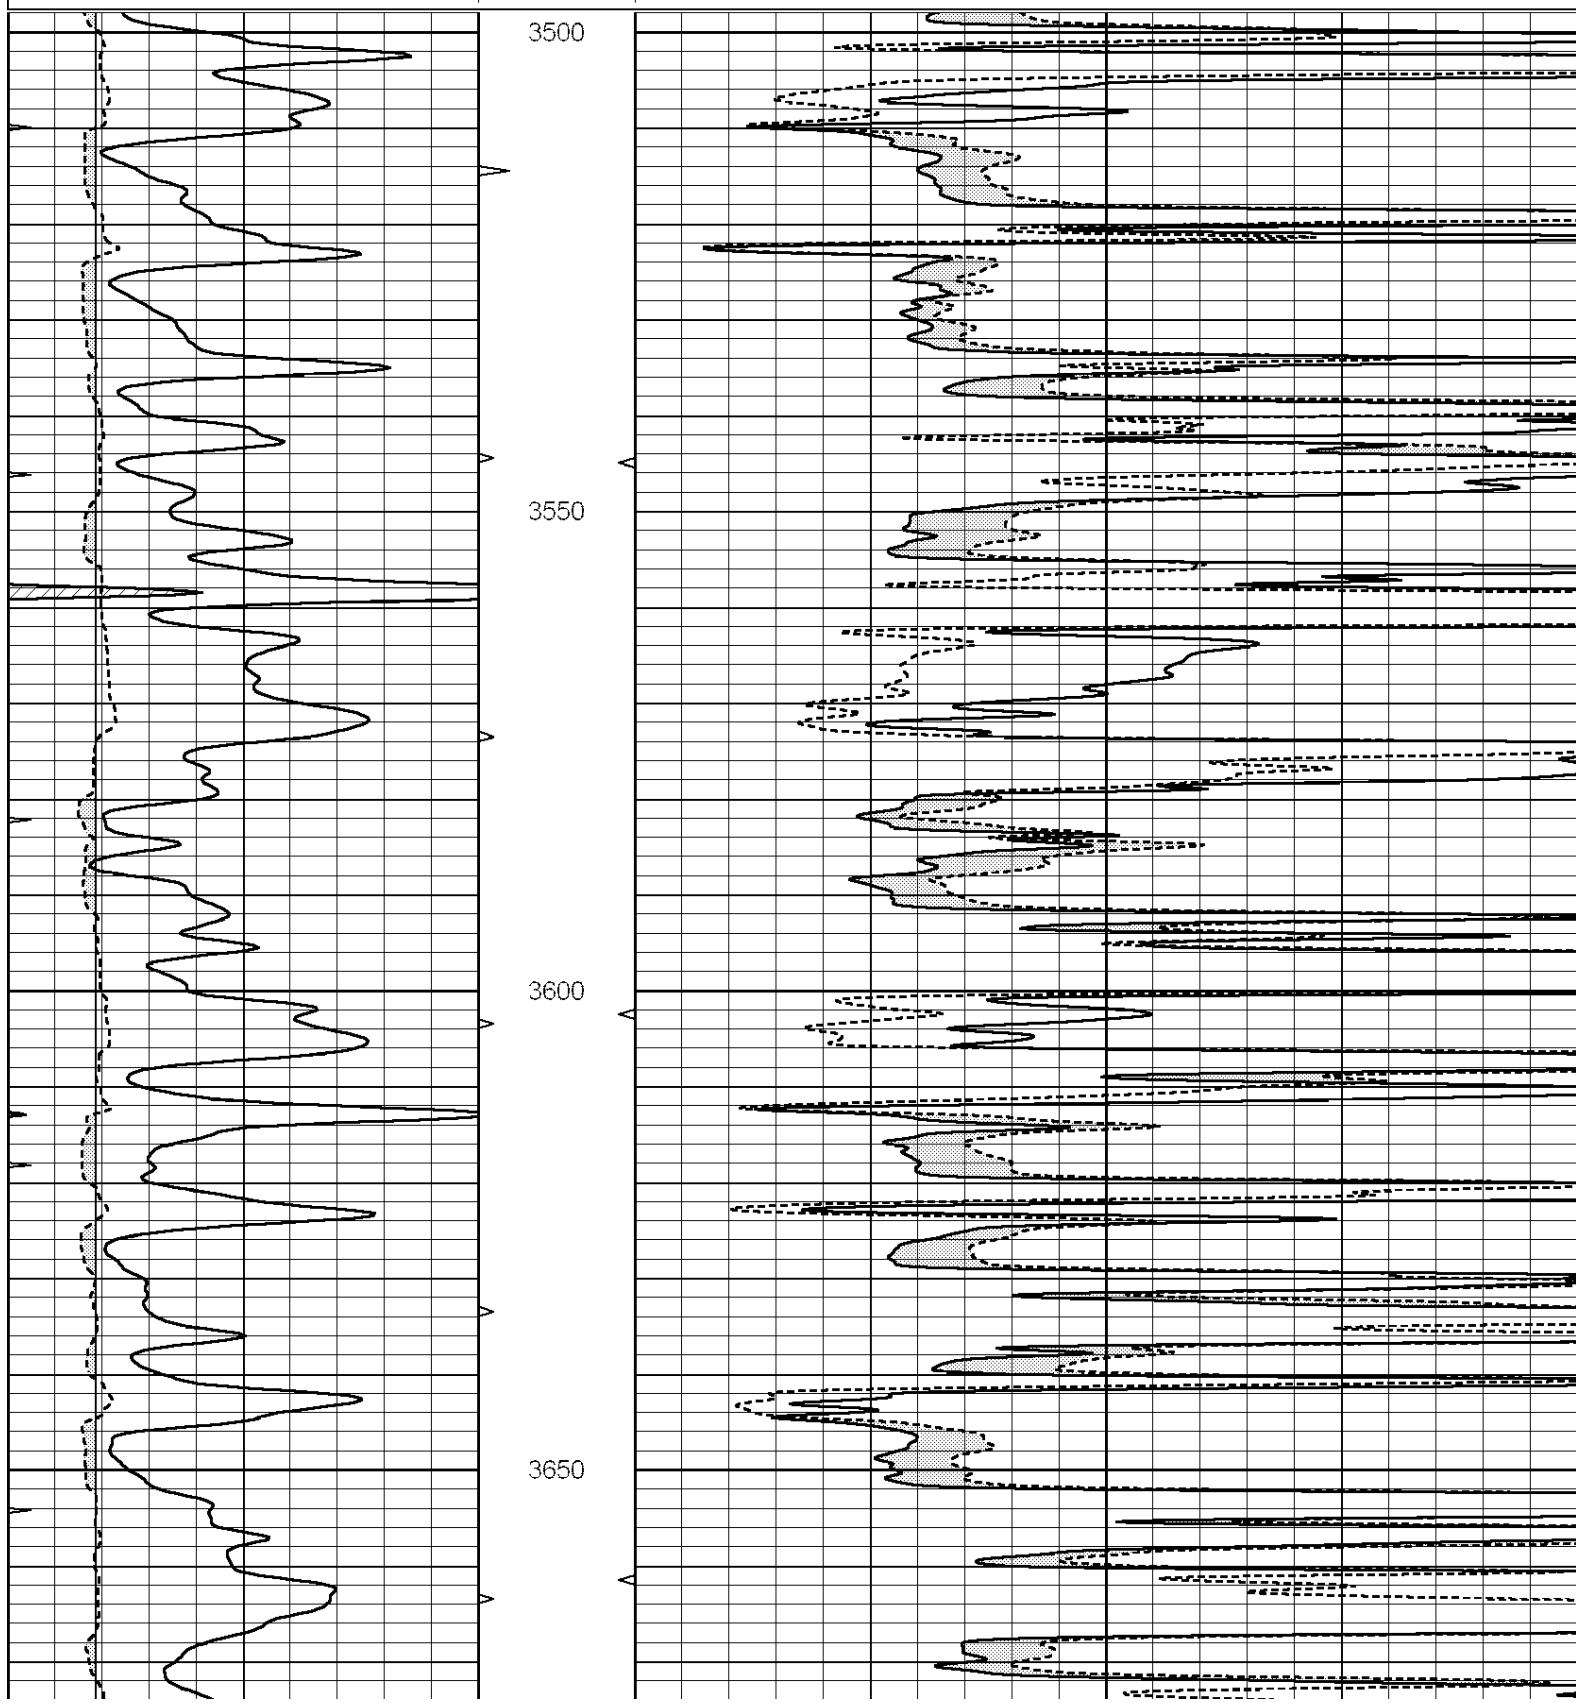

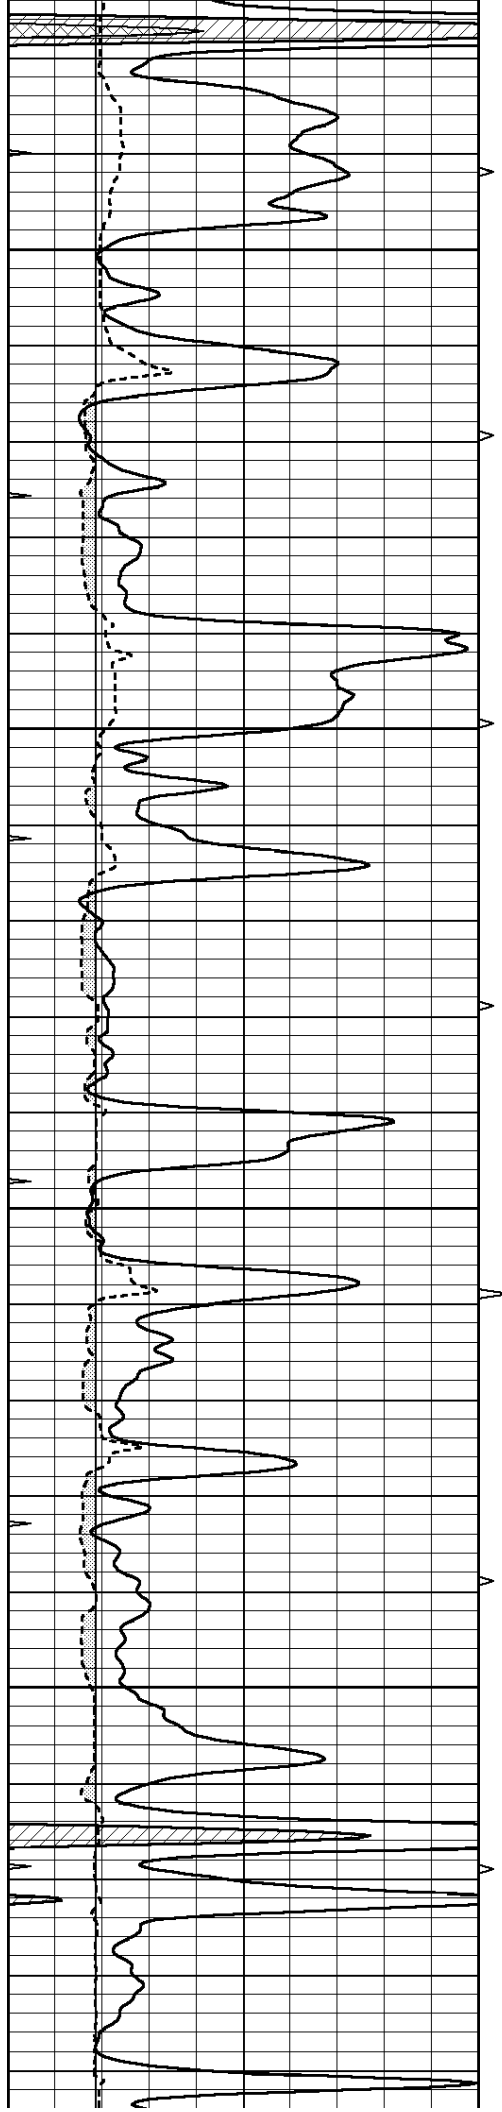



3700

3750

3800

3850

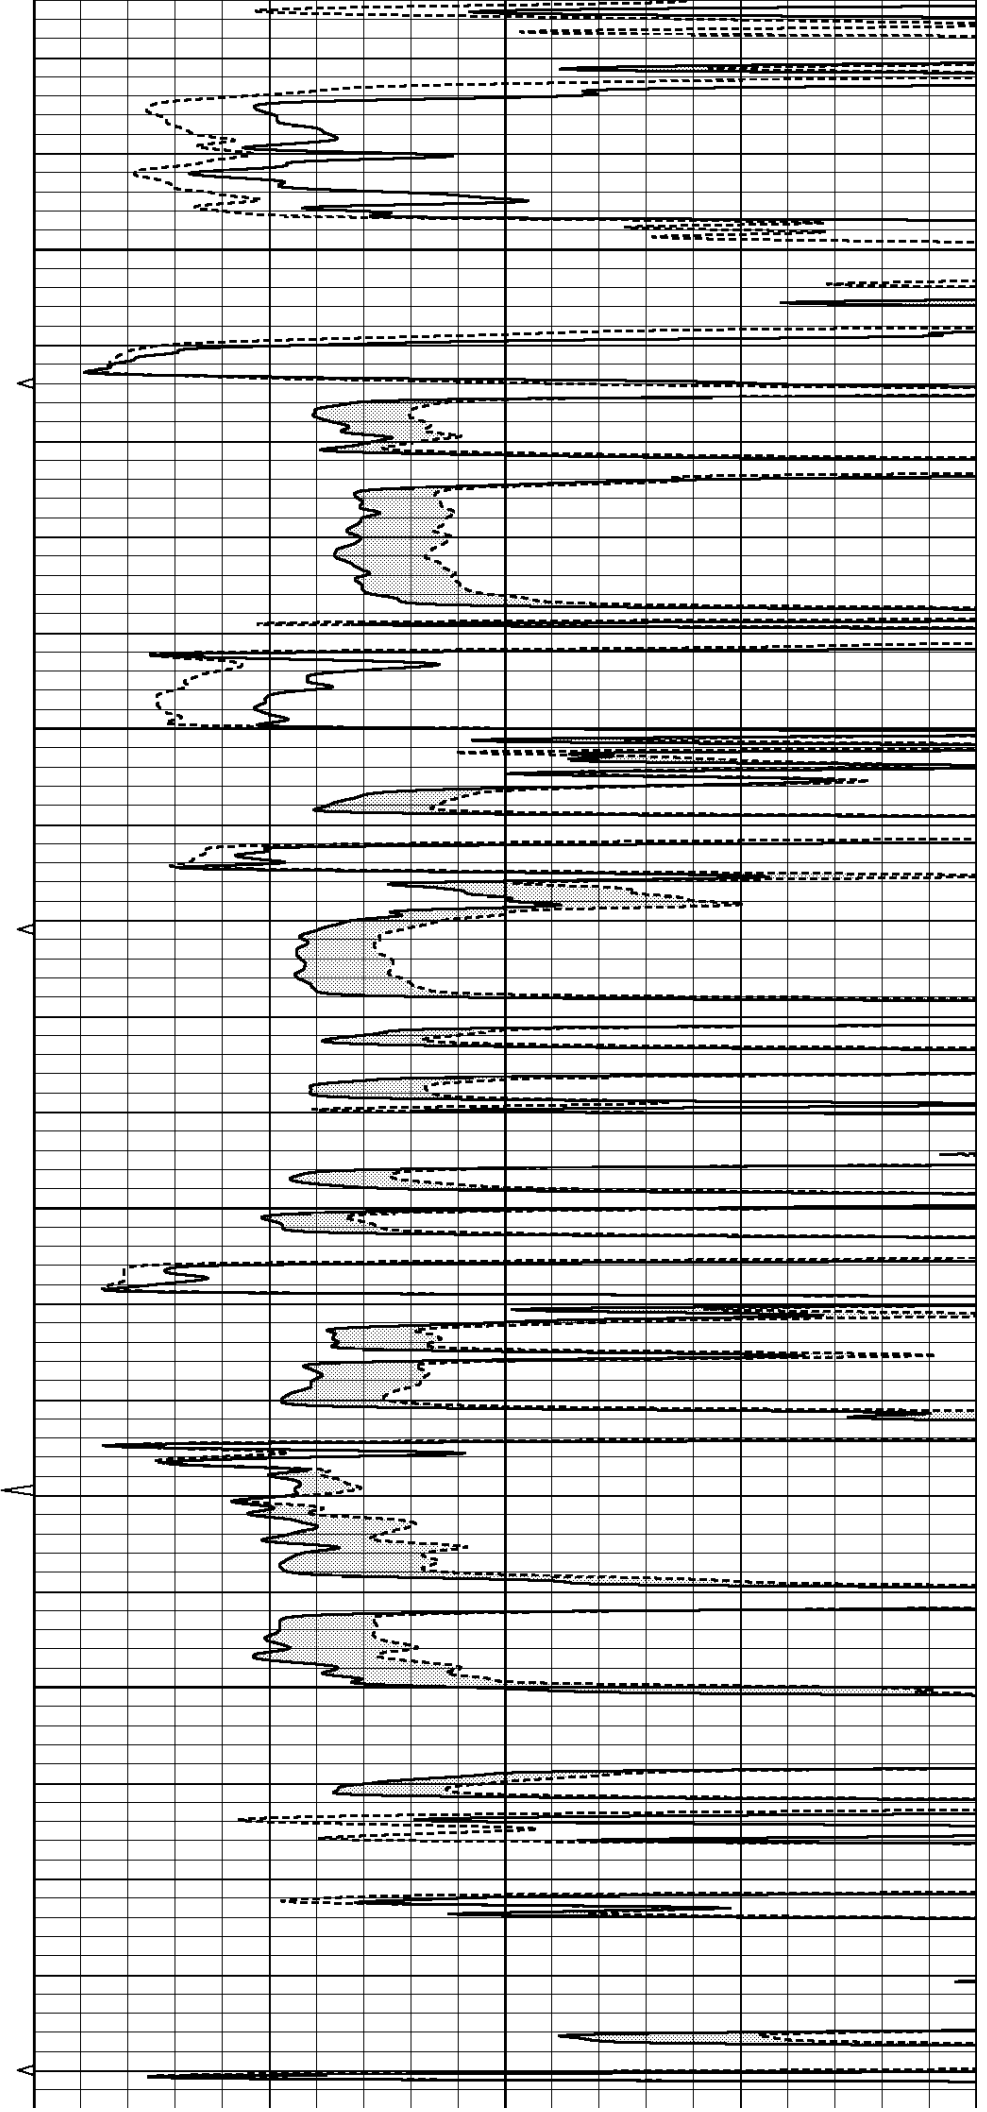

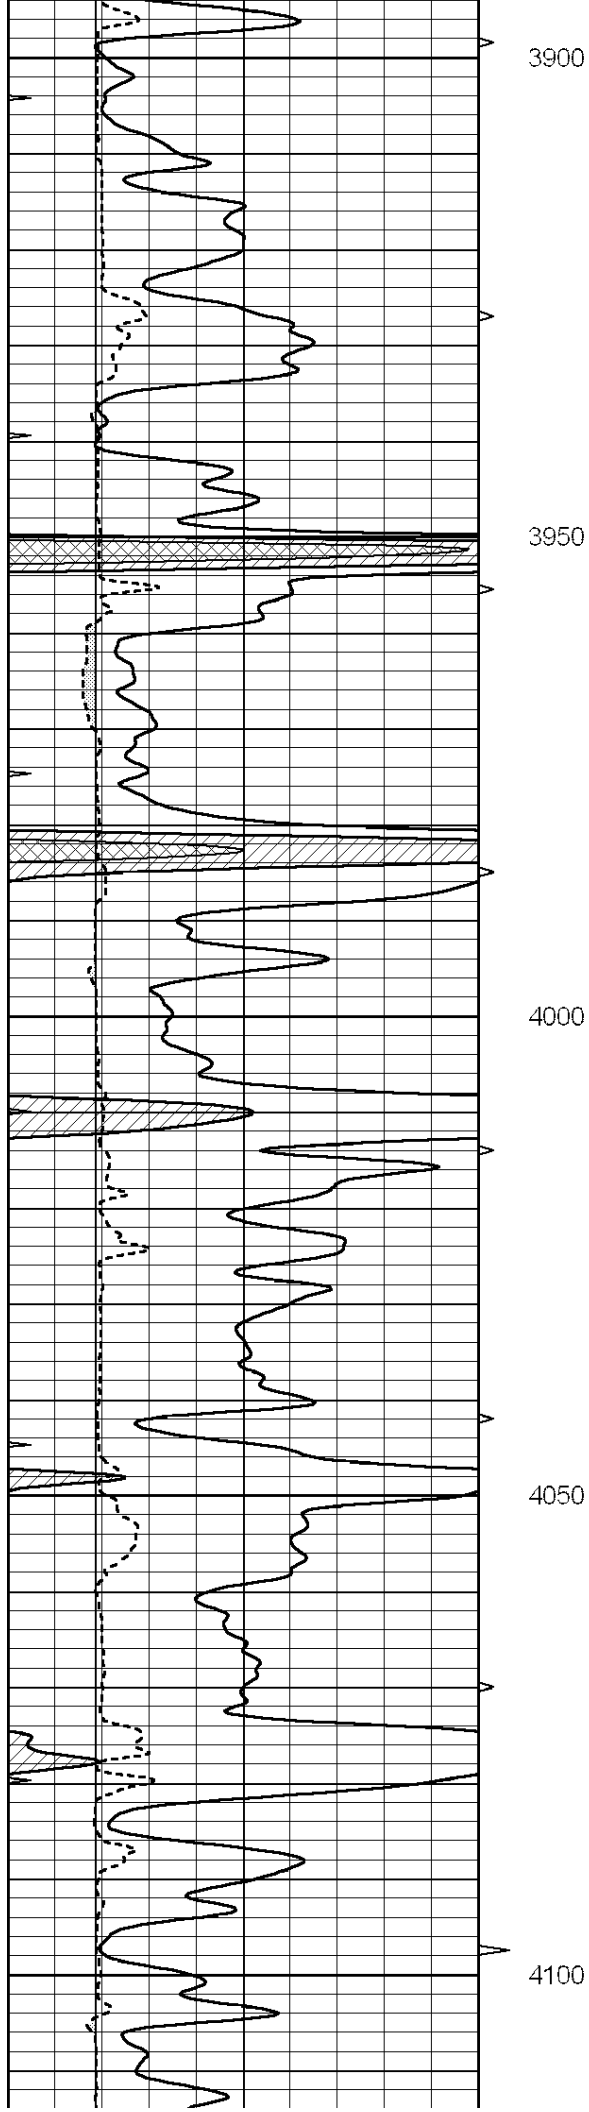


3900


3950

4000

4050

4100

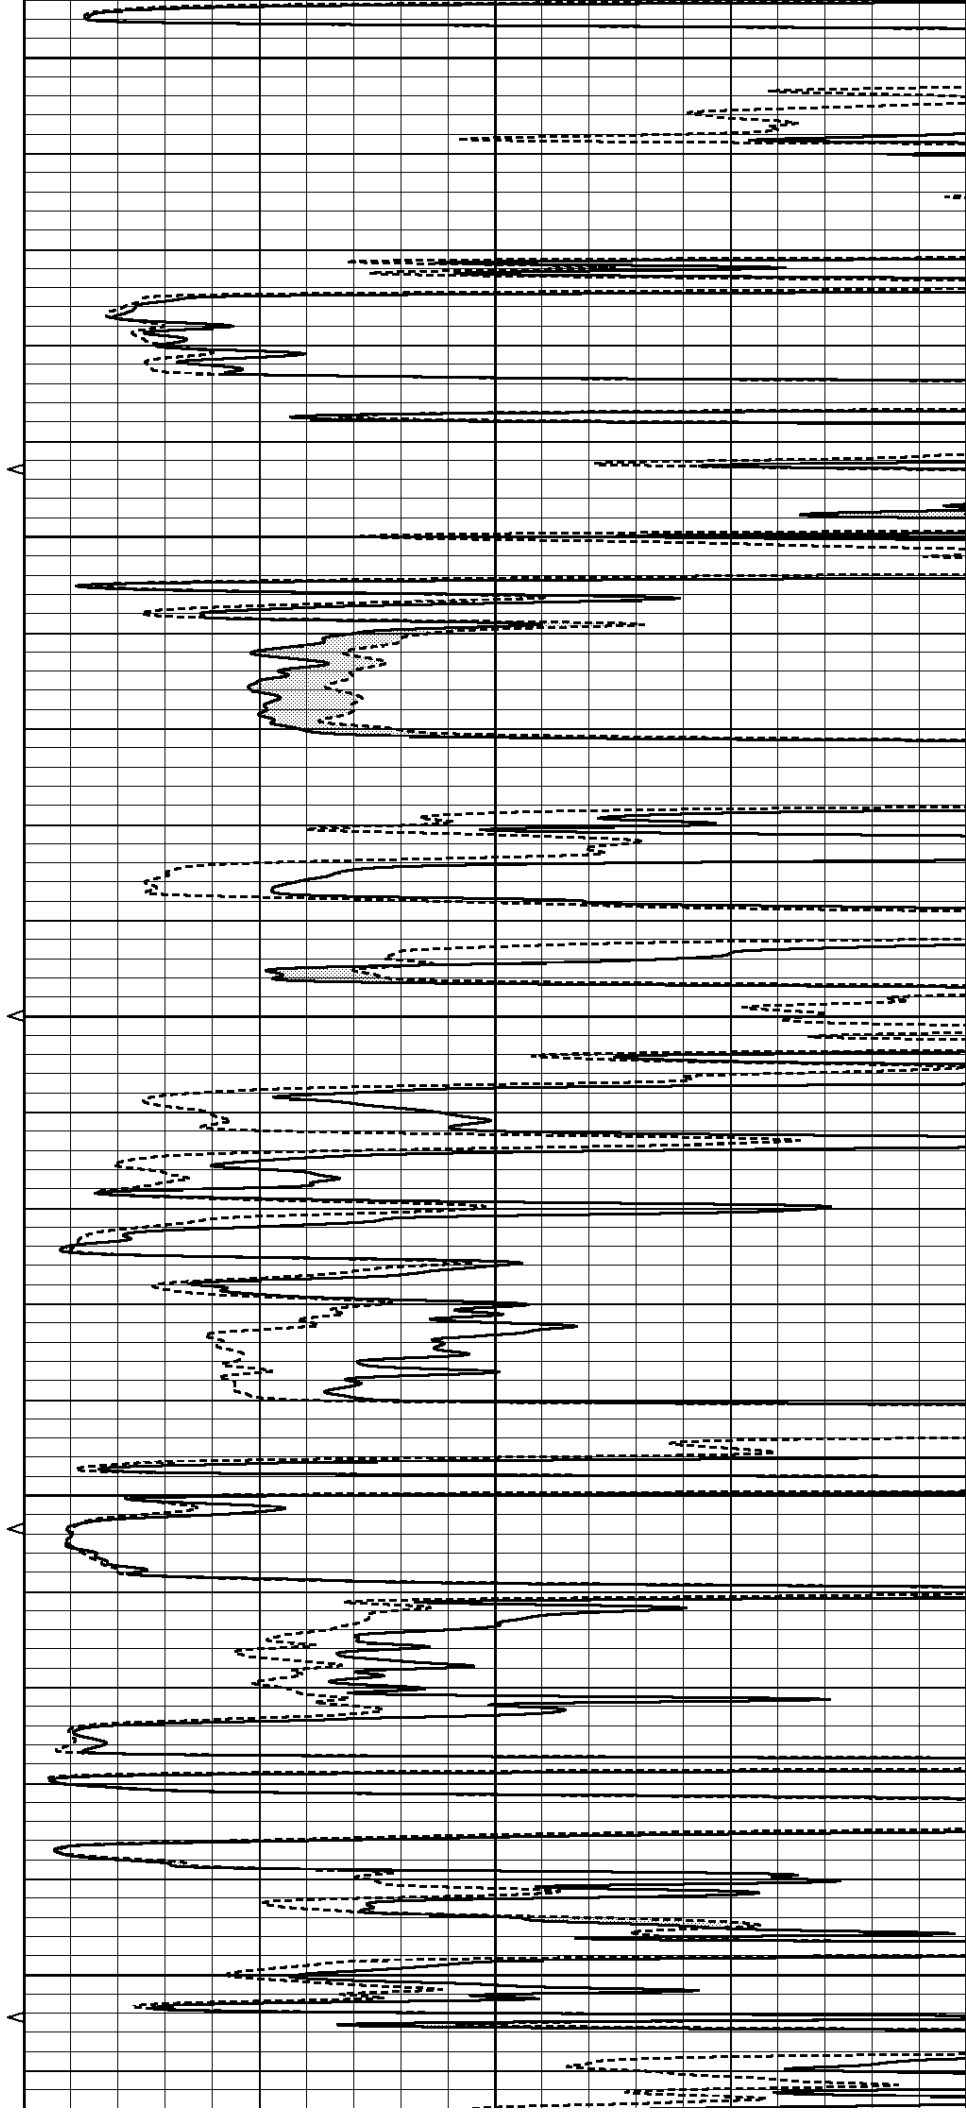

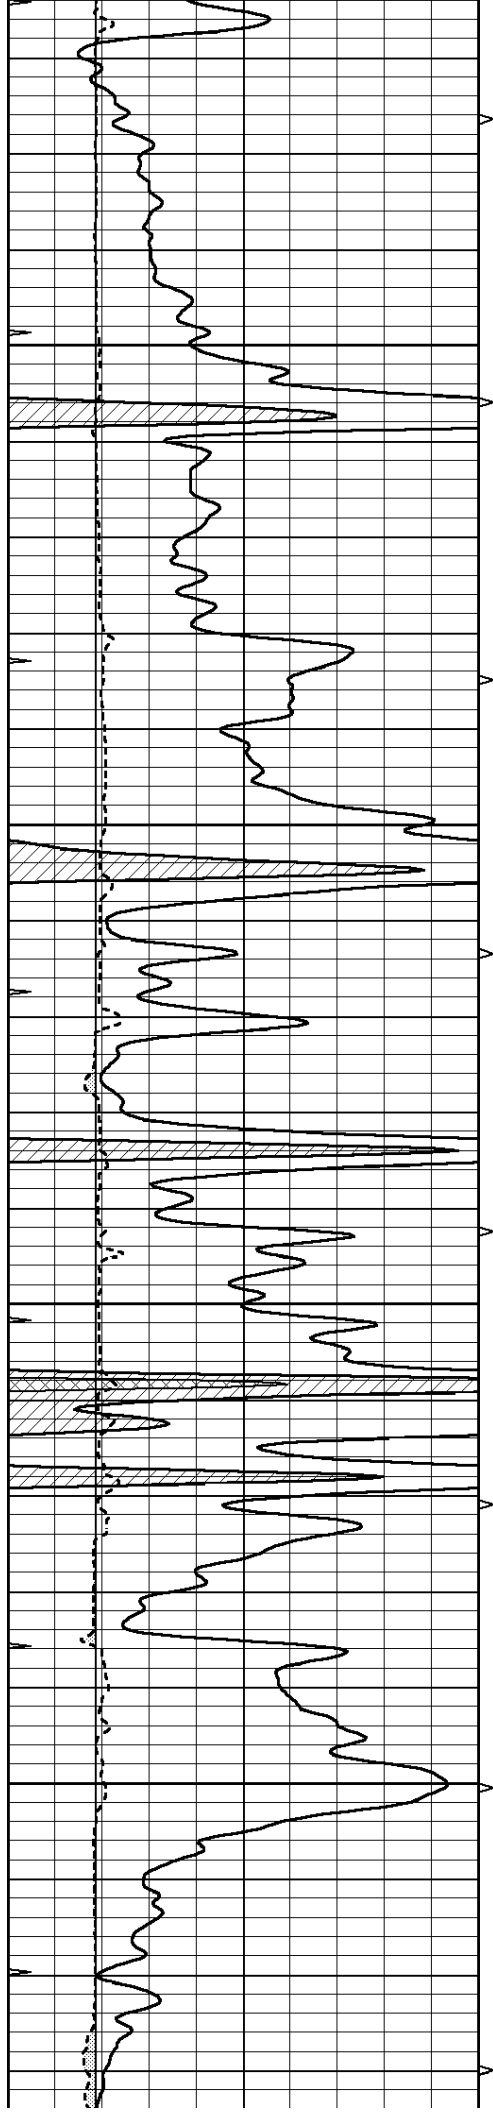


4150



4200

4250

4300

5 5" ARHV

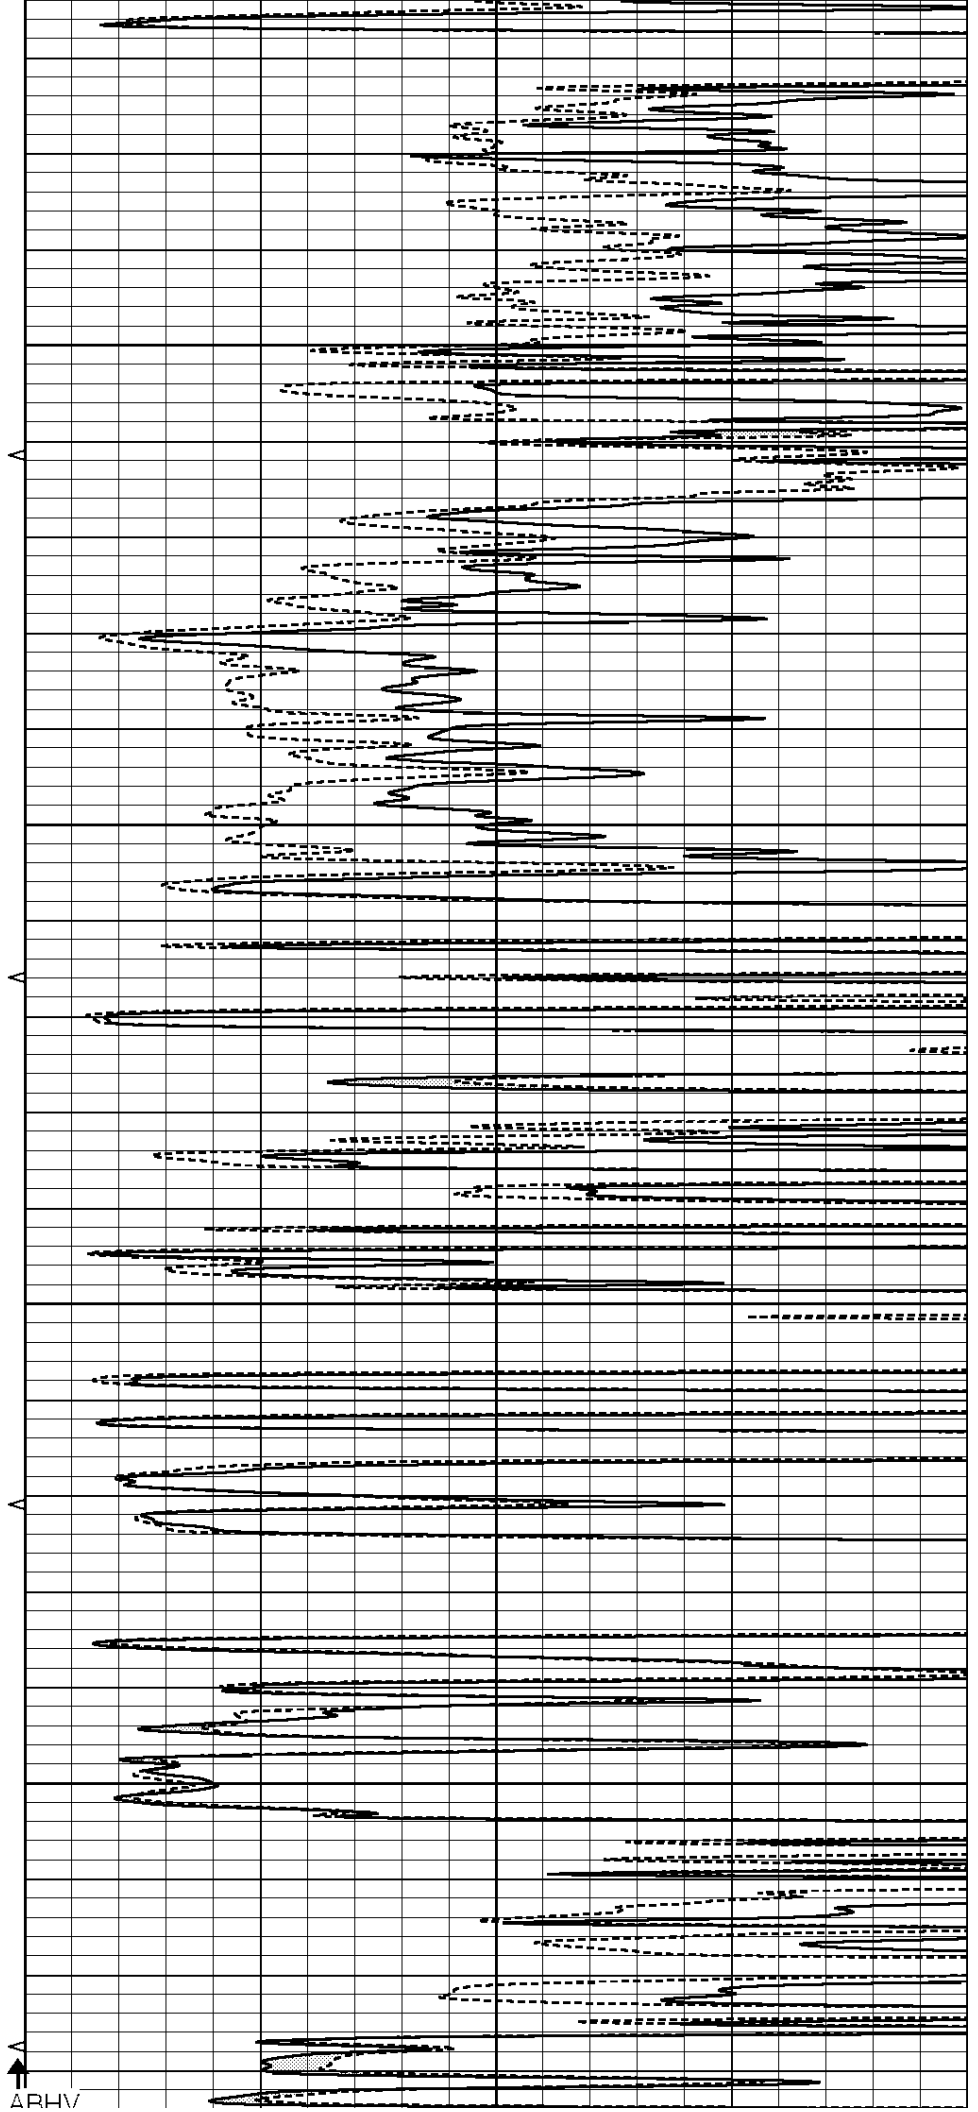


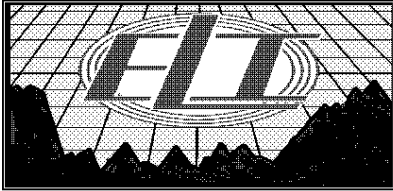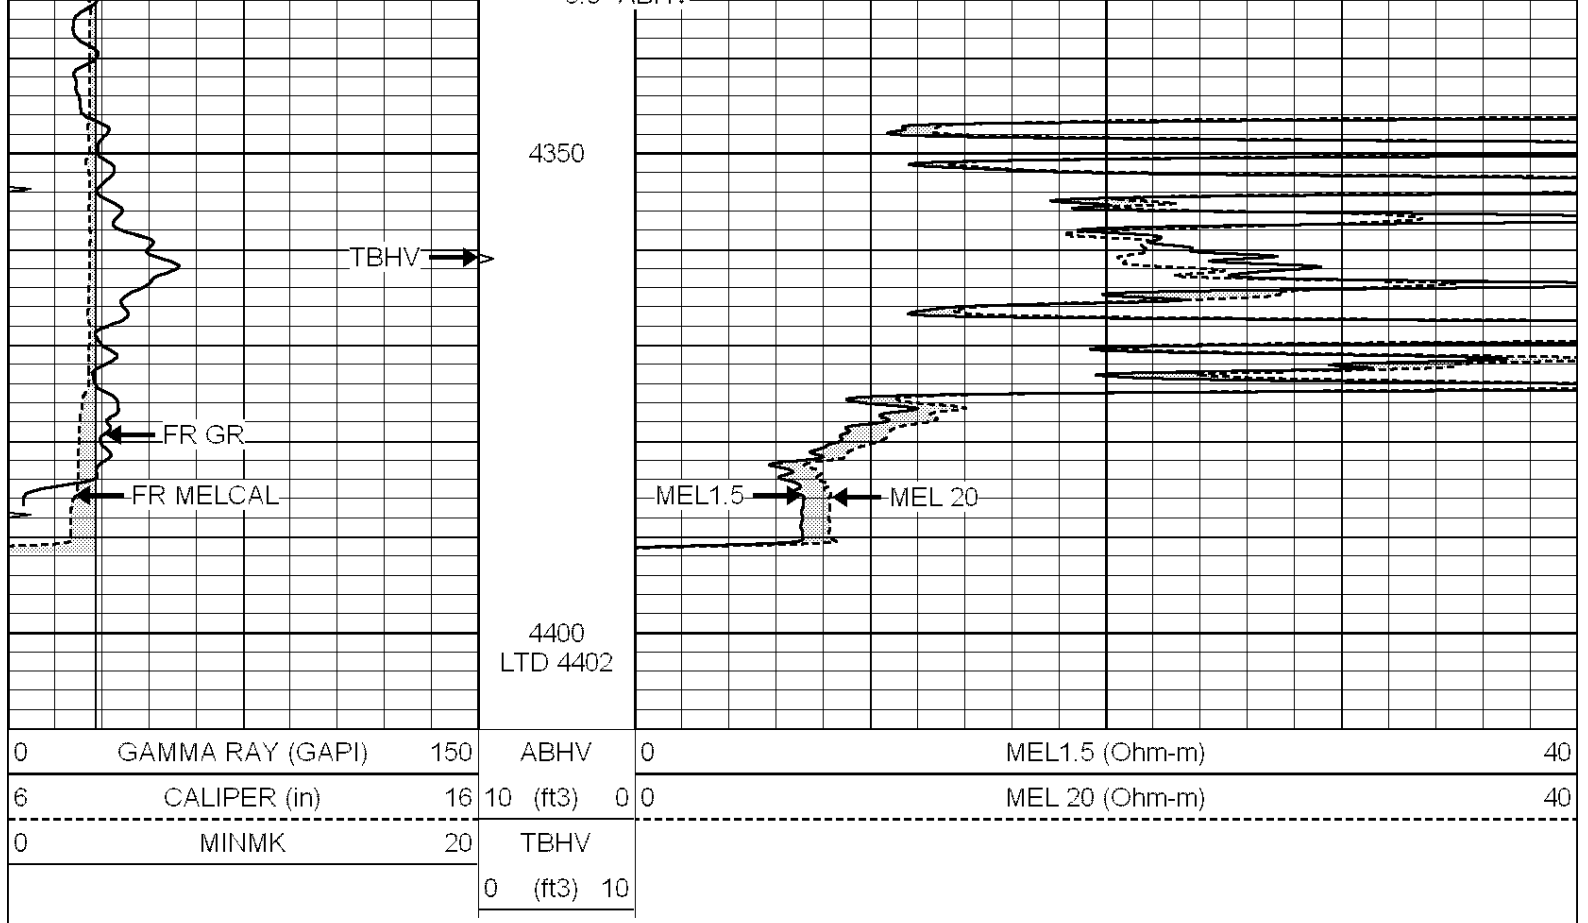


REPEAT SECTION

Database File: 2948pe.db
 Dataset Pathname: pass5.3
 Presentation Format: micro
 Dataset Creation: Sat Oct 27 00:03:14 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

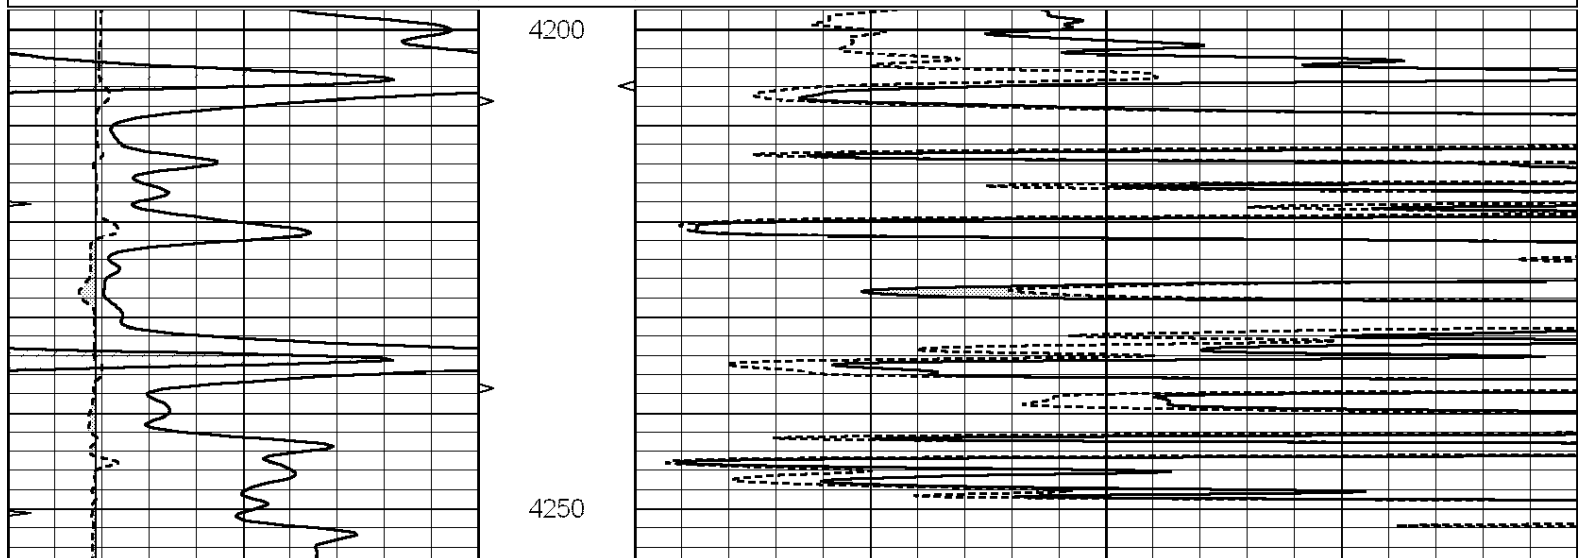

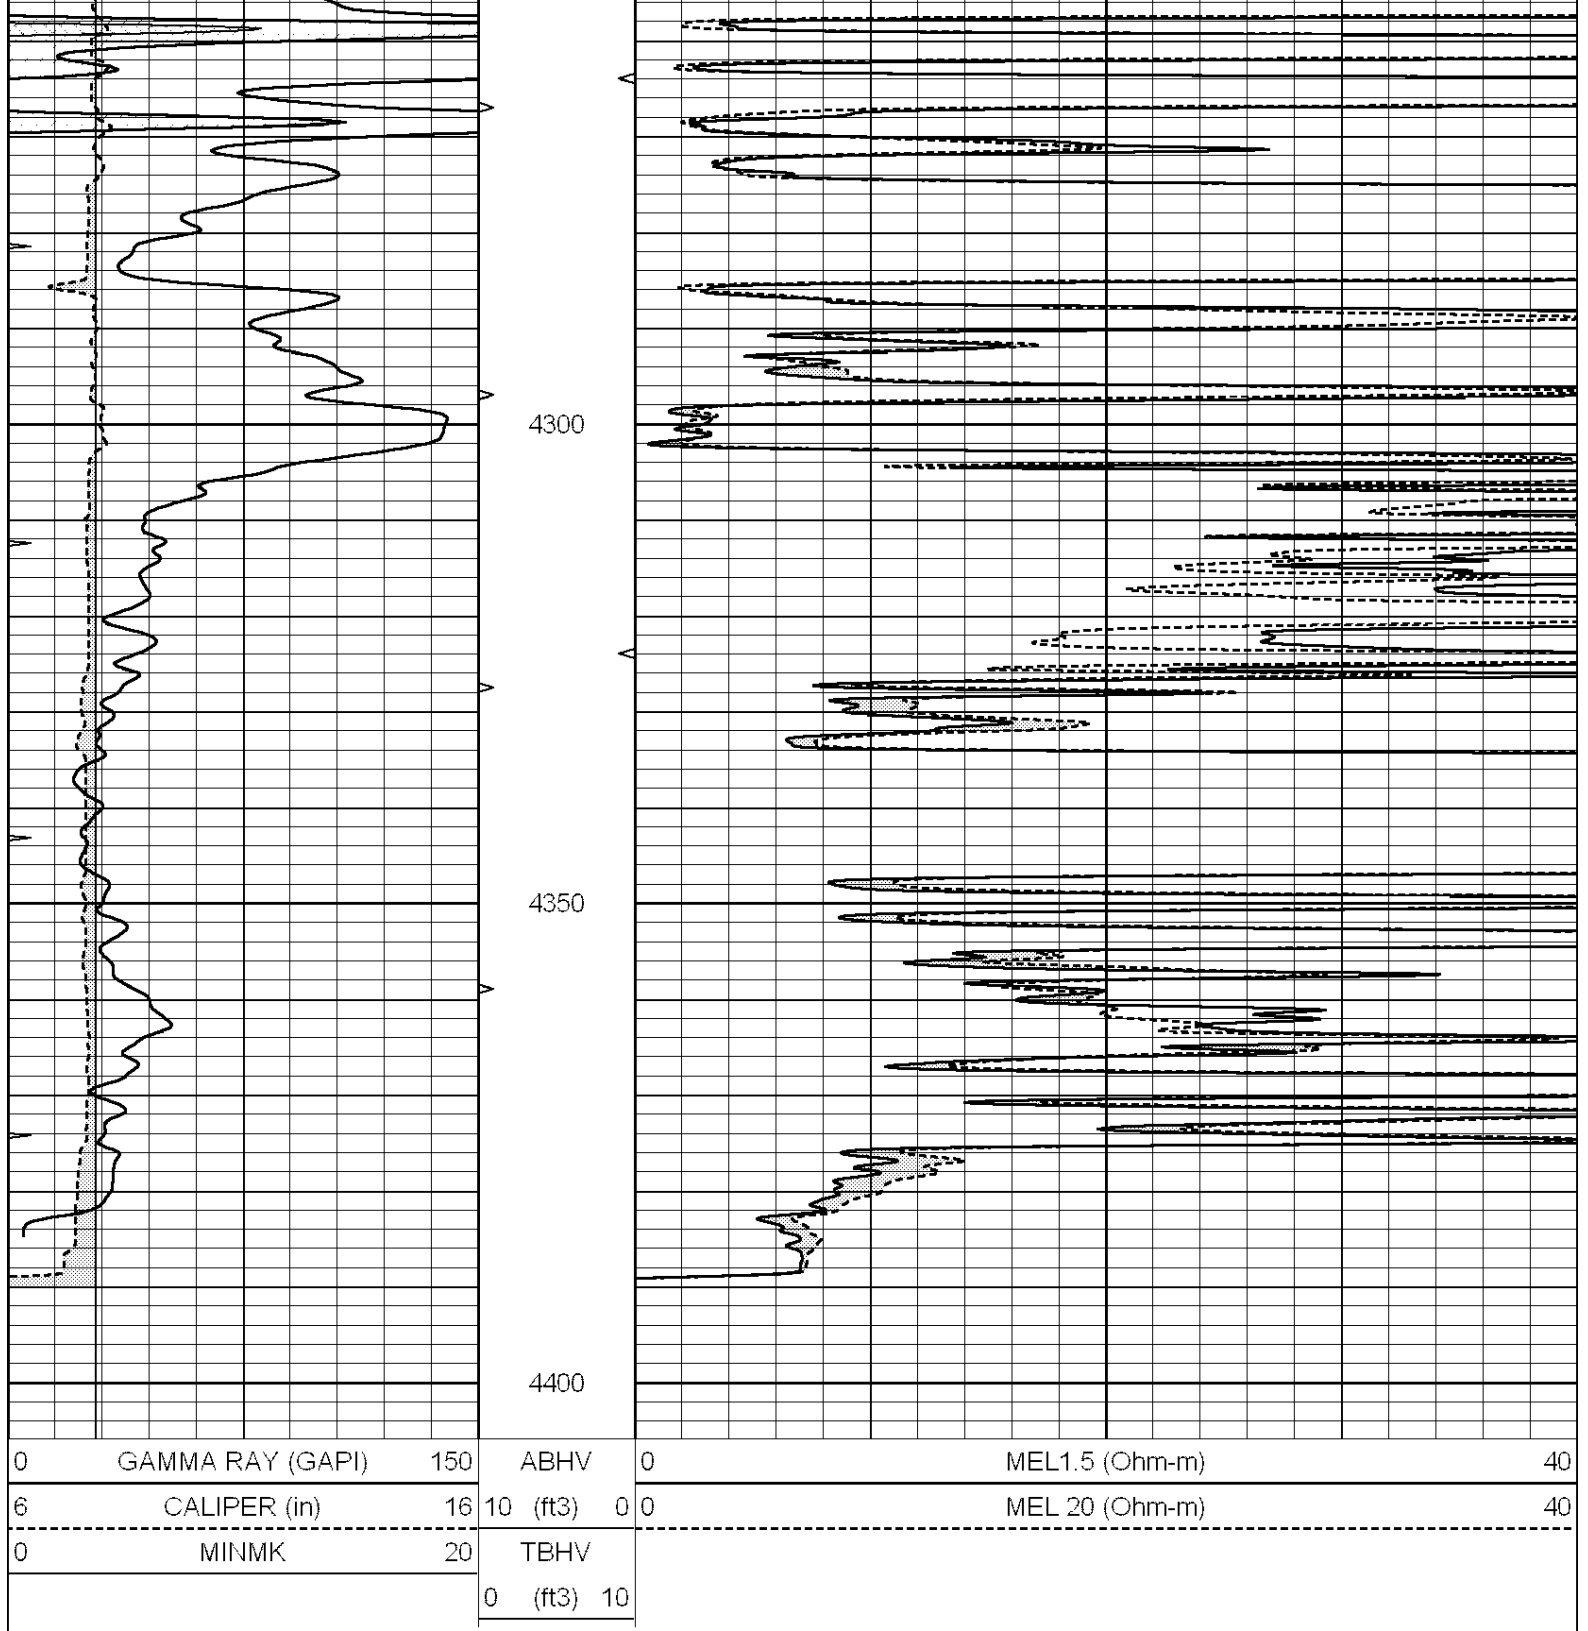

Calibration Report			
Database File:	2948pe.db		
Dataset Pathname:	pass6.2		
Dataset Creation:	Sat Oct 27 00:05:36 2018 by Calc SOC 120430		
MICRO Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeN		
Performed:	Fri Oct 19 06:11:52 2018		
Caliper Calibration:	Gain=4.537	Offset=1.512	
	Low Cal	High Cal	

	References	Low Cal	High Cal
	Readings	8.000	20.000
		1.430	4.075
1.5" Calibration:		Gain=60.000	Offset=-2.500
		Low Cal	High Cal
References		0.000	20.000
Readings		0.001	1.240
2" Calibration:		Gain=62.000	Offset=-2.000
		Low Cal	High Cal
References		0.000	20.000
Readings		0.001	1.076
Gamma Ray Calibration Report			
Serial Number:	110959		
Tool Model:	OPEN_GR		
Performed:	Wed Oct 17 13:39:46 2018		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.2300	GAPI/cps	