

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-147-20607-00-00  
Spot: S2N2NE Sec/Twnshp/Rge: 34-5S-19W  
4350 feet from S Section Line, 1350 feet from E Section Line  
Lease Name: SHAW Well #: 1  
County: PHILLIPS Total Vertical Depth: 3600 feet

Operator License No.: 5011  
Op Name: VIKING RESOURCES, INC  
Address: 105 S BROADWAY, STE 1040  
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	219		

# 117<sup>00</sup>

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 03/10/2006 5:00 PM  
Plug Co. License No.: 33575 Plug Co. Name: WW DRILLING, LLC  
Proposal Rcvd. from: CHUCK RHOADES Company: VIKING RESOURCES, INC. Phone: (316) 262-2502

Proposed Plugging Method: Order 215 sxs 60/40 pozmix - 6% gel with 1/4# flocele per sack.  
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: HERB DEINES Witness Type: NONE  
Date/Time Plugging Completed: 03/10/2006 7:00 PM KCC Agent: HERB DEINES

Actual Plugging Report:

1st. Plug at 3540' w/25 sxs.  
2nd. Plug at 1650' w/25 sxs.  
3rd. Plug at 1025' w/100 sxs.  
4th. Plug at 275' w/40 sxs.  
5th. Plug at 40' w/10 sxs.  
Rathole with 15 sxs.

Perfs:


RECEIVED  
KANSAS CORPORATION COMMISSION  
MAR 15 2006  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed

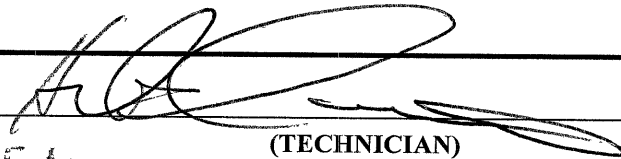

(TECHNICIAN)

INVOICED

DATE 3-15-06

INV. NO. 2006061292

MAR 14 2006