

DUAL INDUCTION LOG

Company	PHILLIPS EXPLORATION COMPANY, LLC.		
Well	ZIEGLER-GARBER UNIT #1-20 CR		
Field	NA		
County	TREGO		
State	KANSAS		
Location:	AP1 # : 15-195-23061-00-00 2520' FNL & 1000' FWL		
Permanent Datum	GROUND LEVEL	Elevation	2543
Log Measured From	KELLY BUSHING 5' A.G.L.		
Drilling Measured From	KELLY BUSHING		
SEC 20	TWP 12S	RGE 25W	
Other Services	CDL/CNL/MEL		
Date	08/14/18		
Run Number	ONE		
Depth Driller	4482		
Depth Logger	4484		
Bottom Logged Interval	4482		
Top Log Interval	50		
Casing Driller	8 5/8" @ 218		
Casing Logger	218		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.160		
pH / Fluid Loss	11.0/6.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.1@76		
Rmt @ Meas. Temp	.83@76		
Rmc @ Meas. Temp	1.32@76		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.70@120		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	120F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	PAT DEENIHAN		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS


COLLYER EXIT SOUTH TO FIRST INTERSECTION WEST 1,
SOUTH 1.5, EAST INTO.

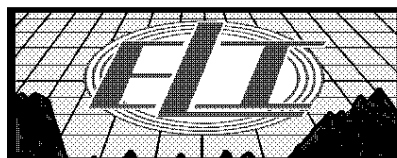


MAIN PASS

Database File: 2903ddn.db
Dataset Pathname: pass3.1
Presentation Format: _dil2
Dataset Creation: Tue Aug 14 20:20:08 2018 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150	0	RLL3 (Ohm-m)	50	
-100	SP (mV)	100	0	RILD (Ohm-m)	50	
-----			1000	CILD (mmho/m)		0
			50	RILD X10 (Ohm-m)	500	
			50	RLL3 X10 (Ohm-m)	500	

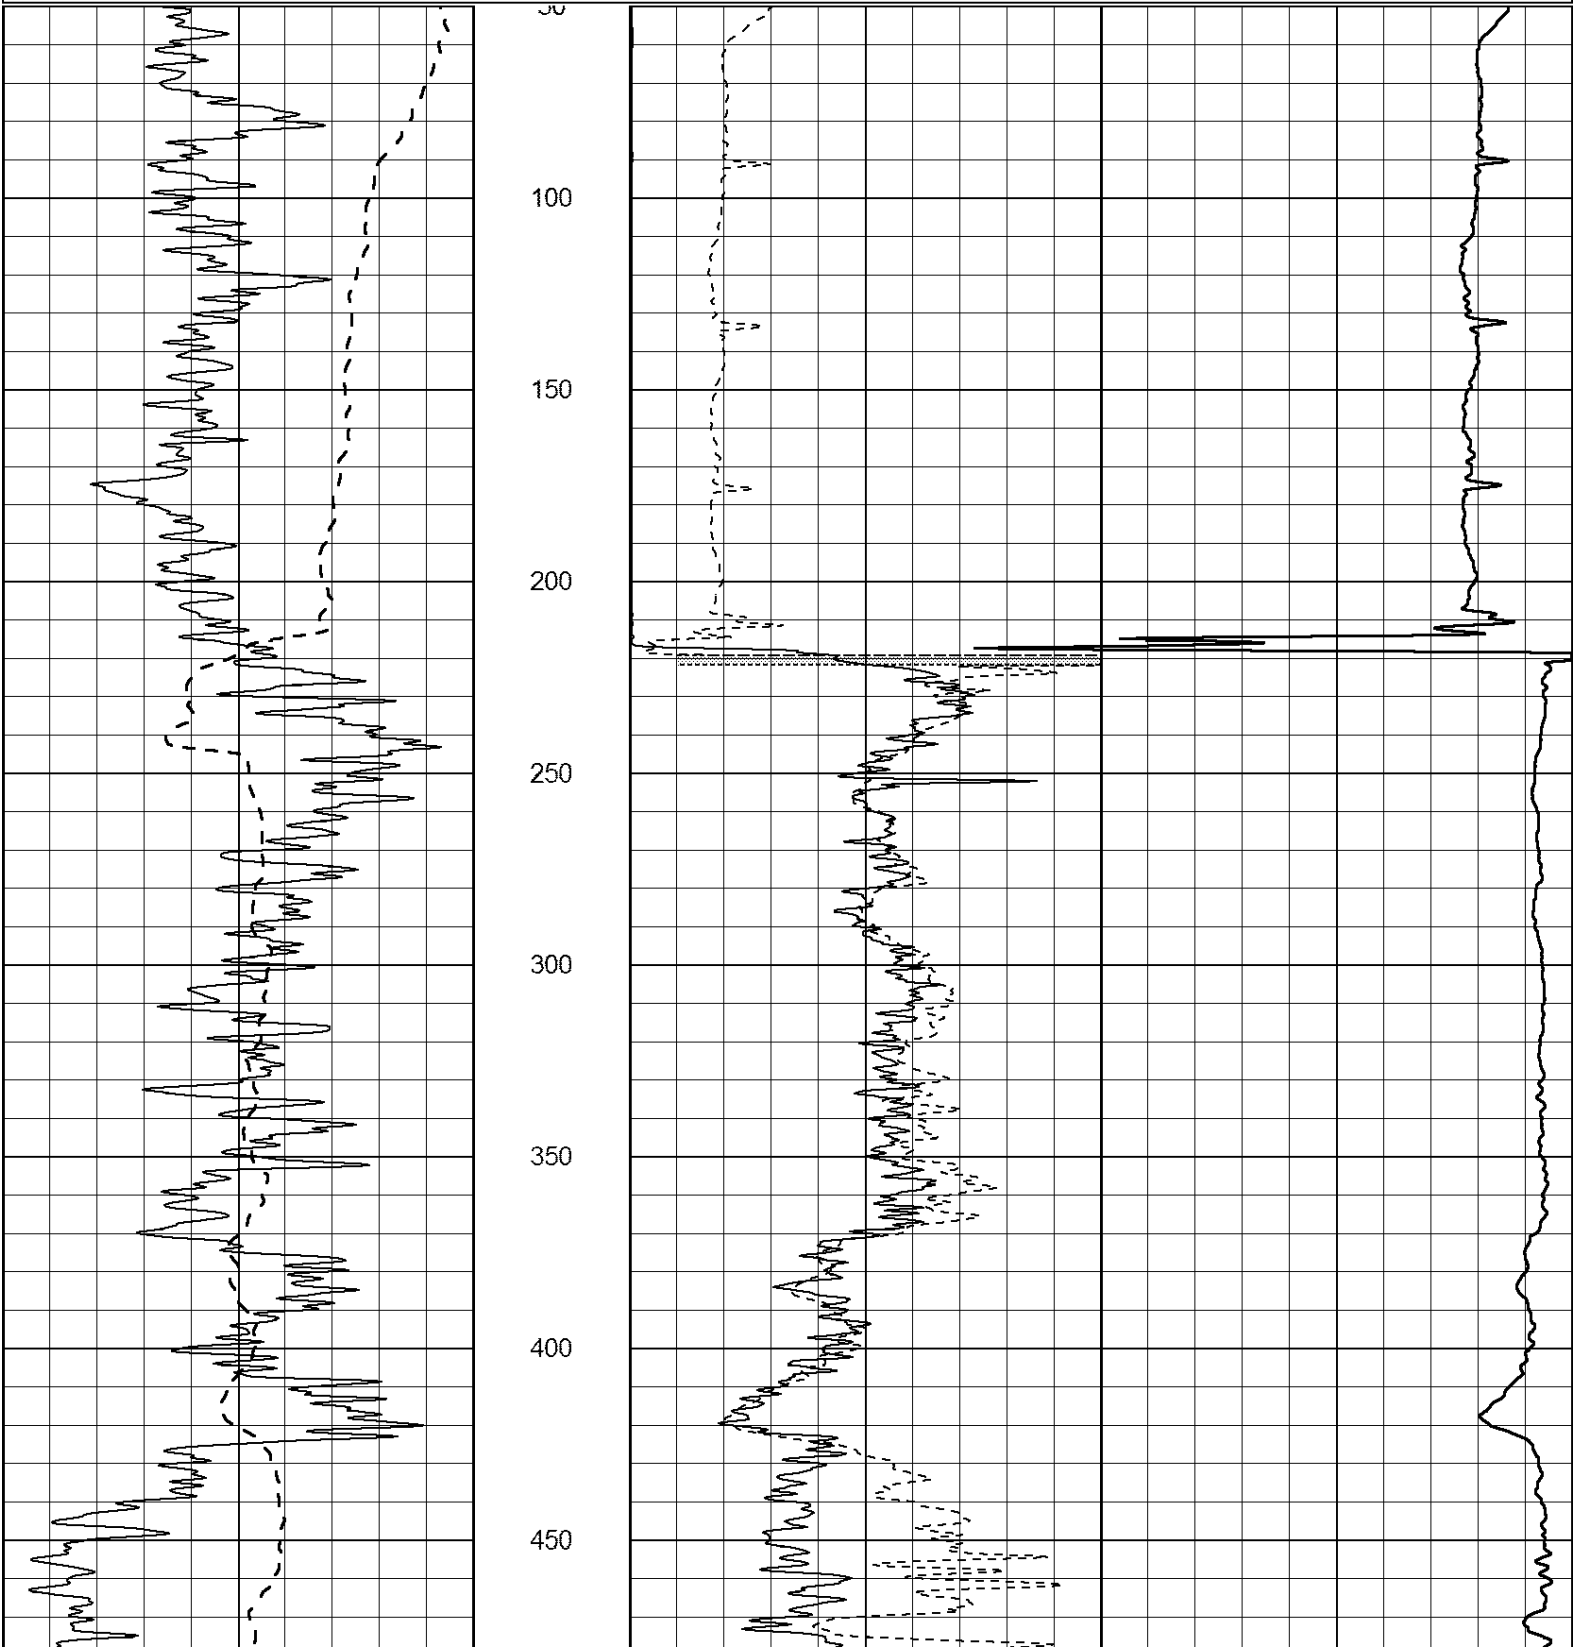

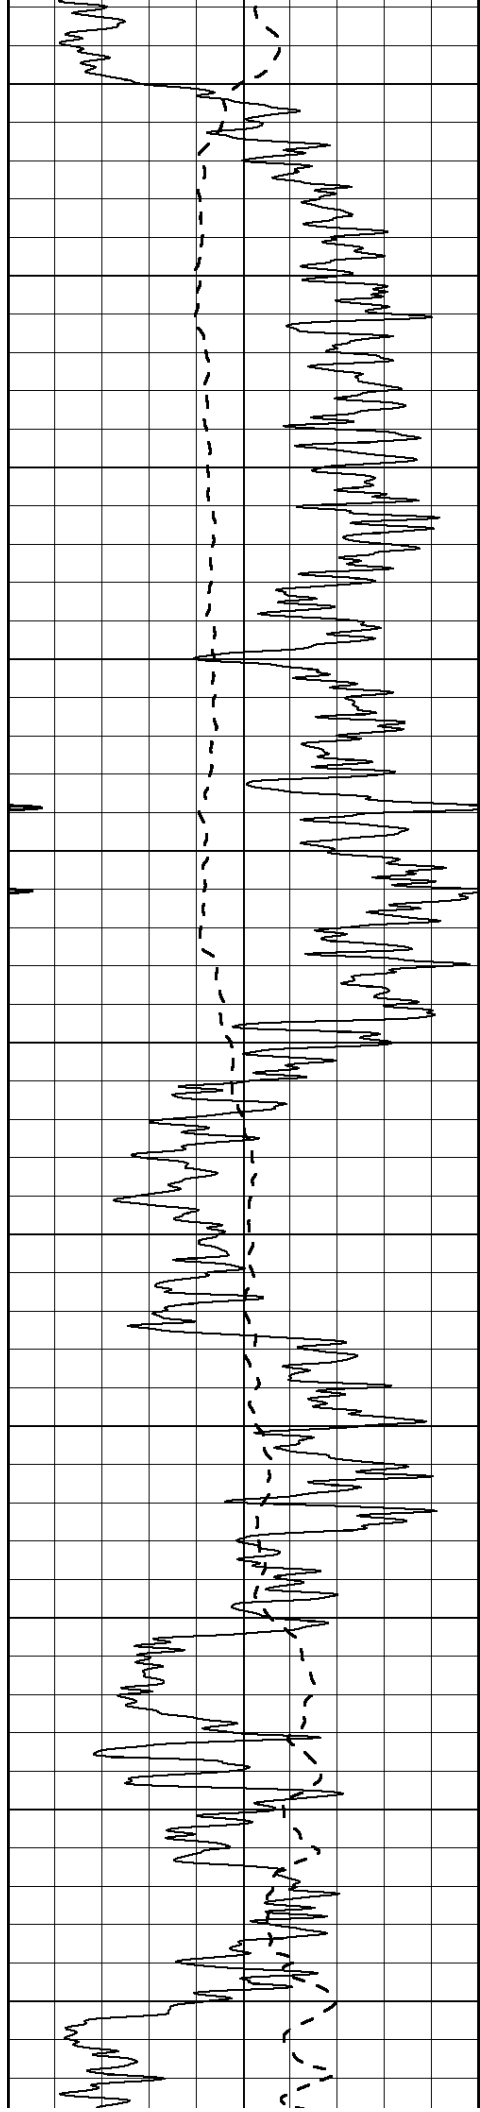

500

550

600

650

700

750



800



850



900



950


1000

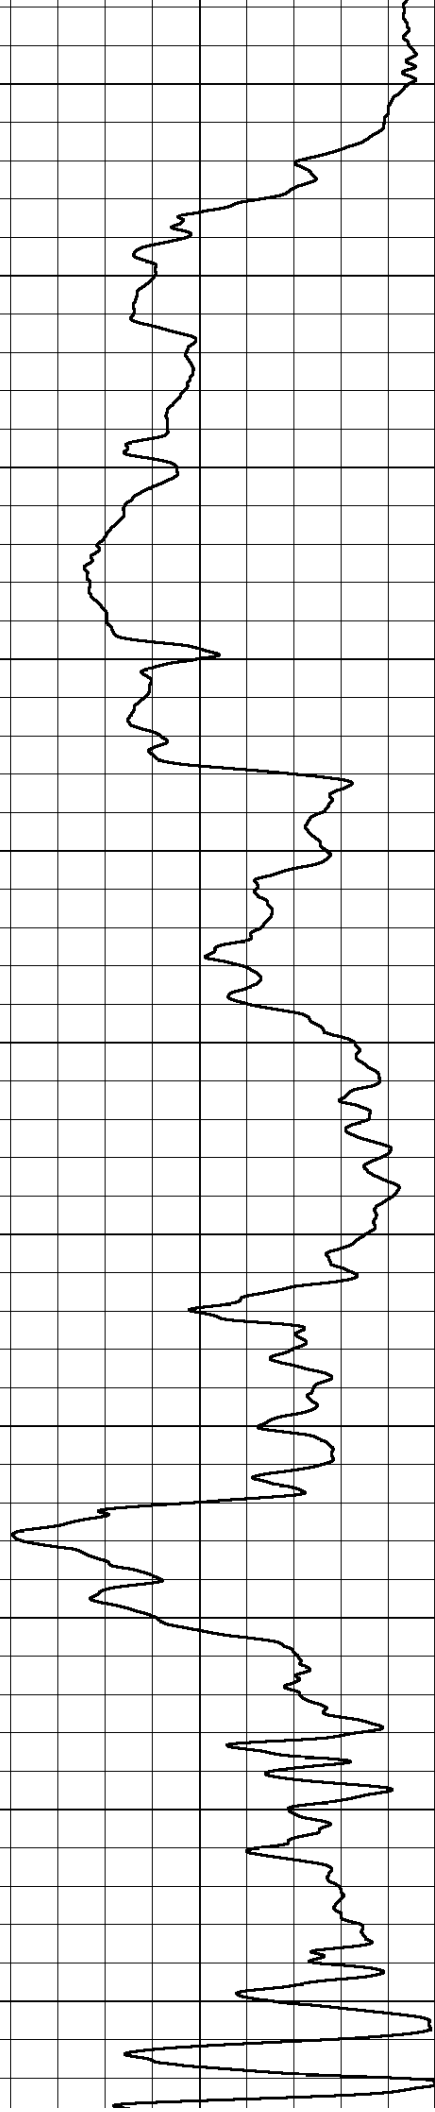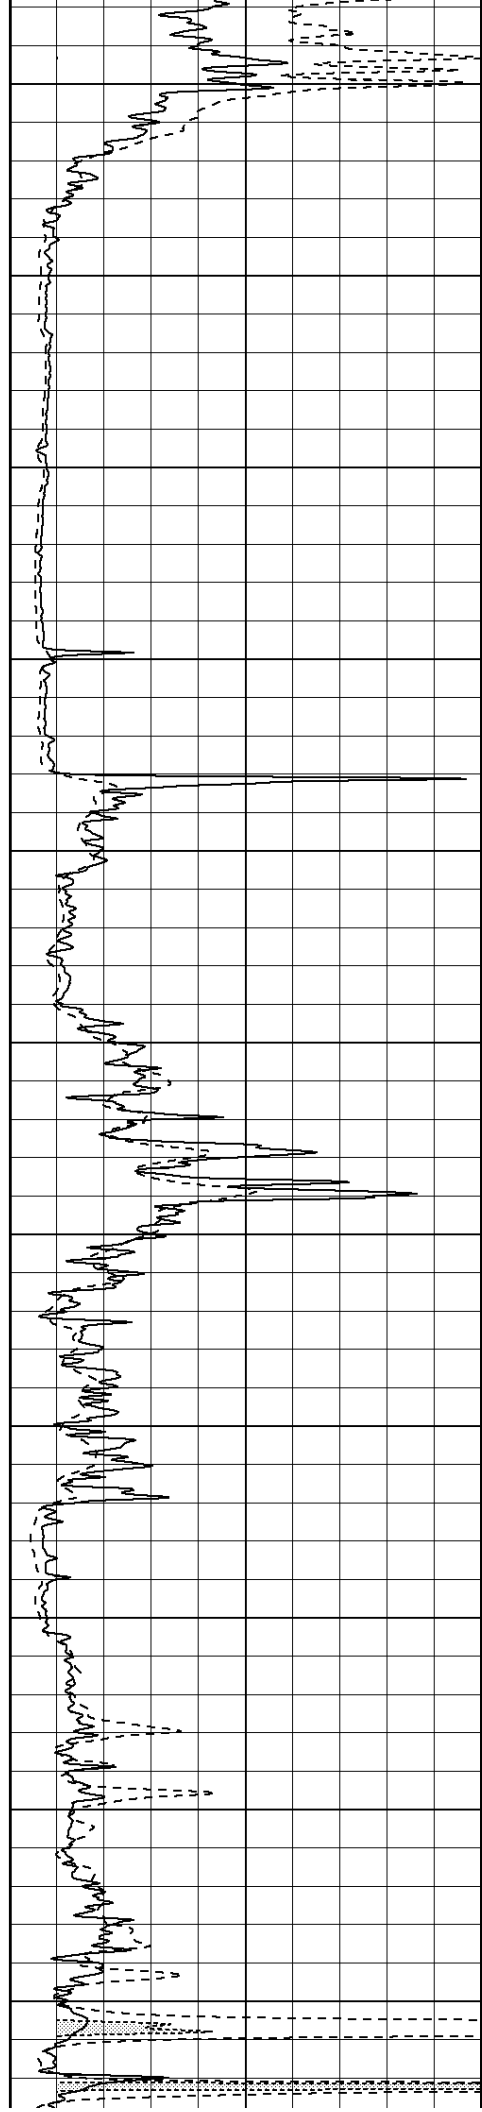

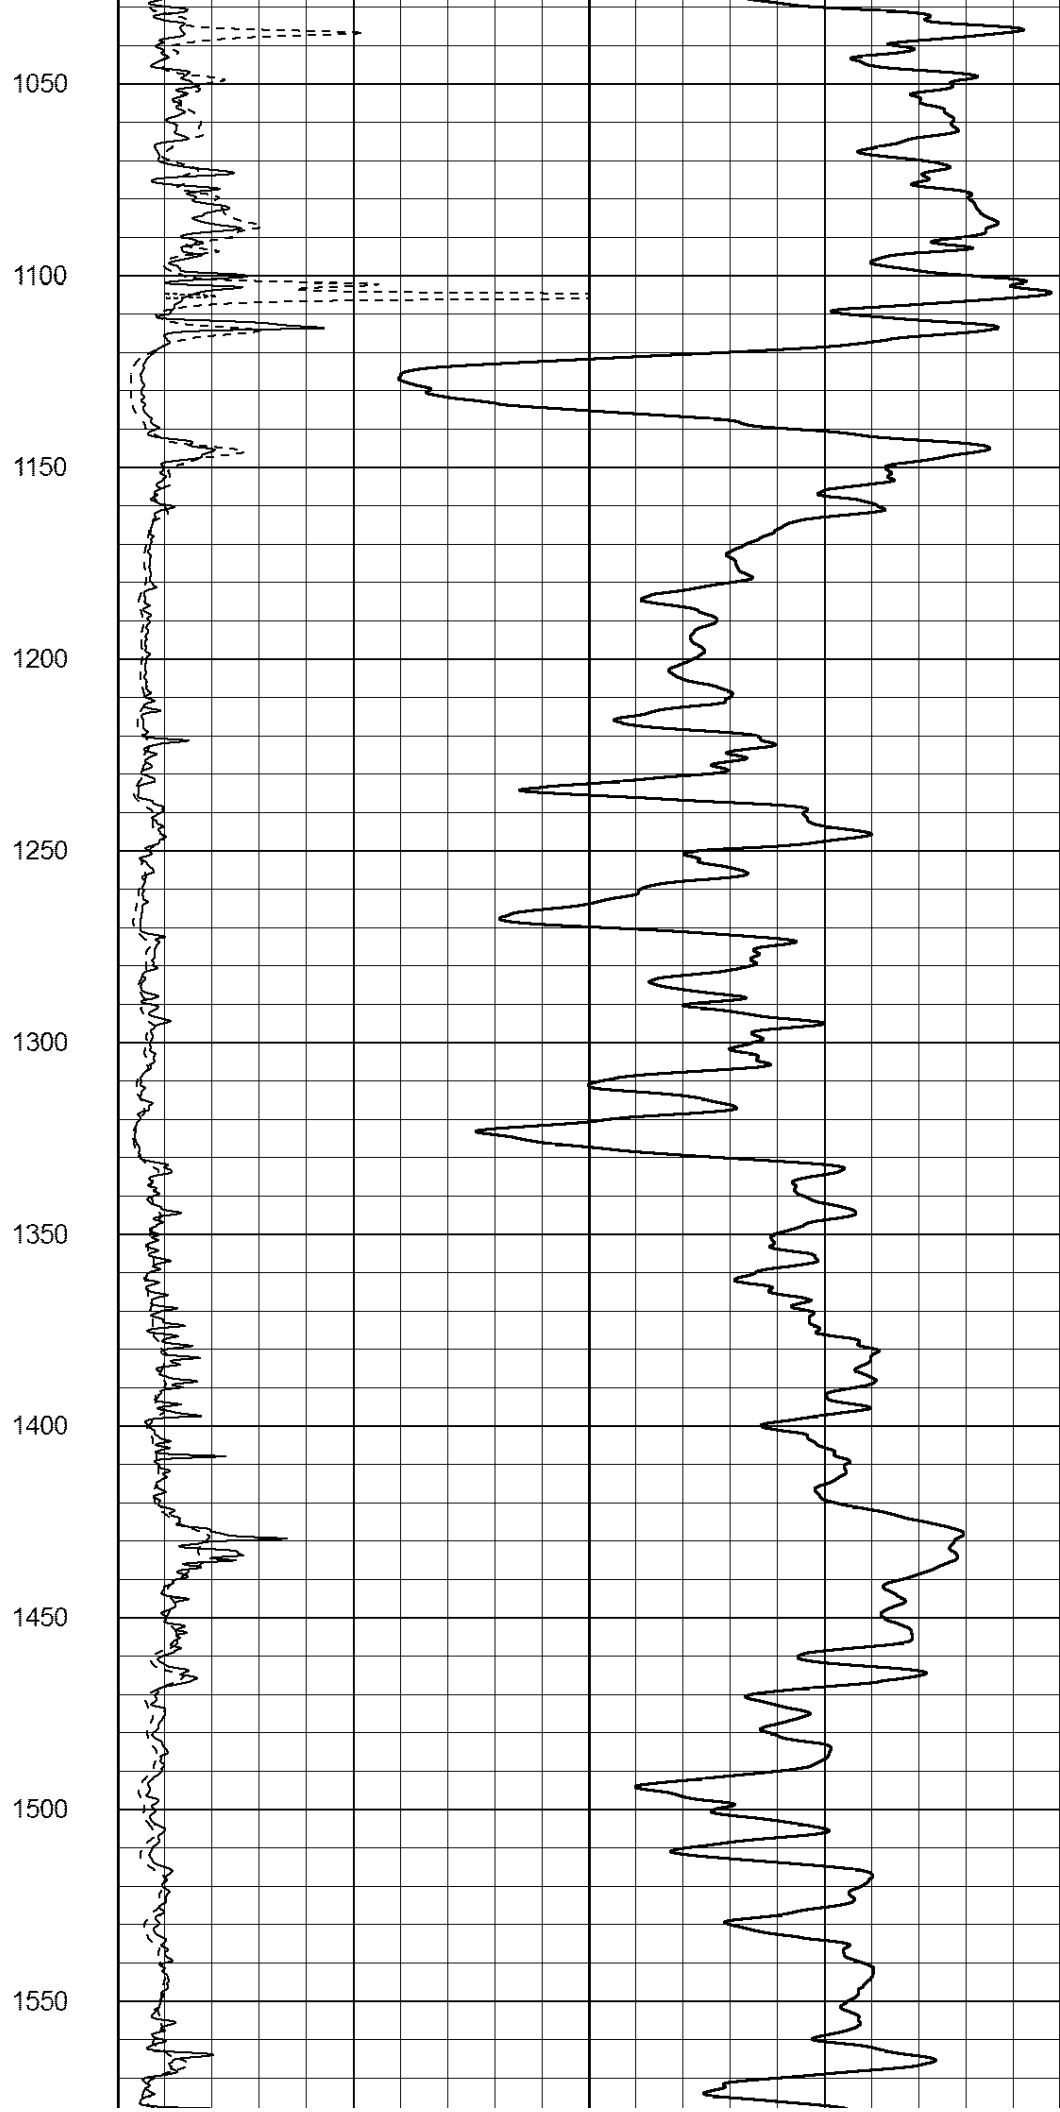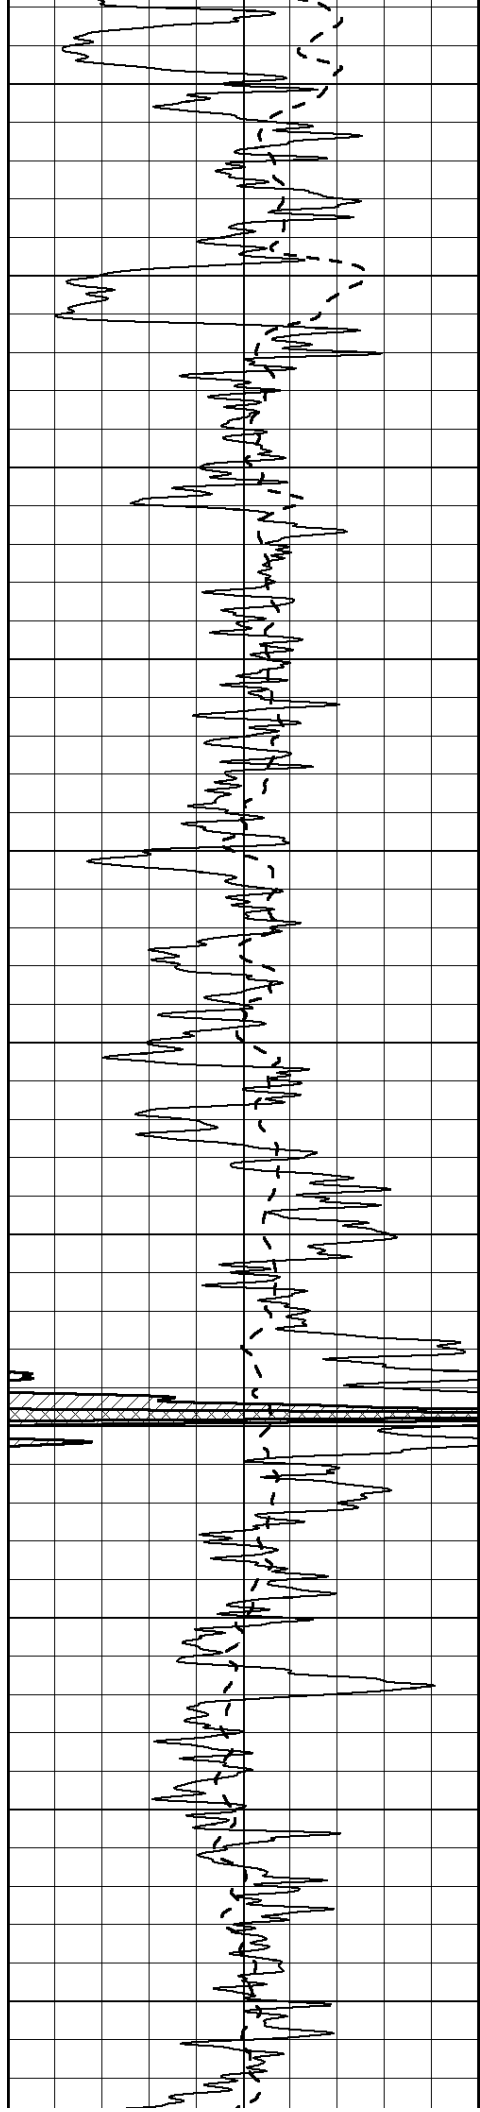

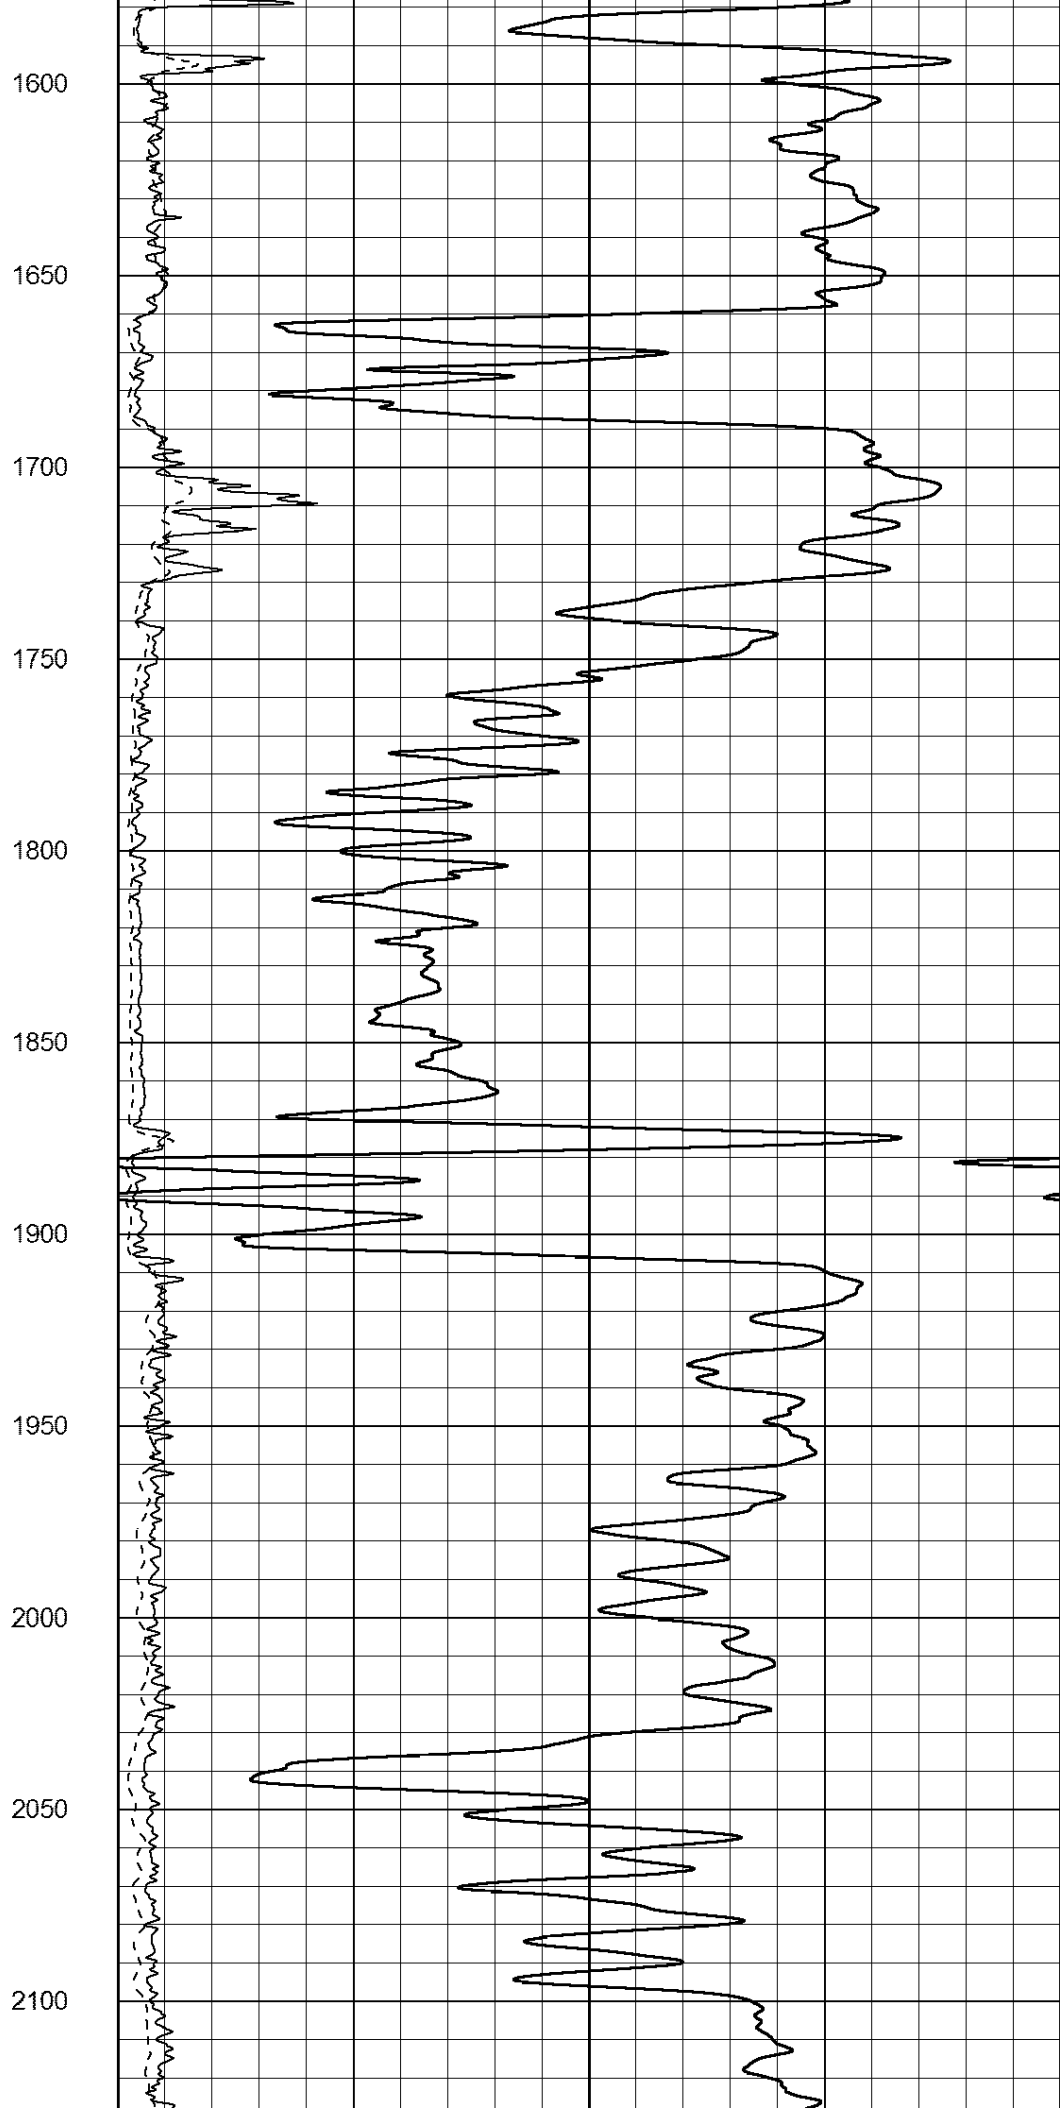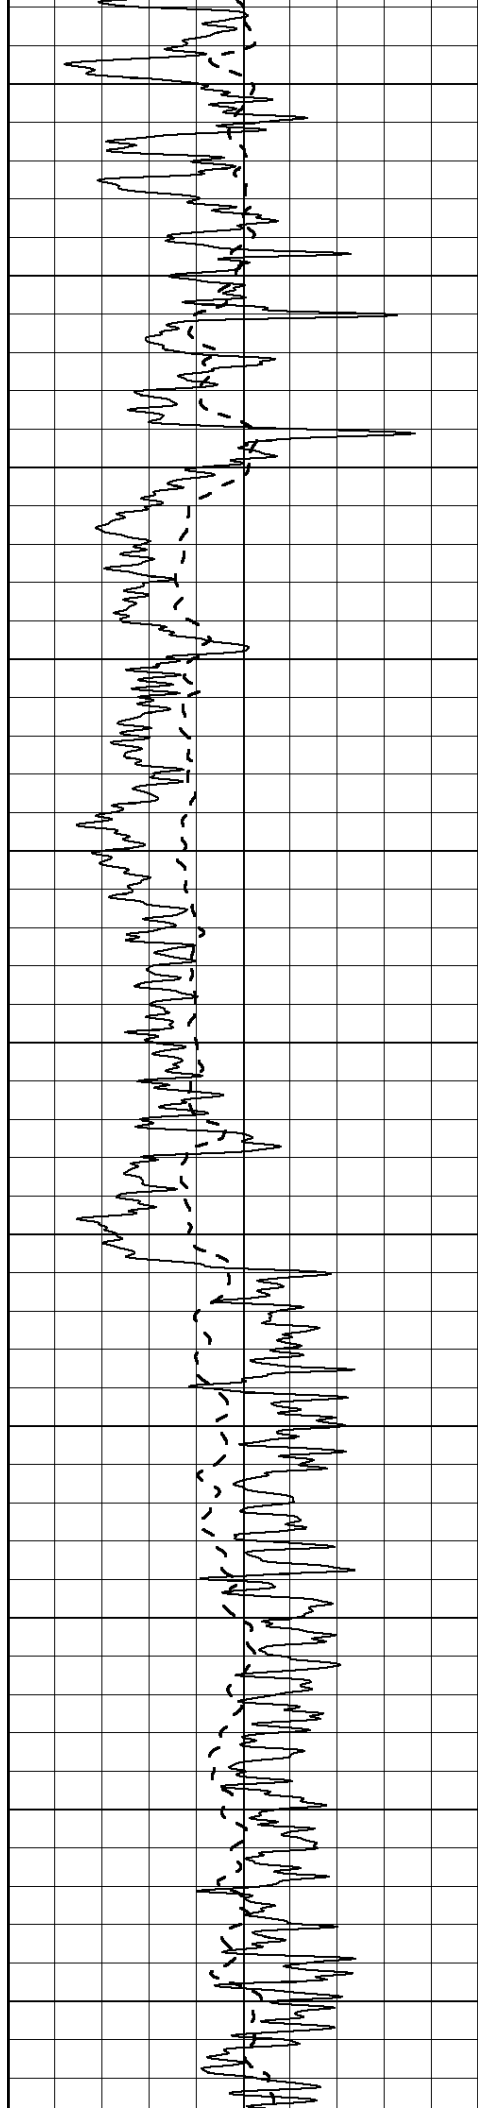

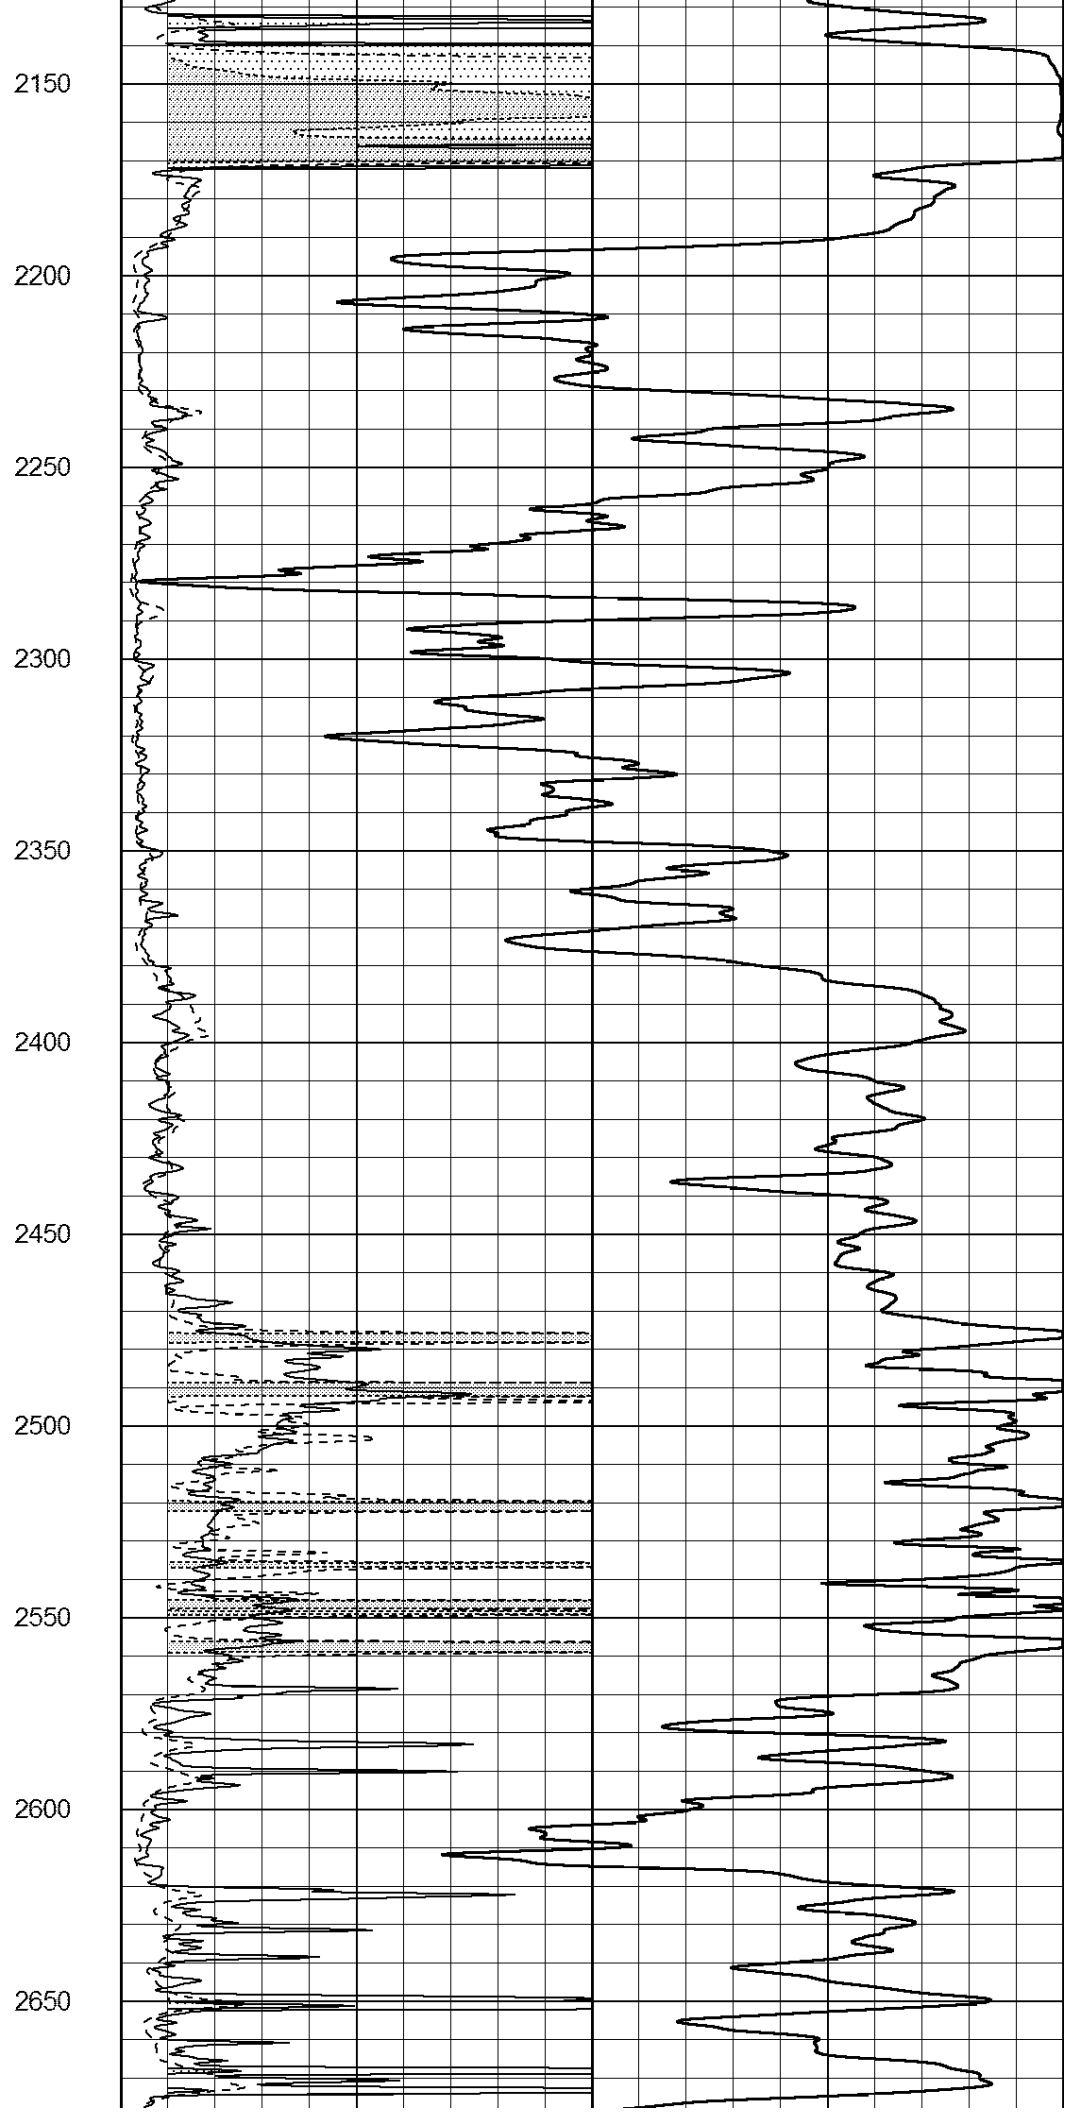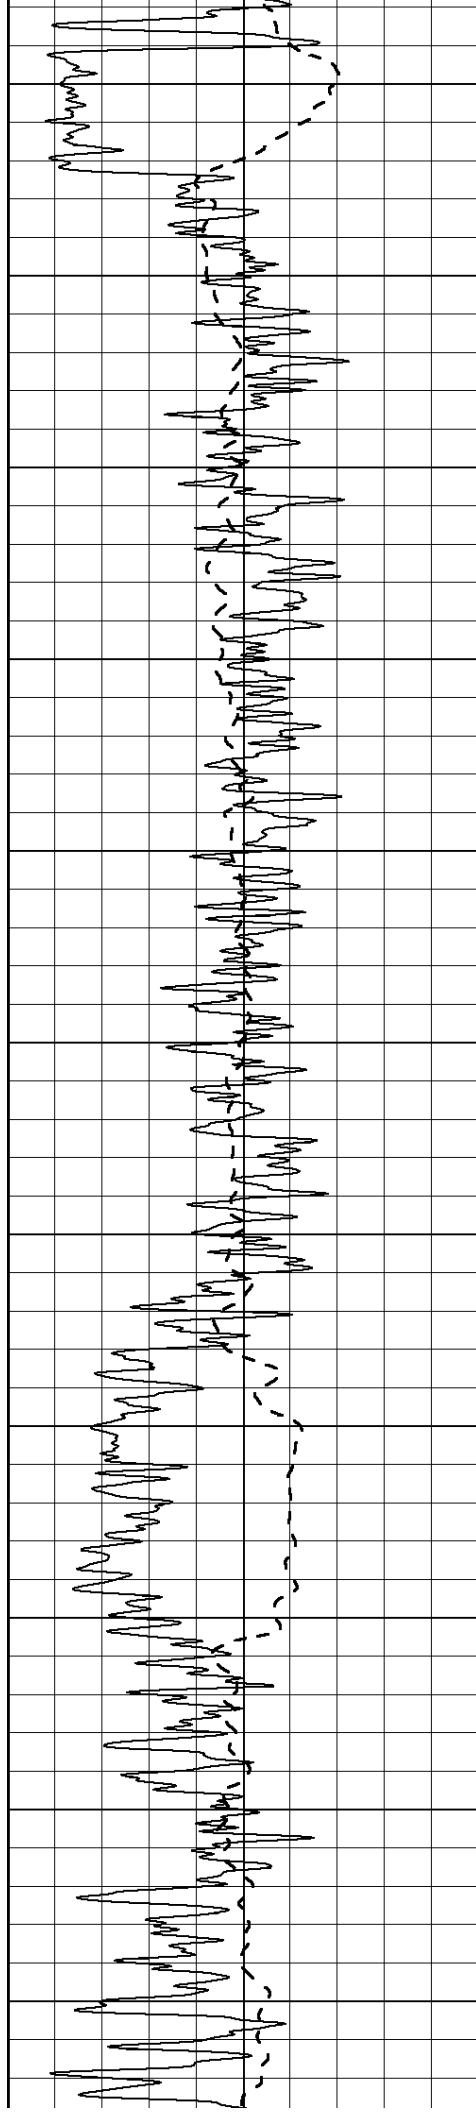

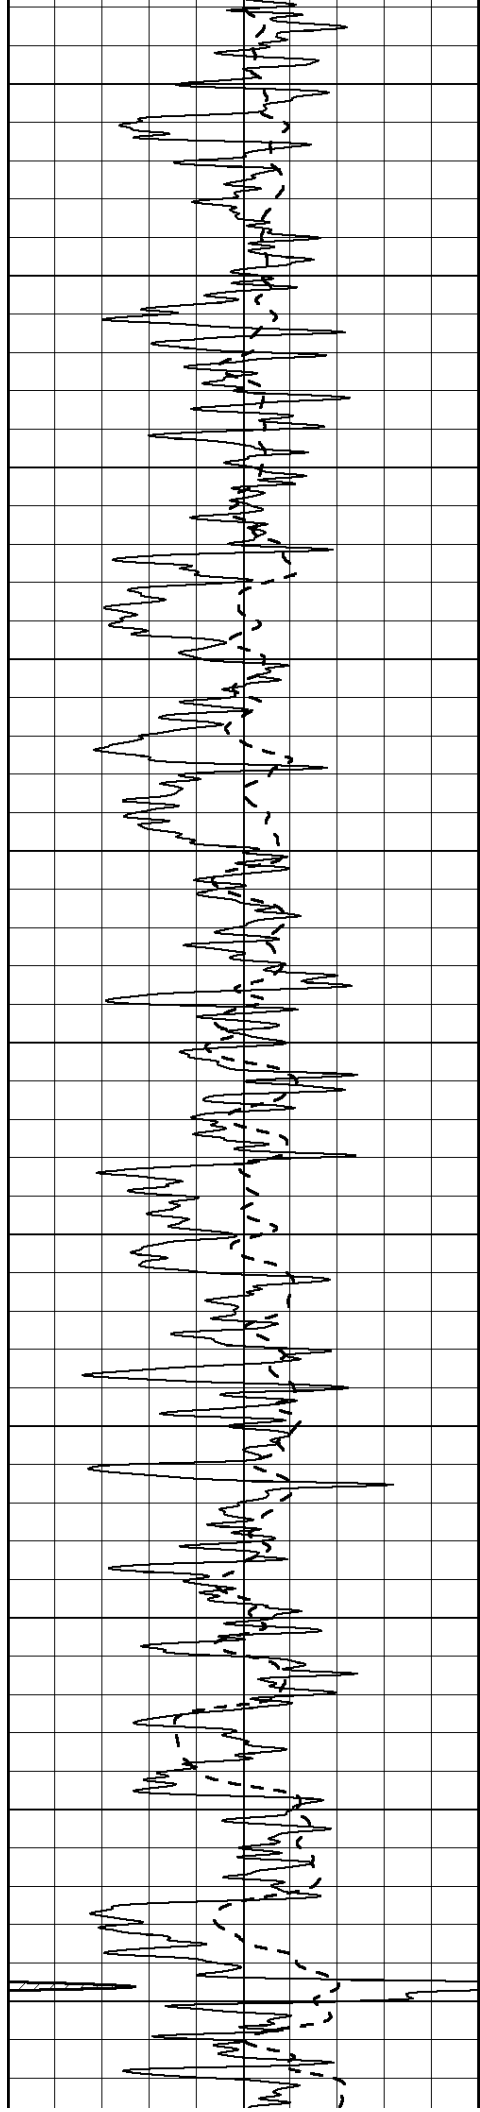

2700

2750

2800

2850

2900

2950


3000



3050


3100

3150

3200

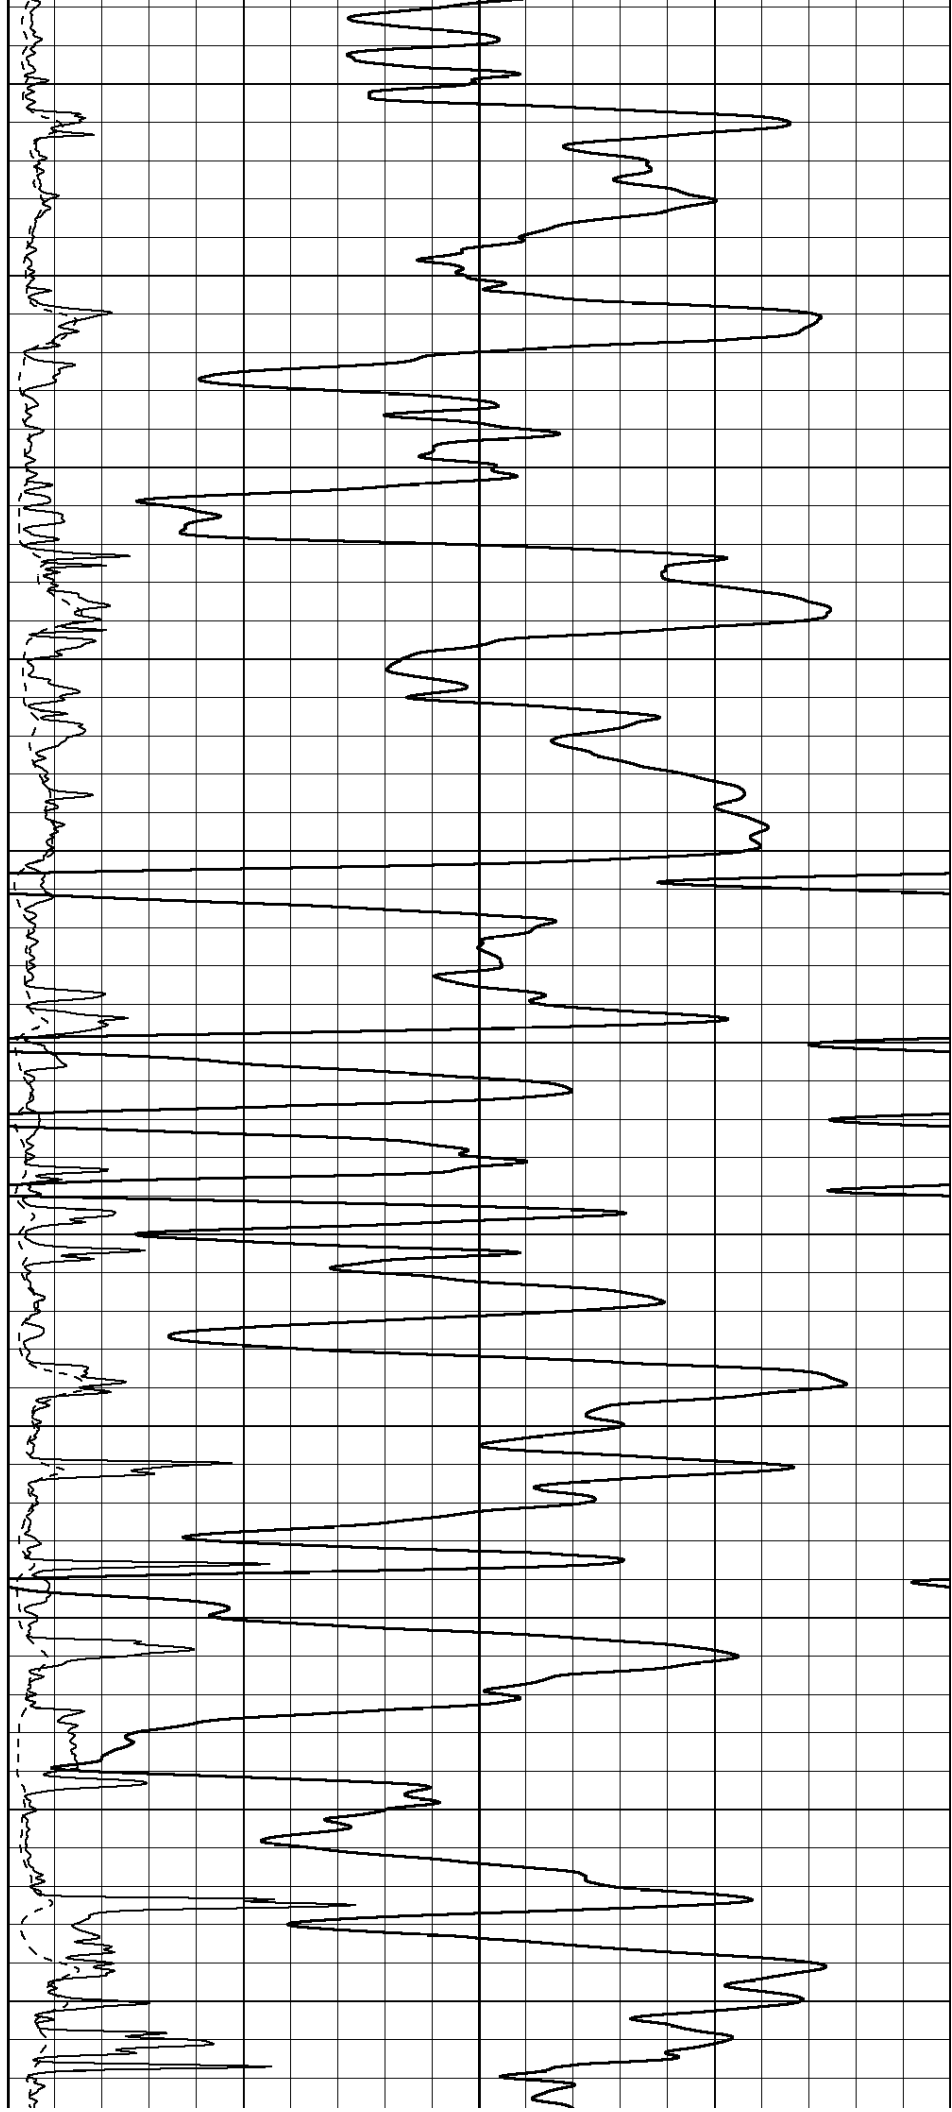

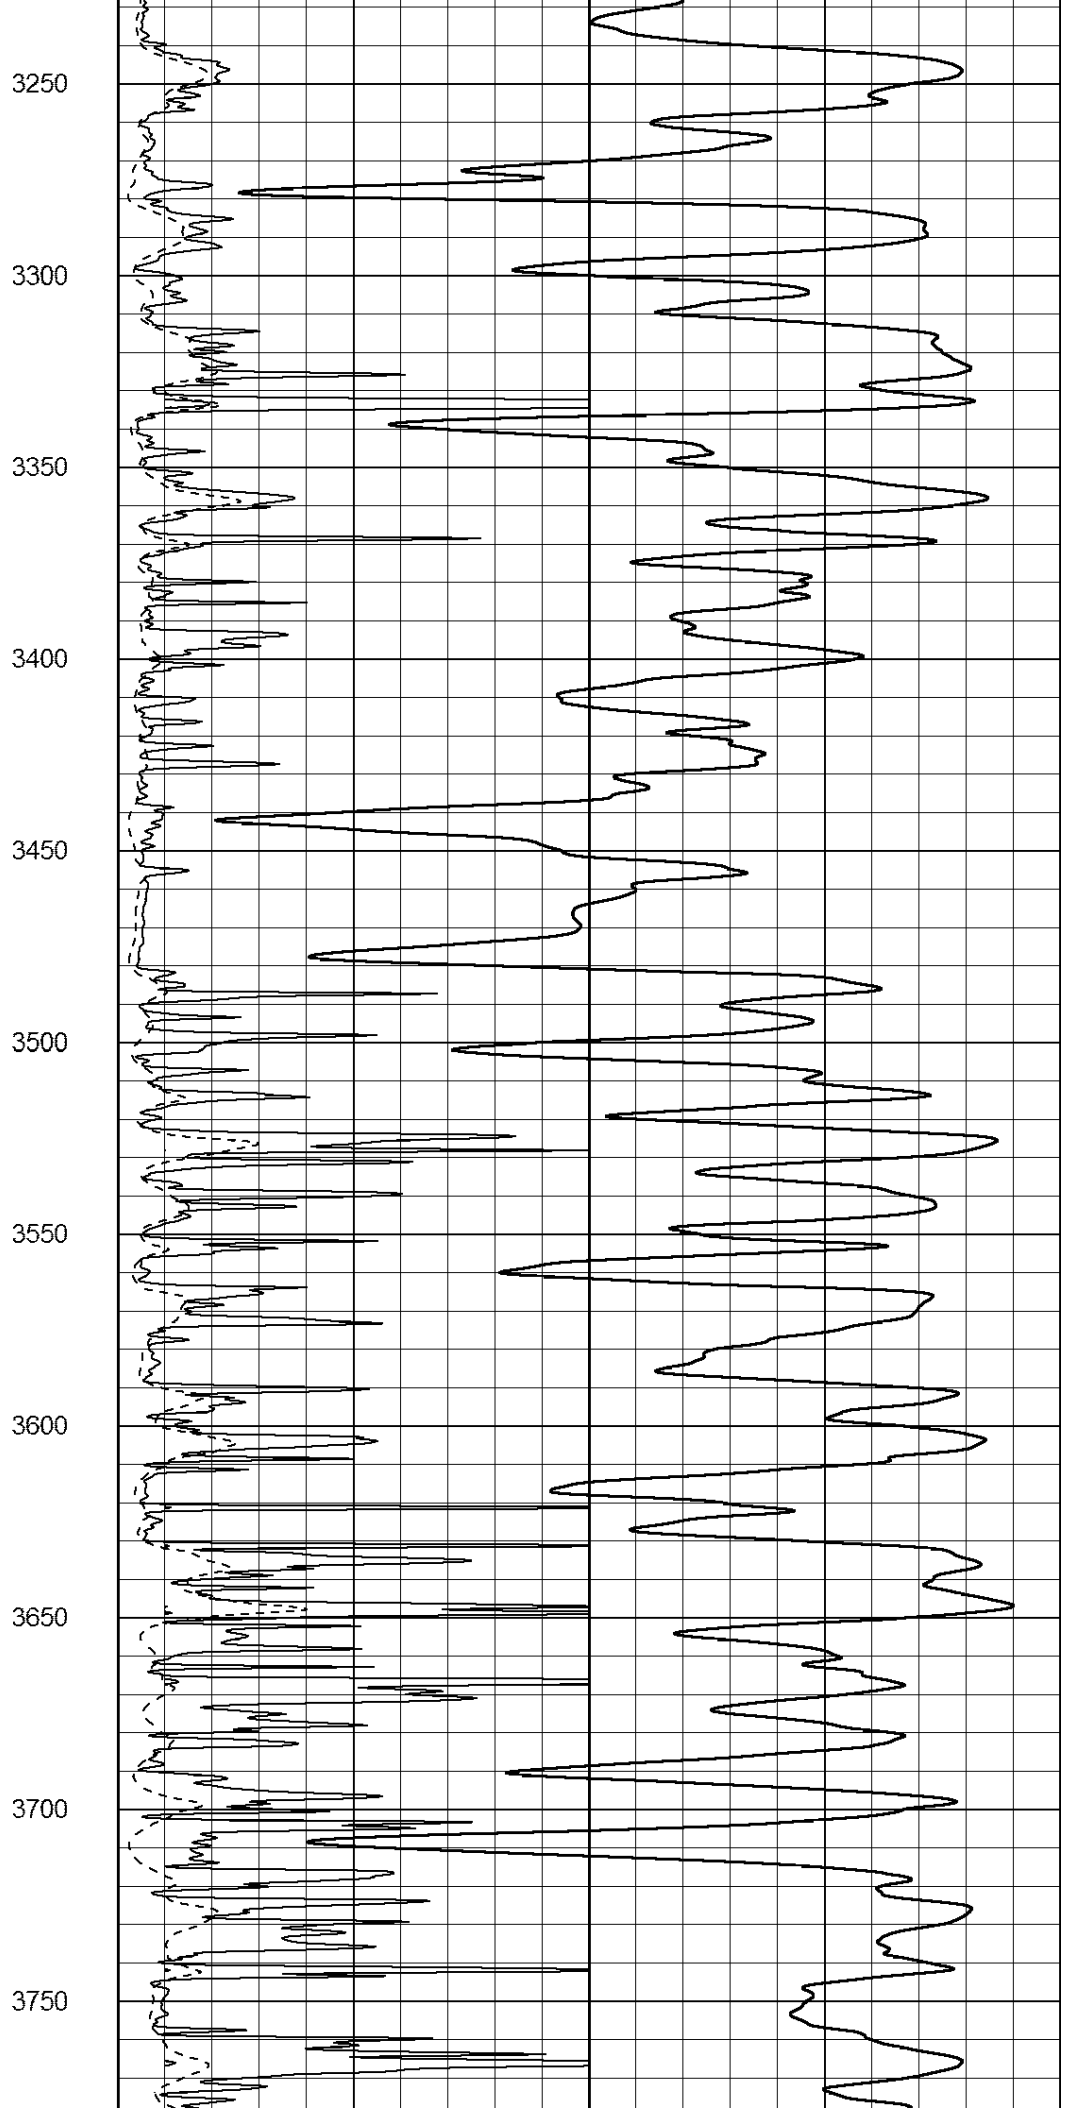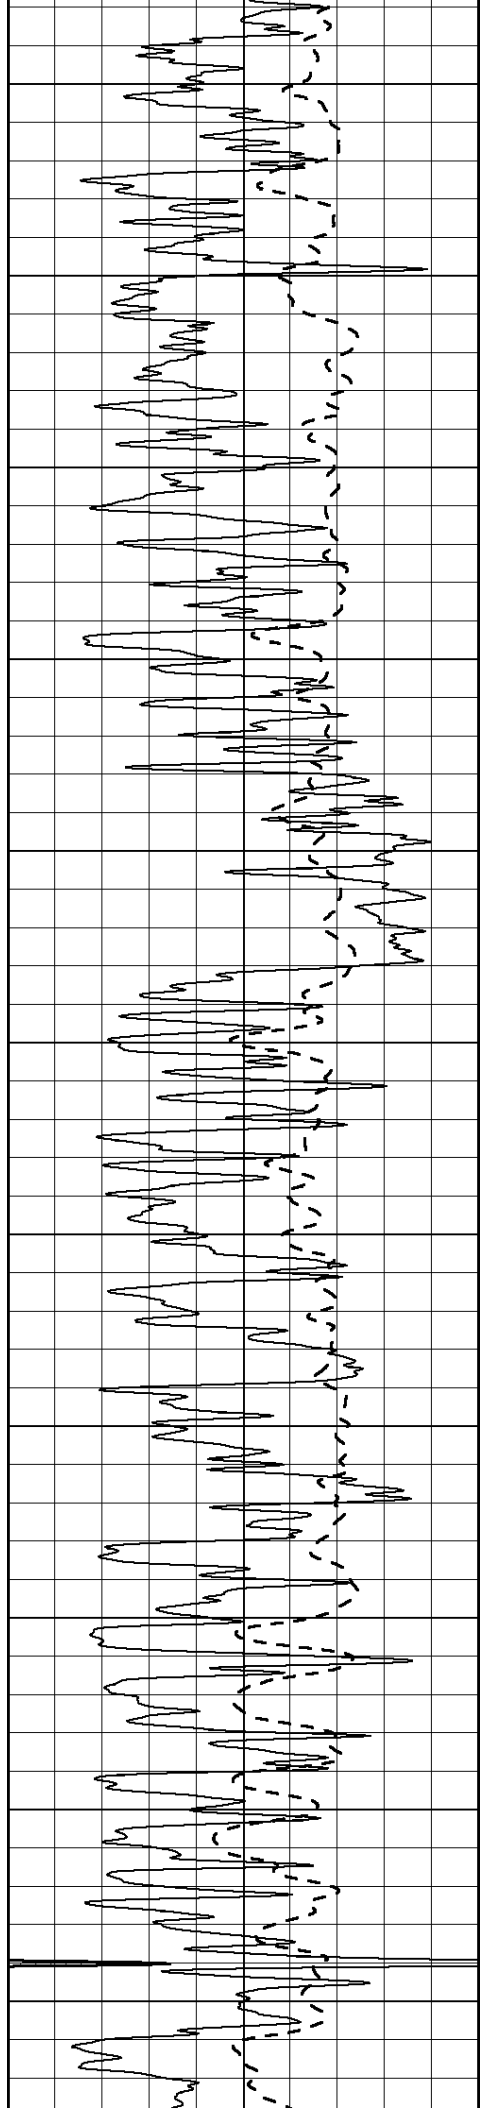

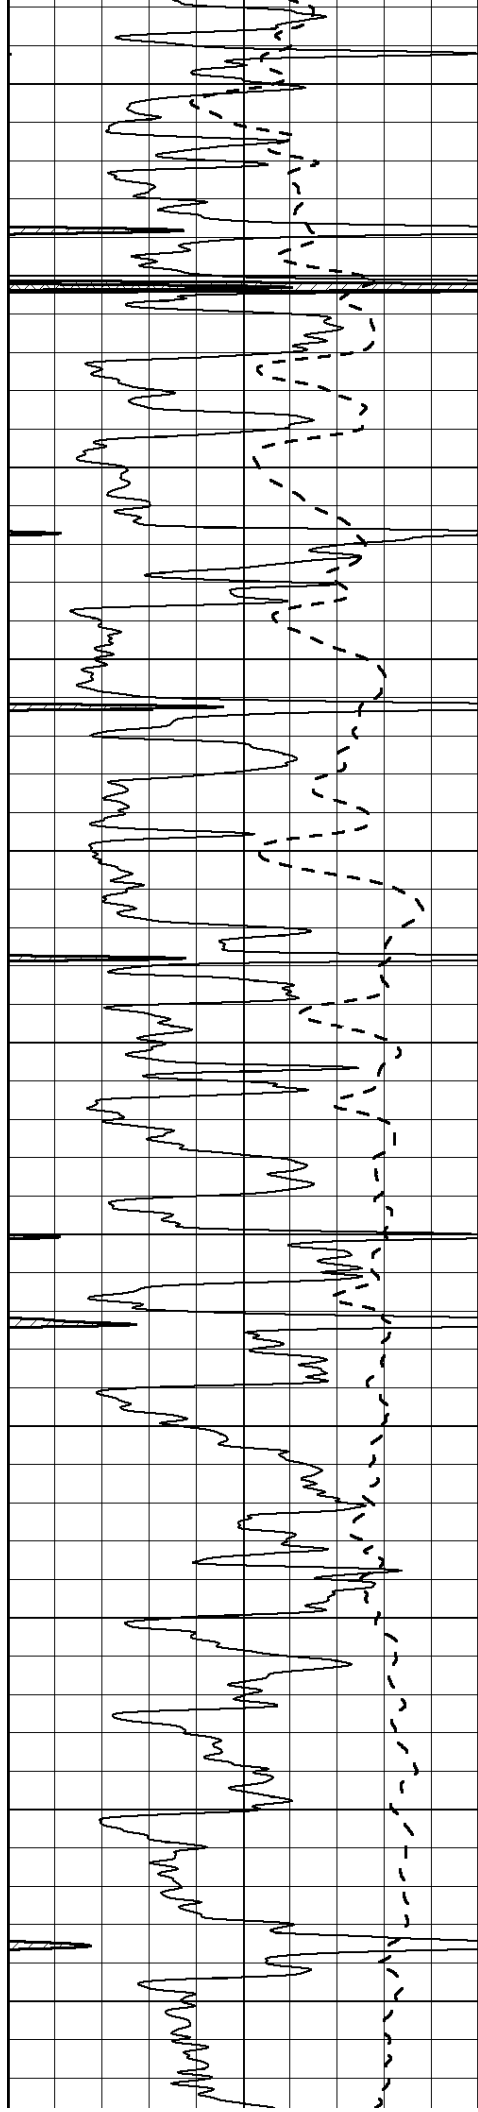

3800

3850

3900

3950

4000

4050



4100



4150

4200

4250

4300

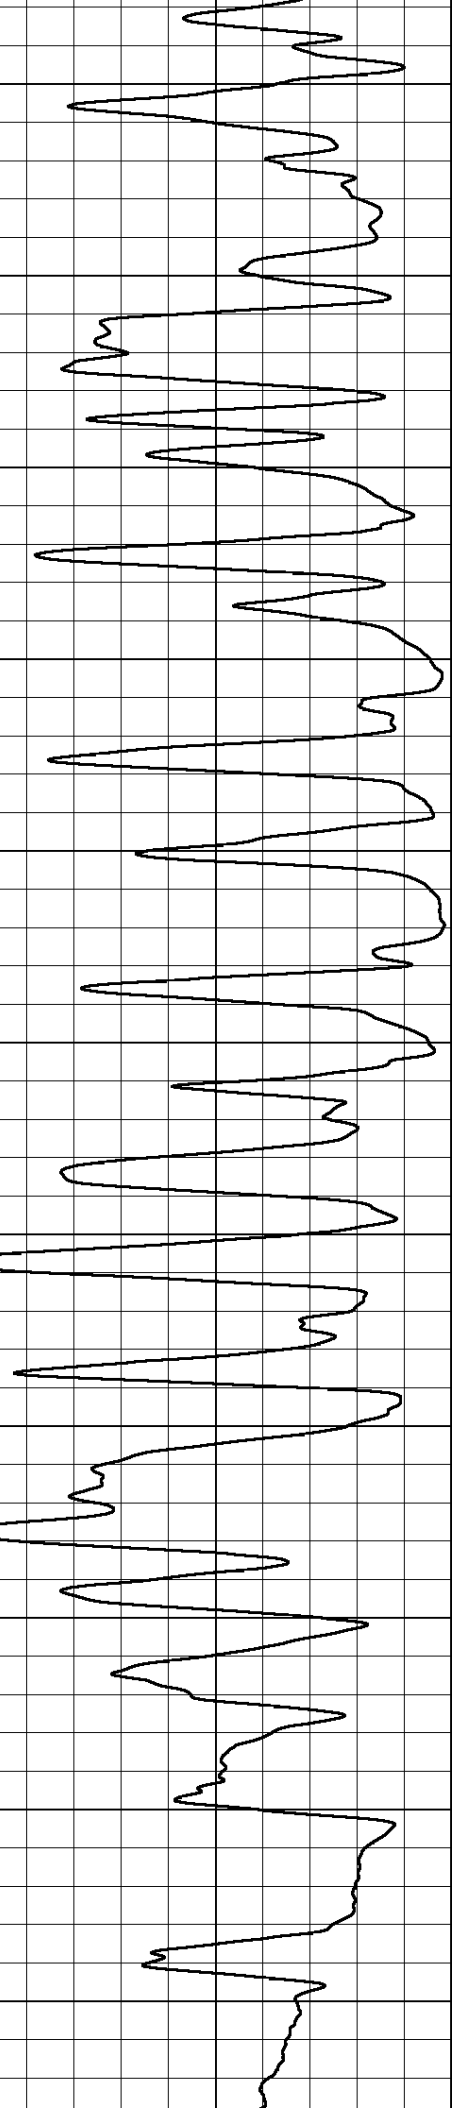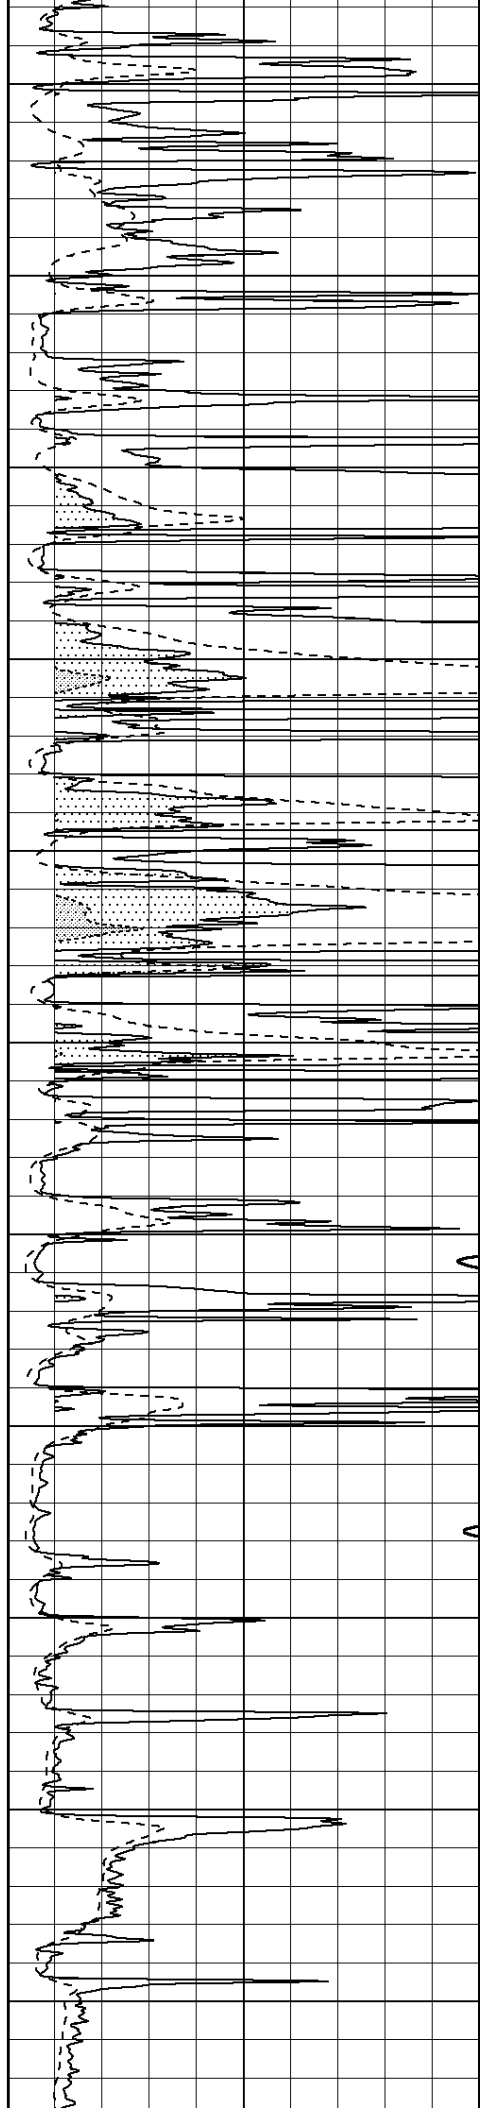


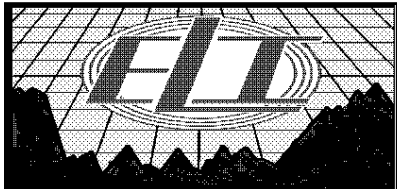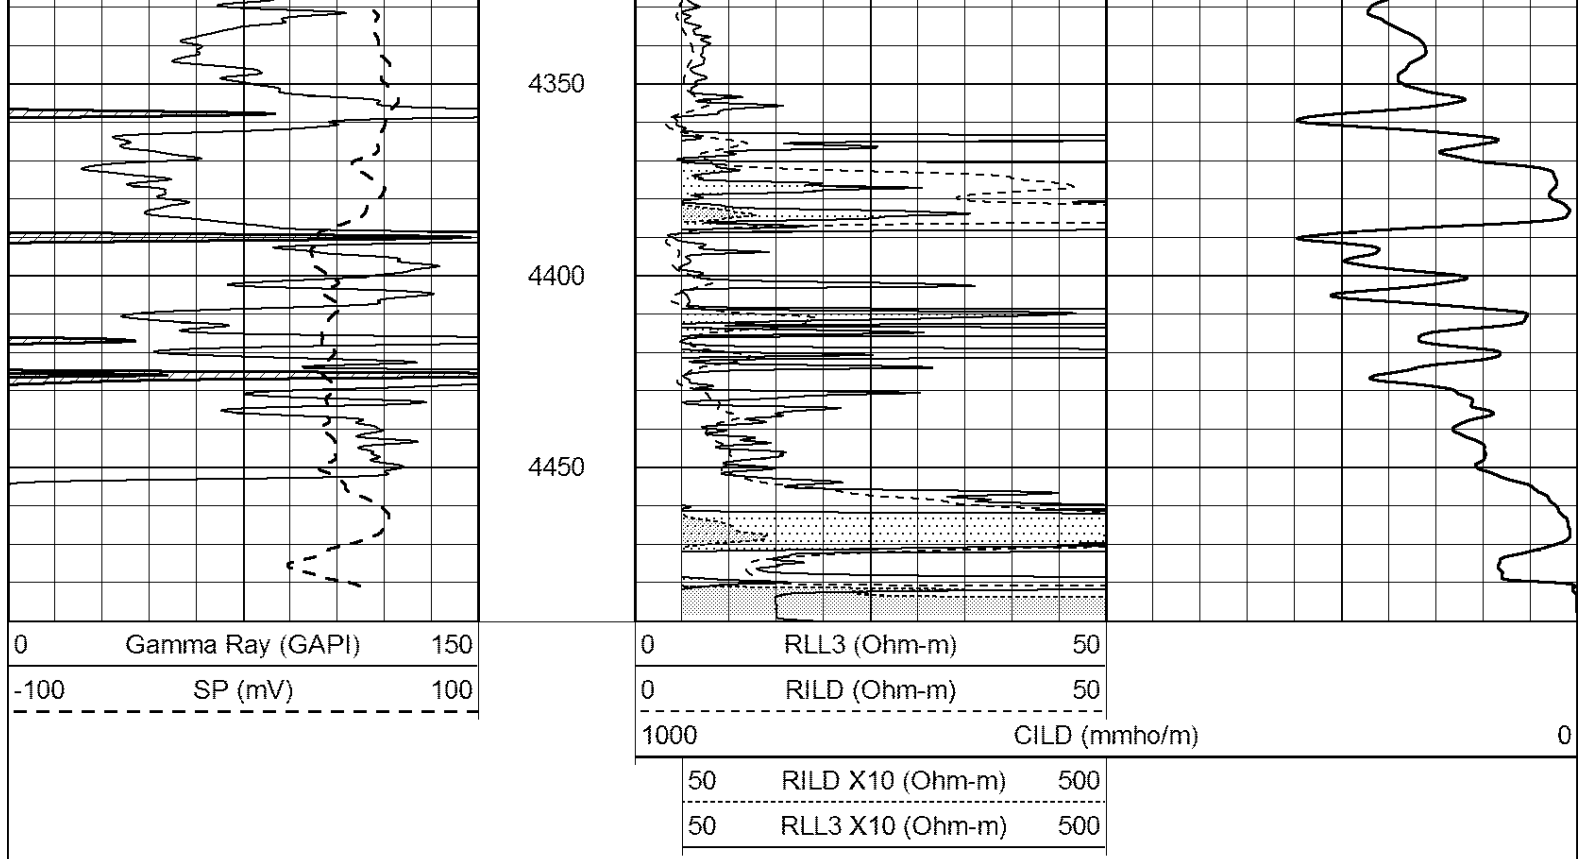


MAIN PASS

Database File: 2903ddn.db
 Dataset Pathname: pass3.1
 Presentation Format: _dil
 Dataset Creation: Tue Aug 14 20:20:08 2018 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	DEEP INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	MEDIUM INDUCTION (Ohm-m)	2000
0	MINMK	20			

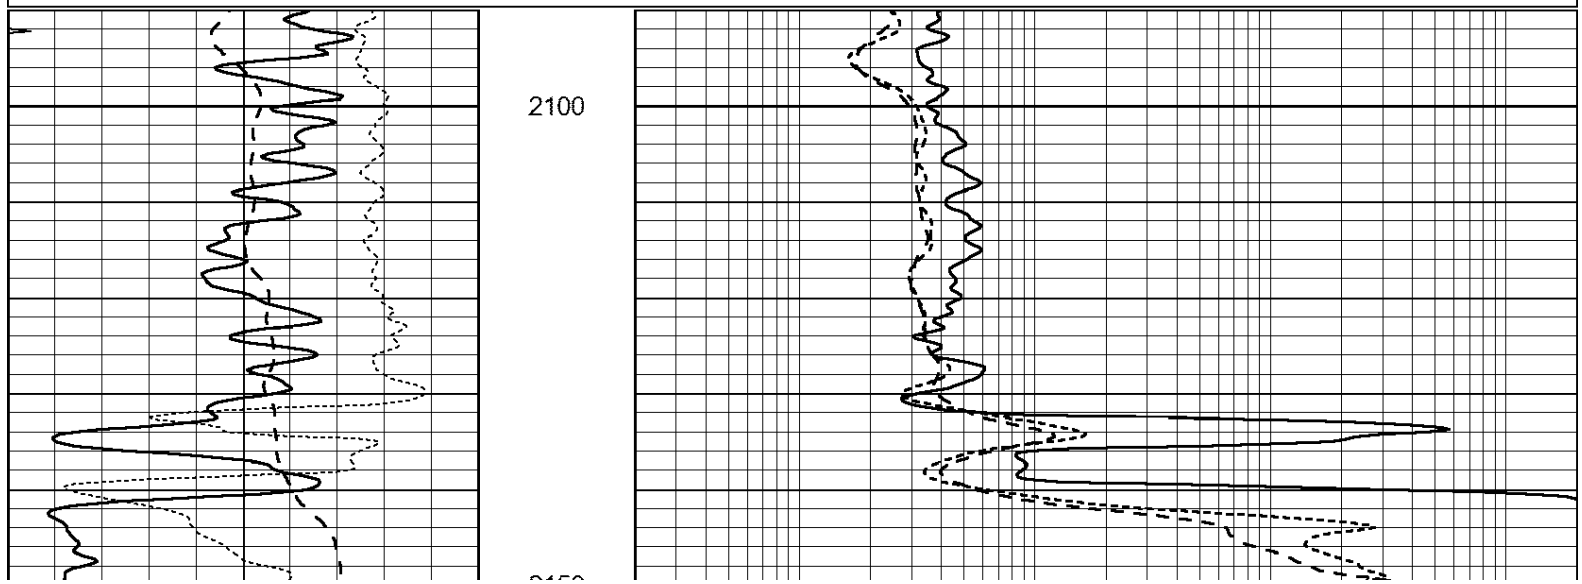

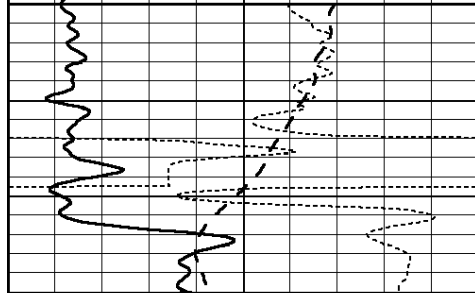


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

2150

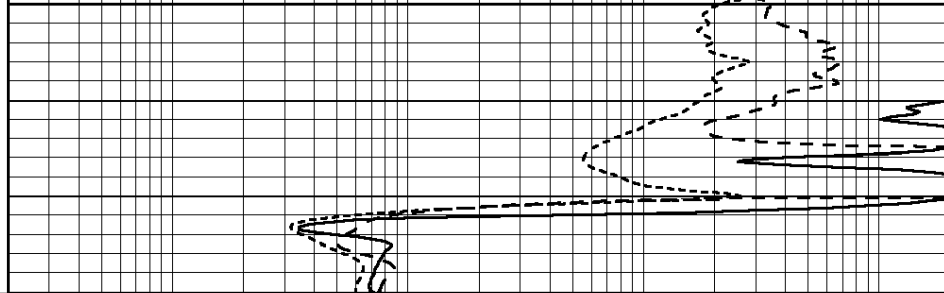

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

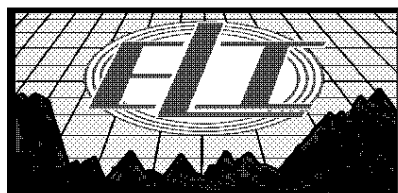


MAIN PASS

Database File: 2903ddn.db
 Dataset Pathname: pass3.1
 Presentation Format: _dil
 Dataset Creation: Tue Aug 14 20:20:08 2018 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

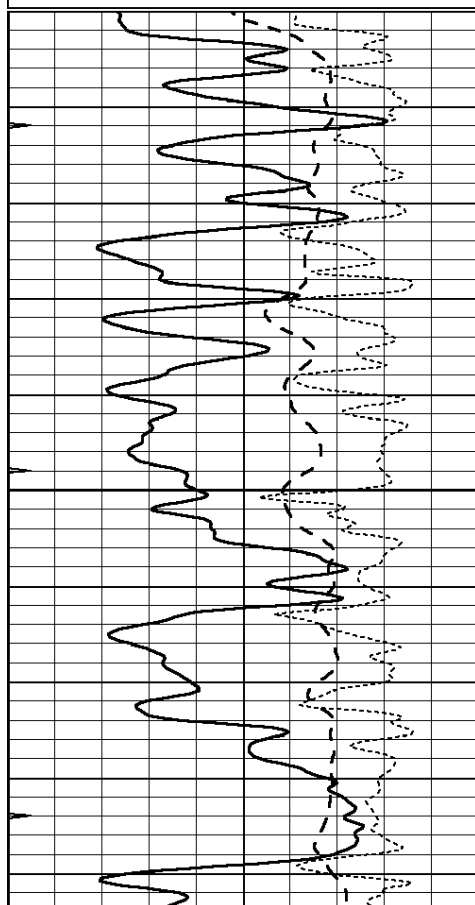

3300

3550

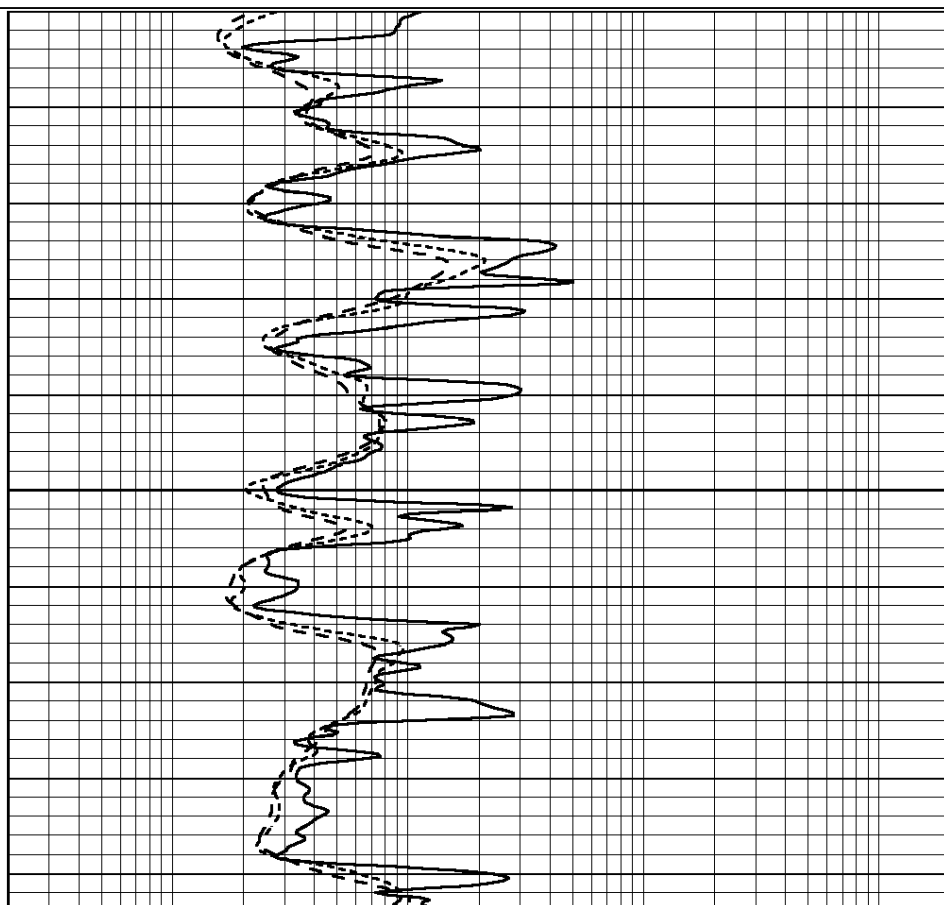

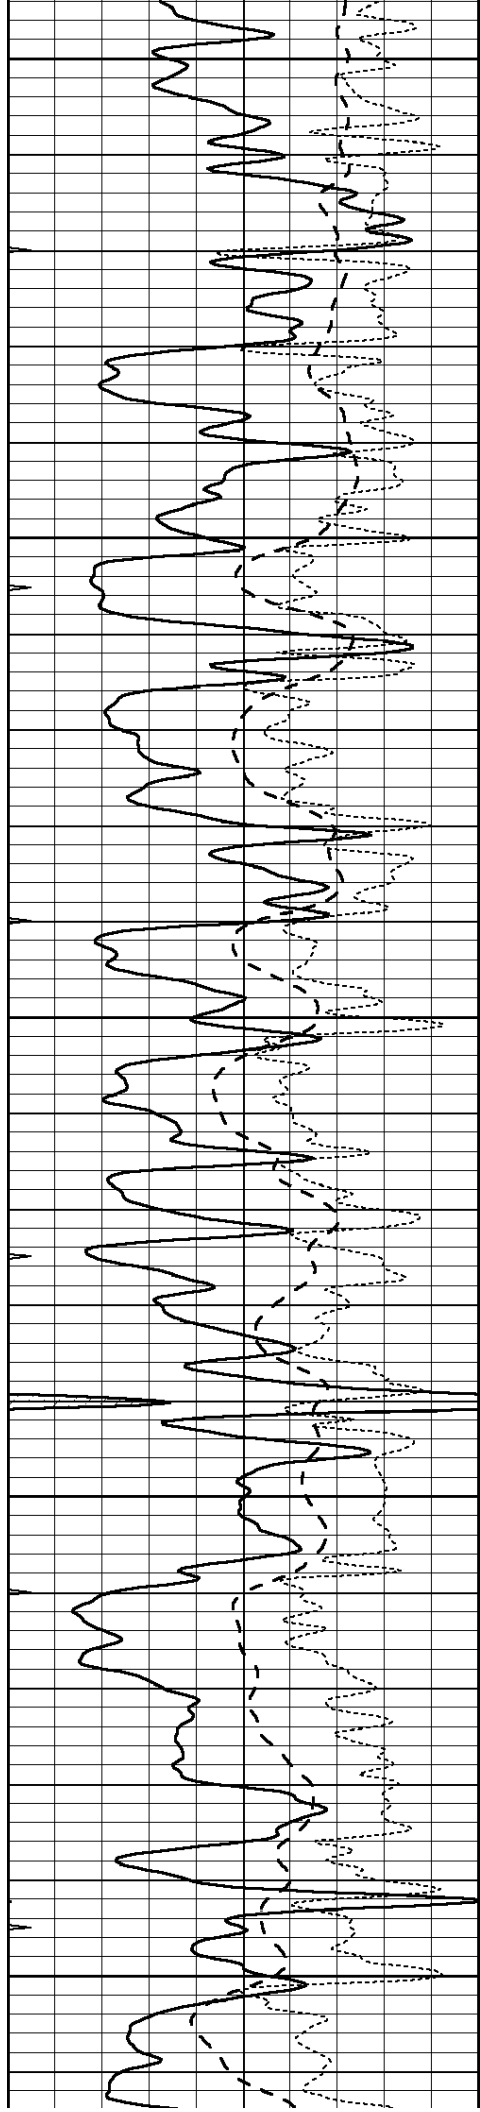


3600


3650

3700

3750

3800

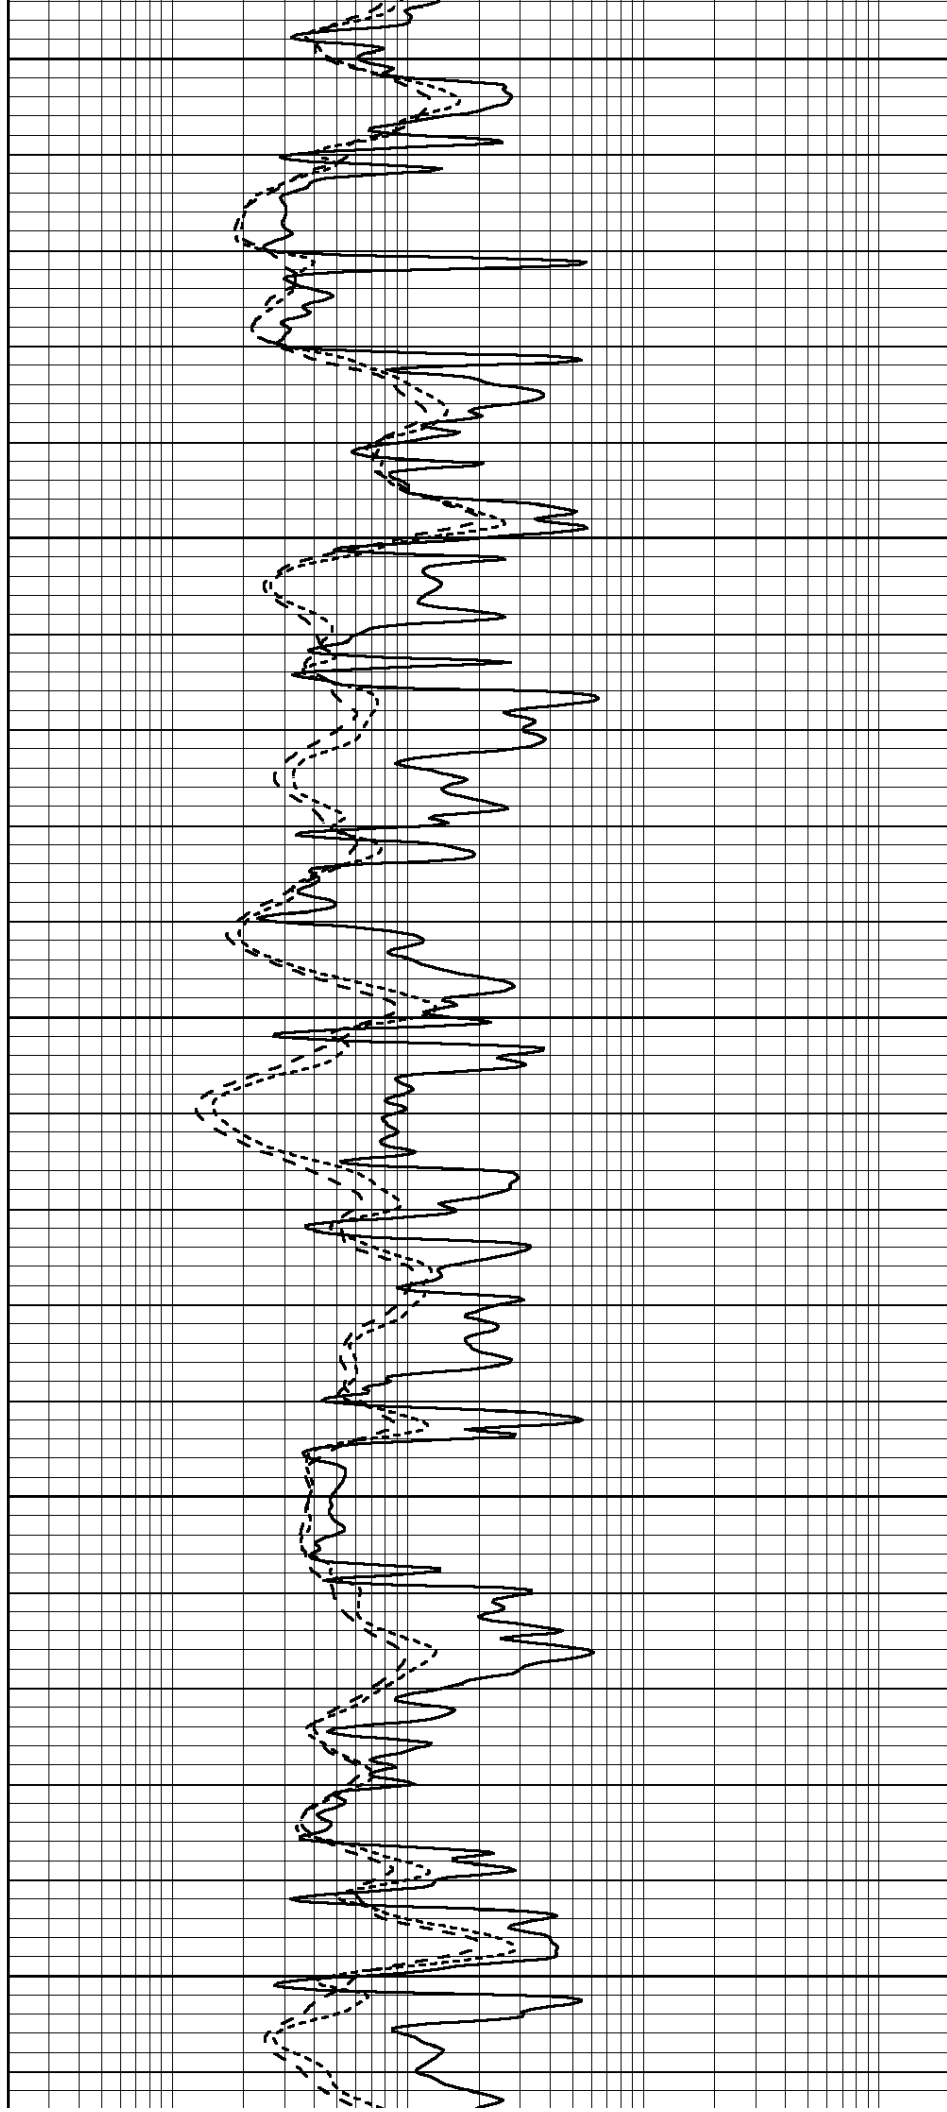

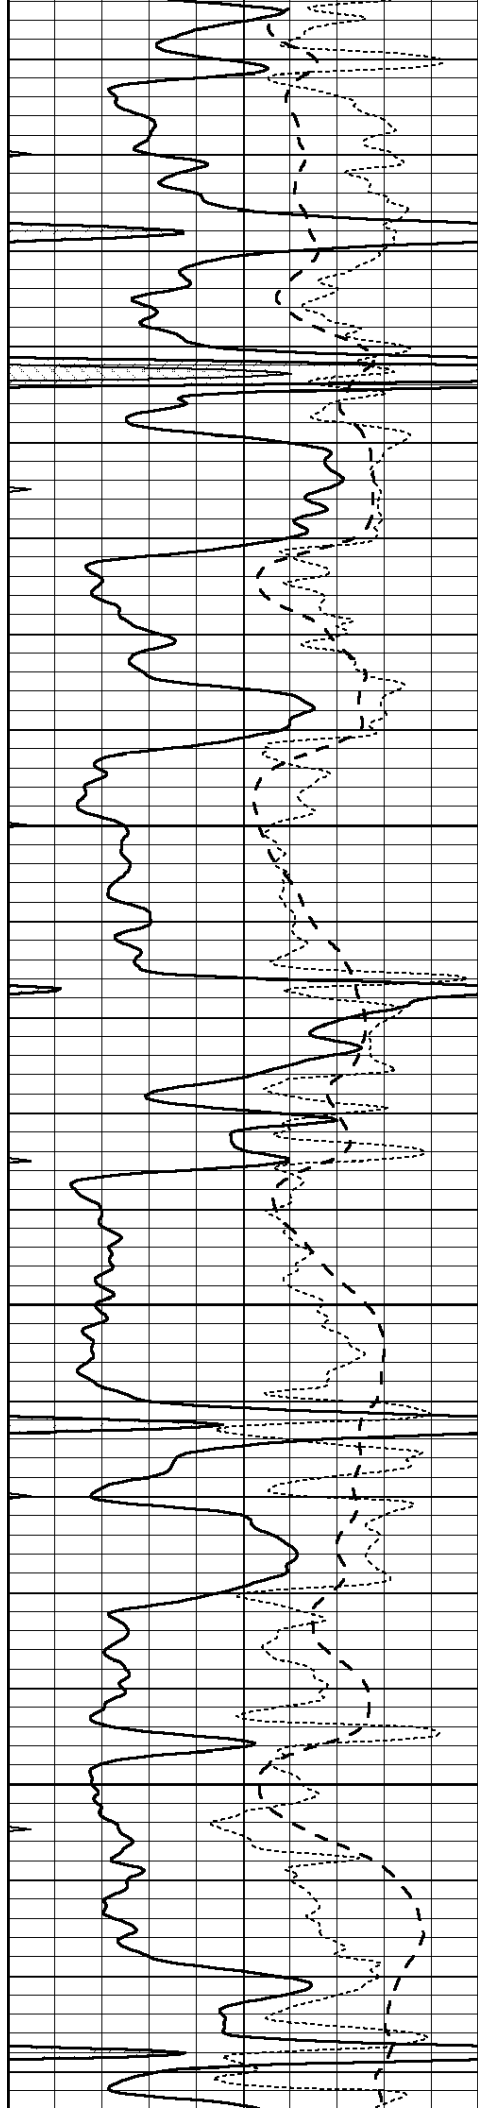



3850

3900

3950

4000

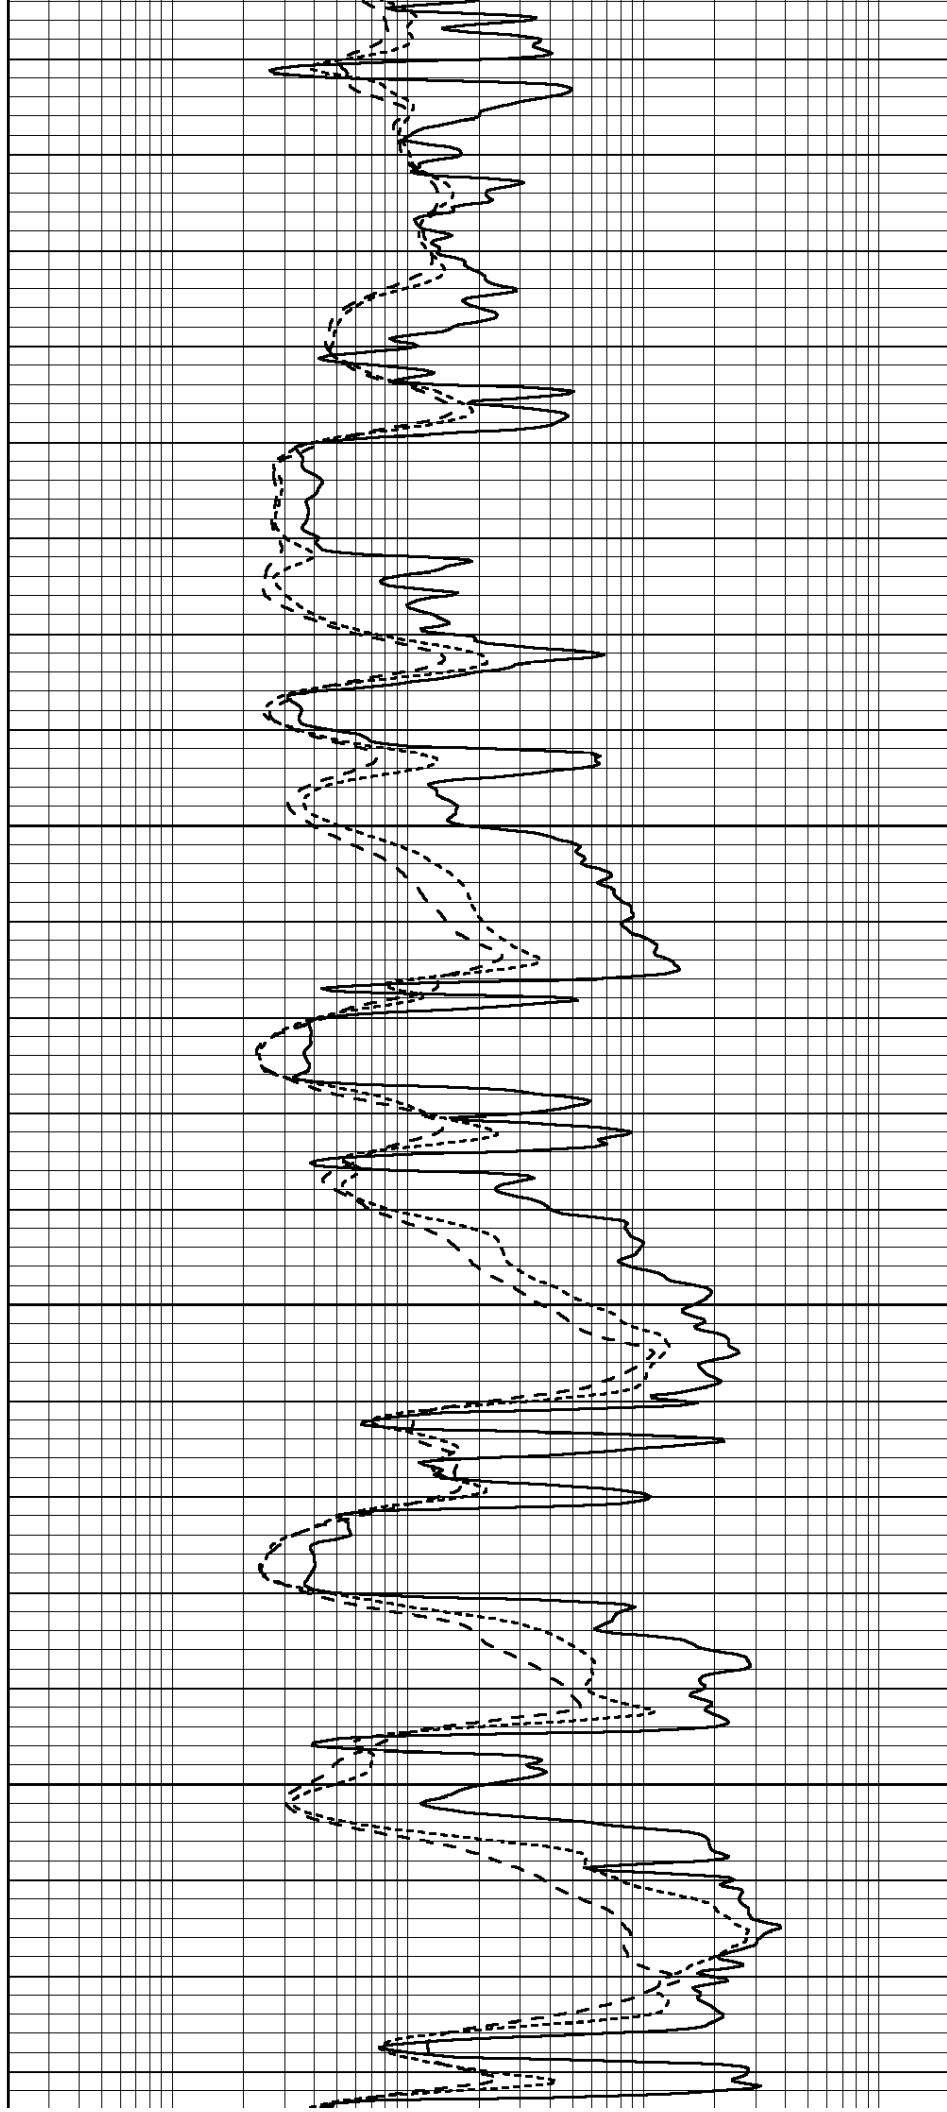

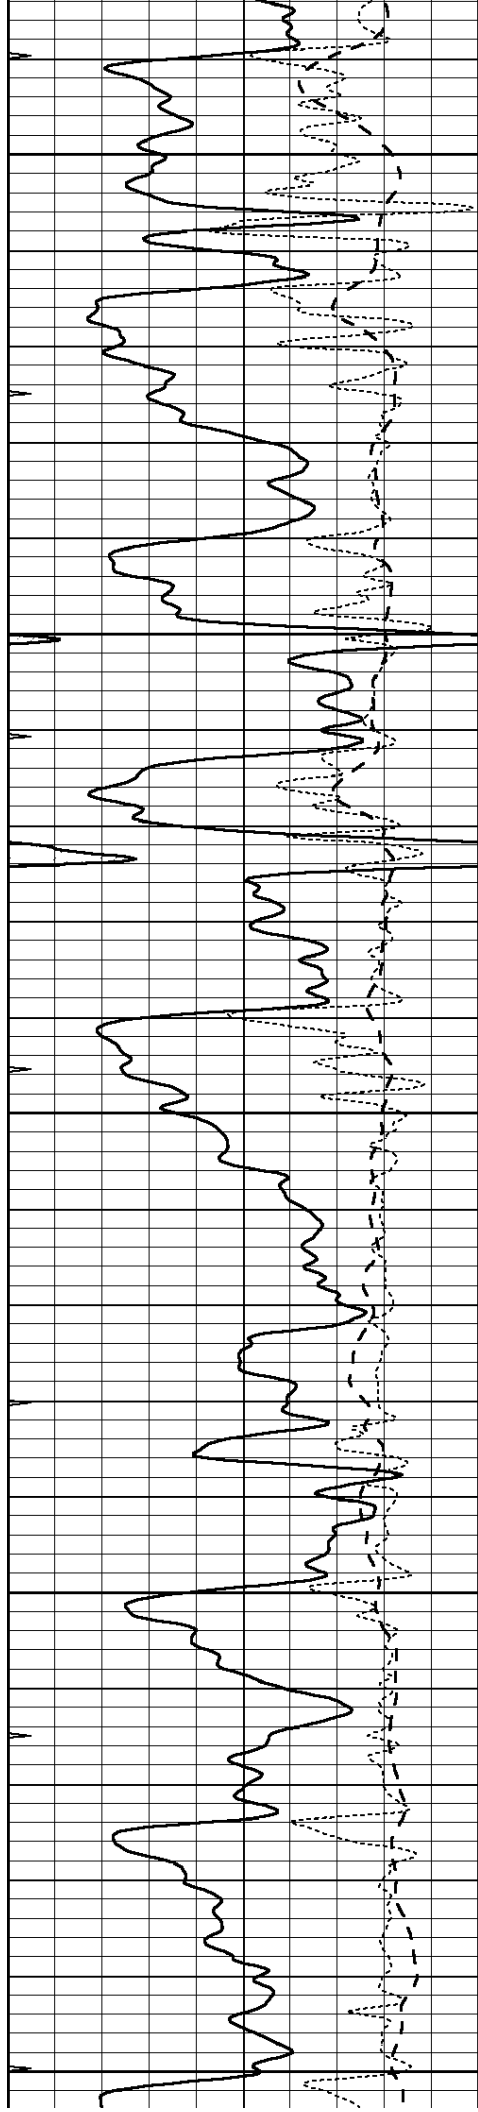


4050



4100



4150

4200

4250


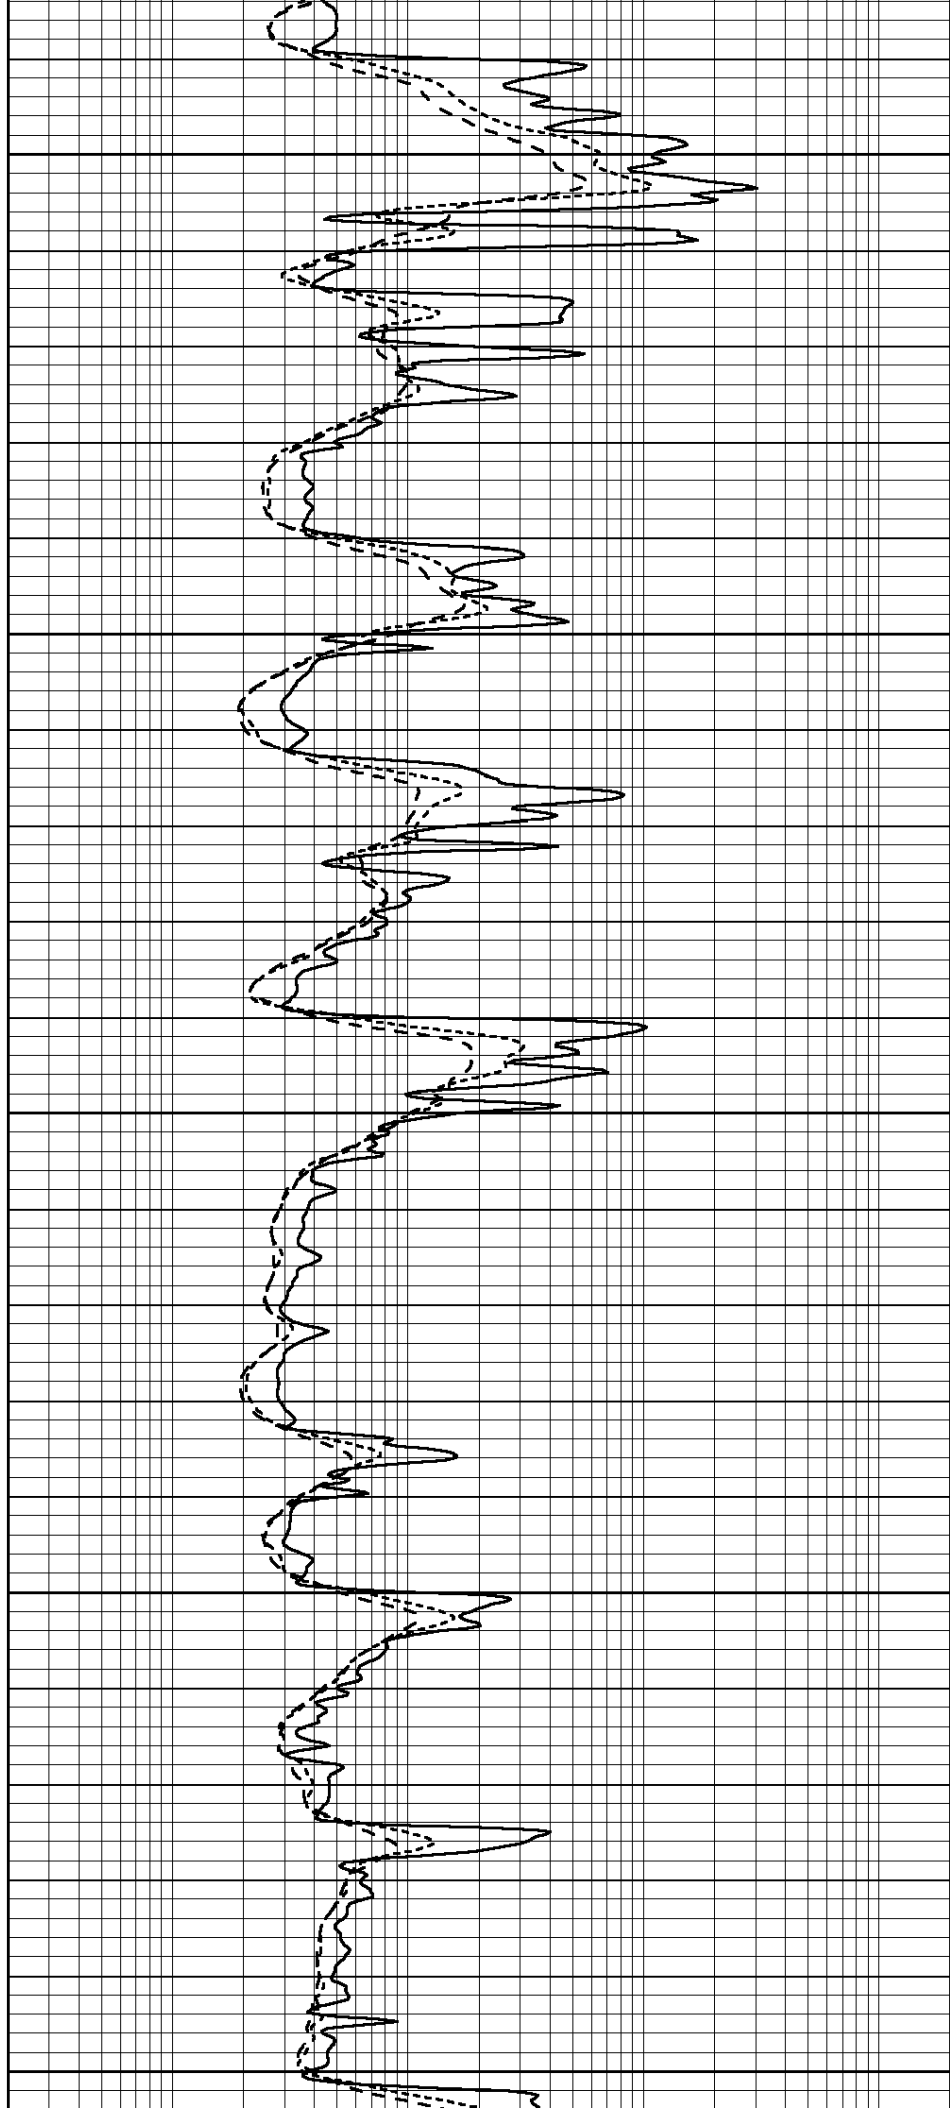


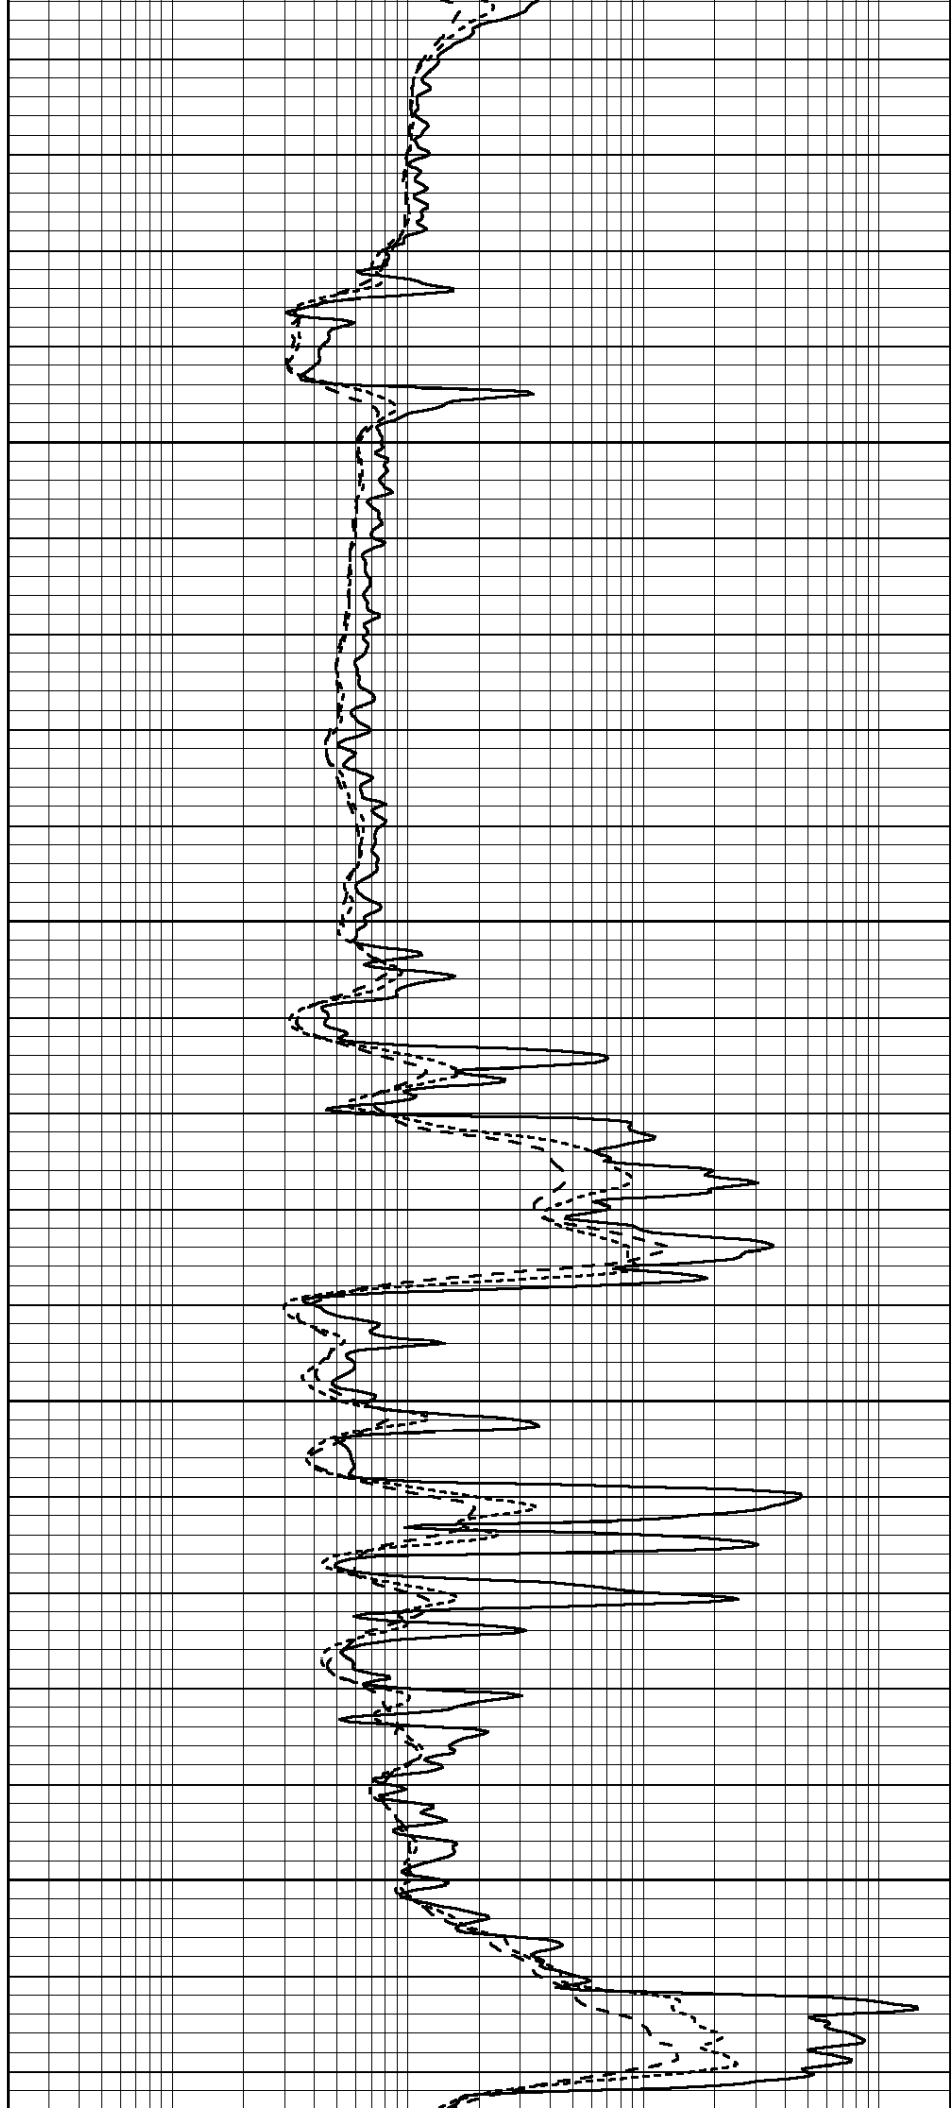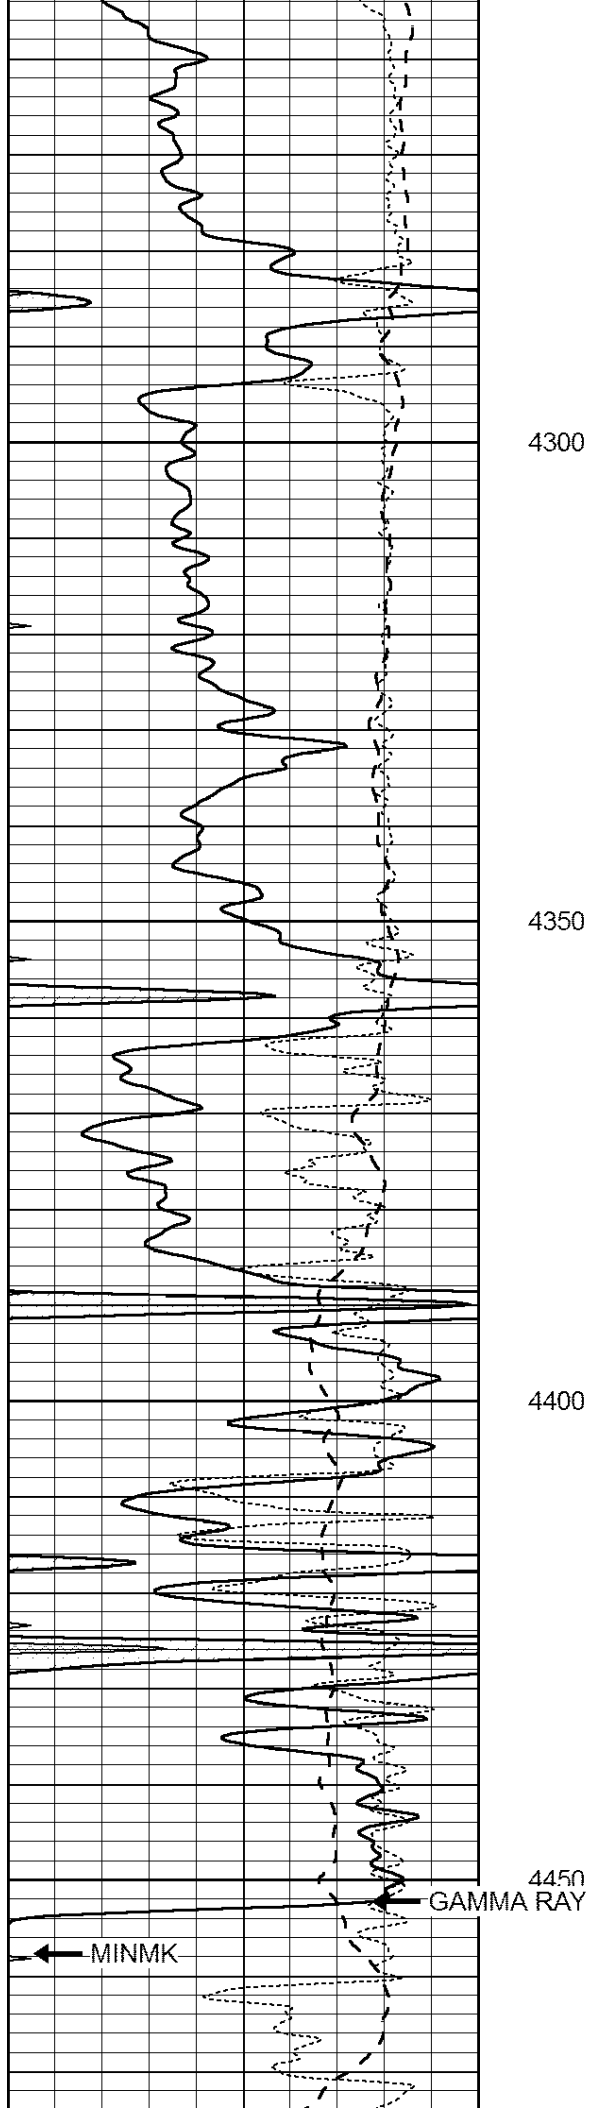

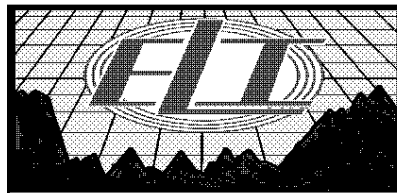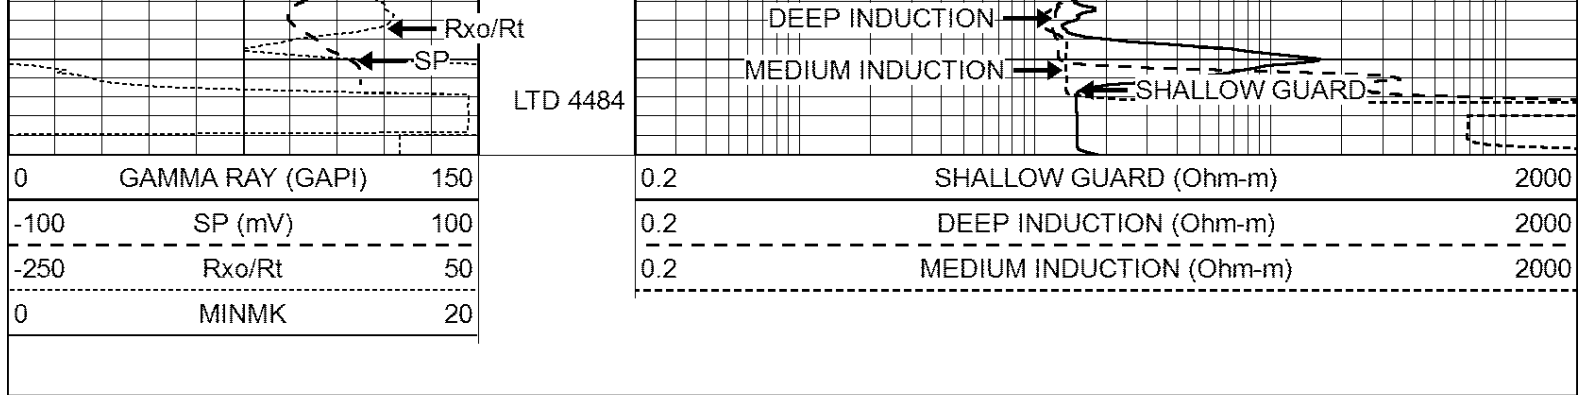


REPEAT SECTION


Database File: 2903ddn.db
Dataset Pathname: pass2RP
Presentation Format: _dil
Dataset Creation: Tue Aug 14 20:11:05 2018 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

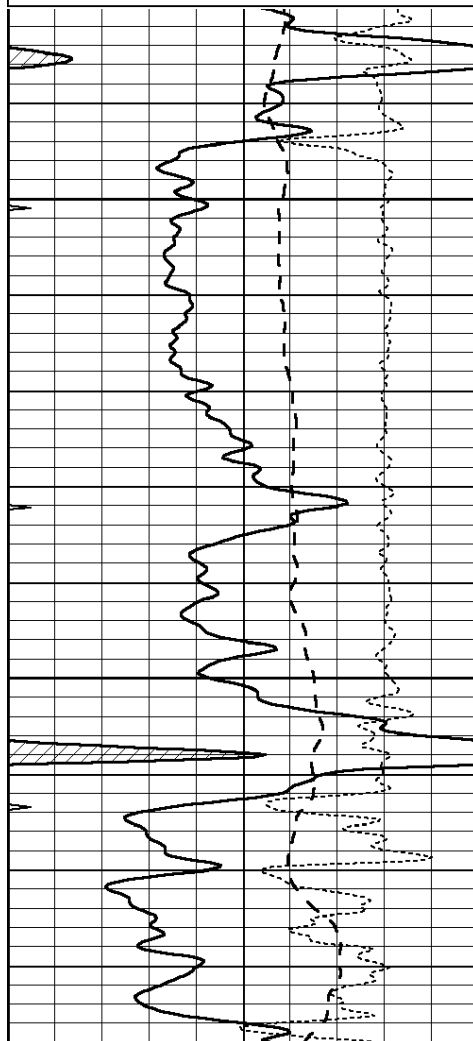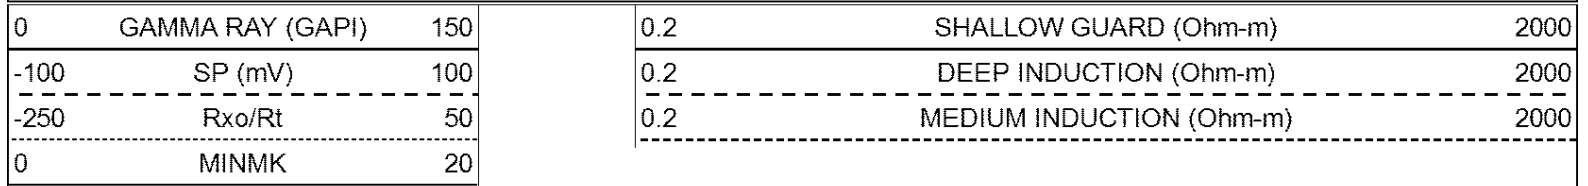

4300

4350

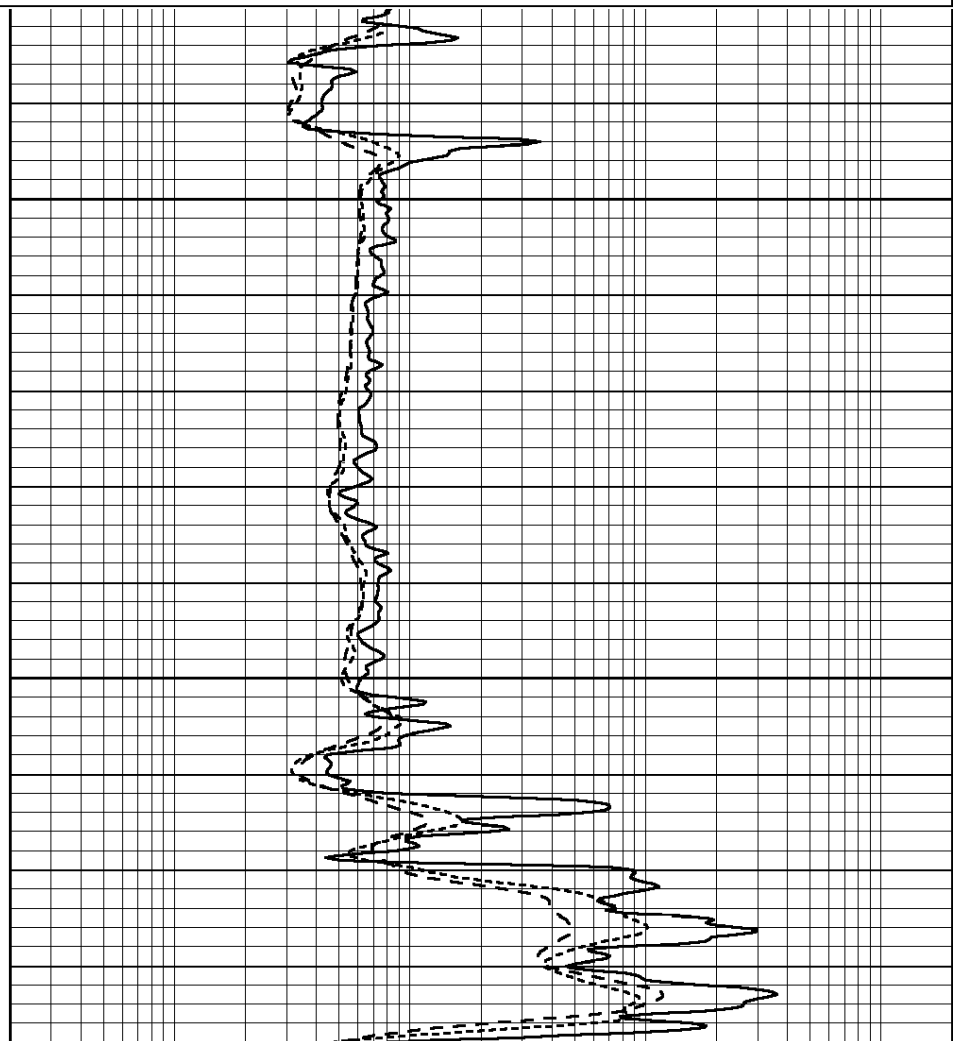


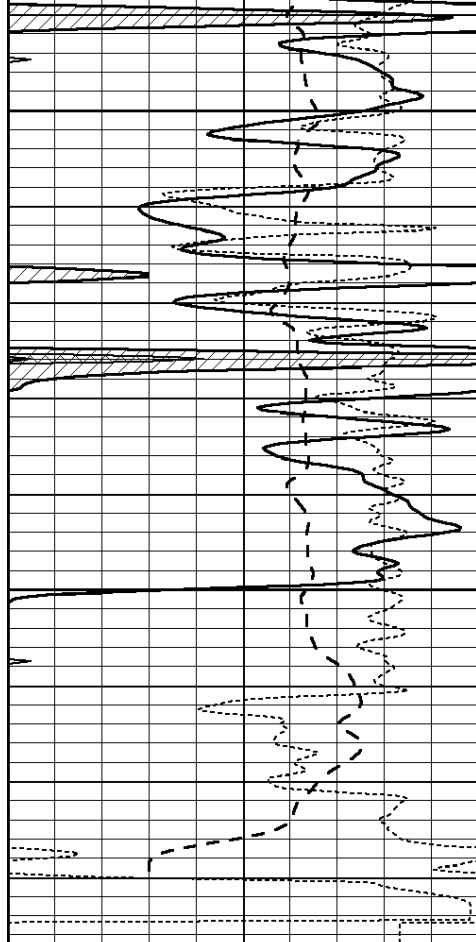

4400

4450

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

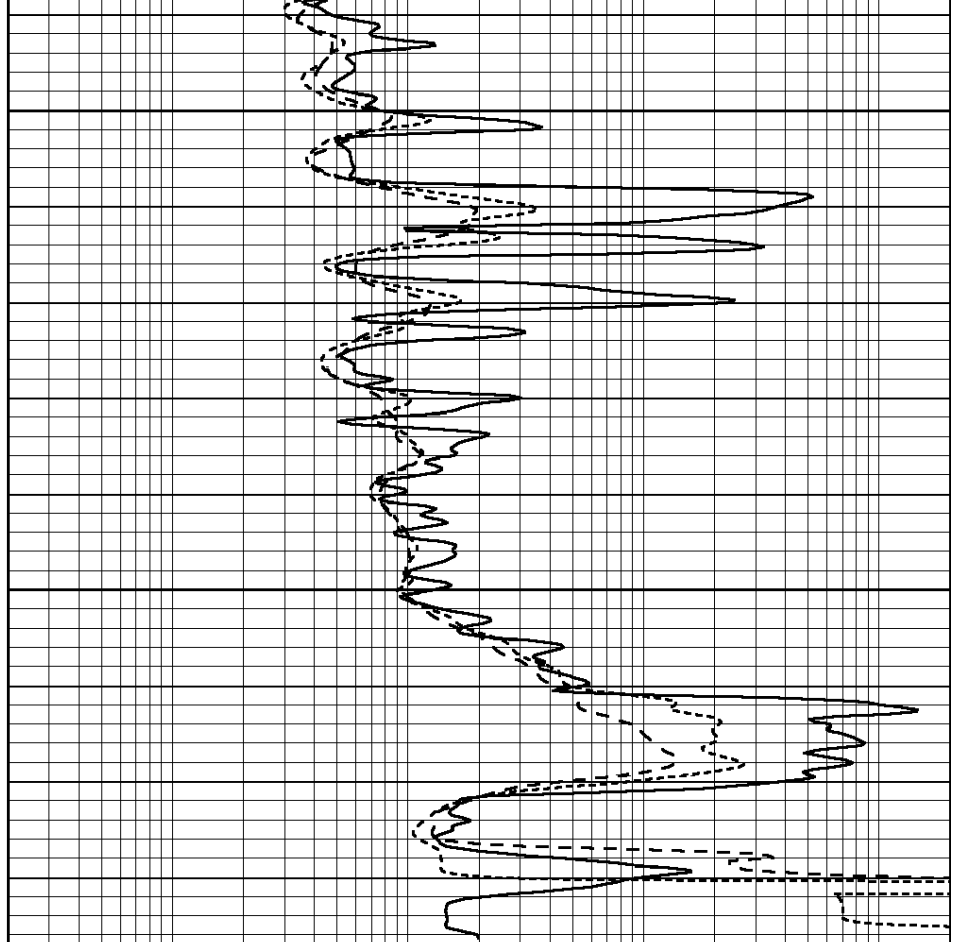

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: pe2.db
 Dataset Pathname: pass2
 Dataset Creation: Mon Aug 21 11:58:02 2017 by Log Open-Cased 090629

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG
 Surface Cal Performed: Mon Aug 21 11:58:18 2017
 Downhole Cal Performed: Mon Aug 21 11:58:21 2017
 After Survey Verification Performed: Mon Aug 21 11:58:23 2017

Surface Calibration

Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-12.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration

Readings References Results

	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification								
Readings			Targets			Results		
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report								
Serial: 002 Model: PRB								

Master Calibration			Performed Mon Aug 21 11:56:41 2017					
	Background	Magnesium		Aluminum		Sandstone		
Window 1	833.6	7394.2		2287.3		8111.8		cps
Window 2	768.9	6322.3		1995.6		6800.0		cps
Window 3	621.5	3261.9		1186.4		3380.9		cps
Window 4	184.2	185.7		184.9		184.8		cps
Long Space	0.0	5553.4		1226.6		6031.1		cps
Short Space	1.2	1307.5		903.9		1387.7		cps
Rho		1.7100		2.5900		1.3800		g/cc
Pe		0.0000		2.5700		1.5500		
Rib Angle	: 46.3	Rib Slope	: 1.045	Density/Spine Ratio		: 0.566		
Spine Angle	: 76.3	Spine Slope	: 4.090	Spine Intercept		: -20.7		

Before Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc
Measured Correction		0.0000		0.0000		0.0000		g/cc
Measured Pe				0.0000		0.0000		

After Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc
Measured Correction		0.0000		0.0000		0.0000		g/cc
Measured Pe				0.0000		0.0000		

Compensated Neutron Calibration Report

Serial Number: 6I
Tool Model: G

CALIBRATION

Detector	Readings	Target	Normalization
Short Space	1.00 cps	1.00 cps	1.0000
Long Space	1.00 cps	1.00 cps	1.0000

PRE-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	
3)	Short Space	cps		
	Long Space	cps	pu	

POST-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	pu
3)	Short Space	cps		
	Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: GR6
Tool Model: OPEN
Performed: Mon Aug 21 11:59:01 2017

Calibrator Value: 150.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 276.0 cps

Sensitivity: 0.5500 GAPI/cps