

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-171-20610-00-00
Spot: SENWNW Sec/Twnshp/Rge: 25-17S-31W
1043 feet from N Section Line, 1146 feet from W Section Line
Lease Name: RODENBERG Well #: 1
County: SCOTT Total Vertical Depth: 4625 feet

Operator License No.: 4767
Op Name: RITCHIE EXPLORATION, INC.
Address: BOX 783188 8100 E 22ND ST. N. #700
WICHITA, KS 67278

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	238		

150.31

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 03/19/2006 7:00 AM
Plug Co. License No.: 5822 Plug Co. Name: VAL ENERGY, INC.
Proposal Rcvd. from: RICK Company: VAL ENERGY, INC. Phone: (316) 263-6688

Proposed Plugging Method: 1ST PLUG AT 2350' WITH 50 SX CMT. 2ND PLUG AT 1500' WITH 80 SX CMT. 3RD PLUG AT 600' WITH 50 SX CMT. 4TH PLUG AT 270' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: NONE
Date/Time Plugging Completed: 03/19/2006 9:30 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

1ST PLUG AT 2350' WITH 50 SX CMT. 2ND PLUG AT 1500' WITH 80 SX CMT. 3RD PLUG AT 600' WITH 50 SX CMT. 4TH PLUG AT 270' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.


Perfs:

INVOICED
3-29-06
2006010301

Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

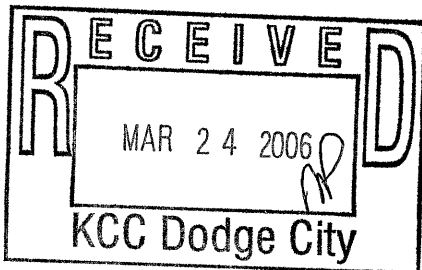

Signed Eric MacLaren (TECHNICIAN)

RECEIVED
MAR 29 2006
KCC WICHITA

Form 1P-23
[Signature]
PCT