

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging of formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Sheridan

County. Sec. 35 Twp. 7S Rge. 26 (E) W (W)

Location as "NE1/4NW1/4SW1/4" or footage from lines SW1/4 SW1/4 SE1/4

Lease Owner Continental Oil Company

Lease Name C. A. Croffoot Well No.

Office Address P. O. Box 1267, Ponca City, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed Feb. 14 19 44

Application for plugging filed May 22 19 44

Application for plugging approved May 24 19 44


Plugging commenced May 24 19 44

Plugging completed May 24 19 44

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production No production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

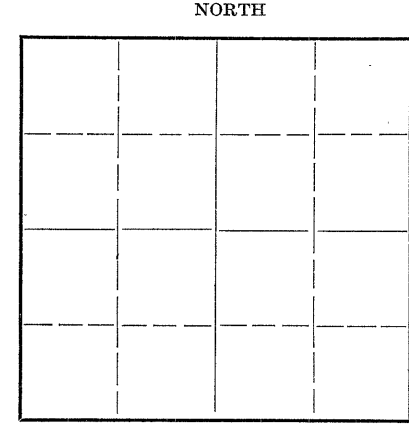

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. E. R. Petty, Great Bend, Kansas

Producing formation Kansas City Line Depth to top 3748' Bottom 3888' Total Depth of Well 3920 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

| Formation | Content | From | To | Size | Put In | Pulled Out |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8 5/8" | 240' | None |
| | | | | 5 1/2" | 3940' | 1853' 1" |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

The hole was filled with heavy mud to within 240' of top where a wood plug was set and cemented with 15 sacks of cement. The hole was then filled with heavy mud to within 25' of the top where a second wood plug was set and capped with 10 sacks of cement.

35 7 26W
118 11

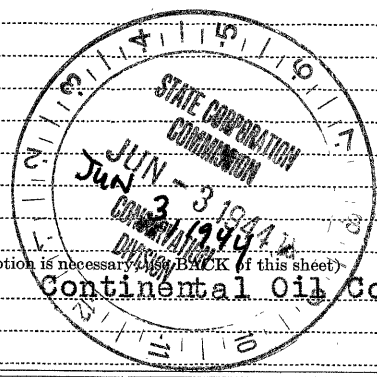

(If additional description is necessary, write BACK of this sheet)

Correspondence regarding this well should be addressed to Continental Oil Company
Address R. F. D. #4, Lyons, Kansas

STATE OF Kansas, COUNTY OF Rice, ss.
F. L. Dunn (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) F. L. Dunn

R.F.D. #4, Lyons, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 1st day of June, 19 44

Louis M. Line Notary Public.

My commission expires October 21, 1944