


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

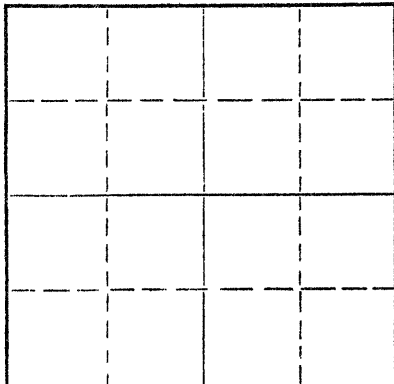

Locate well correctly on above  
Section Plat

Sheridan County. Sec. 2 Twp. 7S Rge. (E) 27 (W)  
Location as "NE/CNW/SW" or footage from lines NE SW NW  
Lease Owner. Abercrombie Drilling, Inc.  
Lease Name. SNIFFIN Well No. 1  
Office Address. 801 Union Center, Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed January 22, 19 72  
Application for plugging filed January 22, 19 72  
Application for plugging approved January 22, 19 72  
Plugging commenced January 22, 19 72  
Plugging completed January 22, 19 72  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Nichols  
Producing formation Depth to top Bottom Total Depth of Well 4082 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. The table is currently empty.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st plug was set at 1450' w/60 sx. cement.  
2nd plug was set at 280' w/25 sx. cement.  
Top plug was set at 40' w/10 sx. cement.  
Job was complete at 1:00 p.m. 1-22-72.

RECEIVED  
STATE CORPORATION COMMISSION  
JAN 25 1972  
CONSERVATION DIVISION  
Wichita, Kansas  
JAN 25 1972

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.  
Address 801 Union Center, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Jerry A. Langrehr (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jerry A. Langrehr  
801 Union Center, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of January, 1972

My commission expires February 10, 1975

Beverly Mann  
Notary Public

CONTRACTOR'S WELL LOG

OPERATOR:	Abercrombie Drilling, Inc.
CONTRACTOR:	Abercrombie Drilling, Inc.
WELL NAME:	SNIFFIN #1
LOCATION:	NE SW NW, Sec. 2-7S-27W Sheridan County, Kansas
GEOLOGIST:	Jack K. Wharton
SPUD DATE:	January 15, 1972
COMPLETION DATE:	January 22, 1972

0	225	Clay - Sand
225	1210	Shale
1210	1338	Sand
1338	1880	Shale & Sand
1880	1930	Shale
1930	2155	Sand
2155	2378	Shale
2378	2414	Anhydrite
2414	2573	Shale
2573	2845	Shale w/Lime Streaks
2845	3346	Lime & Shale
3346	3445	Lime
3445	3860	Lime and Shale
3860	4082	Lime
	4082	Rotary Total Depth

ELECTRIC LOG TOPS

Anhydrite	2379 (+ 298)
B/Anhydrite	2412 (+ 264)
Heebner	3823 (-1147)
Toronto	3846 (-1170)
Lansing	3865 (-1189)
B/K.C.	4074 (-1398)
ELTD	4079 (-1403)

ELEVATION

2676 K.B.  
2674 D.F.  
2668 G.L.

RECEIVED  
STATE CORPORATION COMMISSION  
JAN 25 1972  
CONSERVATION DIVISION  
Wichita, Kansas  
1972  
25  
16

STATE OF KANSAS        )  
                                  ) SS  
COUNTY OF SEDGWICK    )

Jerry A. Langrehr, President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the SNIFFIN #1, NE SW NW, Section 2-7S-27W, Sheridan County, Kansas.

ABERCROMBIE DRILLING, INC.

By: Jerry A. Langrehr  
Jerry A. Langrehr  
President

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 24th day of January, 1972.

Beverly Mann  
Beverly Mann, Notary Public

My Commission Expires:

February 10, 1975