

DUAL
INDUCTION
LOG


Company GORE OIL COMPANY		Company GORE OIL COMPANY	
Well BARC UNIT #1		Well BARC UNIT #1	
Field		Field	
County ROOKS		County ROOKS	
State KANSAS		State KANSAS	
Location: API #: 15-163-24372-0000		Other Services CDL/CNL MEL	
Permanent Datum SEC 10 TWP 9S RGE 19W		Elevation	
Log Measured From GROUND LEVEL Elevation 2037		K.B. 2042	
Drilling Measured From KELLY BUSHING 5' A.G.L.		D.F. 2040	
		G.L. 2037	
Date 10/5/18	Run Number ONE		
Depth Driller	3575		
Depth Logger	3575		
Bottom Logged Interval	3573		
Top Log Interval	00		
Casing Driller	8 5/8" @ 260		
Casing Logger	260		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2100 PPM	
Density / Viscosity	9.2/58		
pH / Fluid Loss	10.5/5.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.20 @ 80F		
Rmf @ Meas. Temp	.90 @ 80F		
Rmc @ Meas. Temp	1.44 @ 80F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.85 @ 112F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	112F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	CHUCK SCHMALTZ		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
PLAINVILLE, KS. - 4 NORTH TO RD. T - 7 1/2 WEST - SOUTH INTO

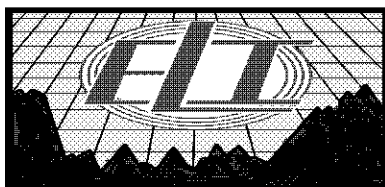


MAIN SECTION

Database File	3008ddn8.db
Dataset Pathname	pass3.1
Presentation Format	_dil
Dataset Creation	Fri Oct 05 09:50:43 2018
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	MEDIUM INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	DEEP INDUCTION (Ohm-m)	2000

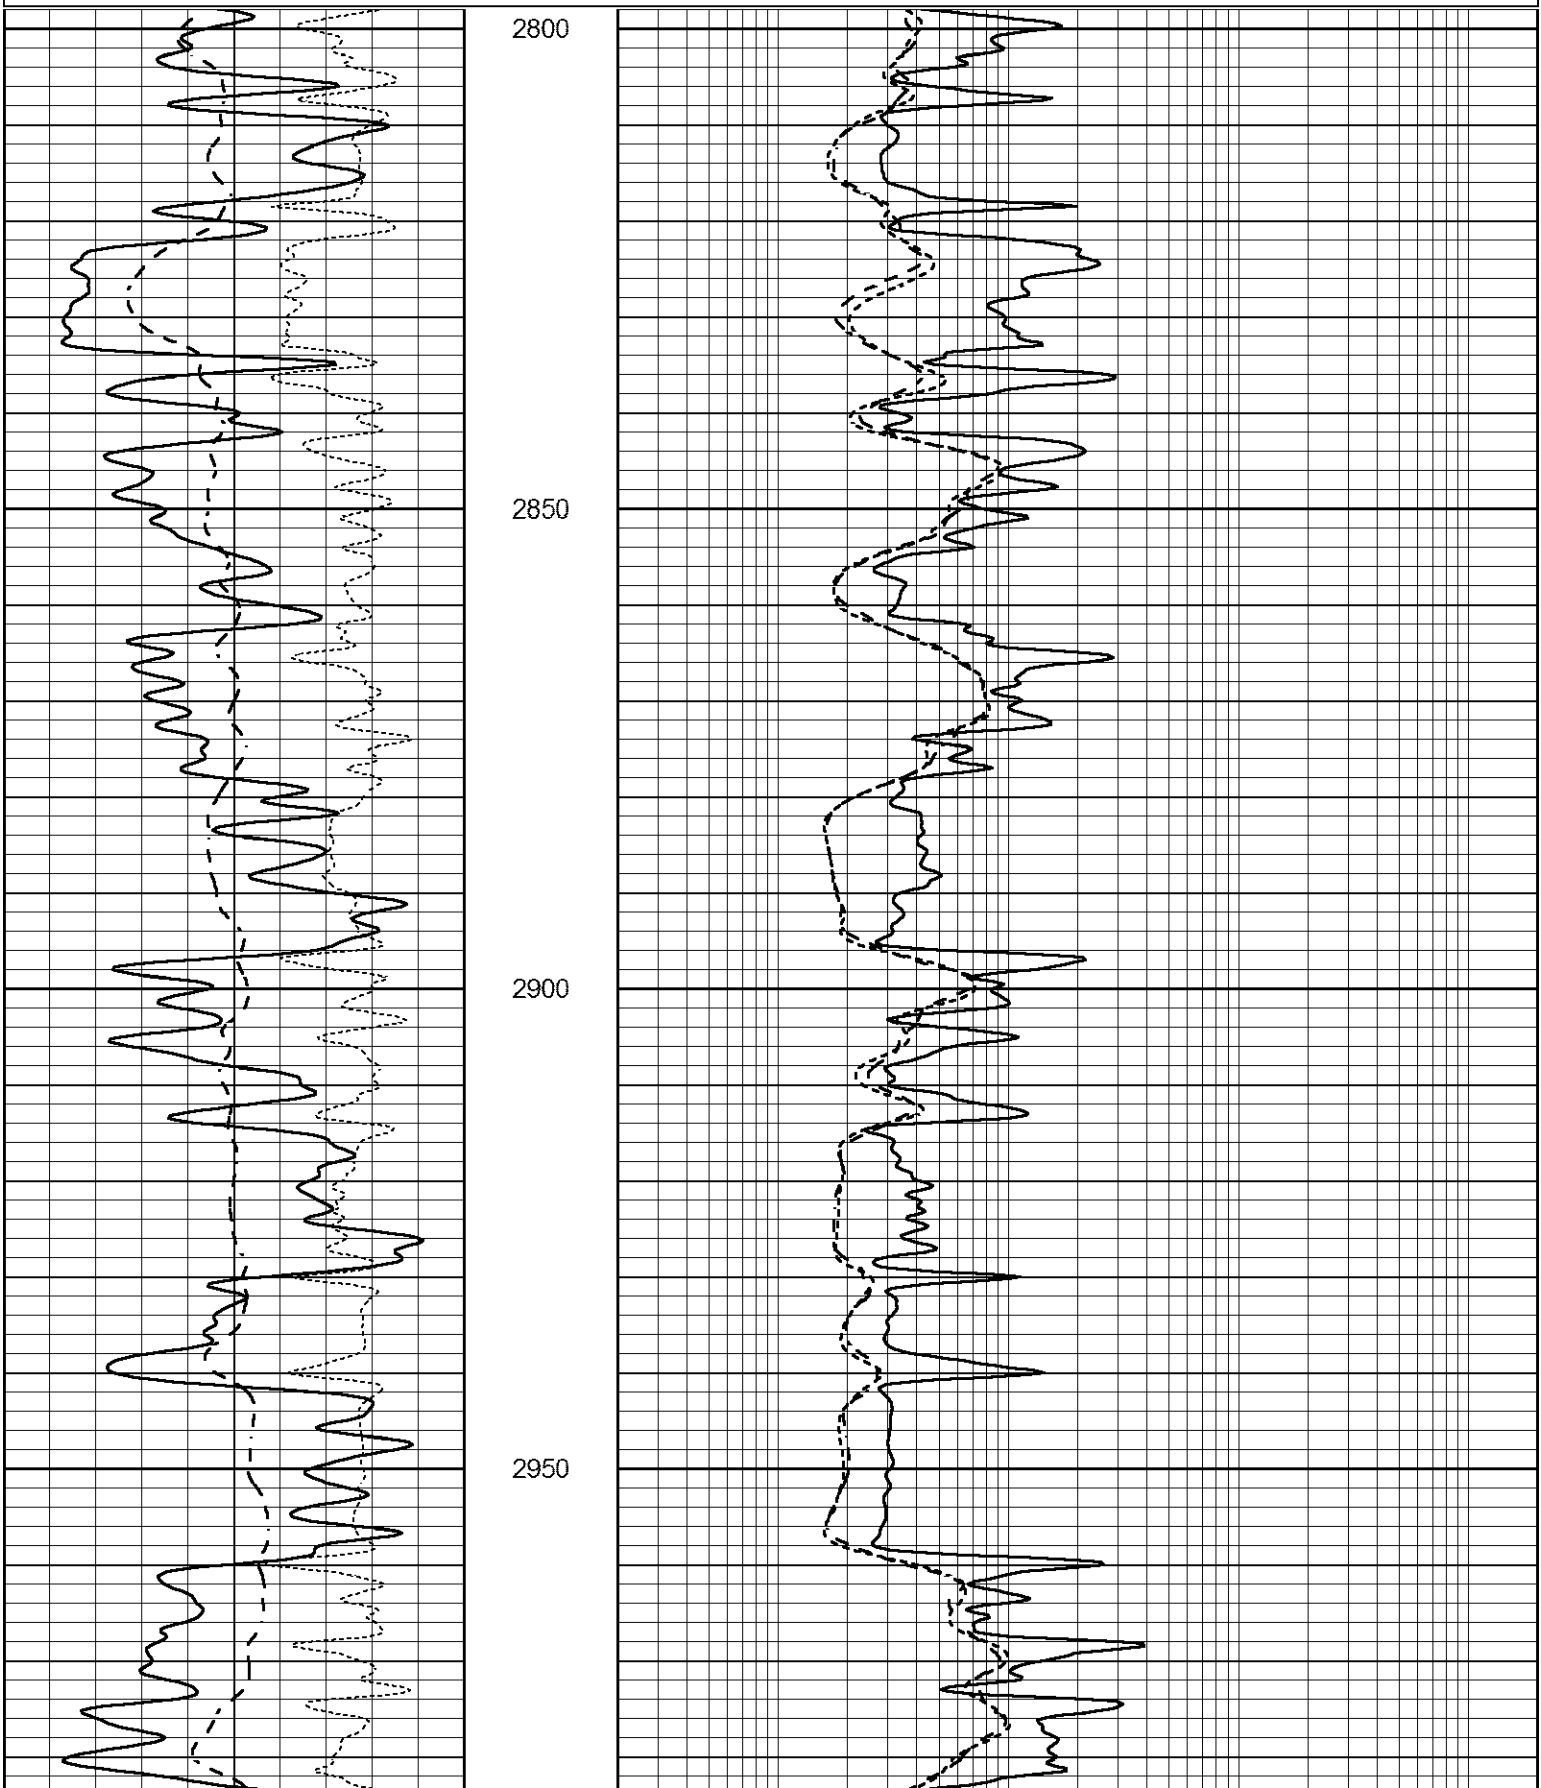

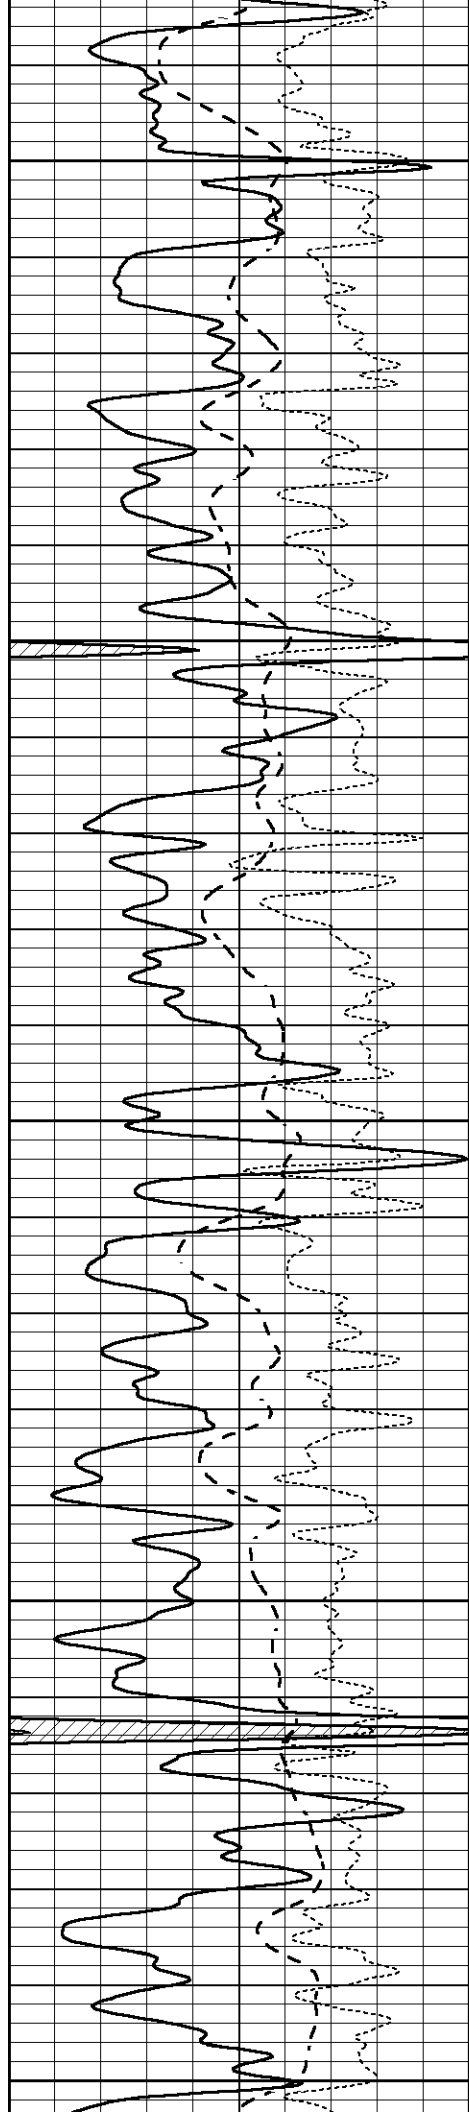


3000


3050

3100

3150

3200

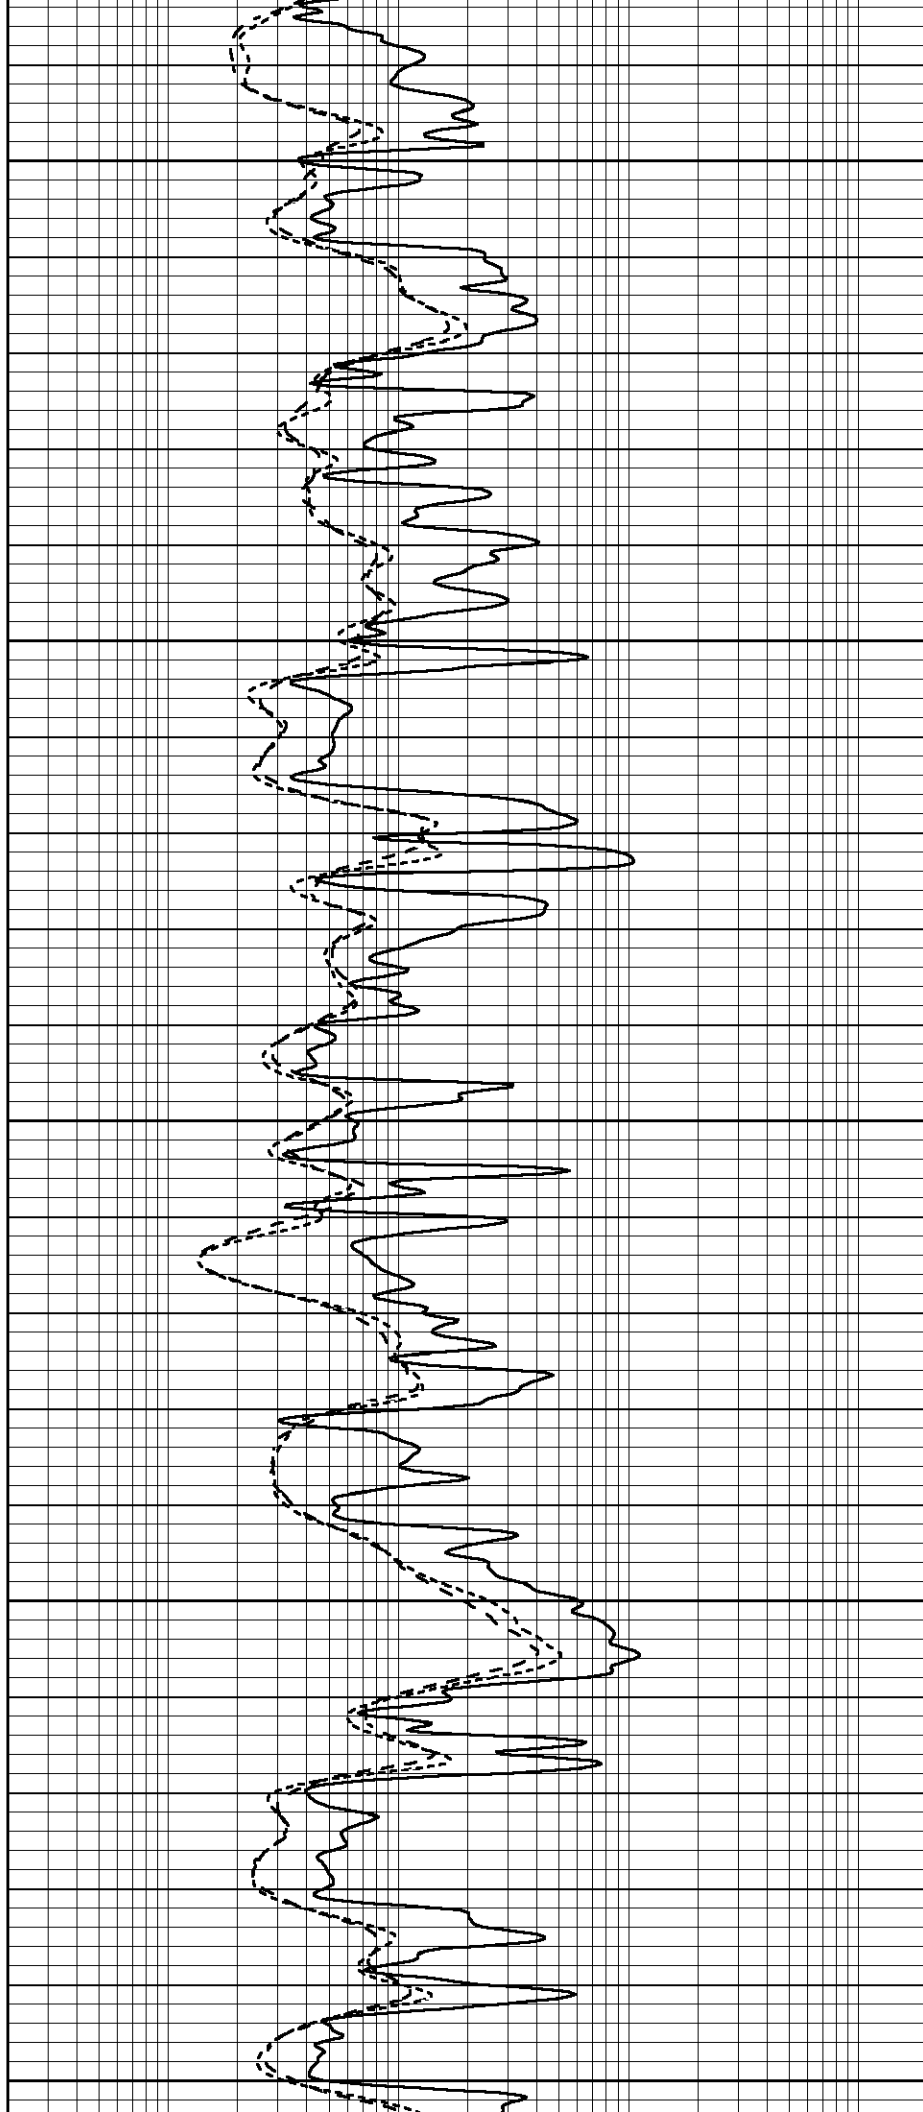

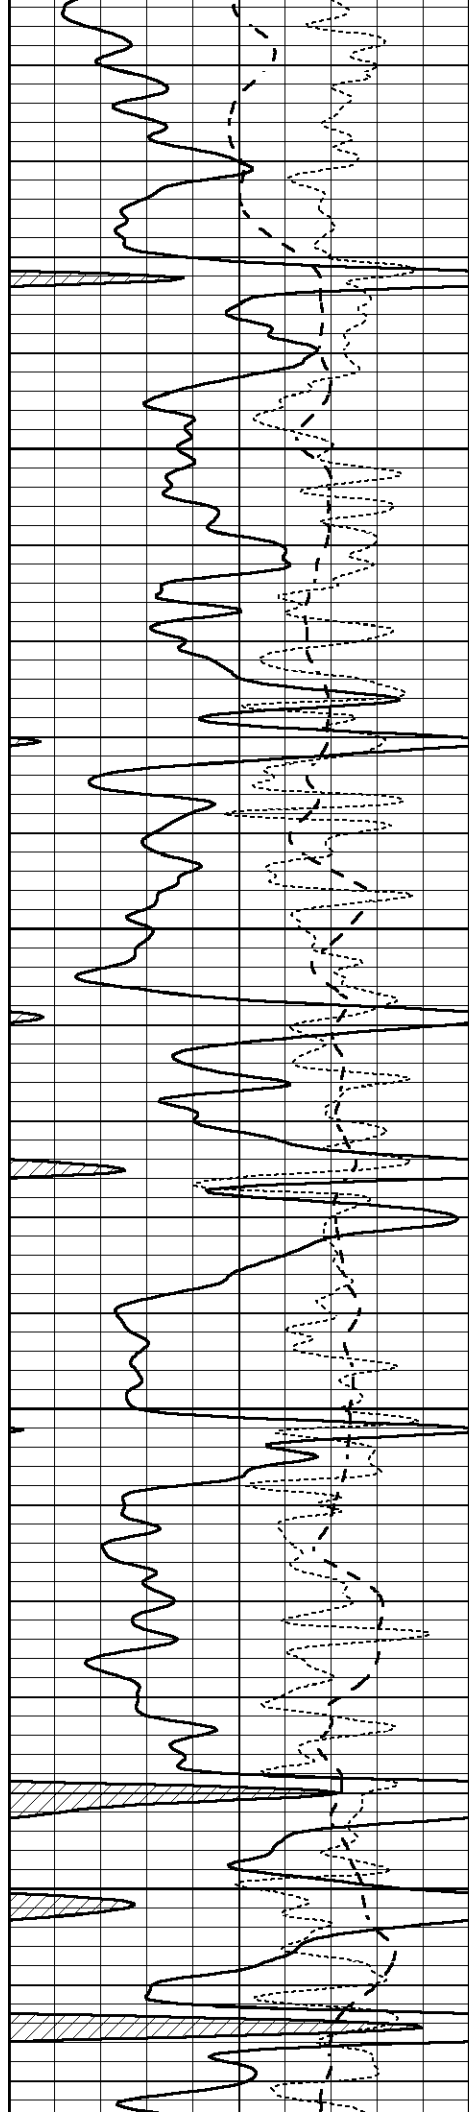



3250

3300

3350

3400

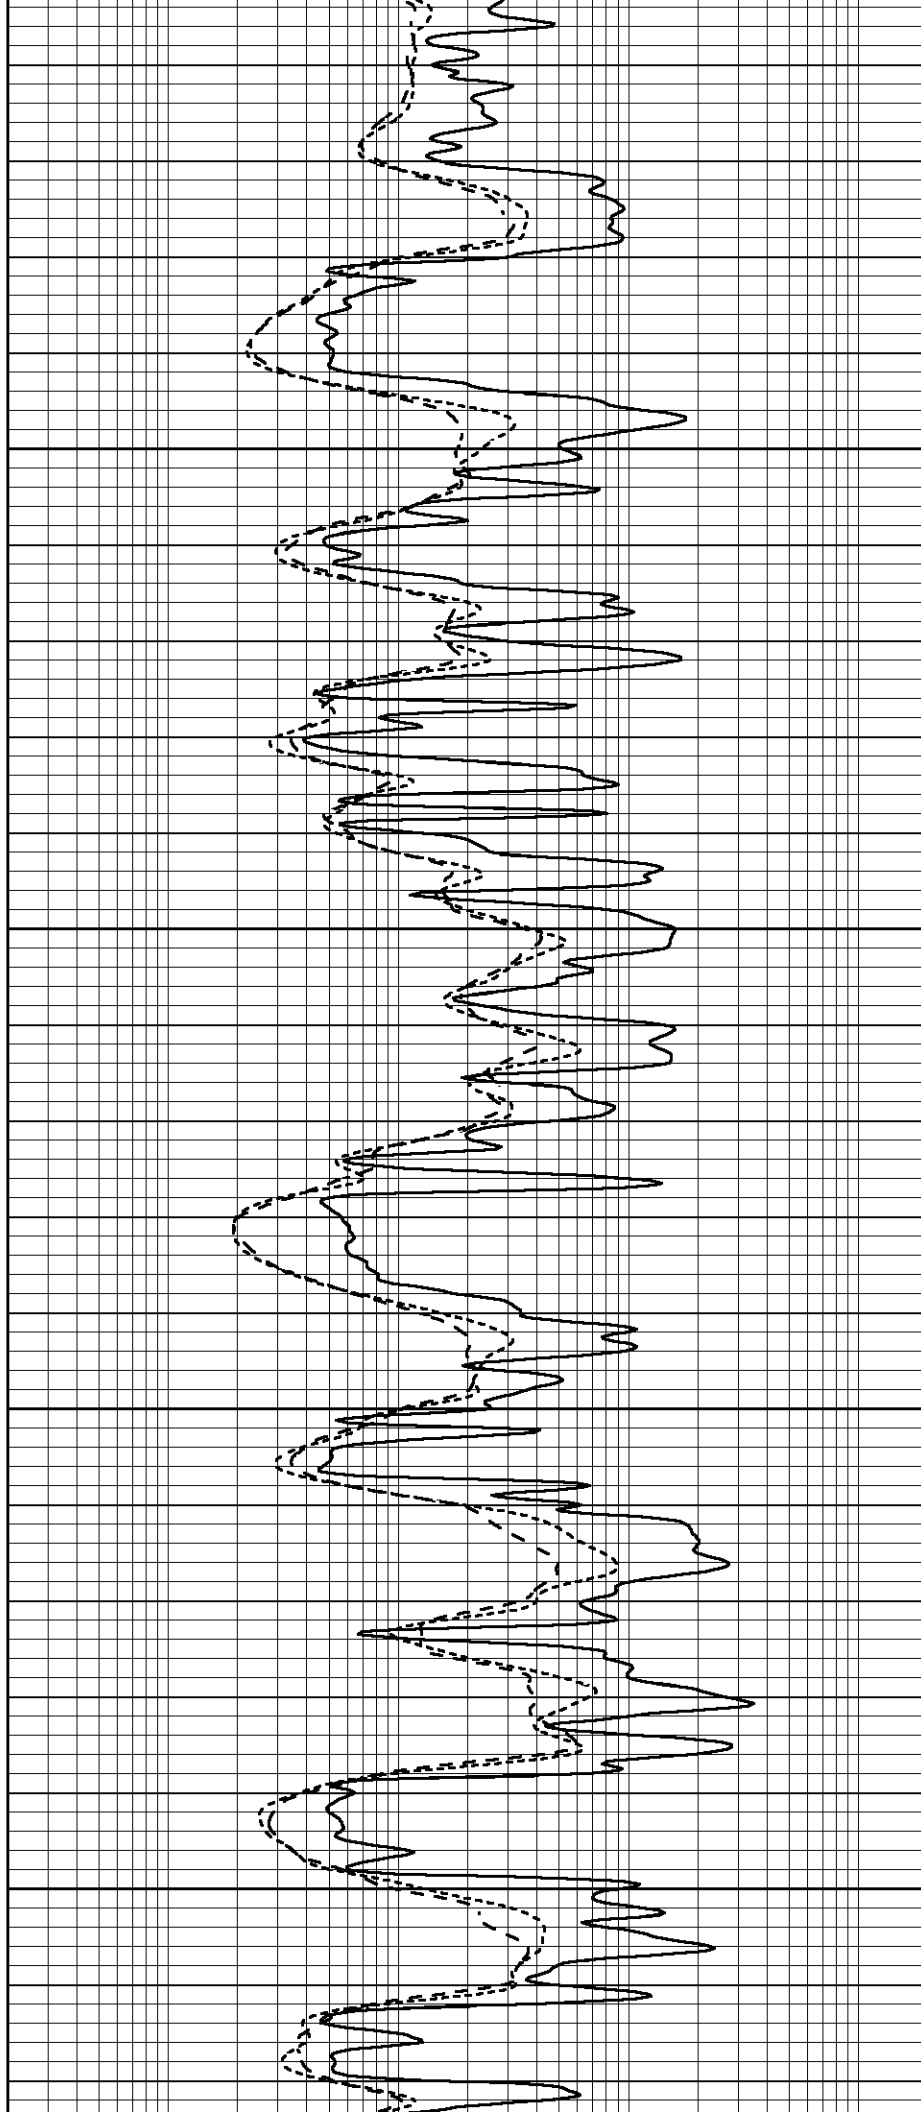

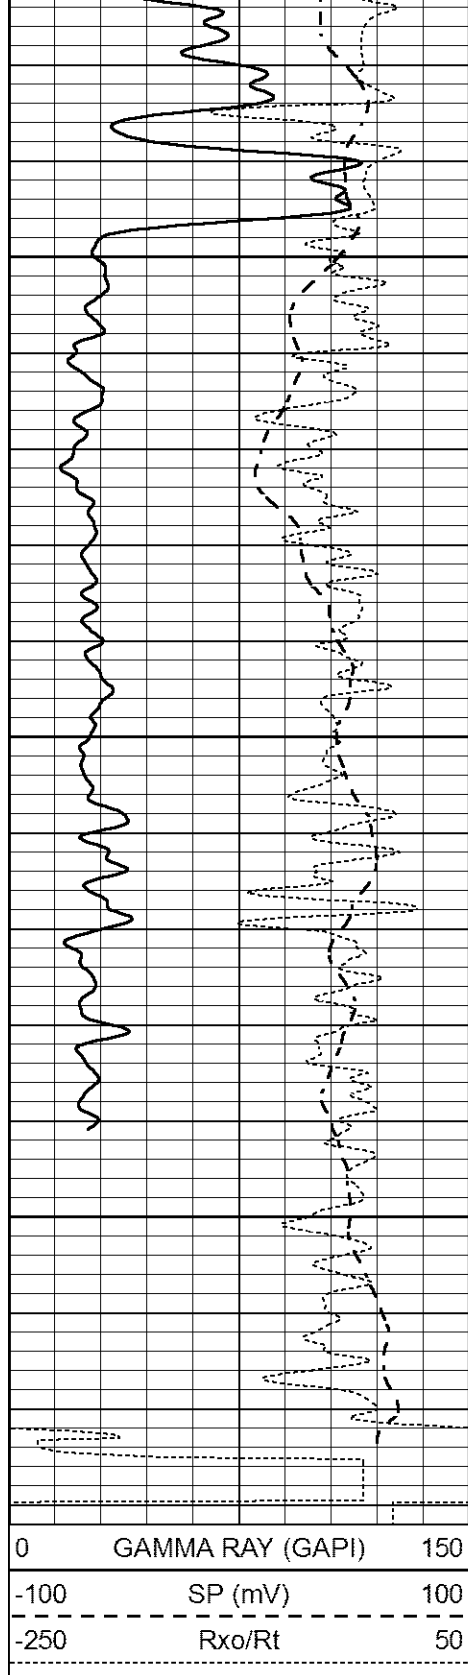

3450

3500

3550

