

COMPENSATED
DENSITY/NEUTRON
LOG


Company	GORE OIL COMPANY	
Well	BARC UNIT #1	
Field		
County	ROOKS	
State	KANSAS	
Location:	API # : 15-163-24372-0000	
	798' FNL & 2600' FWL	
Permanent Datum	GROUND LEVEL Elevation	2037
Log Measured From	KELLY BUSHING 5' A.G.L	
Drilling Measured From	KELLY BUSHING	
	SEC 10 TWP 9S RGE 19W	Elevation
		K.B. 2042
		D.F. 2040
		G.L. 2037
Date	10/5/18	
Run Number	ONE	
Depth Driller	3575	
Depth Logger	3575	
Bottom Logged Interval	3551	
Top Log Interval	2800	
Casing Driller	8 5/8" @ 260	
Casing Logger	260	
Bit Size	7 7/8	
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2100 PPM
Density / Viscosity	9.2/58	
pH / Fluid Loss	10.5/5.8	
Source of Sample	FLOWLINE	
Rm @ Meas. Temp	1.20 @ 80F	
Rmf @ Meas. Temp	.90 @ 80F	
Rmc @ Meas. Temp	1.44 @ 80F	
Source of Rmf / Rmc	MEASUREMENT	
Rm @ BHT	.85 @ 112F	
Time Circulation Stopped	2 HOURS	
Time Logger on Bottom	////	
Maximum Recorded Temperature	112F	
Equipment Number	3802	
Location	HAYS, KANSAS	
Recorded By	JASON CAPPELLUCCI	
Witnessed By	CHUCK SCHMALTZ	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
PLAINVILLE, KS. - 4 NORTH TO RD. T - 7 1/2 WEST - SOUTH INTO

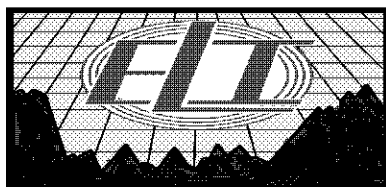



MAIN SECTION

Database File	3008ddn8.db
Dataset Pathname	pass3.1
Presentation Format	_den_neu
Dataset Creation	Fri Oct 05 09:50:43 2018
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	AVTX	30	COMPENSATED DENSITY (pu)	-10
0	MINMK	20	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
6	CALIPER (in)	16	BVTX		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3) 10			

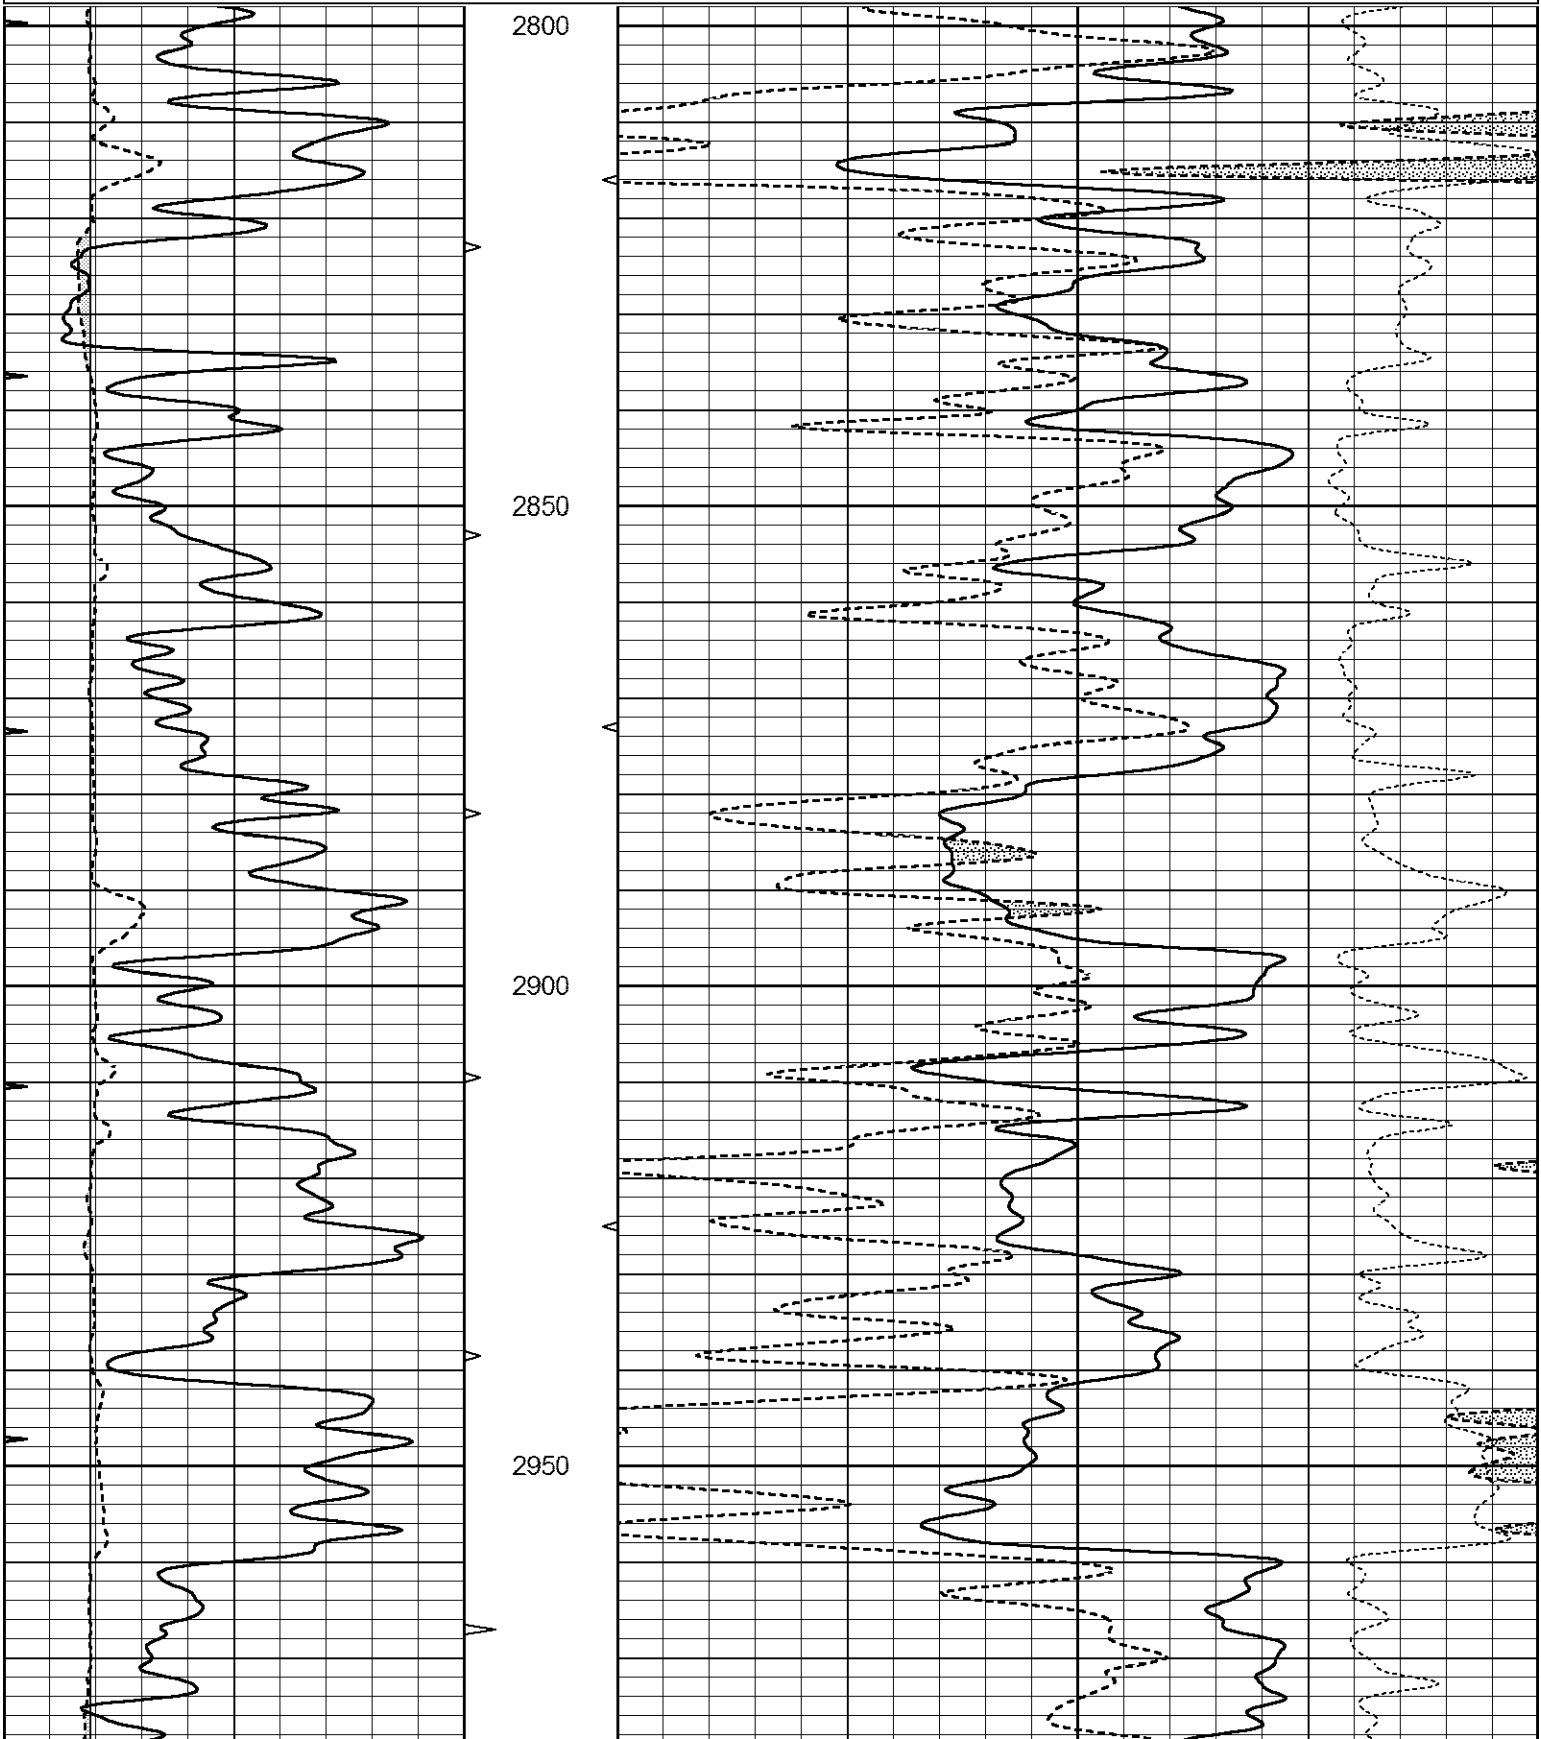

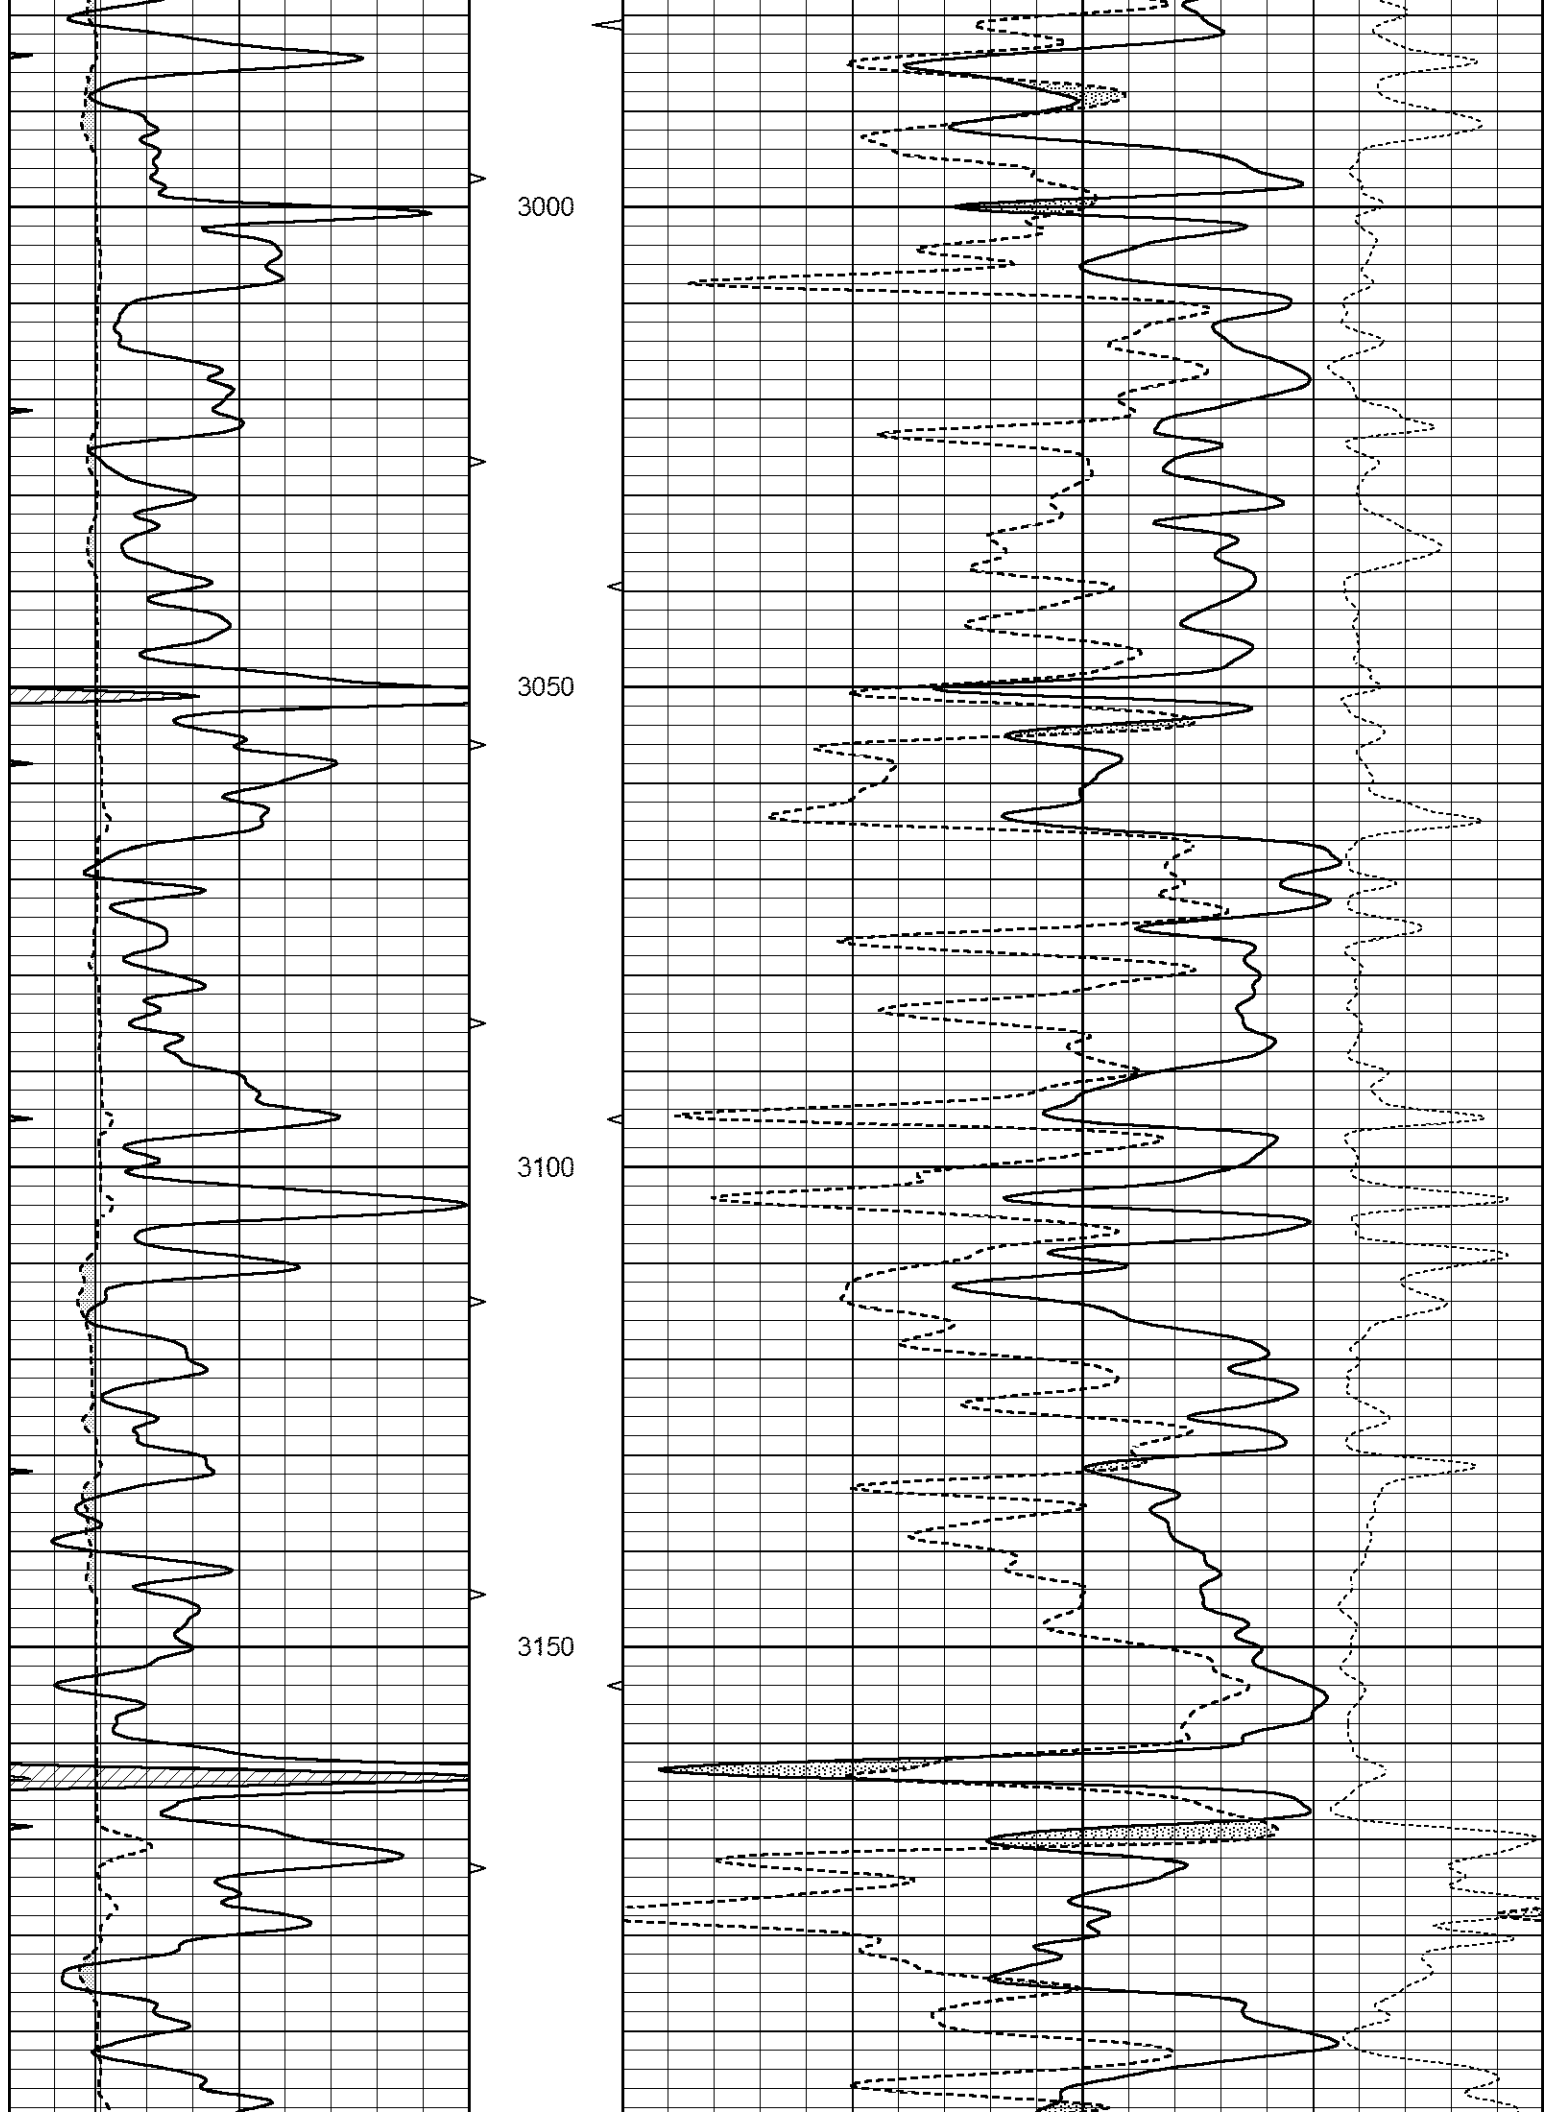

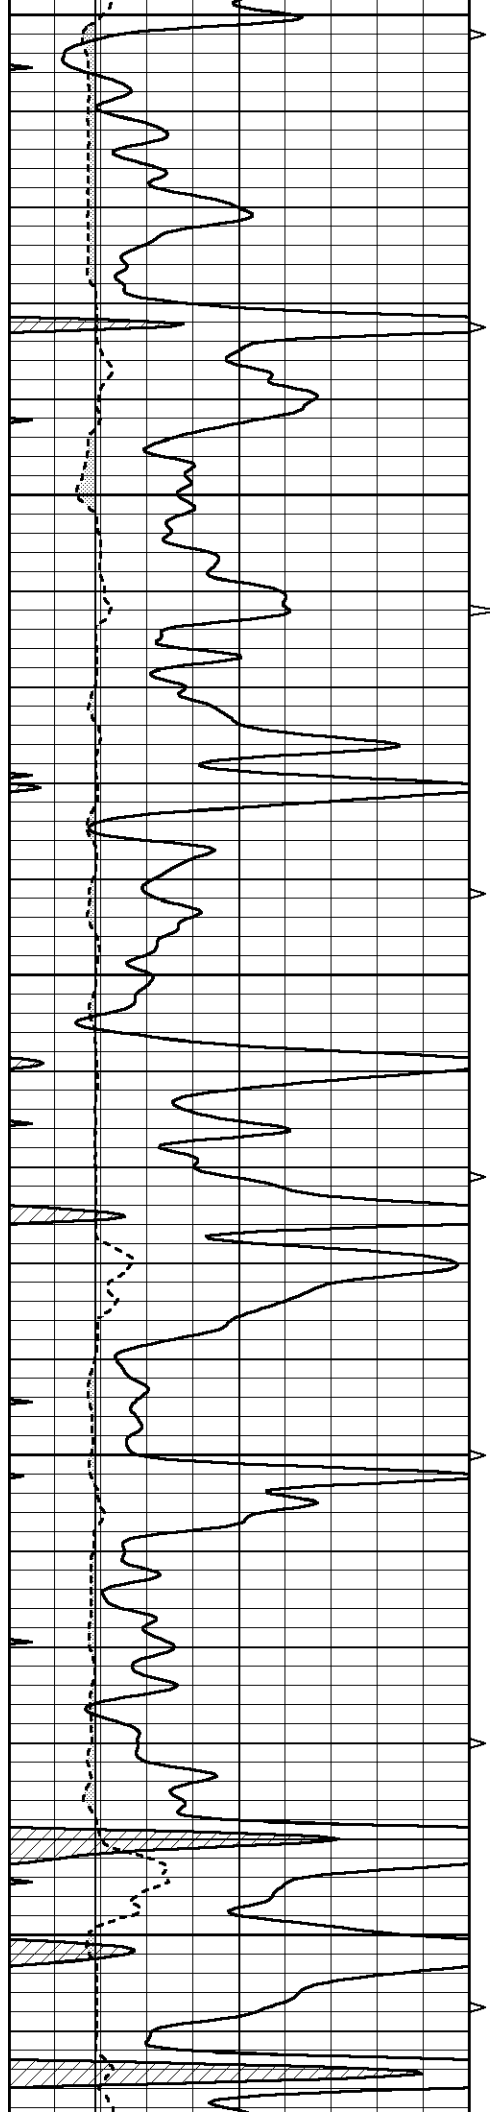

3200

3250

3300

3350

3400

