



MICRO LOG

Company	PROLIFIC RESOURCES	Company	PROLIFIC RESOURCES
Well	ROESLER #6	Well	ROESLER #6
Field	UNNAMED	Field	UNNAMED
County	PAWNEE	County	PAWNEE
State	KANSAS	State	KANSAS
Location:	AP1 # : 15-145-21835-00-00		Other Services
	1215' FSL & 1365' FWL		CDL/CNL/DIL
Permanent Datum	SEC 2	TWP 22S	RGE 18W
Log Measured From	GROUND LEVEL		Elevation
Drilling Measured From	KELLY BUSHING 7' A.G.L.		K.B. 2049
	KELLY BUSHING		D.F. 2047
			G.L. 2042
Date	10/01/18		
Run Number	TWO		
Depth Driller	4305		
Depth Logger	4306		
Bottom Logged Interval	4305		
Top Log Interval	3400		
Casing Driller	8 5/8" @ 1107		
Casing Logger	1107		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.3/60		
pH / Fluid Loss	9.5/10.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.5@68		
Rmt @ Meas. Temp	.36@68		
Rmc @ Meas. Temp	.60@68		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.29@119		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	119F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	JEFFREY A. BURK		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS


FROM FORT LARNED GO WEST 1/2 MILE TO 180 RD.
SOUTH TO L RD., 3 WEST TO 210 RD
1/2 NORTH, EAST INTO.

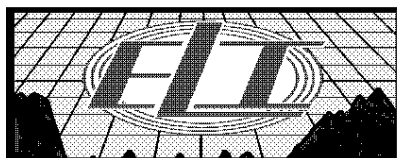


MAIN PASS

Database File: 2918ddn.db
 Dataset Pathname: pass5MIC
 Presentation Format: _micro
 Dataset Creation: Mon Oct 01 16:08:32 2018
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

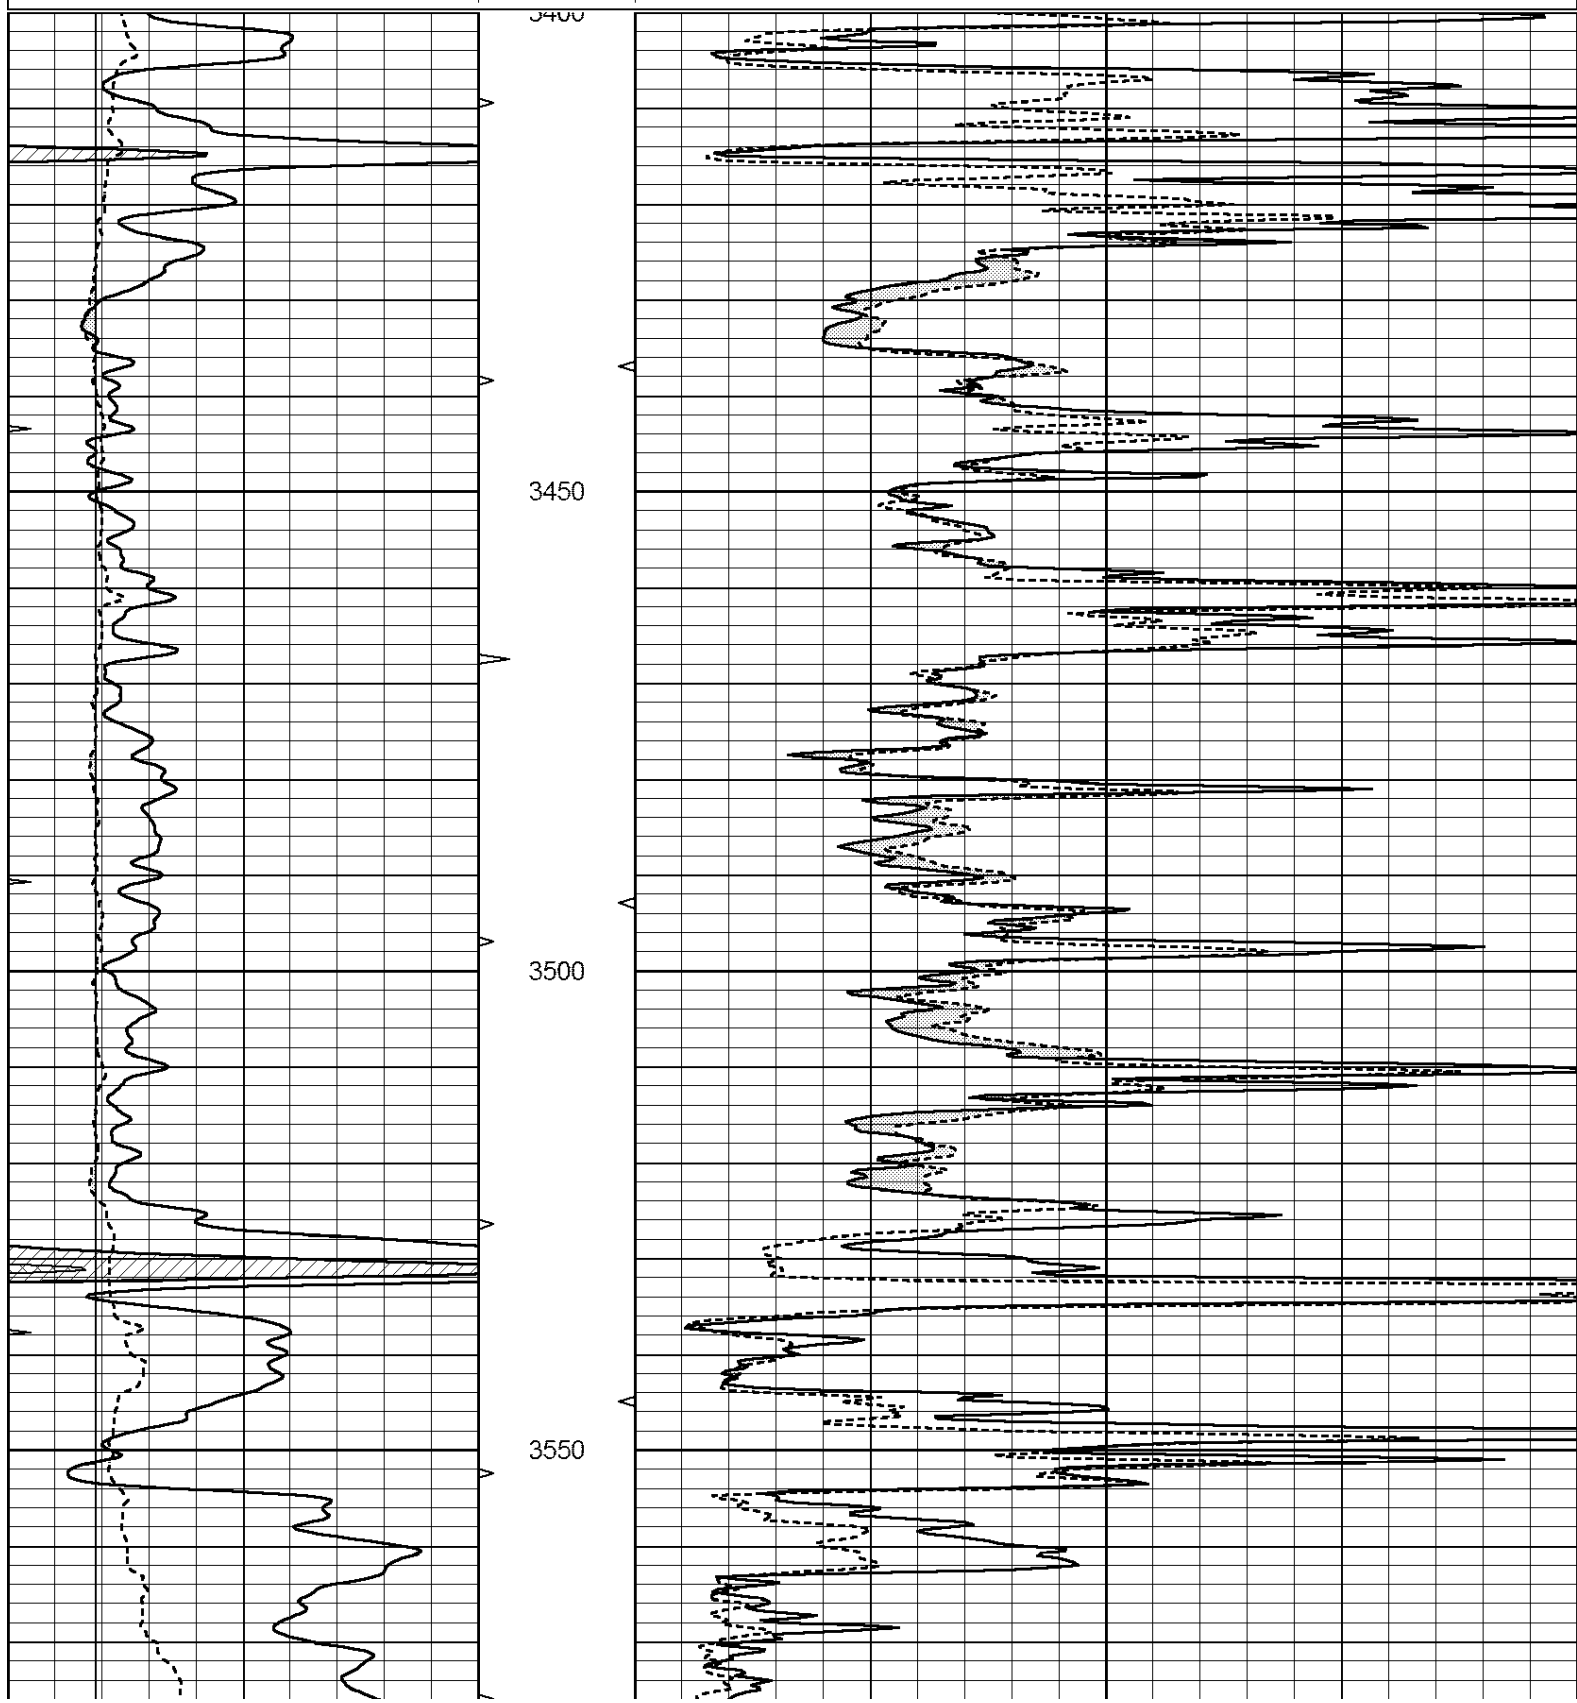

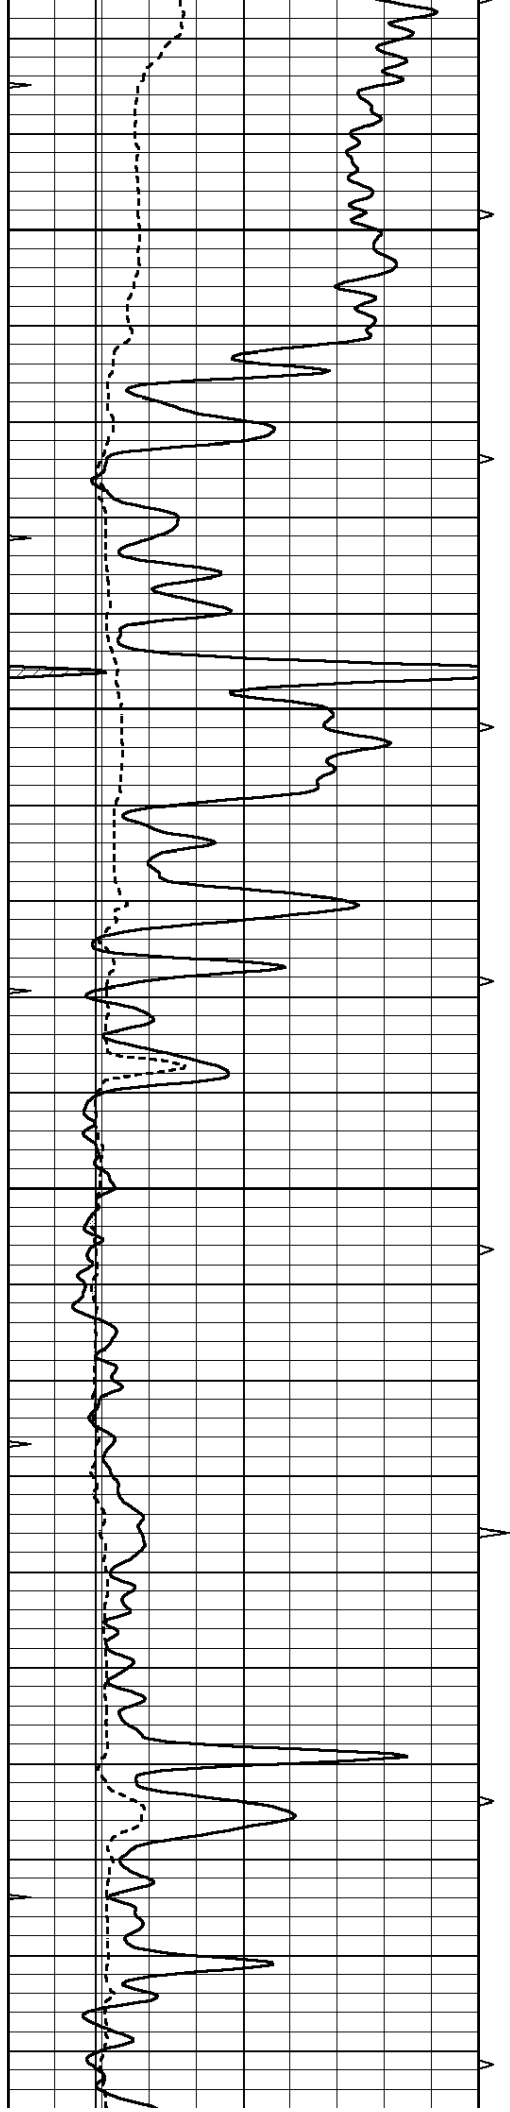




3600


3650



3700

3750

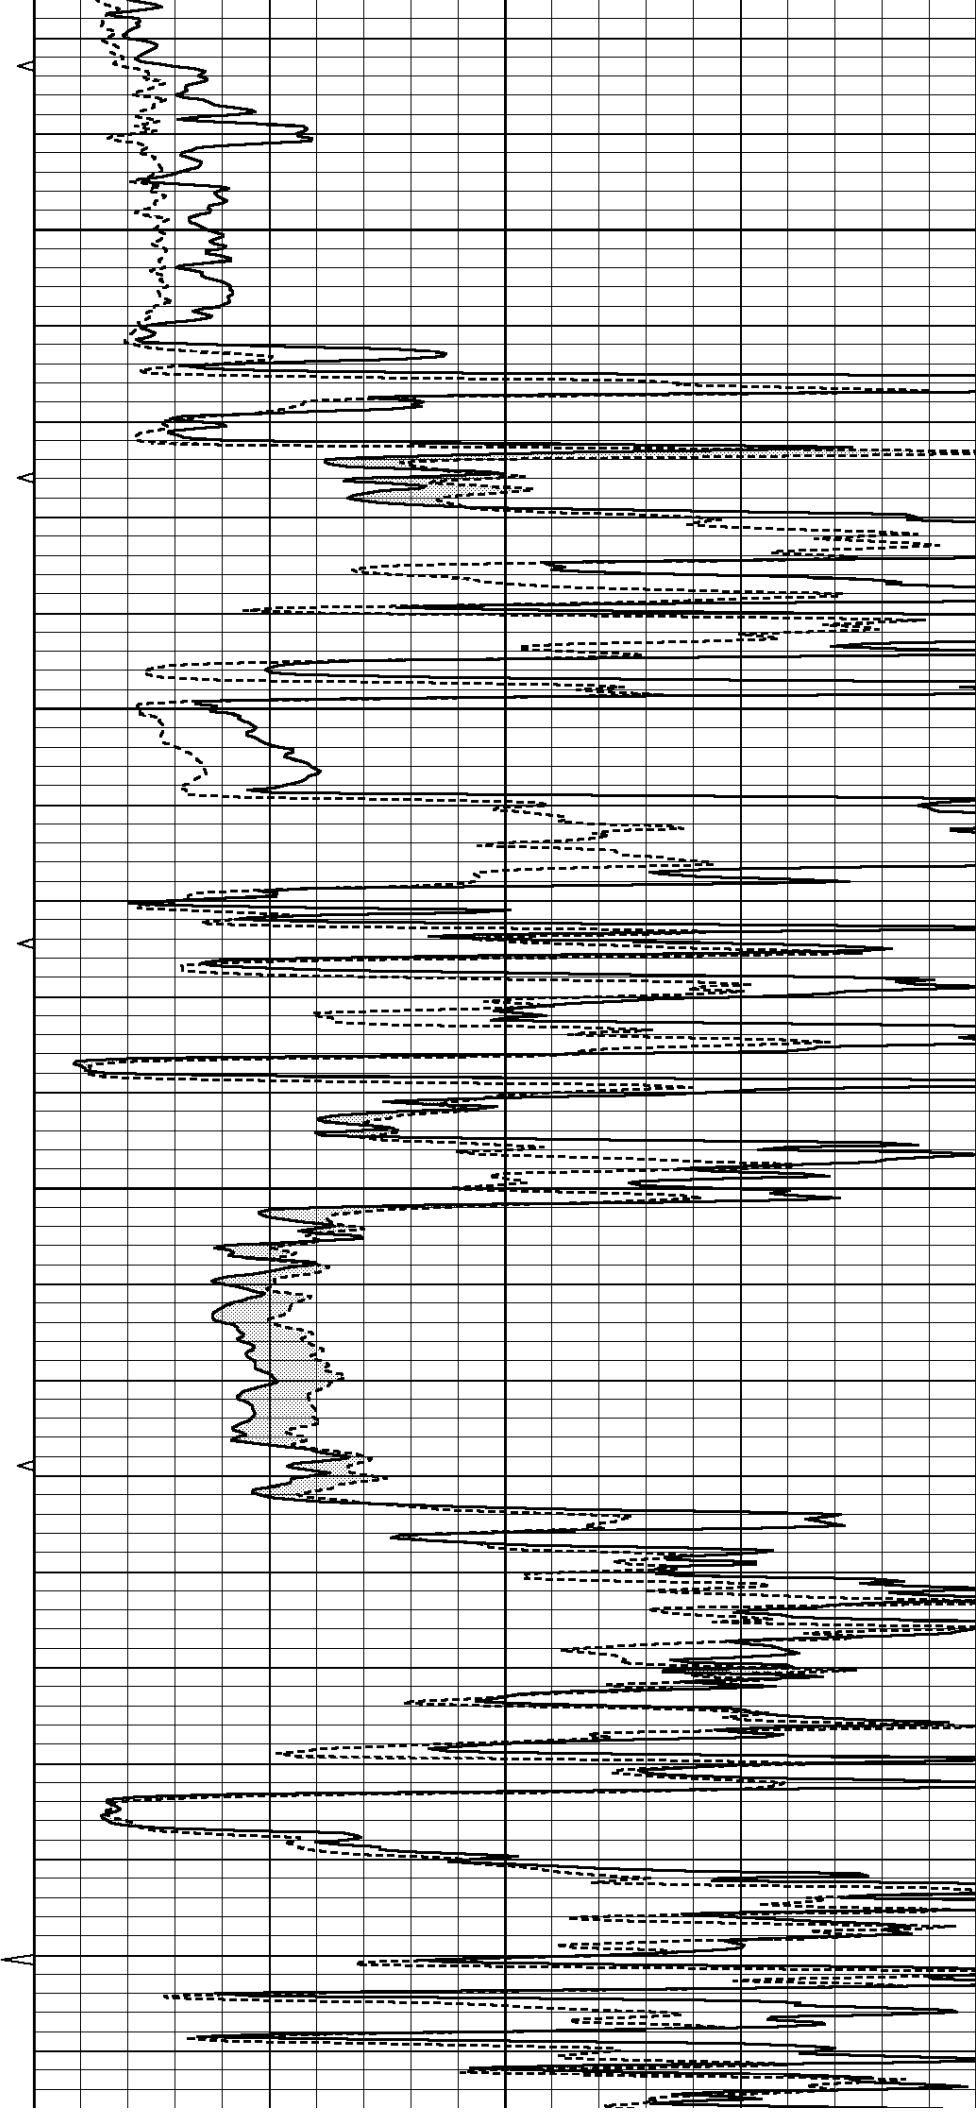

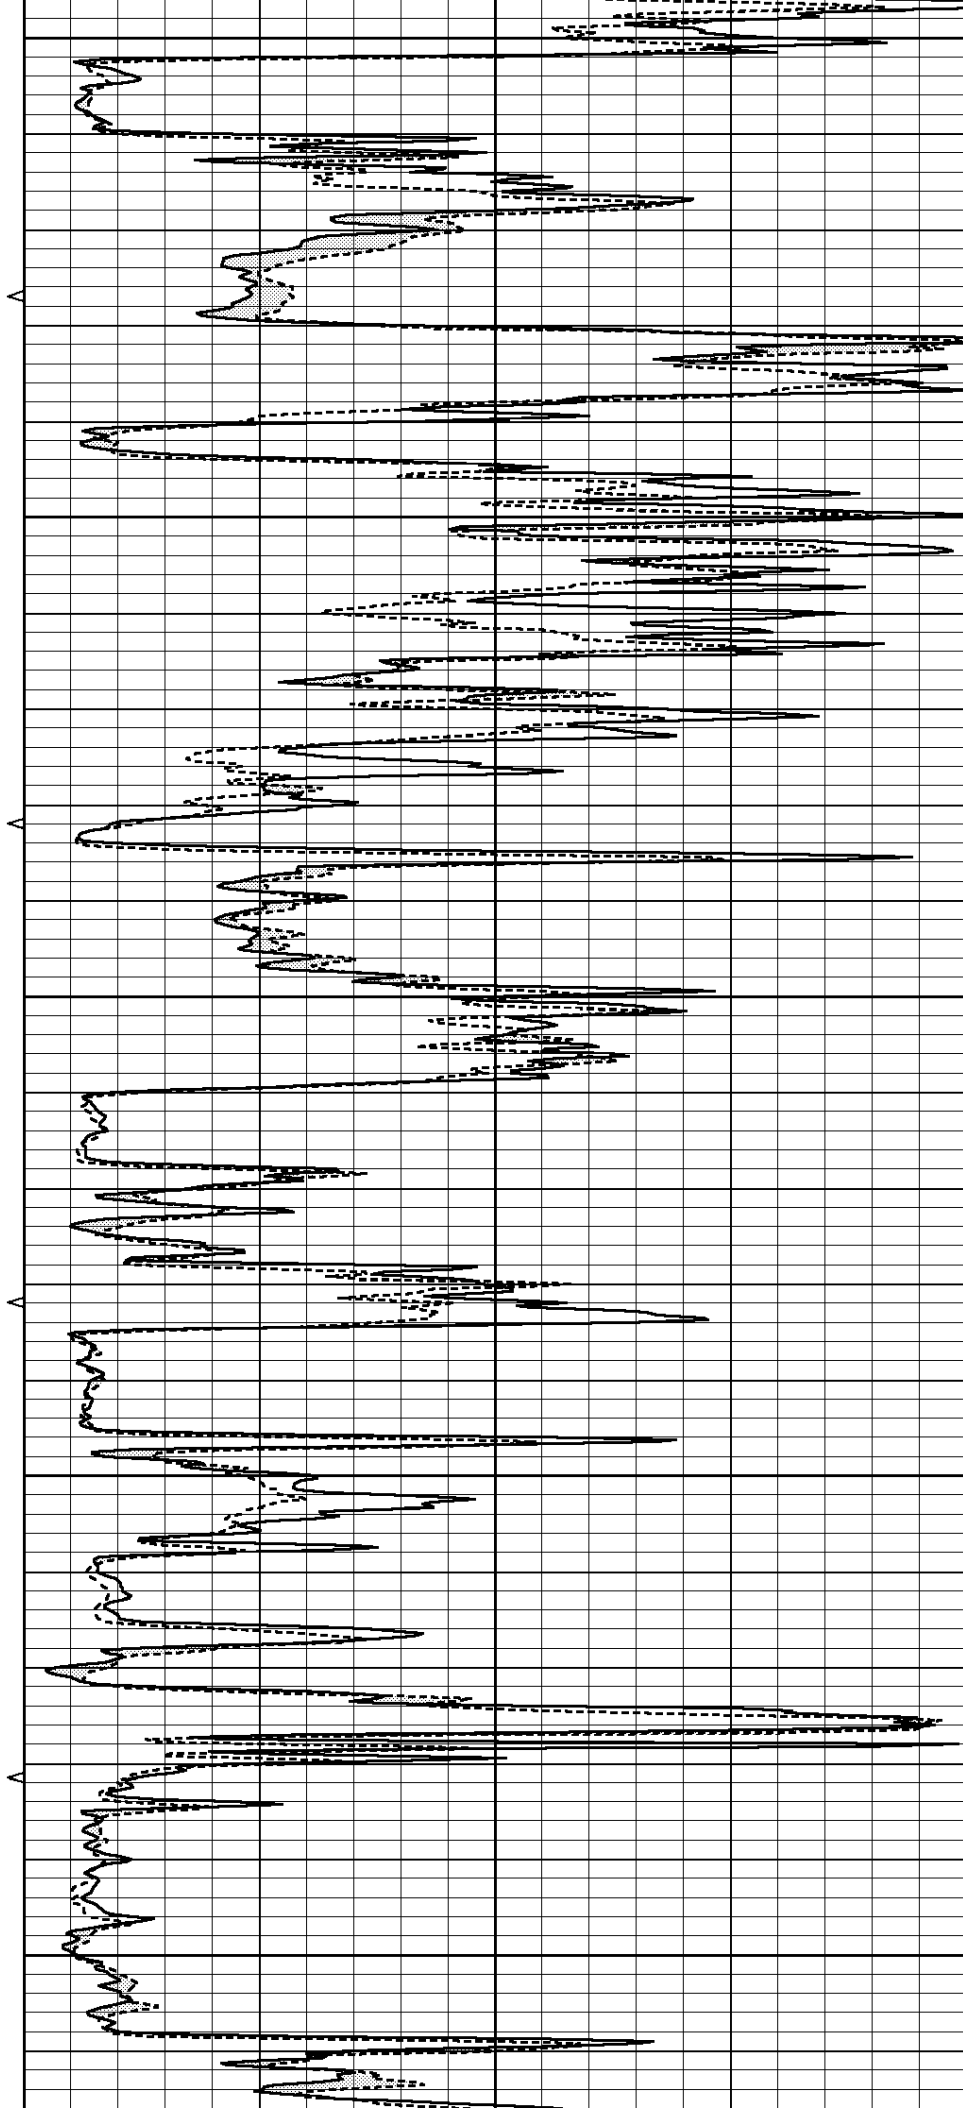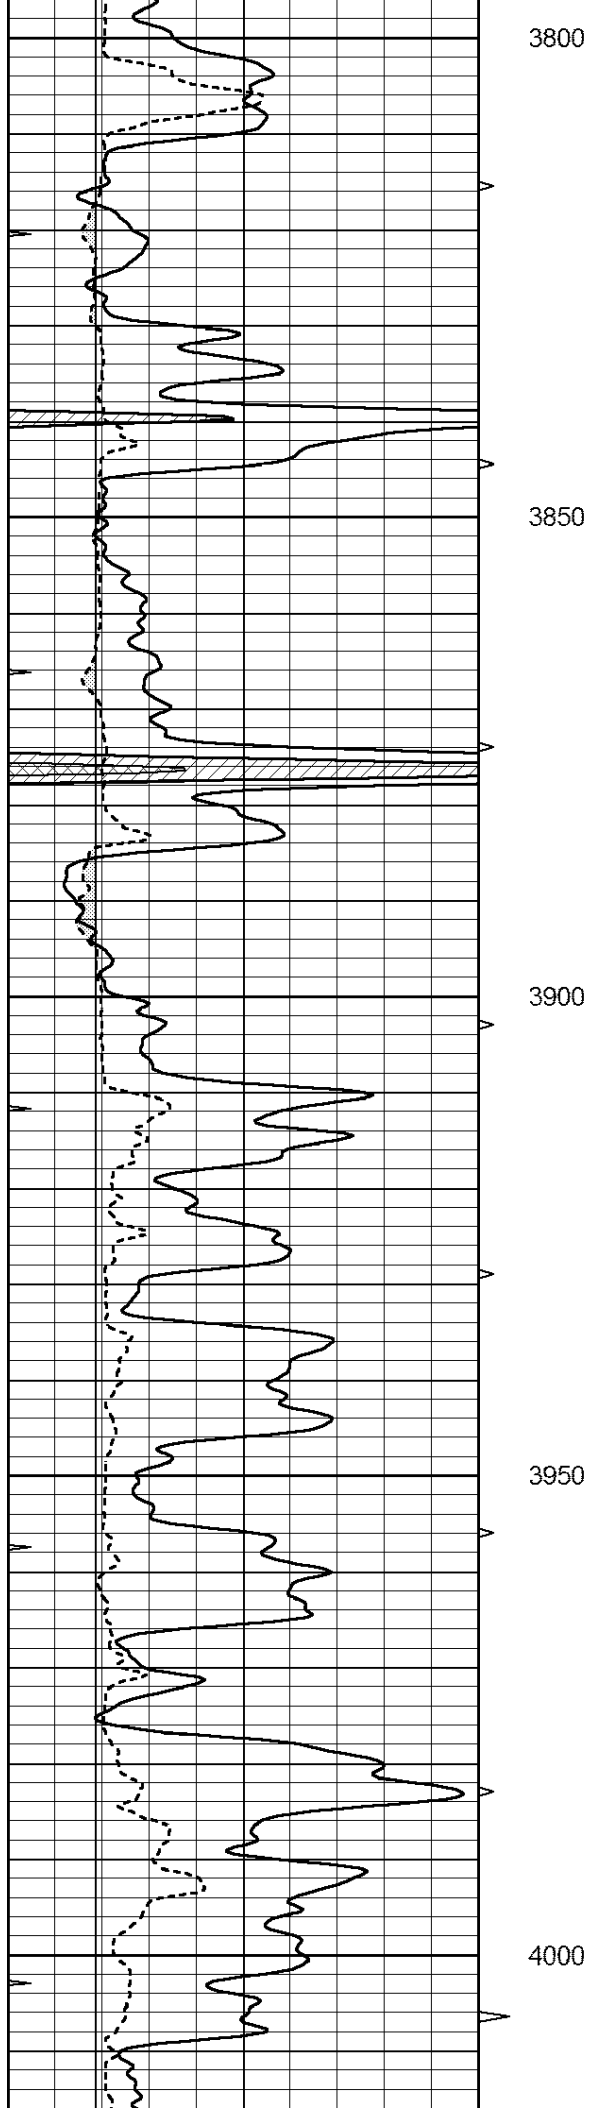

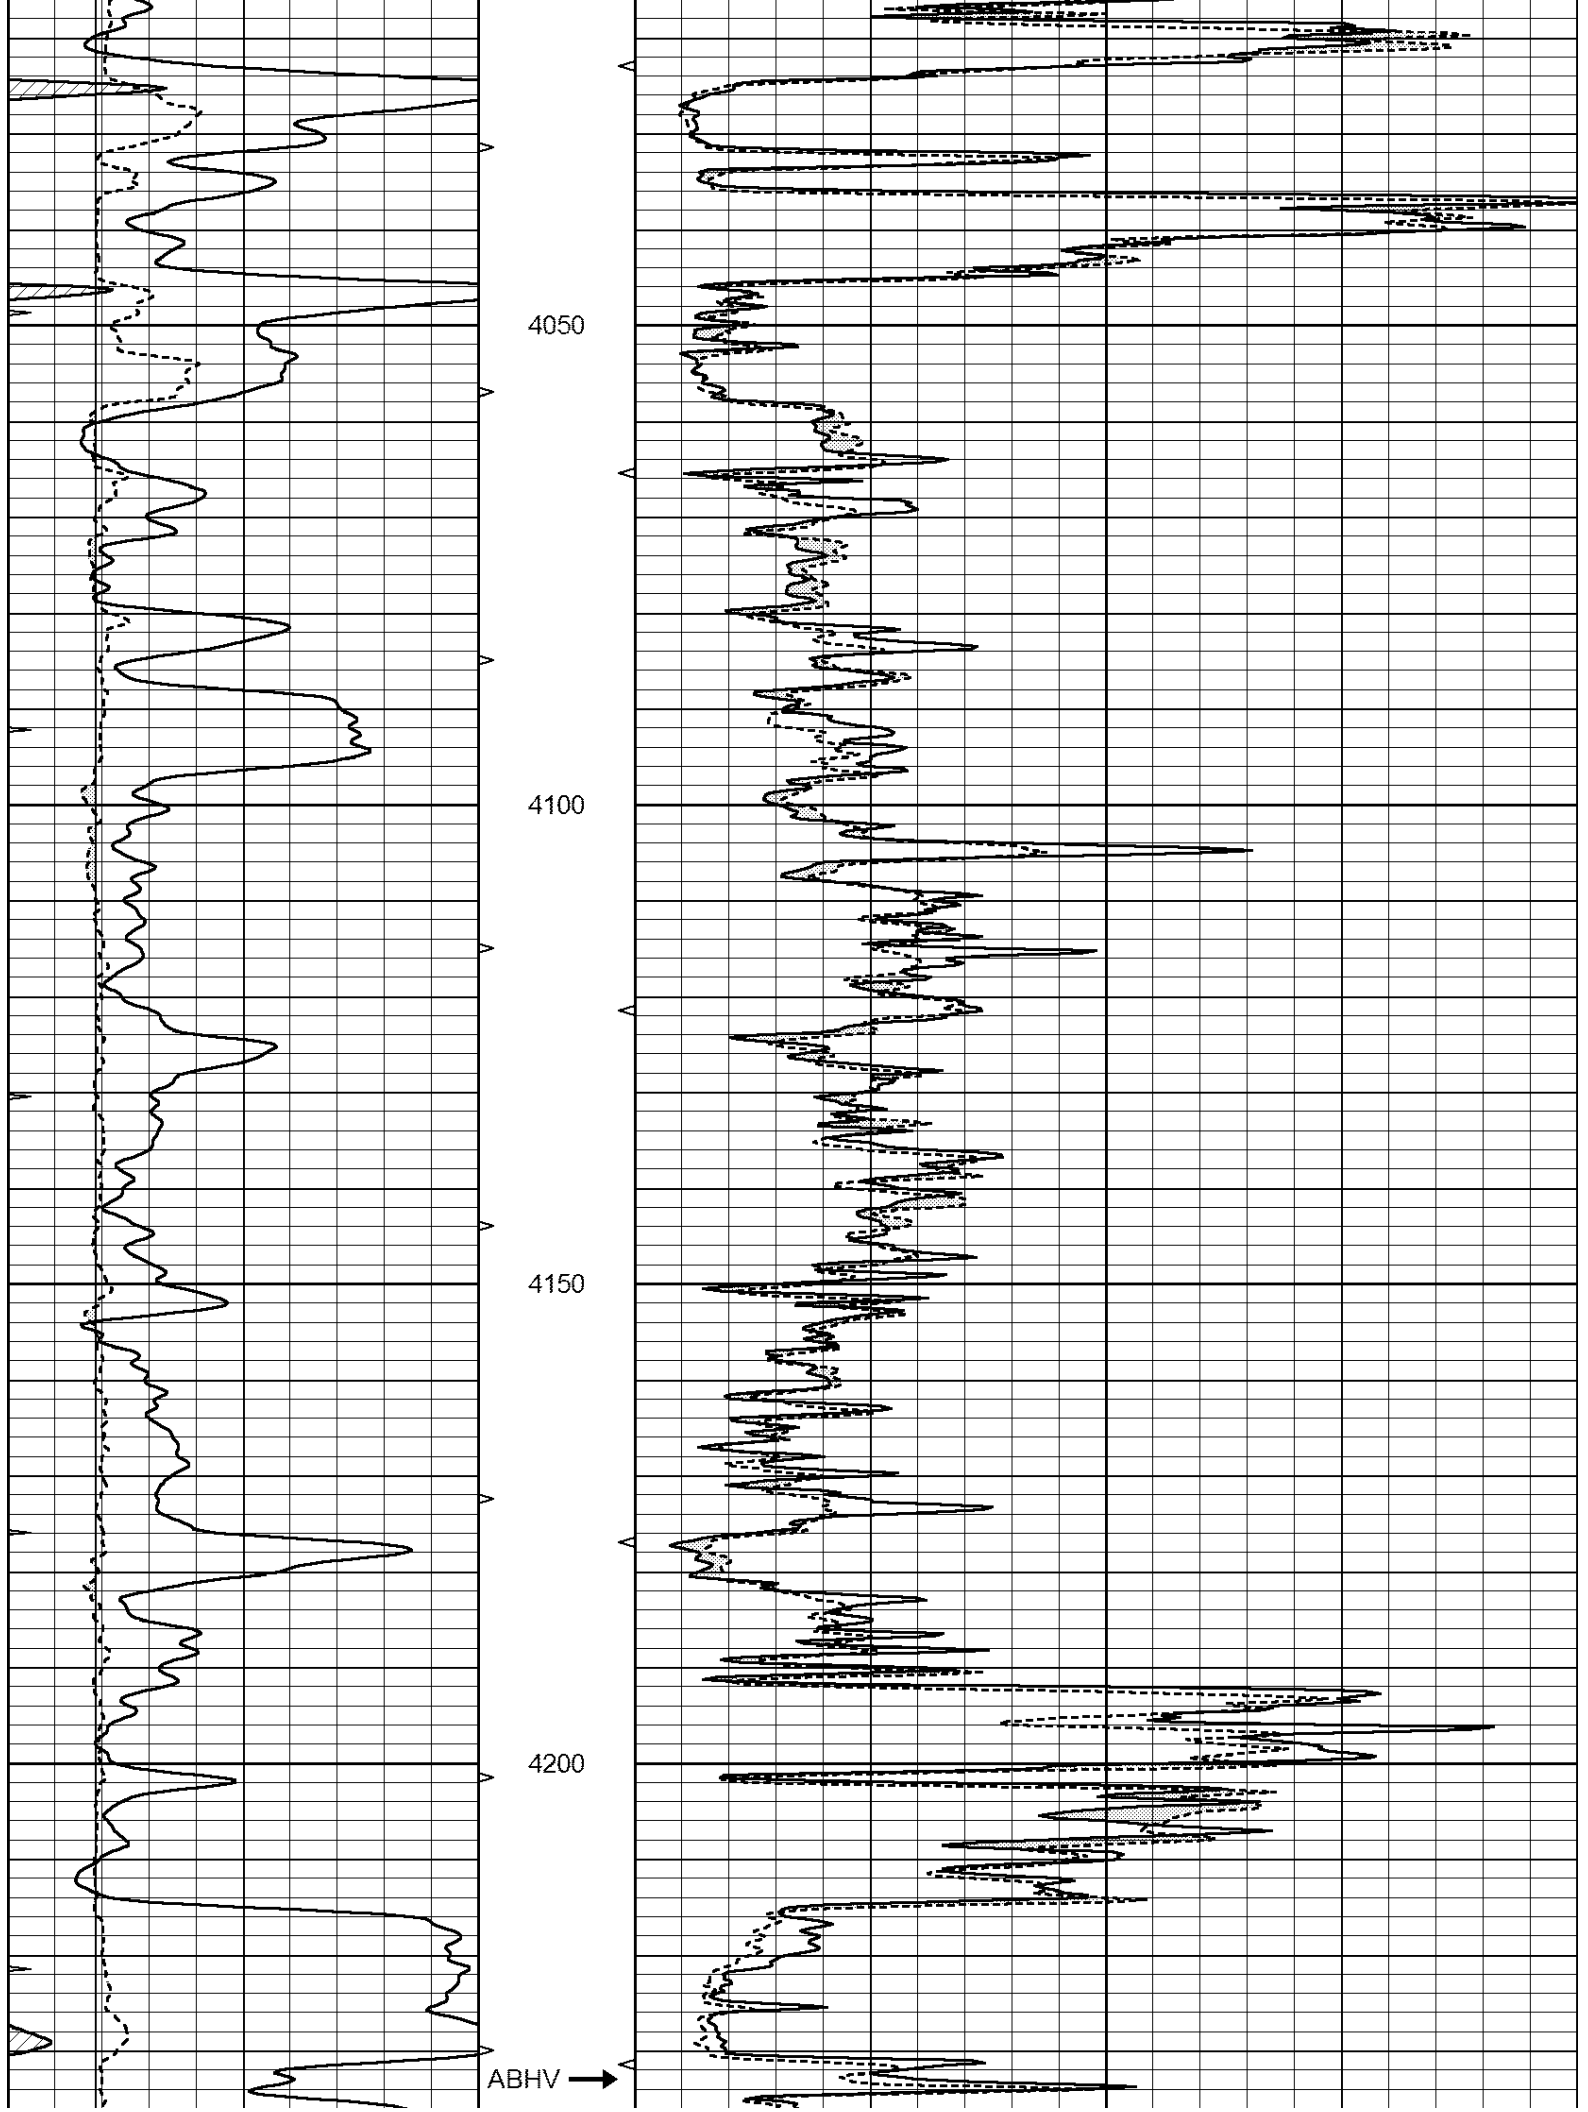


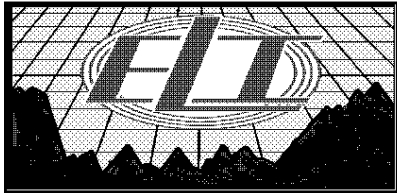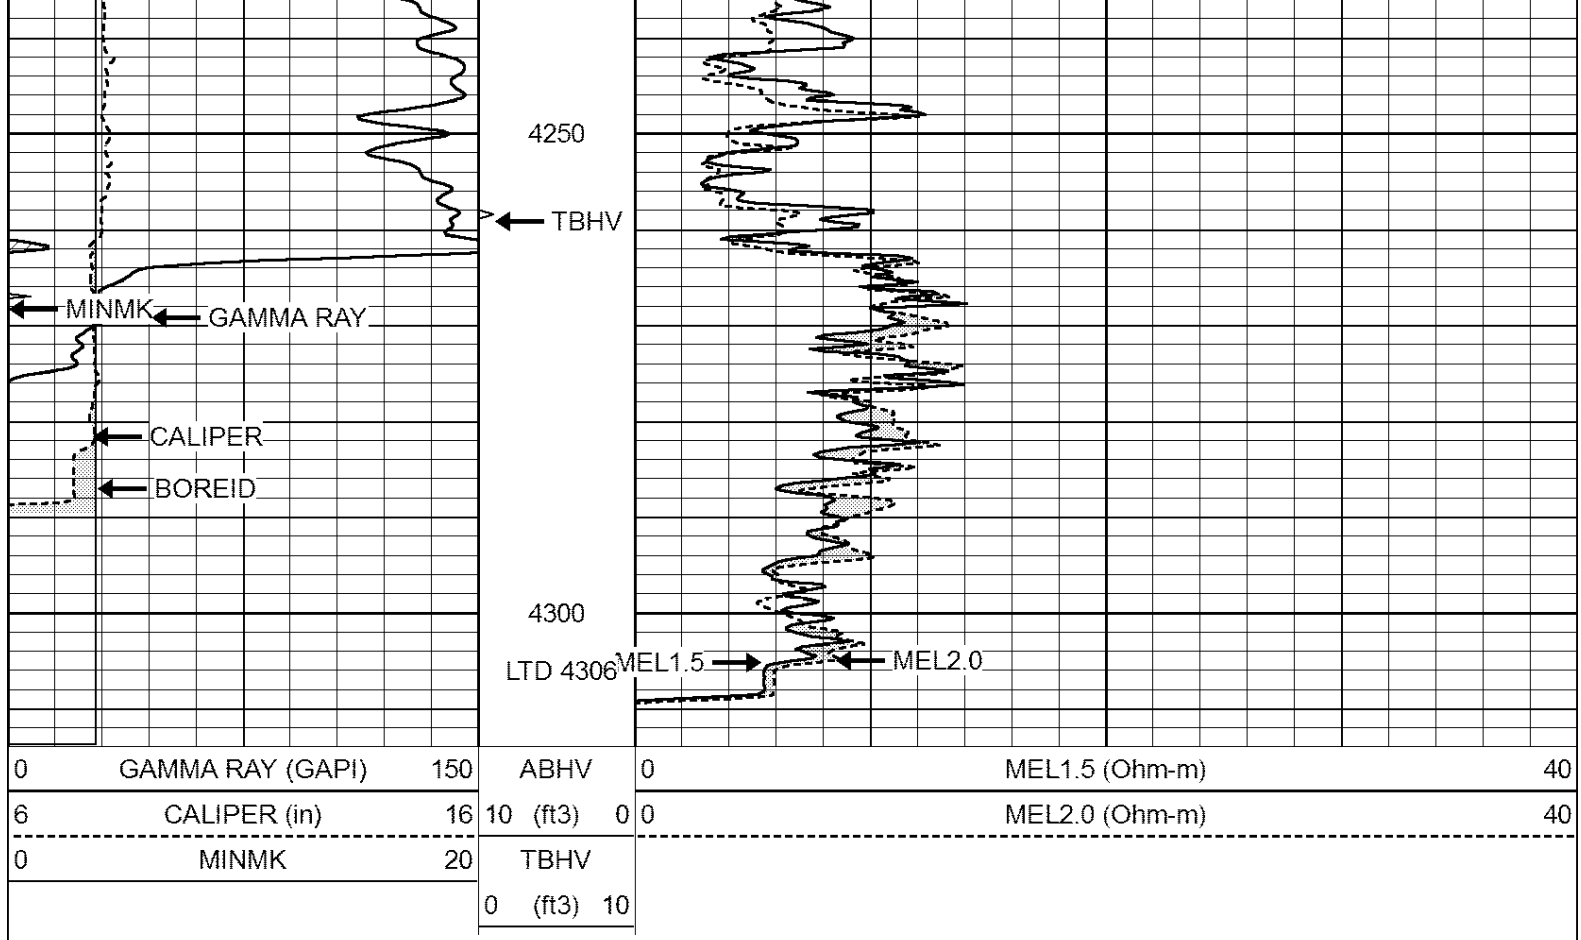


REPEAT SECTION

Database File: 2918ddn.db
 Dataset Pathname: pass4RP
 Presentation Format: _micro
 Dataset Creation: Mon Oct 01 16:15:49 2018
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

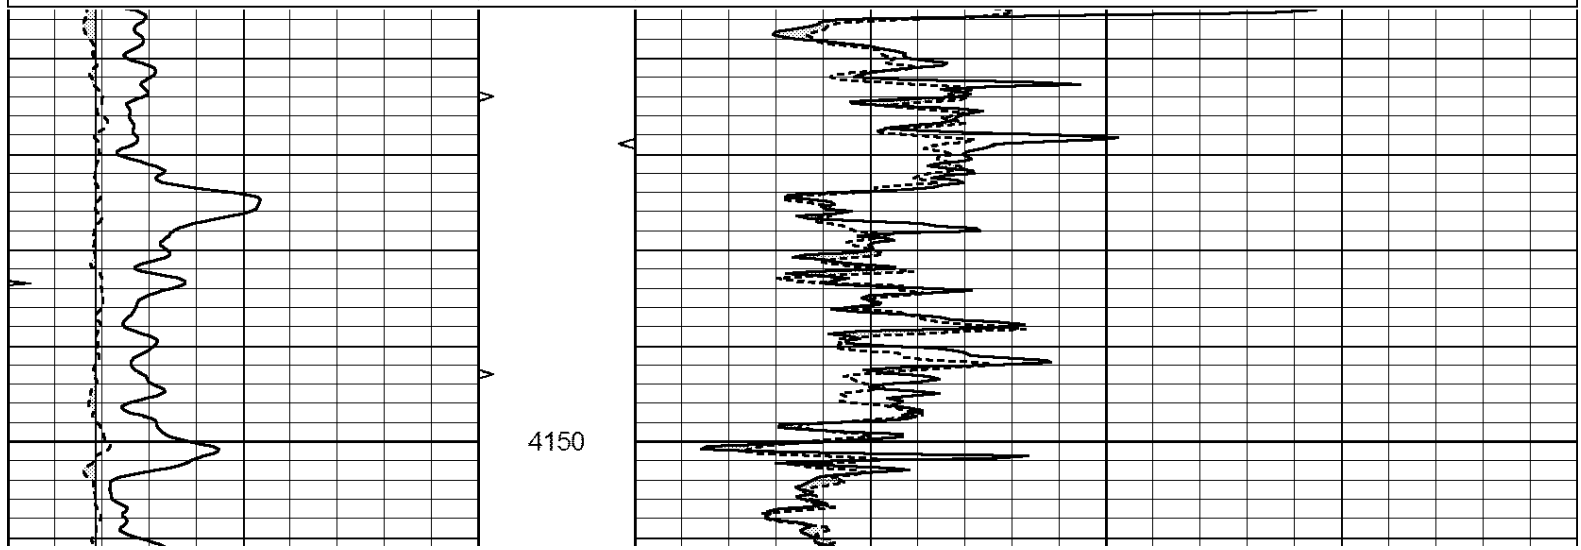

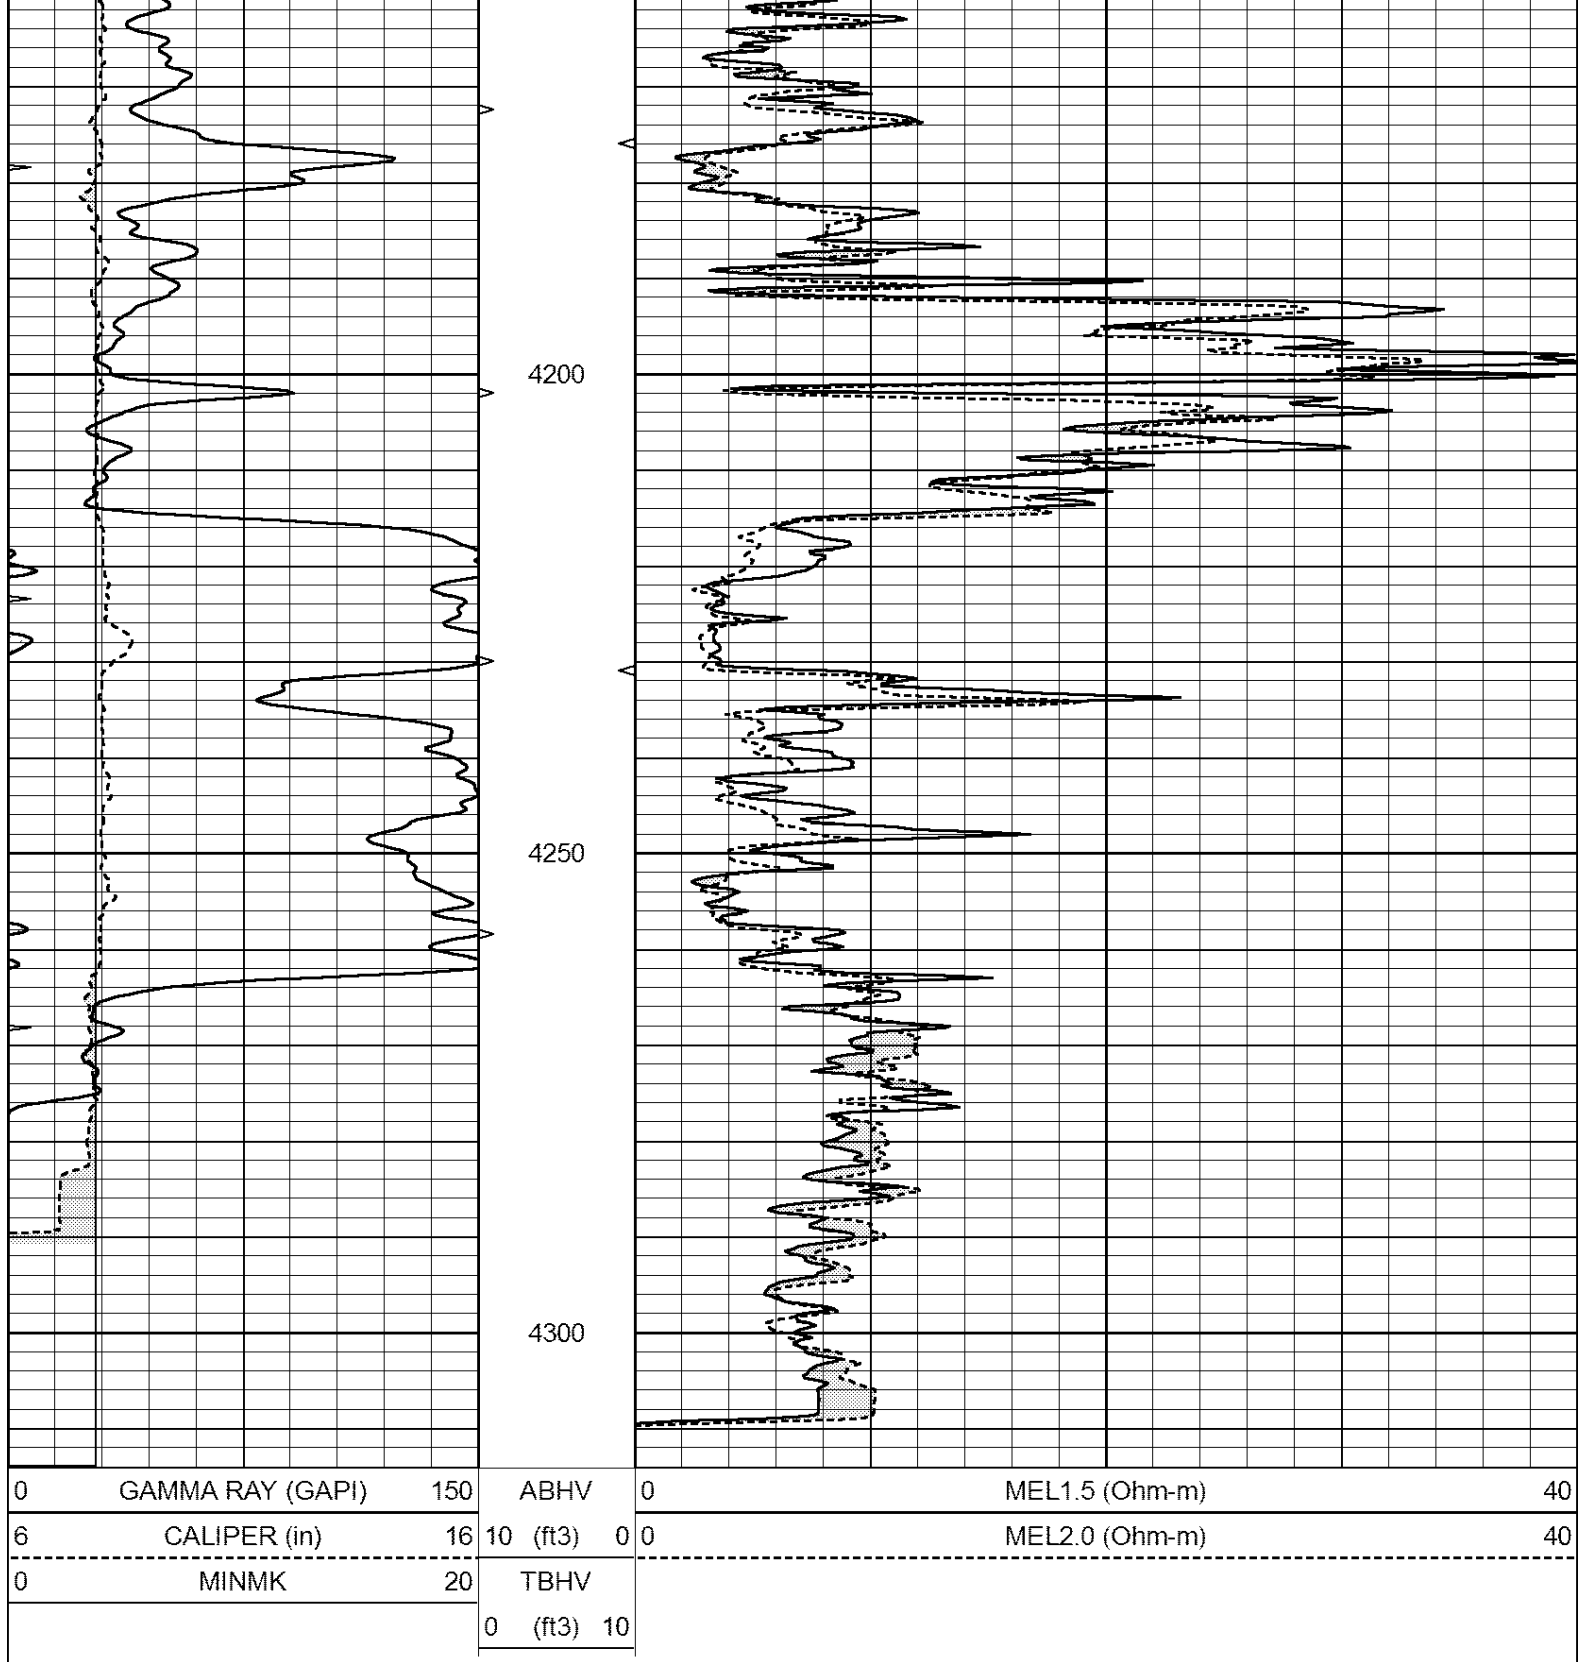

Calibration Report

Database File: 2918ddn.db
 Dataset Pathname: pass4RP
 Dataset Creation: Mon Oct 01 16:15:49 2018

MICRO Calibration Report

Serial Number: MICRO4
 Tool Model: PROBE
 Performed: Tue Sep 25 18:25:59 2018

Caliper Calibration: Gain=3.238 Offset=-10.624

References	Low Cal	High Cal
Readings	7.000	14.000
	5.800	8.104
1.5" Calibration:	Gain=43.717	Offset=-0.618
References	Low Cal	High Cal
Readings	0.000	20.000
	0.007	1.280
2" Calibration:	Gain=51.130	Offset=-0.687
References	Low Cal	High Cal
Readings	0.000	20.000
	0.040	1.208
Gamma Ray Calibration Report		
Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Sun Sep 30 12:56:34 2018	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	2.6000	GAPI/cps