


15-065-00465-00-00

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

Graham County. Sec. 26 Twp. 7 Rge. 23 (E) W (W)  
Location as "NE/CNW%SW%" or footage from lines SW SW SW  
Lease Owner Trans Era Petroleum, Inc.  
Lease Name Morris "B" Well No. 1  
Office Address Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry  
Date well completed 5/6/54 19  
Application for plugging filed 5/5/54 19  
Application for plugging approved 5/5/54 19  
Plugging commenced 5/6/54 19  
Plugging completed 5/6/54 19  
Reason for abandonment of well or producing formation Dry Hole

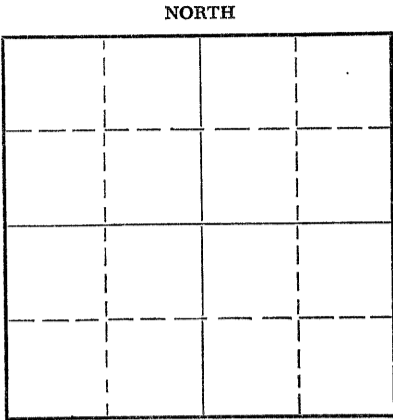

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4023 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	192	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

PLUGGING RECORD

Filled hole with heavy mud to 180', set first wooden plug at 180' with one-half sack of hulls and 15 sacksof cement. Filled hole with heavy mud to 40', set second wooden plug at 40' with 10 sacks of cement used.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor \_\_\_\_\_  
Address \_\_\_\_\_

STATE OF KANSAS, COUNTY OF RUSSELL, ss.  
H. R. Michaelis (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) H. R. Michaelis  
Russell, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 14th day of May, 19 54

Margie Cooper  
Notary Public.

My commission expires 1-30-57

24-7368-S 3-53-20M



5/18/54

15-065-00465-00-00

Trans Era Petroleum, Inc.  
Morris "B" #1

S1/4 S1/4 S1/4 25-7-23  
Graham County, Ks.

Total Depth: 4023'  
Comm. 4/27/54  
Comp. 5/6/54

Casing

Cement

2 5/8" Set @ 192'

135 sacks of Atlas

Formation	Depth
Surface clay	100
Shale-shells	192
Shale	1050
Sand	1300
Shale-red bed	1545
Sand	1725
Shale-red bed	1965
Anhydrite	2005
Shale-red bed	2195
Shale-pyrite	2270
Shale	2440
Shale-red bed	2560
Shale	2790
Shale-lime	3130
Shale	3395
Lime-shale	3570
Lime	3965
Conglomerate	3979
Arbuckle	4023'

STATE OF KANSAS }  
RUSSELL COUNTY } ss

I hereby certify that the above information is true and correct to the best of my knowledge.

Carol Betty

Subscribed and sworn to before me this 14th day of May, 1954.

Margie Cooper  
Notary Public

My commission expires 1-30-57.

PLUGGING  
PLK SEC 26 T 7 R 23W  
BOOK PAGE 32 LINE 37

RECEIVED  
STATE CORPORATION COMMISSION

5/18/54