

**KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION**
Please TYPE Form and File ONE Copy

Form CP-1
September 2003
**This Form must be Typed
Form must be Signed
All blanks must be Filled**

API # 15 - 129-10099 -00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

indicate original spud or completion date 10/30/60

Well Operator: Chesapeake Operating, Inc. KCC License #: 32334

Address: P.O. Box 18496 City: Oklahoma City
(Owner/Company Name) (Operator's)

State: Oklahoma Zip Code: 73154-0496 Contact Phone: (405) 767 - 4078

Lease: Atkinson B Well #: 1-15 Sec. 15 Twp. 31 S. R. 40 East West

C - SW - NE Spot Location / QQQQ County: Morton

1980 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

Per oper KCC
1980 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well

SWD Docket # _____ ENHR Docket # _____ Other: _____

surface
Conductor Casing Size: 7" 26# (intermediate casing) Set at: 1699 Cemented with: 50 Sacks

Conductor surface
Casing Size: 8-5/8 Set at: 700' Cemented with: 400 Sacks

Production Casing Size: 4-1/2 Set at: 5650' Cemented with: 100 Sacks

List (ALL) Perforations and Bridgeplug Sets: 5402-5553'

Elevation: 3299 (G.L. / K.B.) T.D.: 5950' PBTD: _____ Anhydrite Depth: _____
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): MIRU cementers & wireline, RIH w/GR/JB to 5400', POOH, PU CIBP, RIH set CIBP @5400';

dump 2 sx cmt on plug, RU on 4-1/2" csg, RU on 7" set @ 1699', determine free point, shoot off & POOH to 720', pump 50 sx plug, POOH to 40', cmt. to surf., weld on cap, clean up location.

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? _____

**RECEIVED
KANSAS CORPORATION COMMISSION
MAR 29 2006**

**CONSERVATION DIVISION
WICHITA, KS**

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Bud Neff

Phone: (620) 277 - 0803

Address: 4532 W. Jones Avenue City / State: Garden City, KS 67846

Plugging Contractor: Allied Cementing Co., Inc. KCC License #: 99996
(Company Name) (Contractor's)


Address: P.O. Box 31, Russell, KS 67665 Phone: (785) 483 - 2627

Proposed Date and Hour of Plugging (if known?): _____

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 3/28/06 Authorized Operator / Agent: *Altha M. Dewbre for Jim Reisch*
(Signature) Asset Manager

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

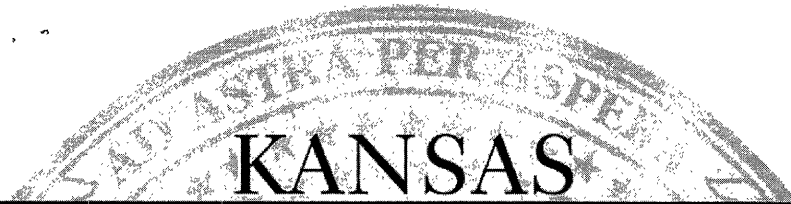

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Chesapeake Operating, Inc.
PO Box 18496
6200 N Western Ave.
Oklahoma City, OK 73154-0496

March 31, 2006

Re: ATKINSON B #1-15
API 15-129-10099-00-00
SWNE 15-31S-40W, 1980 FNL 1980 FEL
MORTON COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888

Sincerely


David P. Williams
Production Supervisor