

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy

Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

API # 15 - 033-20820-00-01 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date initial 6/91, recomplete 9/05.

Well Operator: Pickrell Drilling Company, Inc. KCC License #: 5123
(Owner / Company Name) (Operator's)

Address: 100 S. Main, Suite 505 City: Wichita

State: Kansas Zip Code: 67202 Contact Phone: (316) 262 - 8427

Lease: Stark "A" Well #: 1 OWWO Sec. 18 Twp. 34S S. R. 18 East West

SE - SW Spot Location / QQQQ County: Comanche

660 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

3300 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well

SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: 13 3/8 Set at: 96 Cemented with: 125 Sacks

Surface Casing Size: 8 5/8 Set at: 635 Cemented with: 350 Sacks

Production Casing Size: 4 1/2 Set at: 5739 Cemented with: 150 Sacks

List (ALL) Perforations and Bridgeplug Sets: Perfs. 5602-5606, BP 5510, Perfs 5244-5247

Elevation: 1954 (G.L. / K.B.) T.D.: 6664 PBTD: 5510 Anhydrite Depth: 988 (+966)
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Use dump bailer to spot 5 sx. of cement on CIBP @ 5510.

Cut and recover 4 1/2" casing. Spot cement plugs while pulling casing as directed by K.C.C. Representative.

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? _____

RECEIVED
MAR 30 2006
KCC WICHITA

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Russell Myers

Phone: (620) 793 - 2316

Address: 2485 S. State Rd. 14 City / State: Kingman, Kansas 67068-8629

Plugging Contractor: Quality Well Service KCC License #: 31925

(Company Name) (Contractor's)
Address: 401 West Main, Lyons, Kansas 67554 Phone: (620) 727 - 3410

Proposed Date and Hour of Plugging (if known?): May 15, 2006


Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 03-29-06 Authorized Operator / Agent: Jack Guley
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

Oil Company _____ Well No. 1 0WWD Field _____ Lease Stark "A"
Company Man _____ Date Drilled June 1991 County Cowanche State Kansas

API # 15-033-20820-00-01

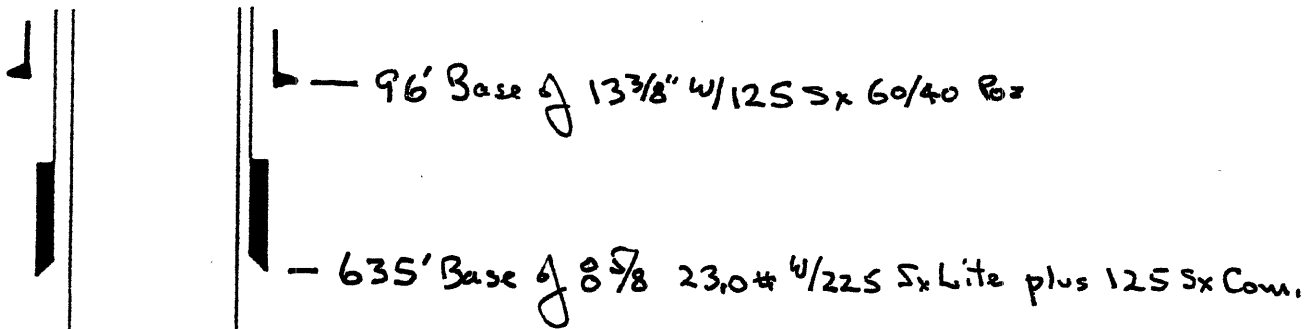

RECEIVED
MAR 30 2006
KCC WICHITA

≡ ≡ 5244-5247 (3 ft, 4 SPF)

≡ ≡ 5510 CIBP

≡ ≡ 5602-5606 (4 ft, 4 SPF)

≡ ≡ 5695 PBD

≡ ≡ 5739 Base 4 1/2 10.5# w/150 Sx ASC

REMARKS:

6545 Base of 50 Sx Plug

6664 L.T.D.

KANSAS

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Pickrell Drilling Company, Inc.
100 South Main - Suite 505
Wichita, KS 67202-3738

March 31, 2006

Re: STARK A OWWO #1
API 15-033-20820-00-01
SESW 18-34S-18W, 660 FSL 3300 FEL
COMANCHE COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.


Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely



David P. Williams
Production Supervisor

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888