



MICRO RESISTIVITY LOG

Company Stewart Producers, Inc

Well Dinges Trust #1

Field Wildcat

County Ness

State Kansas

Location:

API #: 15 135 25941-00-00

1640' FSL & 335' FWL

SEC 13 TWP 18S RGE 25W

Permanent Datum Ground Level Elevation 2372'
Log Measured From KB 5' AGL
Drilling Measured From KB

Other Services
DIL
CDNL
BCS
Elevation

K.B. 2377'
D.F. 2376'
G.L. 2372'

Date 2-24-2017

Run Number Two

Depth Driller 4440'

Depth Logger 4440'

Bottom Logged Interval 4419'

Top Log Interval 3500'

Casing Driller 208'

Casing Logger 208'

Bit Size 7 7/8"

Type Fluid in Hole Chemical

Density / Viscosity 9.2/58

pH / Fluid Loss 11/7.8

Source of Sample Calculated

Rm @ Meas. Temp 1.9@58degf

Rmf @ Meas. Temp 1.43@58degf

Rmc @ Meas. Temp 2.8@58degf

Source of Rmf / Rmc Calculated

Rm @ BHT 0.96@115degf

Time Circulation Stopped 3:15 a.m.

Time Logger on Bottom 6:50 a.m.

Maximum Recorded Temperature 115degf

Equipment Number T-729

Location Hays, KS

Recorded By C. Patterson

Witnessed By Mr. Dave Goldak

Mr. Robert Stewart

Mr. Mark Thompson

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

West of Ness City to L Rd.,
Then 2mi. North, West into

Thanks for using Gemini Wireline LLC
785-625-1182




Main Pass


Database File spdngestrust1oh.db
Dataset Pathname pass4.1
Presentation Format kml
Dataset Creation Fri Feb 24 08:57:33 2017
Charted by Depth in Feet scaled 1:240


0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16

0	MN 2" (Ohm-m)	40
0	MI 1" (Ohm-m)	40
10000	LTEN (lb)	0

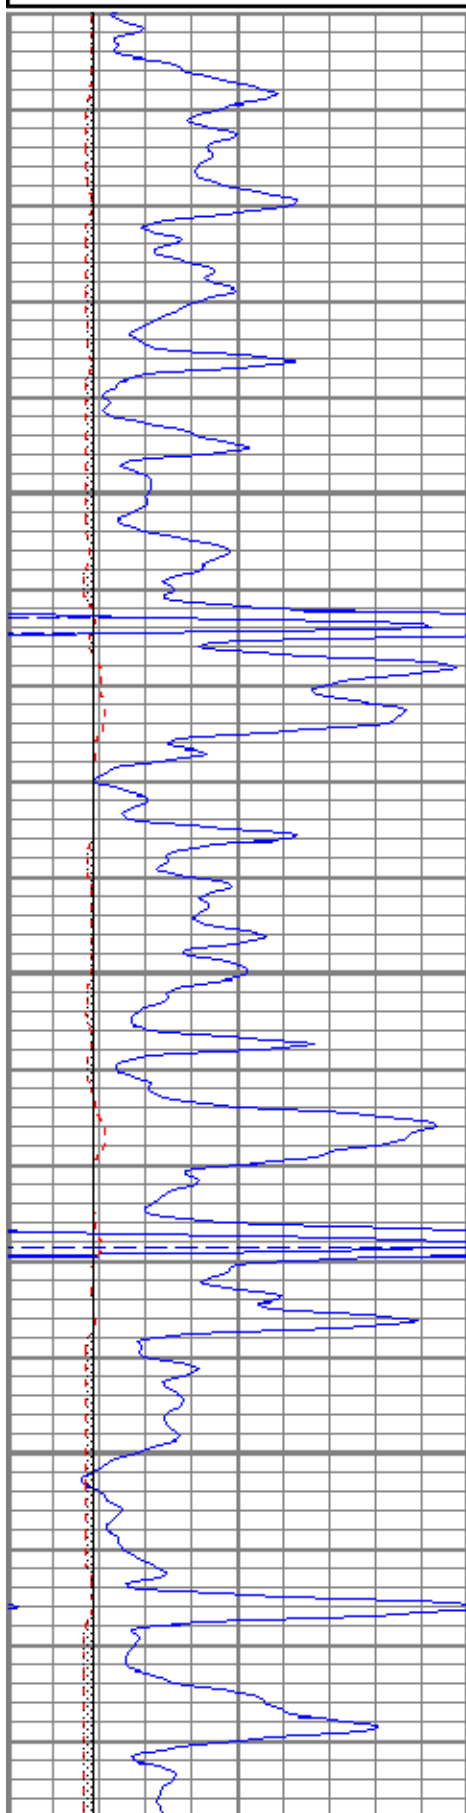

3500
3550
3600
3650

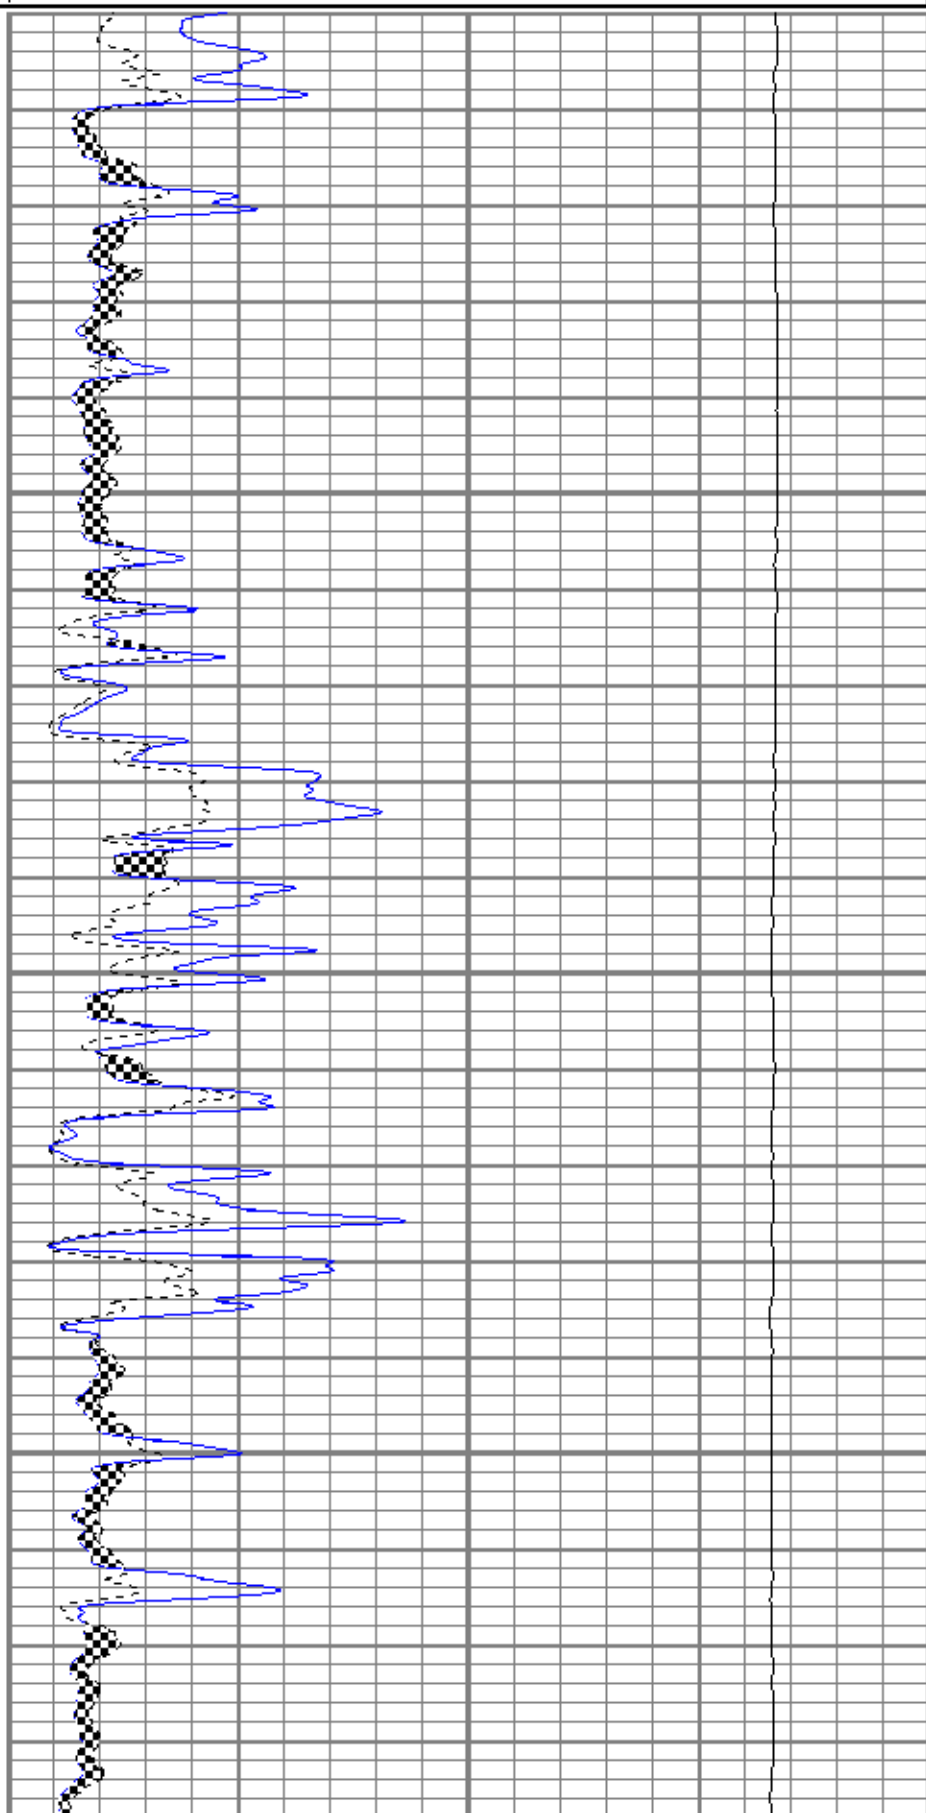

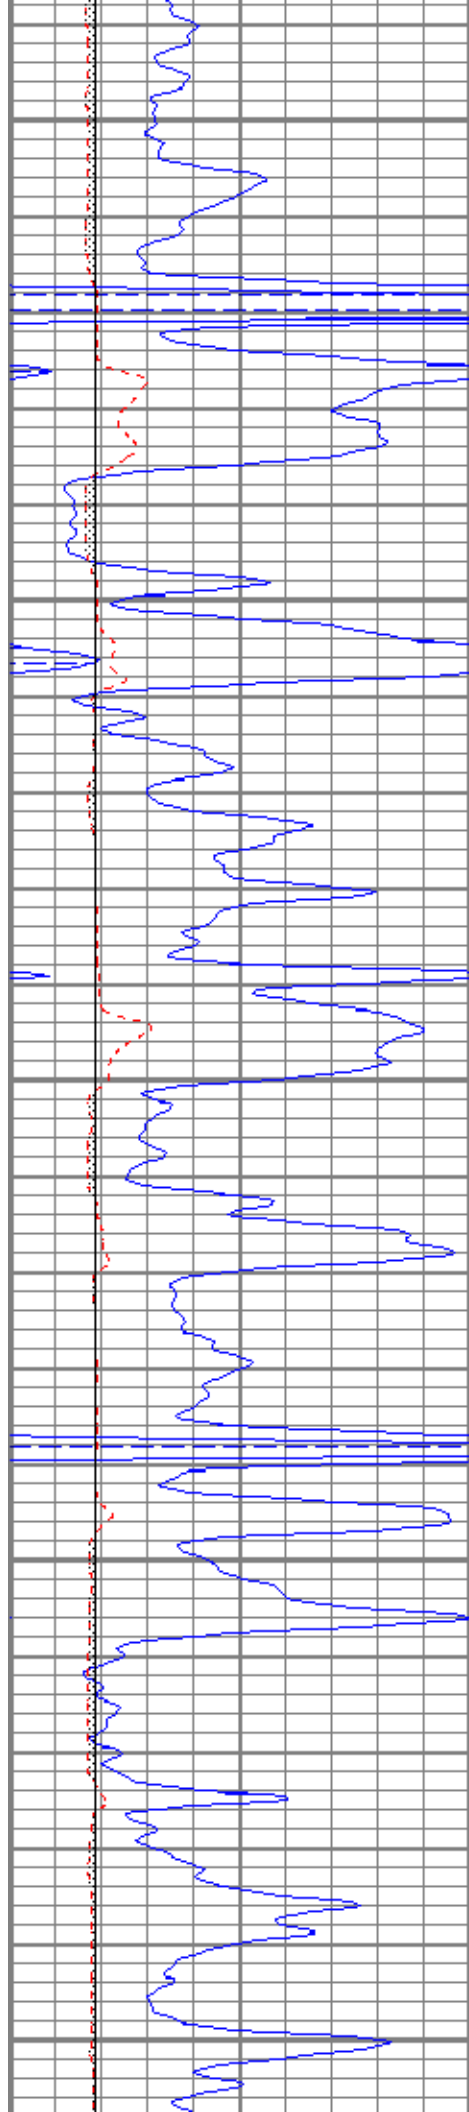


3700


3750

3800

3850

3900

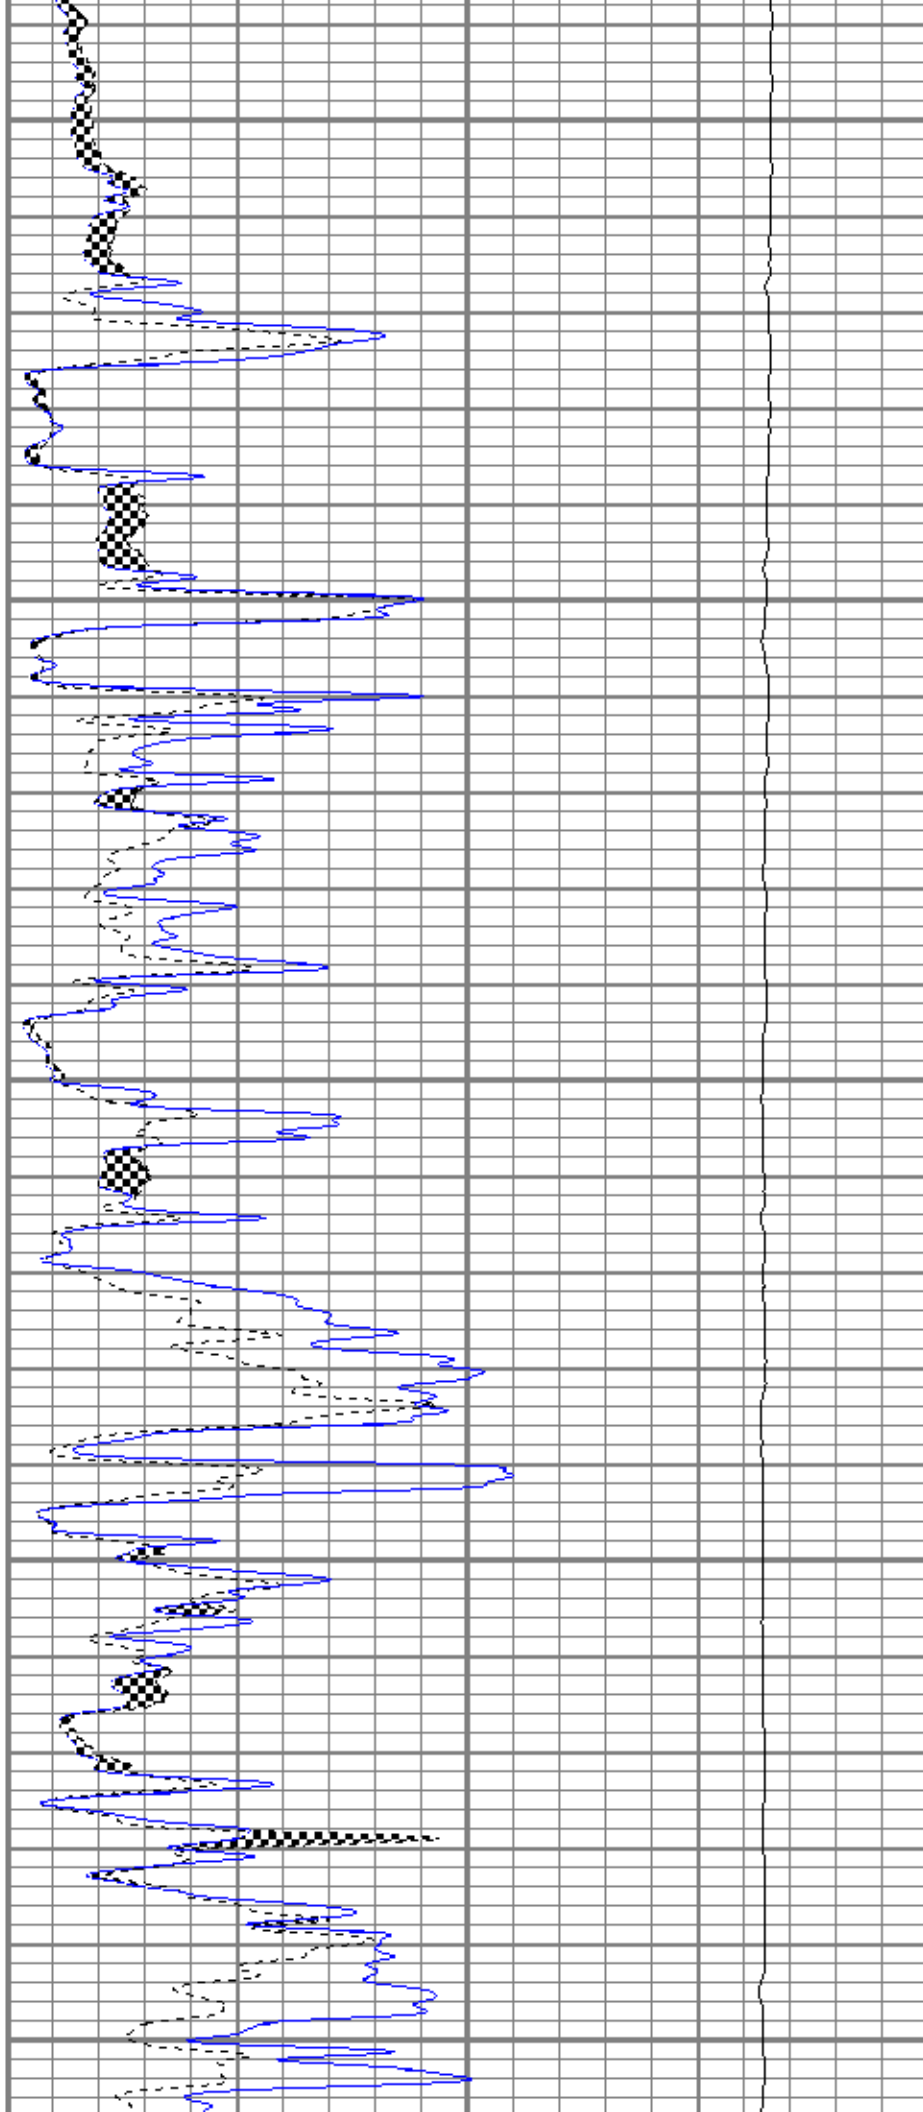

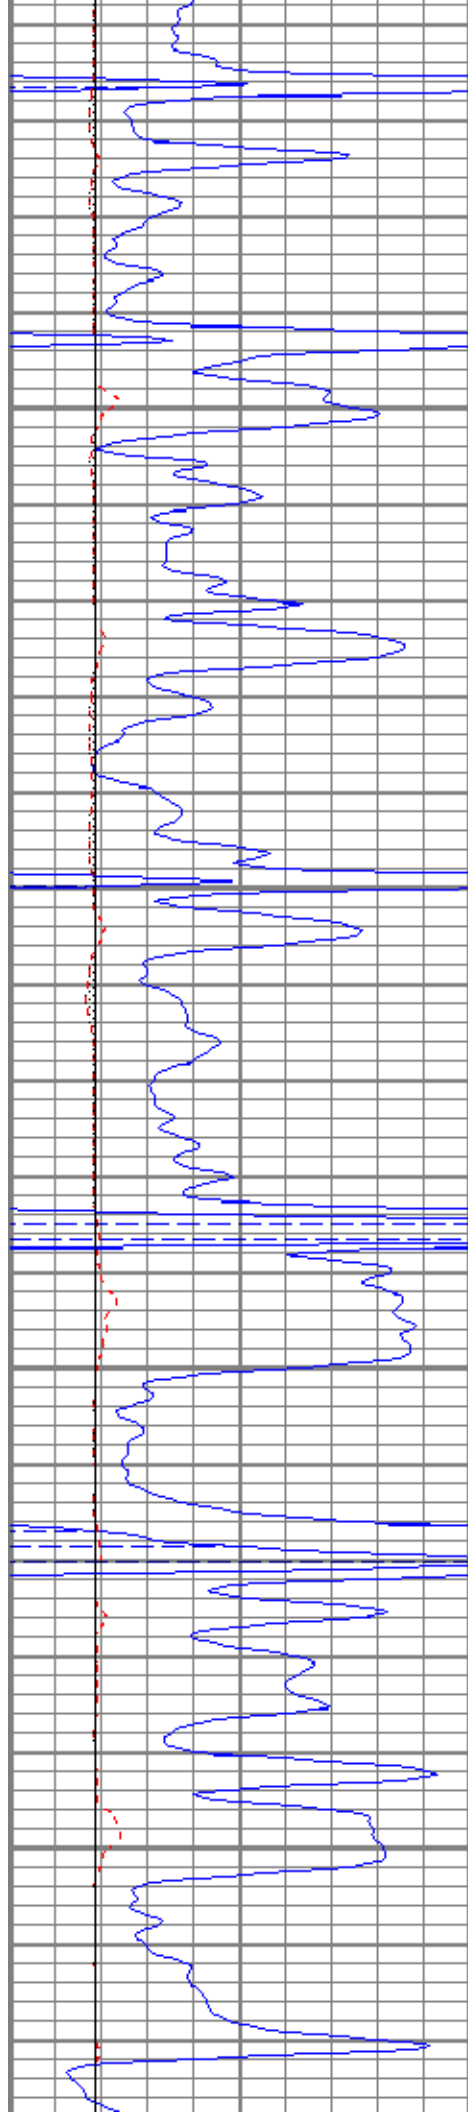



3950

4000

4050

4100

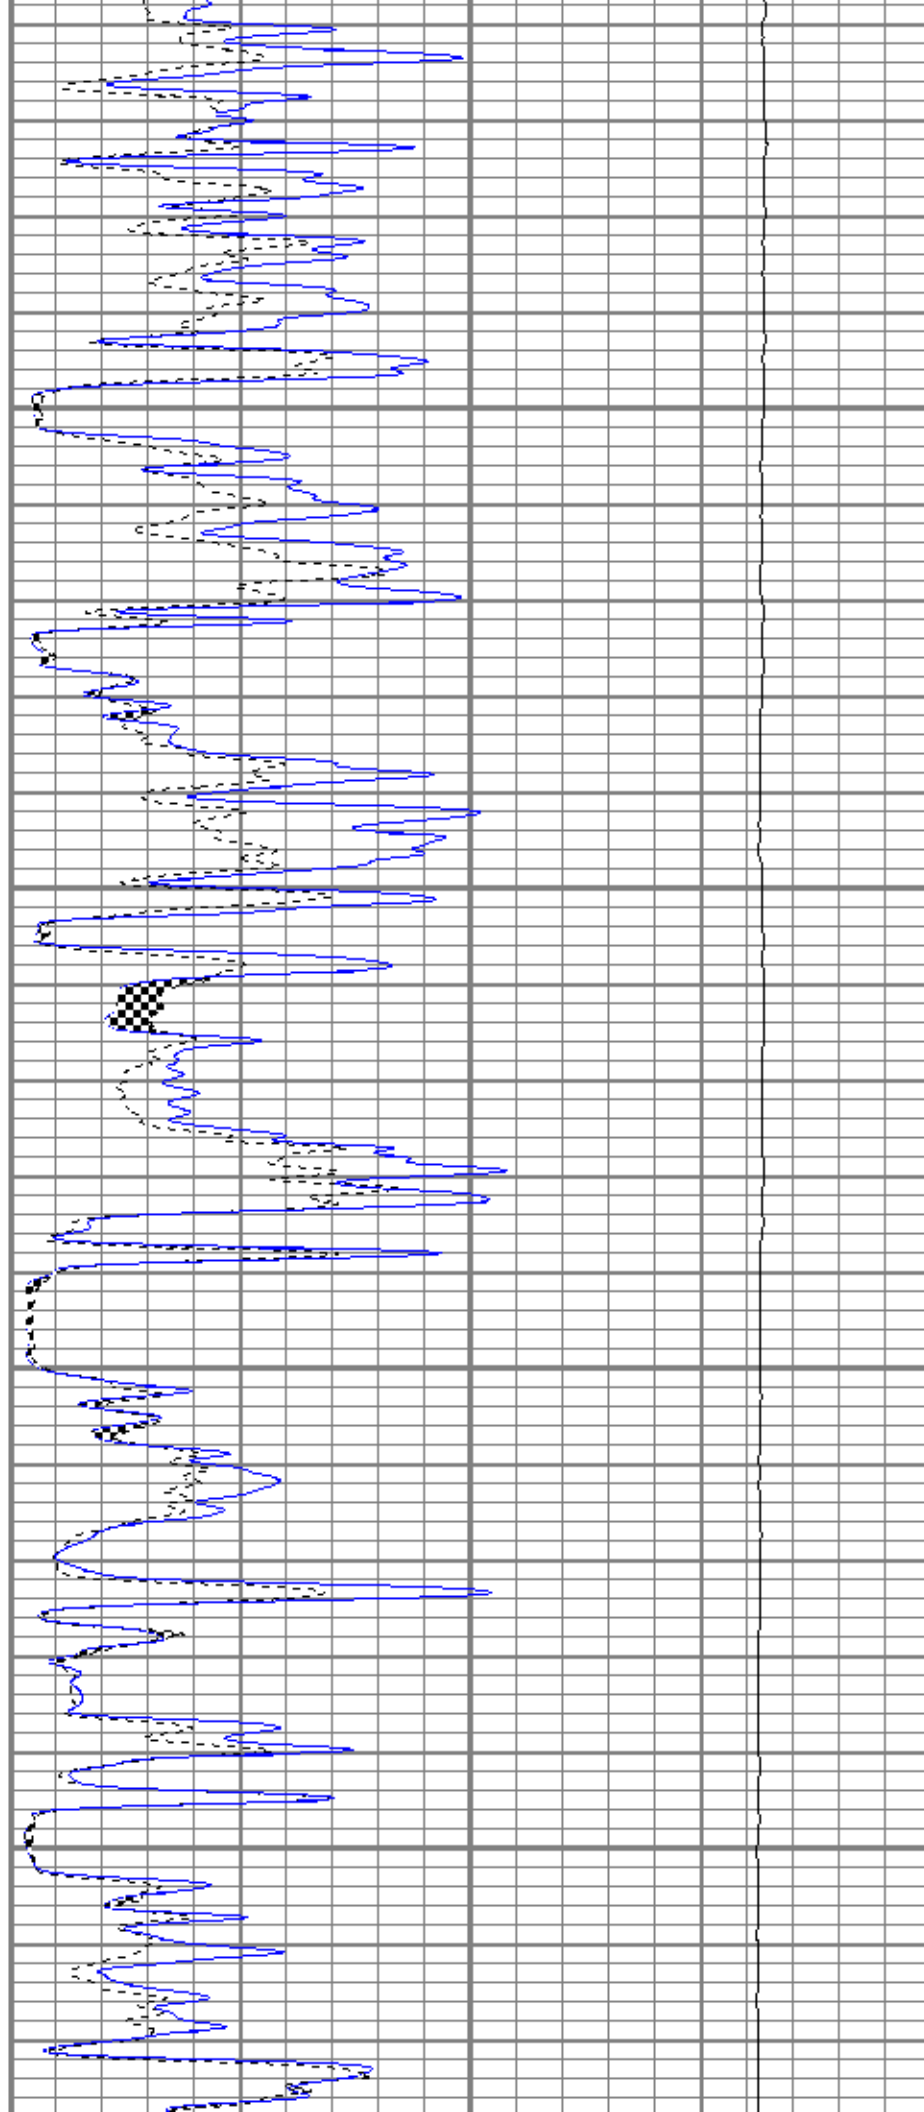

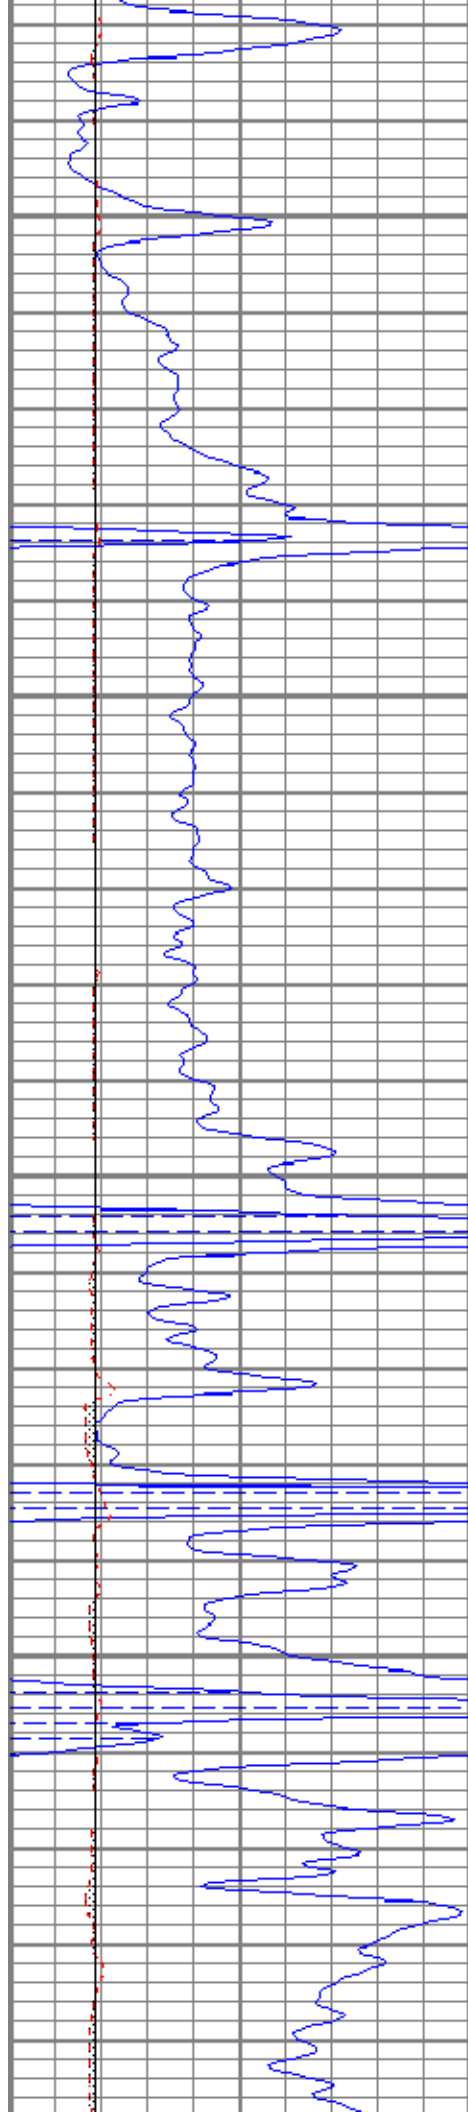




4150

4200

4250

4300

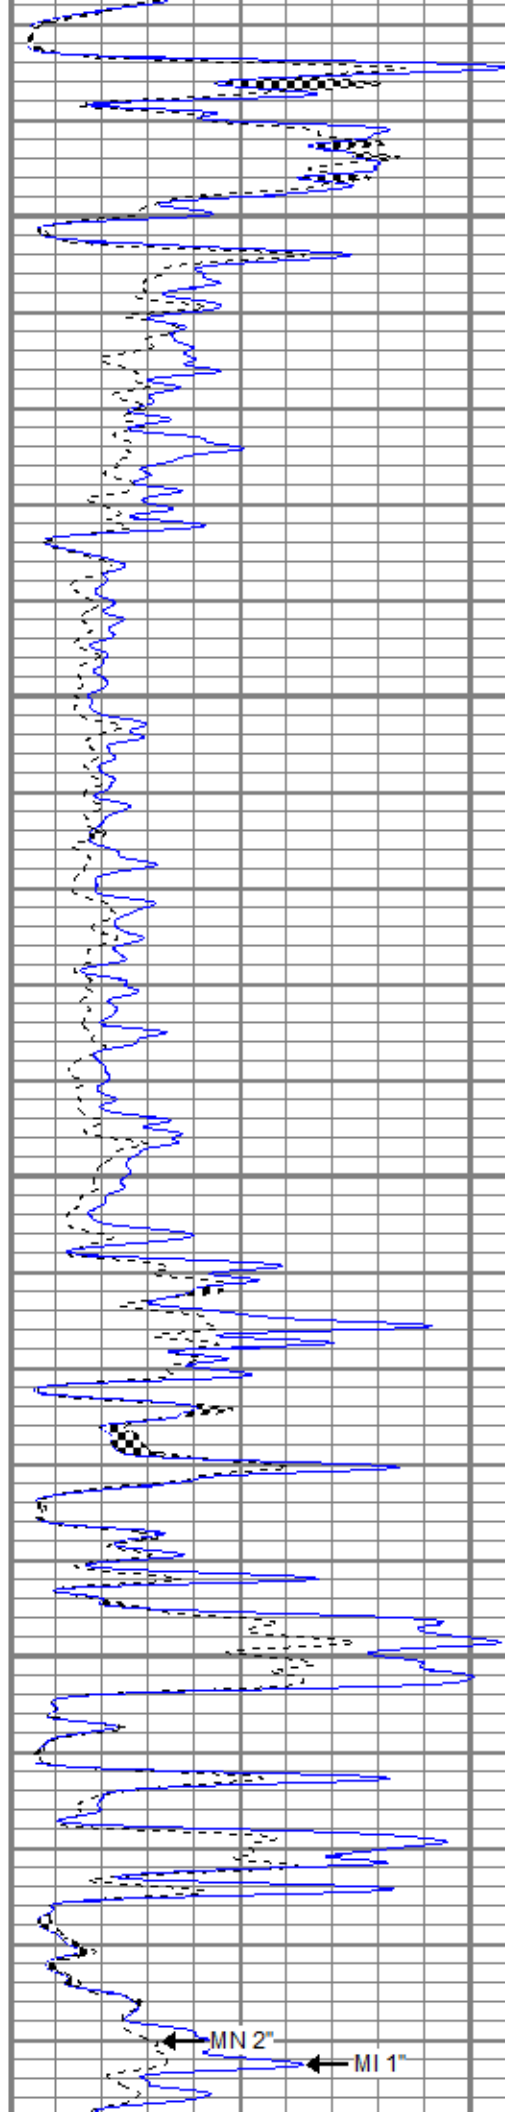

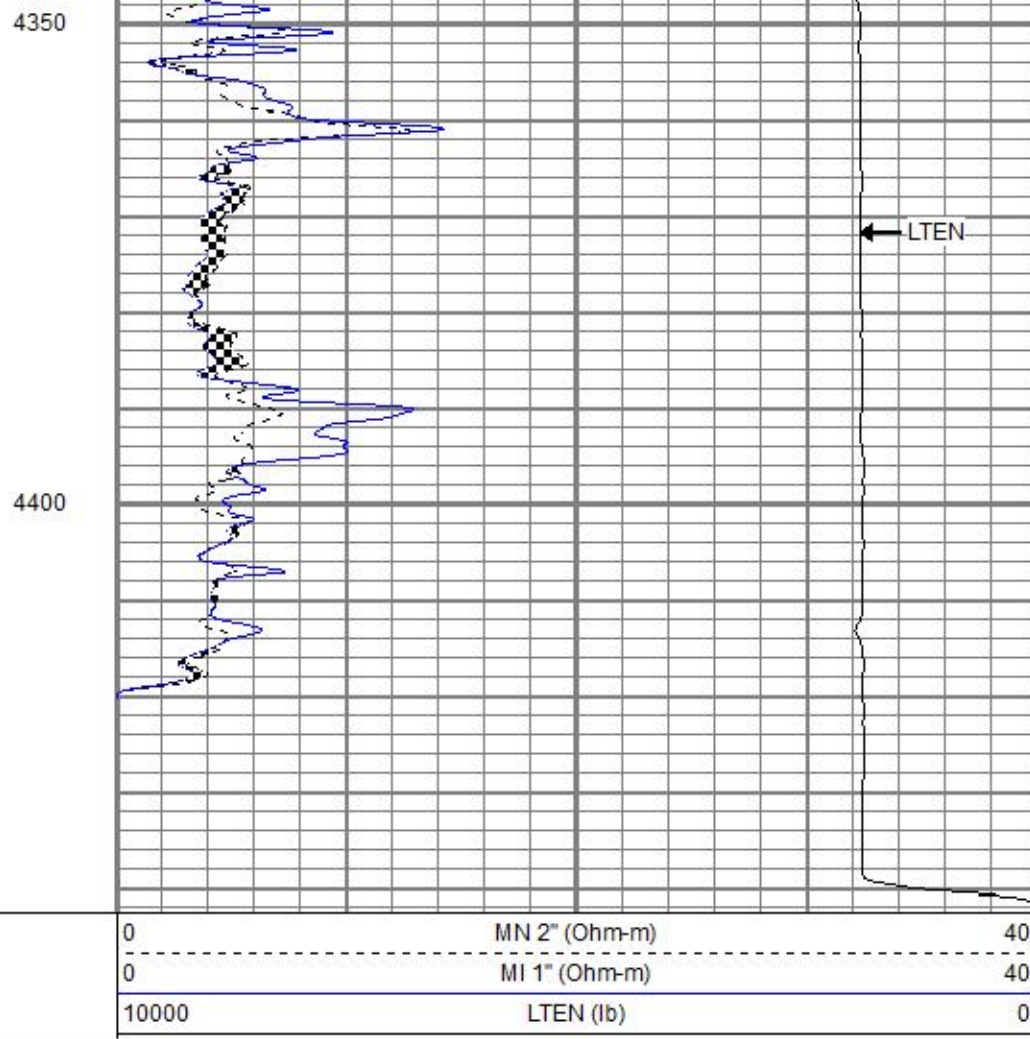
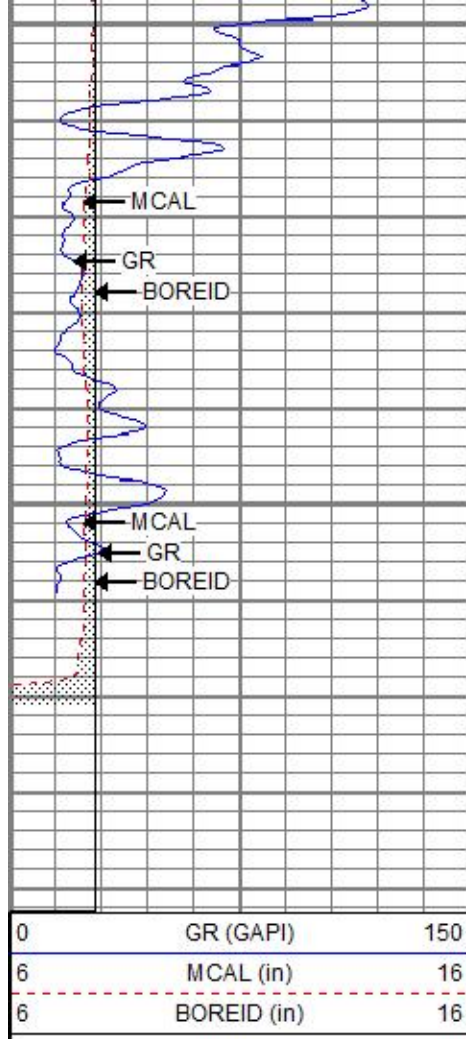




Repeat Section

Database File: spdingestrust1oh.db
 Dataset Pathname: pass3.1
 Presentation Format: kml
 Dataset Creation: Fri Feb 24 09:07:03 2017
 Charted by: Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16

0	MN 2" (Ohm-m)	40
0	MI 1" (Ohm-m)	40
10000	LTEN (lb)	0

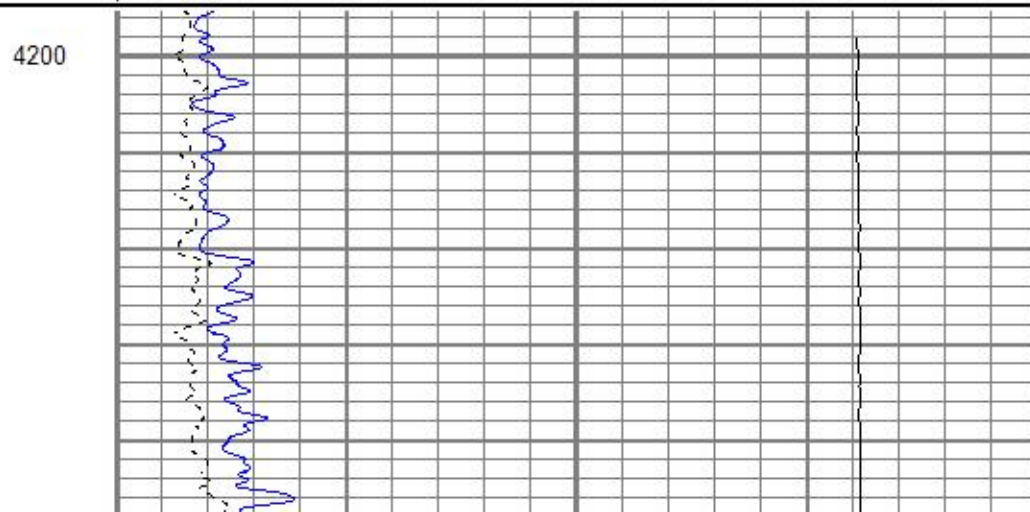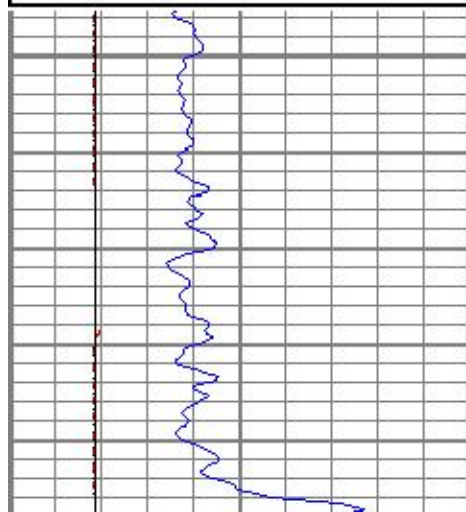

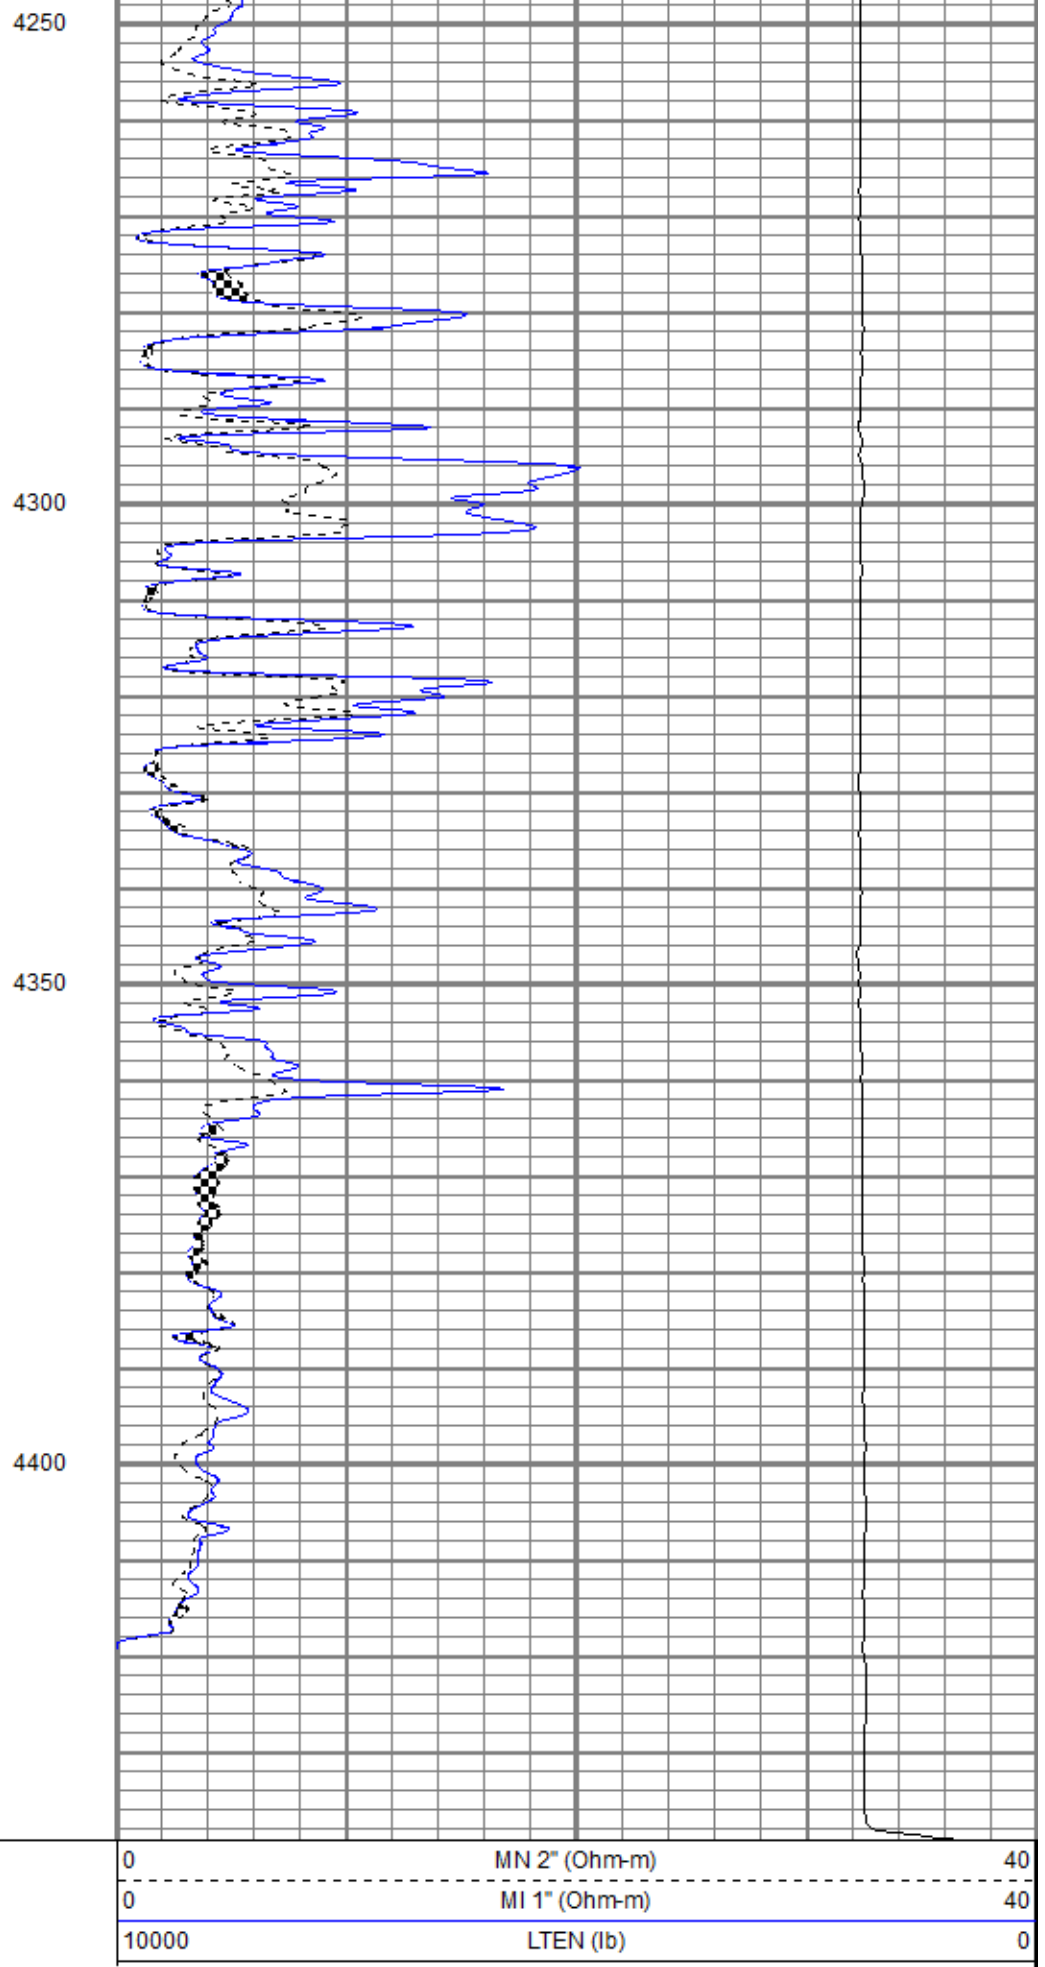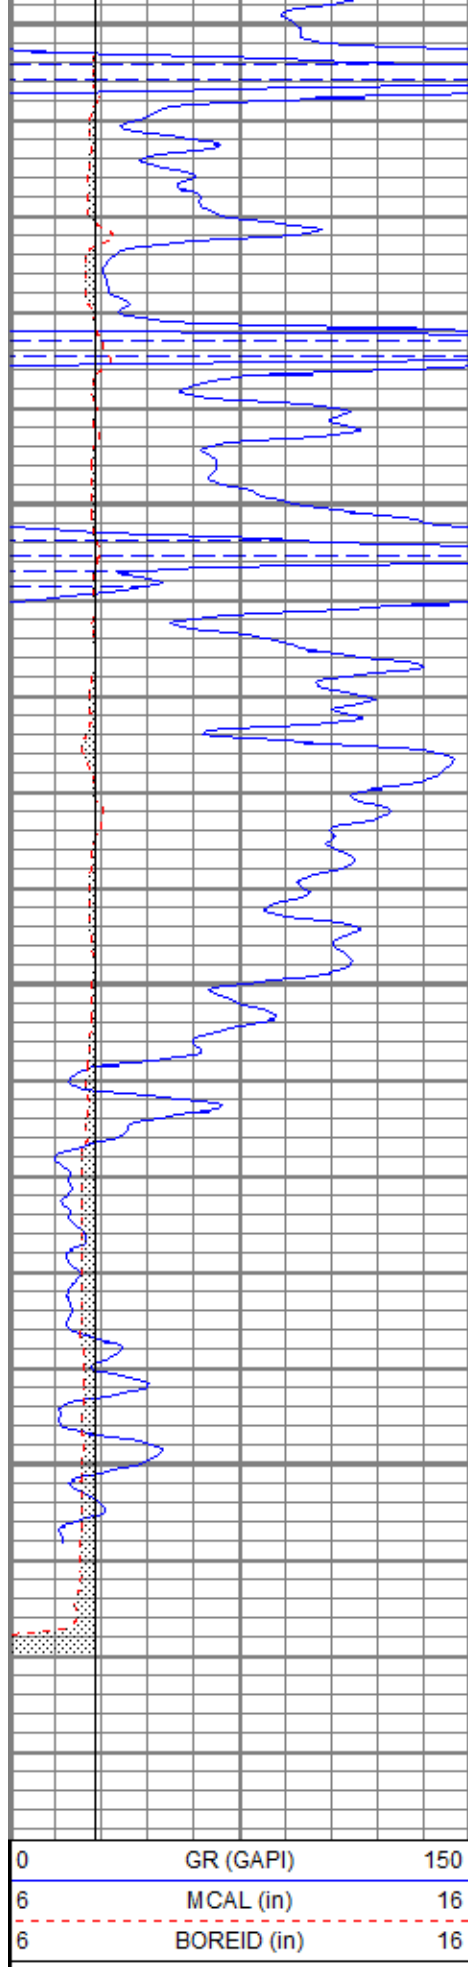

Calibration Report

