

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-22010-00-00
Spot: SWSE Sec/Twnshp/Rge: 6-32S-10W
660 feet from S Section Line, 1980 feet from E Section Line
Lease Name: DICK Well #: 1-6
County: BARBER Total Vertical Depth: 3750 feet

Operator License No.: 5050
Op Name: HUMMON CORPORATION
Address: 950 N. TYLER
WICHITA, KS 67212

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		3560		WITH 2 SX CMT
PROD	5.5	3740	2500	WITH 100 SX CMT
SURF	8.625	227		WITH 215 SX CMT

~~121~~ 88
\$ 121.88

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 03/15/2006 9:00 AM
Plug Co. License No.: 5105 Plug Co. Name: CLARKE CORPORATION
Proposal Revd. from: MARK MORGENSTERN Company: CLARKE CORPORATION Phone: (620) 886-5665

Proposed Plugging Method: CIBP @ 3560' & 2 SX CMT. 1ST PLUG AT 600' WITH 300# HULLS - 10 SX GEL - 50 SX CMT. 2ND PLUG AT 240' WITH 50 SX CMT. 3RD PLUG AT 40-0 WITH 10 SX CMT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 03/15/2006 10:00 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SET CIBP @ 3560' & PUT 2 SX CMT ON TOP OF CIBP THROUGH DUMP BAILER. SPOT PLUGS THROUGH 2 3/8" TUBING. 1ST PLUG AT 600' WITH 200# HULLS, 10 SX GEL, & 50 SX CMT. 2ND PLUG AT 250' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
3613	3619		

Remarks: USED 60/40 POZMIX 65 GEL BY ALLIED.

Plugged through: TBG

INVOICED
4-5-06
2006061425

District: 01

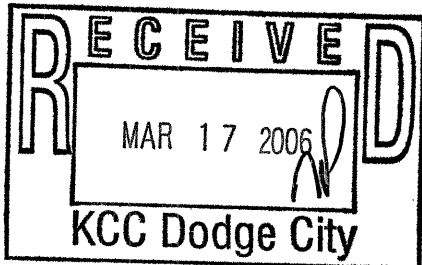

Signed

Stephen J. Pugh
(TECHNICIAN)

RECEIVED
APR 05 2006
KCC WICHITA

Form CR-28

PLS