

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-30380-00-01
Spot: SESESE Sec/Twnshp/Rge: 14-25S-14W
330 feet from S Section Line, 330 feet from E Section Line
Lease Name: TANNER A Well #: 1-W
County: STAFFORD Total Vertical Depth: 4010 feet

Operator License No.: 5010
Op Name: KNIGHTON OIL COMPANY, INC.
Address: 221 S. BROADWAY, STE. 710
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	4002	2030	WITH 75 SX CMT
SURF	8.62	865		WITH 450 SX CMT

\$ 130.33

Well Type: EOR UIC Docket No: E14970.2 Date/Time to Plug: 03/28/2006 1:00 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: JOE MAES Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND TO 3800' & 4 SX CMT. PLUG AT 875' WITH 10 SX GEL & 50 SX CMT. PLUG AT 390 WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 03/28/2006 2:15 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SAND TO 3800' & 4 SX CMT WITH DUMP BAILER. PUMPED PLUGS THROUGH CASING. 1ST PLUG AT 875' WITH 10 SX GEL - 50 SX CMT. 2ND PLUG AT 390' WITH 40 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3917	3926		
3892	3899		
3876	3881		
3846	3853		


Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

INVOICED

4-5-06
2006061427

District: 01

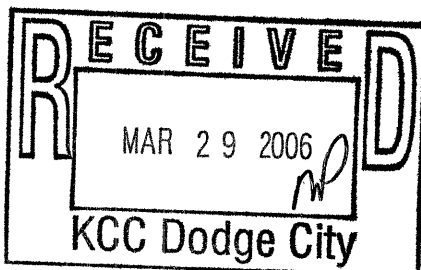

Signed Richard M. Lacey
(TECHNICIAN)

RECEIVED
APR 05 2006
KCC WICHITA

PET