

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-047-20263-00-00  
Spot: NWNESW Sec/Twnshp/Rge: 27-24S-16W  
2315 feet from S Section Line, 3732 feet from E Section Line  
Lease Name: SCHMITT Well #: 2  
County: EDWARDS Total Vertical Depth: 4370 feet

Operator License No.: 8061  
Op Name: OIL PRODUCERS INC. OF KANSAS  
Address: 1710 WATERFRONT PARKWAY  
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		3100		WITH 2 SX CMT
PROD	4.5	4369	2000	WITH 100 SX CMT
SURF	8.625	307		WITH 225 SX CMT

\$142.03

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 03/16/2006 10:00 AM  
Plug Co. License No.: 32453 Plug Co. Name: ACID SERVICES LLC  
Proposal Rcvd. from: BRAD SIROKY Company: ACID SERVICES LLC Phone: (316) 262-3699

Proposed Plugging Method: SET CIBP ABOVE STUCK TUBING IN HOLE AT 3190' WITH 2 SX, SHOOT OFF 4.5" @2000' PULL UP 1 JOINT AND SPOT 35 SX PLUG, PULL TO 1450' W/ 50 SX PLUG, PULL TO 330' W/40 SX PLUG, PULL TO 30' W/10 S PLUG, ALL WITH 60/40 POZ W/6% GEL. THIS PLUG IS RECOMMENDED BY STEVE DURRANT, KCC REPRESENTATIVE-DODGE CITY.

Plugging Proposal Received By: STEVE DURRANT WitnessType: NONE  
Date/Time Plugging Completed: 03/16/2006 3:00 PM KCC Agent: STEVE DURRANT

Actual Plugging Report:

1ST PLUG SET CIBP @ 3100' & 2 SX CMT WITH BAILER. 2ND PLUG AT 1750' WITH 50 SX CMT. 3RD PLUG AT 1450' WITH 50 SX CMT. 4TH PLUG AT 330' WITH 40 SX CMT. 5TH PLUG AT 40-0' WITH 10 SX CMT.


Perfs:

Top	Bot	Thru	Comments
4275	4300		

RECEIVED  
MAR 30 2006  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ACID SERVICES.  
Plugged through: CSG

District: 01

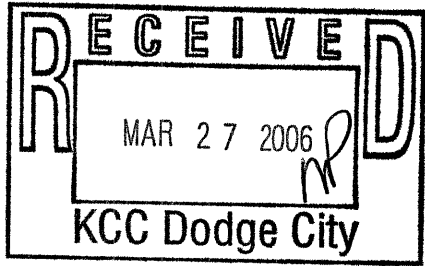

Signed Steve Durrant  
(TECHNICIAN)

INVOICED  
DATE 3-30-06  
INV. NO. 2006061408  
Form CP-2/3

PET