

TO:
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION - PLUGGING
 130 SOUTH MARKET, SUITE 2078
 WICHITA, KANSAS 67202

API Well Number: 15-151-22159-00-00
 Spot: E2NENW Sec/Twnshp/Rge: 33-26S-12W
660 feet from N Section Line, 2310 feet from W Section Line
 Lease Name: GREEN Well #: 1
 County: PRATT Total Vertical Depth: 4429 feet

Operator License No.: 30128
 Op Name: WHITE, KENNETH S.
 Address: 2400 N. WOODLAWN, SUITE 115
WICHITA, KS 67220

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4280		
CIBP		4302		
CIBP		4330		
PROD	5.5	4429	2400	WITH 135 SX CMT
SURF	10.75	316		WITH 250 SX CMT

\$ 143.94

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 03/17/2006 2:00 PM
 Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
 Proposal Rcvd. from: FELIX TOBAR Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 4200' & 5 SX CMT. PLUG AT 650' WITH 15 SX GEL & 50 SX CMT. PLUG AT 345' WITH 75 SX CMT. PLUG AT 40' WITH 25 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)
 Date/Time Plugging Completed: 03/17/2006 3:30 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 4200' & PUT 5 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 5 1/2" CASING. 1ST PLUG AT 650' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 345' WITH 75 SX CMT. 3RD PLUG AT 40' WITH 25 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4332	4335		
4317	4320		
4283	4288		
4222	4226		

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

INVOICED
 DATE 4-5-06
 TIME 2006061437

District: 01

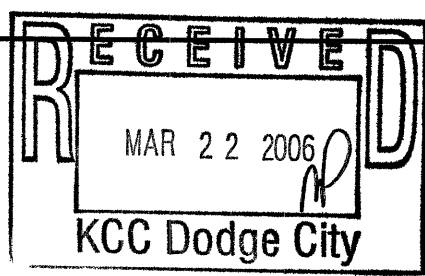

Signed Stephen J. Peifer
 (TECHNICIAN)

RECEIVED
 APR 05 2006
 KCC WICHITA

Form CSG
 PCT