

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-009-24906-00-00
Spot: SWSWSE Sec/Twnshp/Rge: 16-19S-14W
330 feet from S Section Line, 2310 feet from E Section Line
Lease Name: CONNER B Well #: 1
County: BARTON Total Vertical Depth: 3595 feet

Operator License No.: 6170
Op Name: GLOBE OPERATING, INC.
Address: PO BOX 12
GREAT BEND, KS 67530

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	829		

116.84

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 04/05/2006 3:30 PM
Plug Co. License No.: 31548 Plug Co. Name: DISCOVERY DRILLING
Proposal Rcvd. from: TOM ALM Company: DISCOVERY DRILLING Phone: (785) 623-2920

Proposed Order 110 sxs 60/40 pozmix - 6% gel with 1/4# flocele per sack.
Plugging Space all plugs with heavy drilling mud through drill pipe.
Method: No ar buckle found.

Plugging Proposal Received By: HERB DEINES Witness Type: NONE
Date/Time Plugging Completed: 04/05/2006 6:30 PM KCC Agent: HERB DEINES

Actual Plugging Report:

1st. Plug at 880' w/50 sxs.
2nd. Plug at 350' w/25 sxs.
3rd. Plug at 40' w/10 sxs.
Rathole with 15 sxs.
Mousehole with 10 sxs.

Perfs:

RECEIVED
APR 10 2006
KCC WICHITA

INVOICED

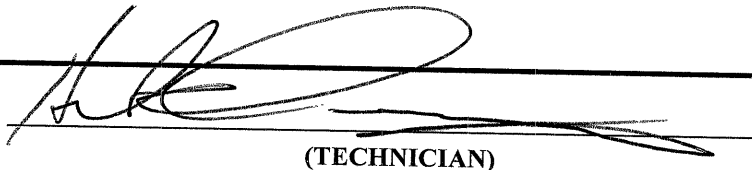
DATE: 4-10-06
TIME: 2006061460

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed


(TECHNICIAN)

APR 07 2006

RET