



SONIC LOG

Company		BIRD DOG OIL, LLC.	
Well		KELLER - GATES #1-17	
Field		KENILWORTH WEST	
County		STAFFORD	
State		KANSAS	
Location:		APL # : 15-185-24043-0000	
Permanent Datum		GROUND LEVEL	
Log Measured From		KELLY BUSHING 8' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 17 TWP 22S RGE 13W		Elevation	
		K.B. 1910	
		D.F. 1908	
		G.L. 1902	
Date	1/5/19		
Run Number	TWO		
Depth Driller	3890		
Depth Logger	3886		
Bottom Logged Interval	3878		
Top Log Interval	300		
Casing Driller	8 5/8"@305'		
Casing Logger	305		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 18,900 PPM	
Density / Viscosity	8.9/50		
pH / Fluid Loss	8.5/14.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.300@55F		
Rmf @ Meas. Temp	.225@55F		
Rmc @ Meas. Temp	.360@55F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.143@115F		
Time Circulation Stopped	4.5 HOURS		
Time Logger on Bottom	1:00 P.M.		
Maximum Recorded Temperature	115F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	JUSTIN CARTER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
LARNED, KS., EAST ON K-19 TO "STAFFORD CR 10", 1 1/4S., W. INTO






MAIN SECTION


Database File: 3329ddn.db
Dataset Pathname: pass6.7
Presentation Format: slt
Dataset Creation: Sat Jan 05 14:41:38 2019
Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	ABHV	140	DELTA TIME (usec/ft)		40	
6	CALIPER (in)	16	10 (ft3)	0	30	SONIC POROSITY (pu)		-10


0	MINMK	20	TBHV	0	ITT (msec)		20	
			0 (ft3)	10				

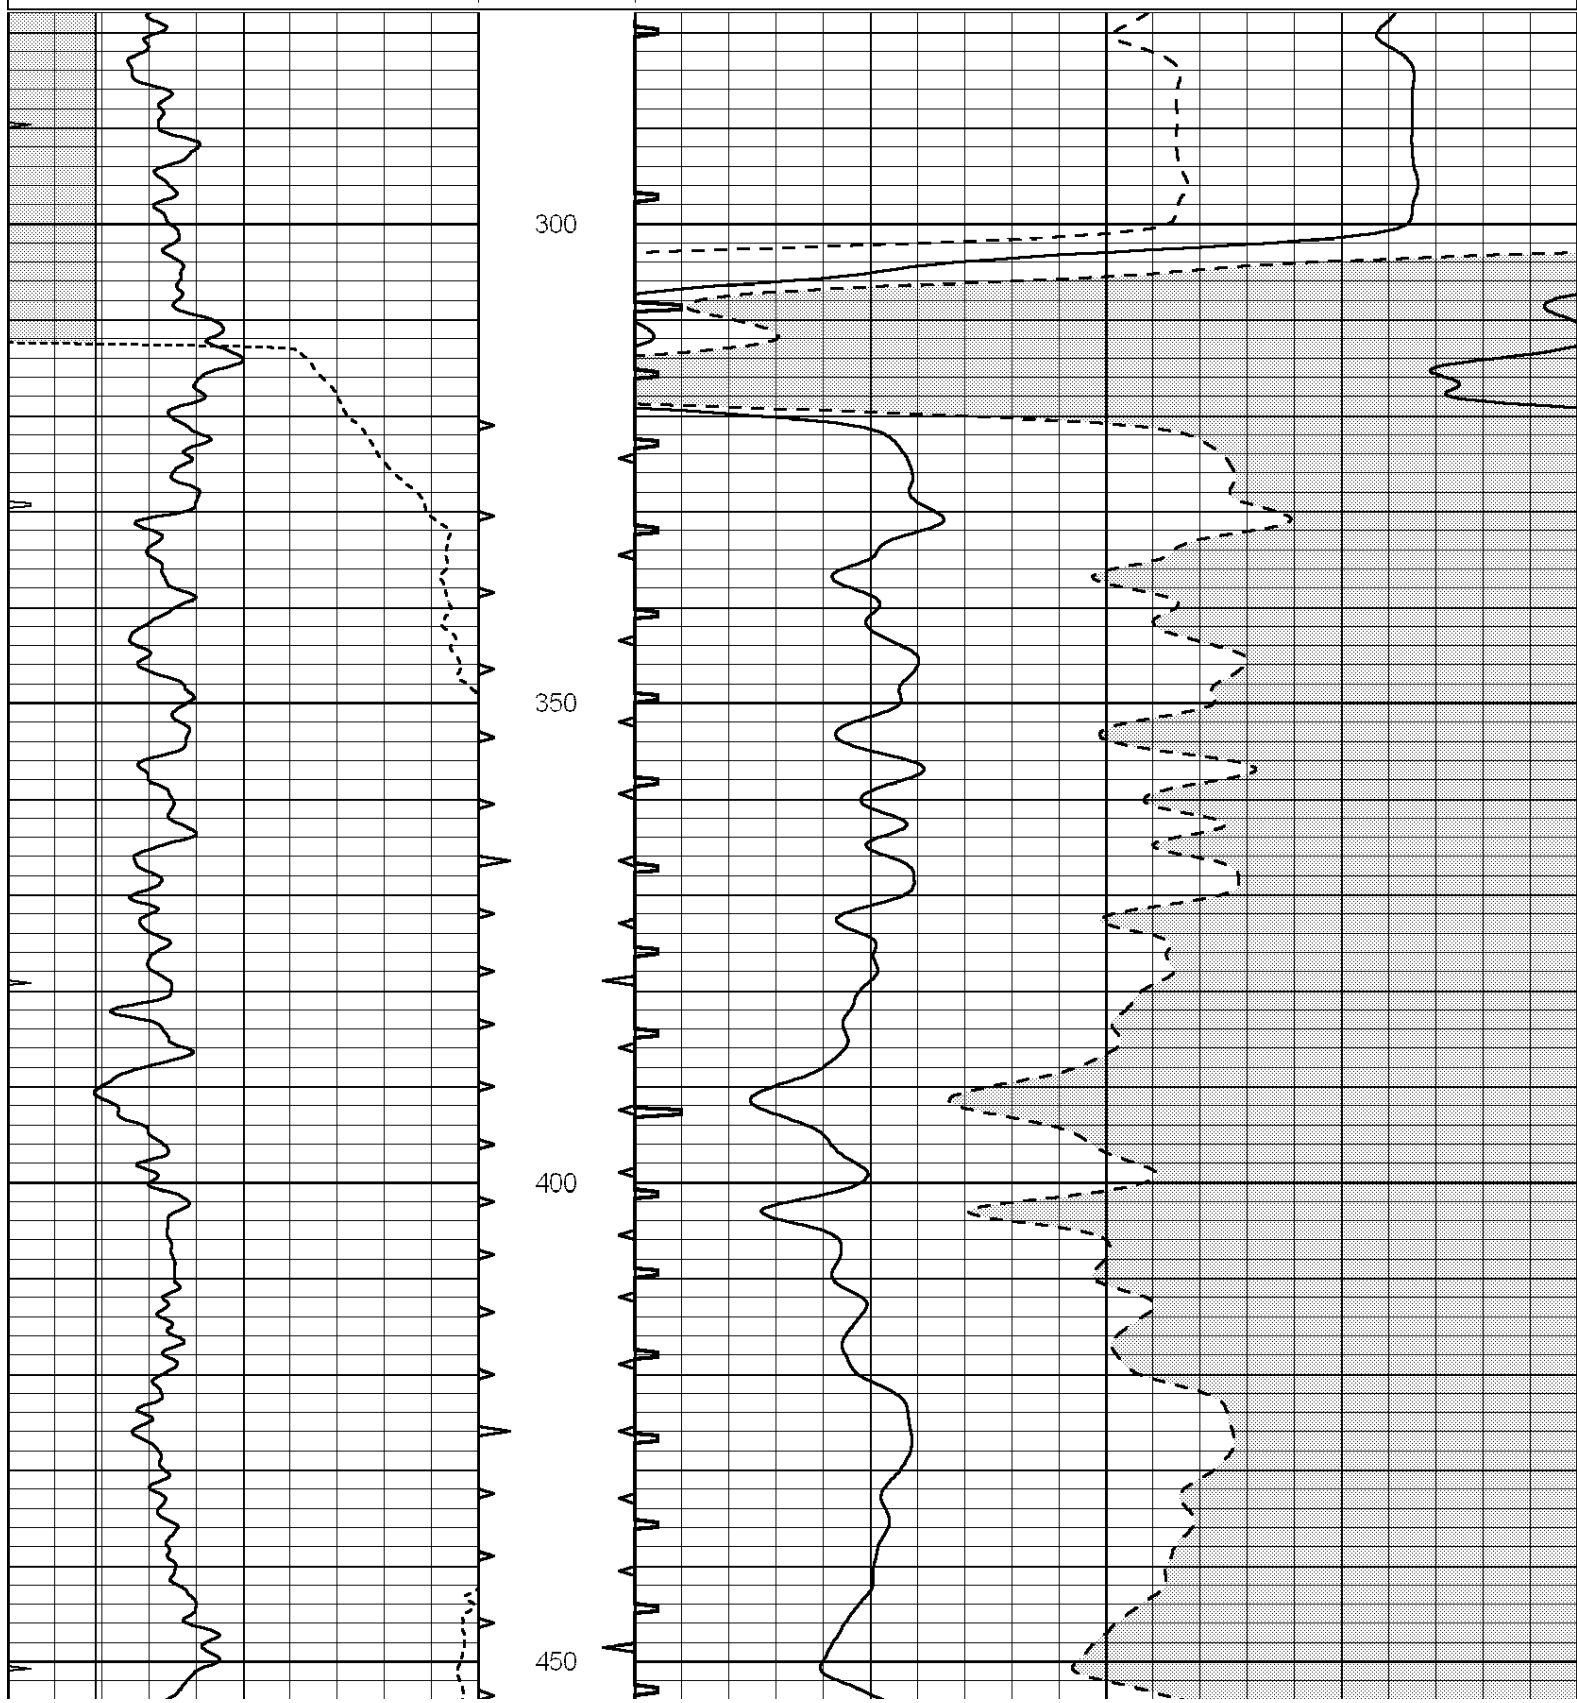

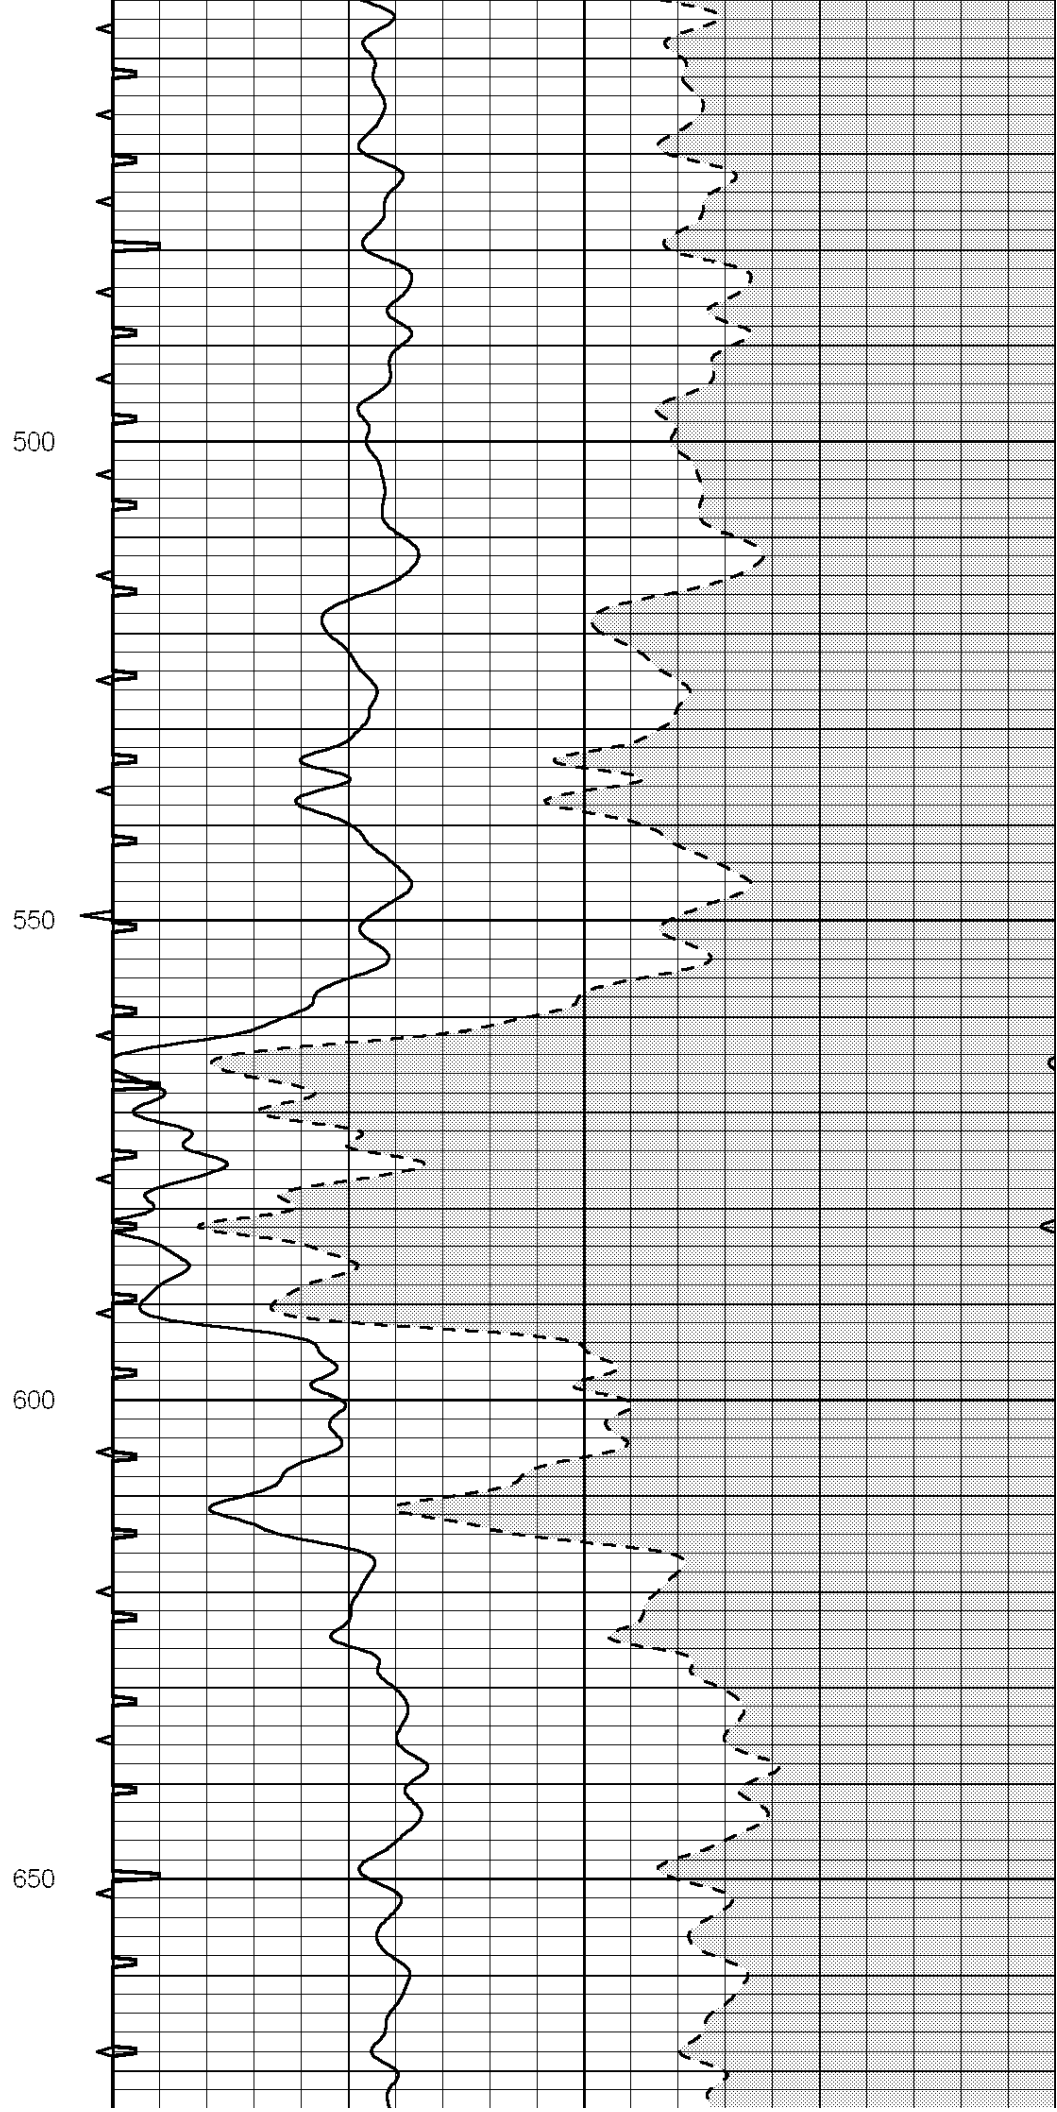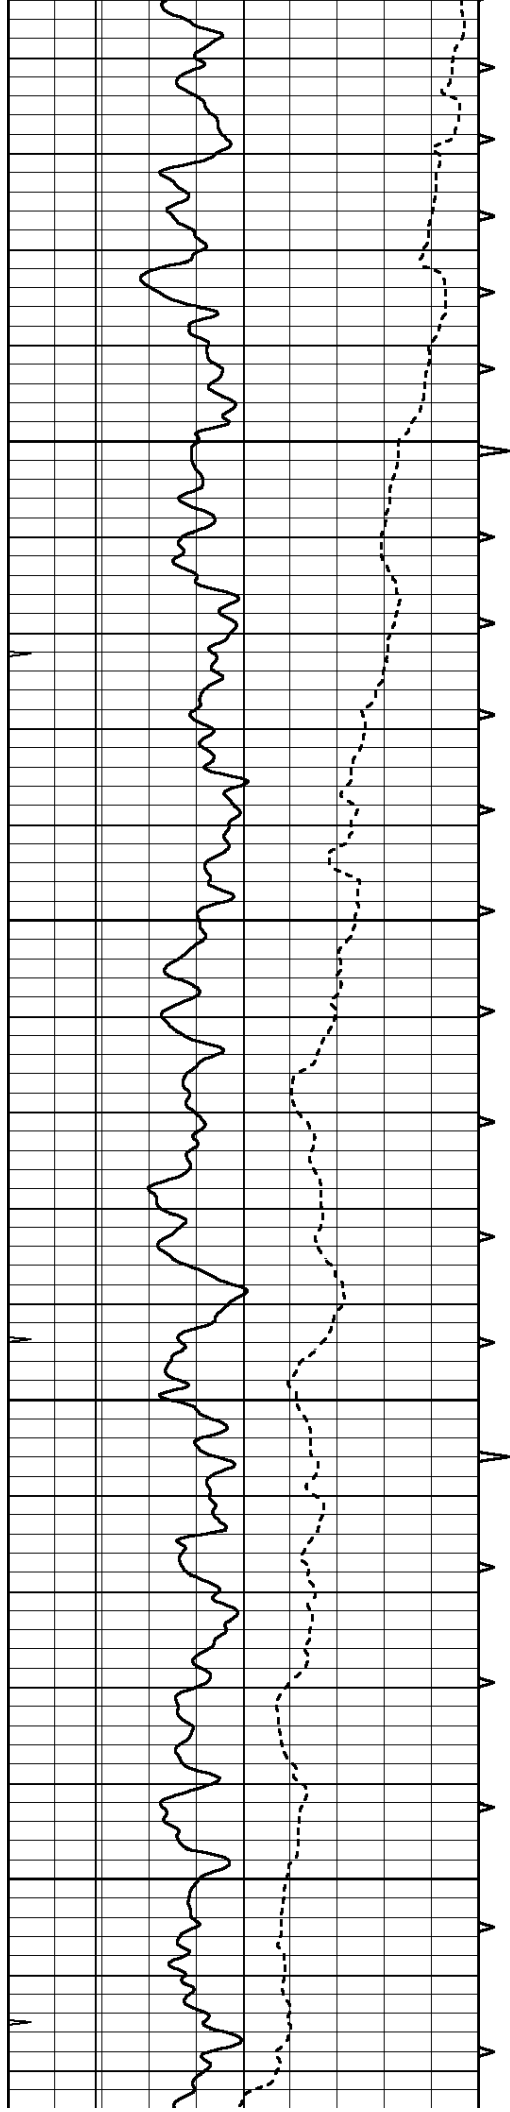

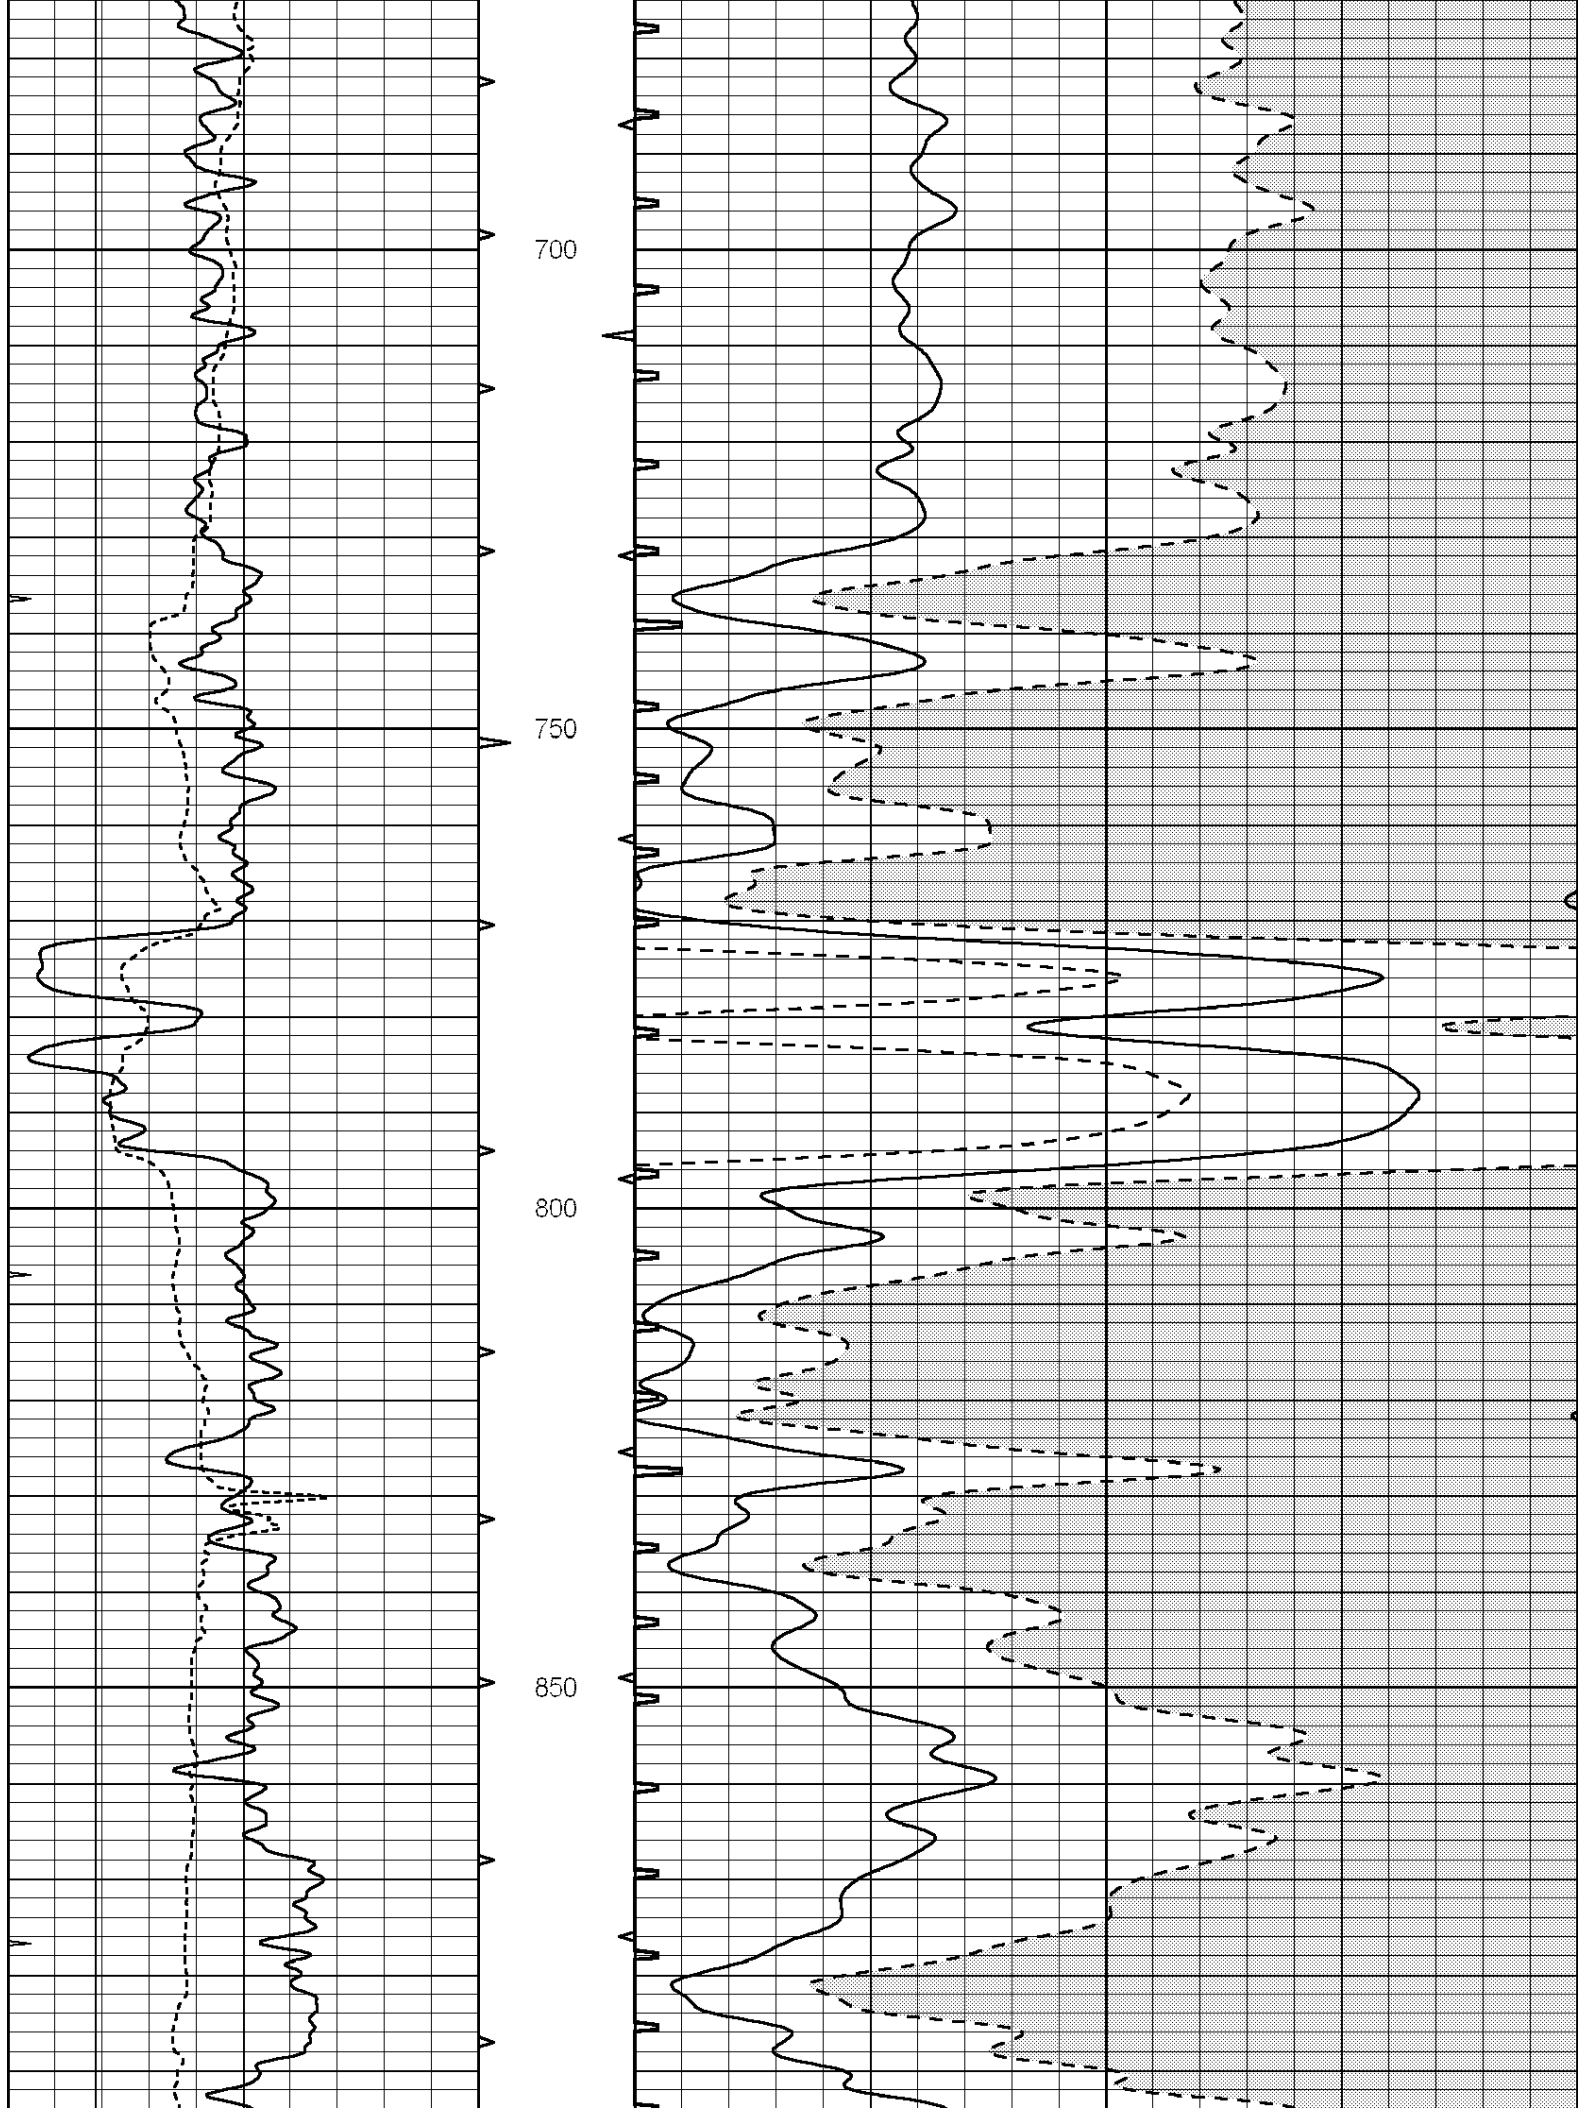

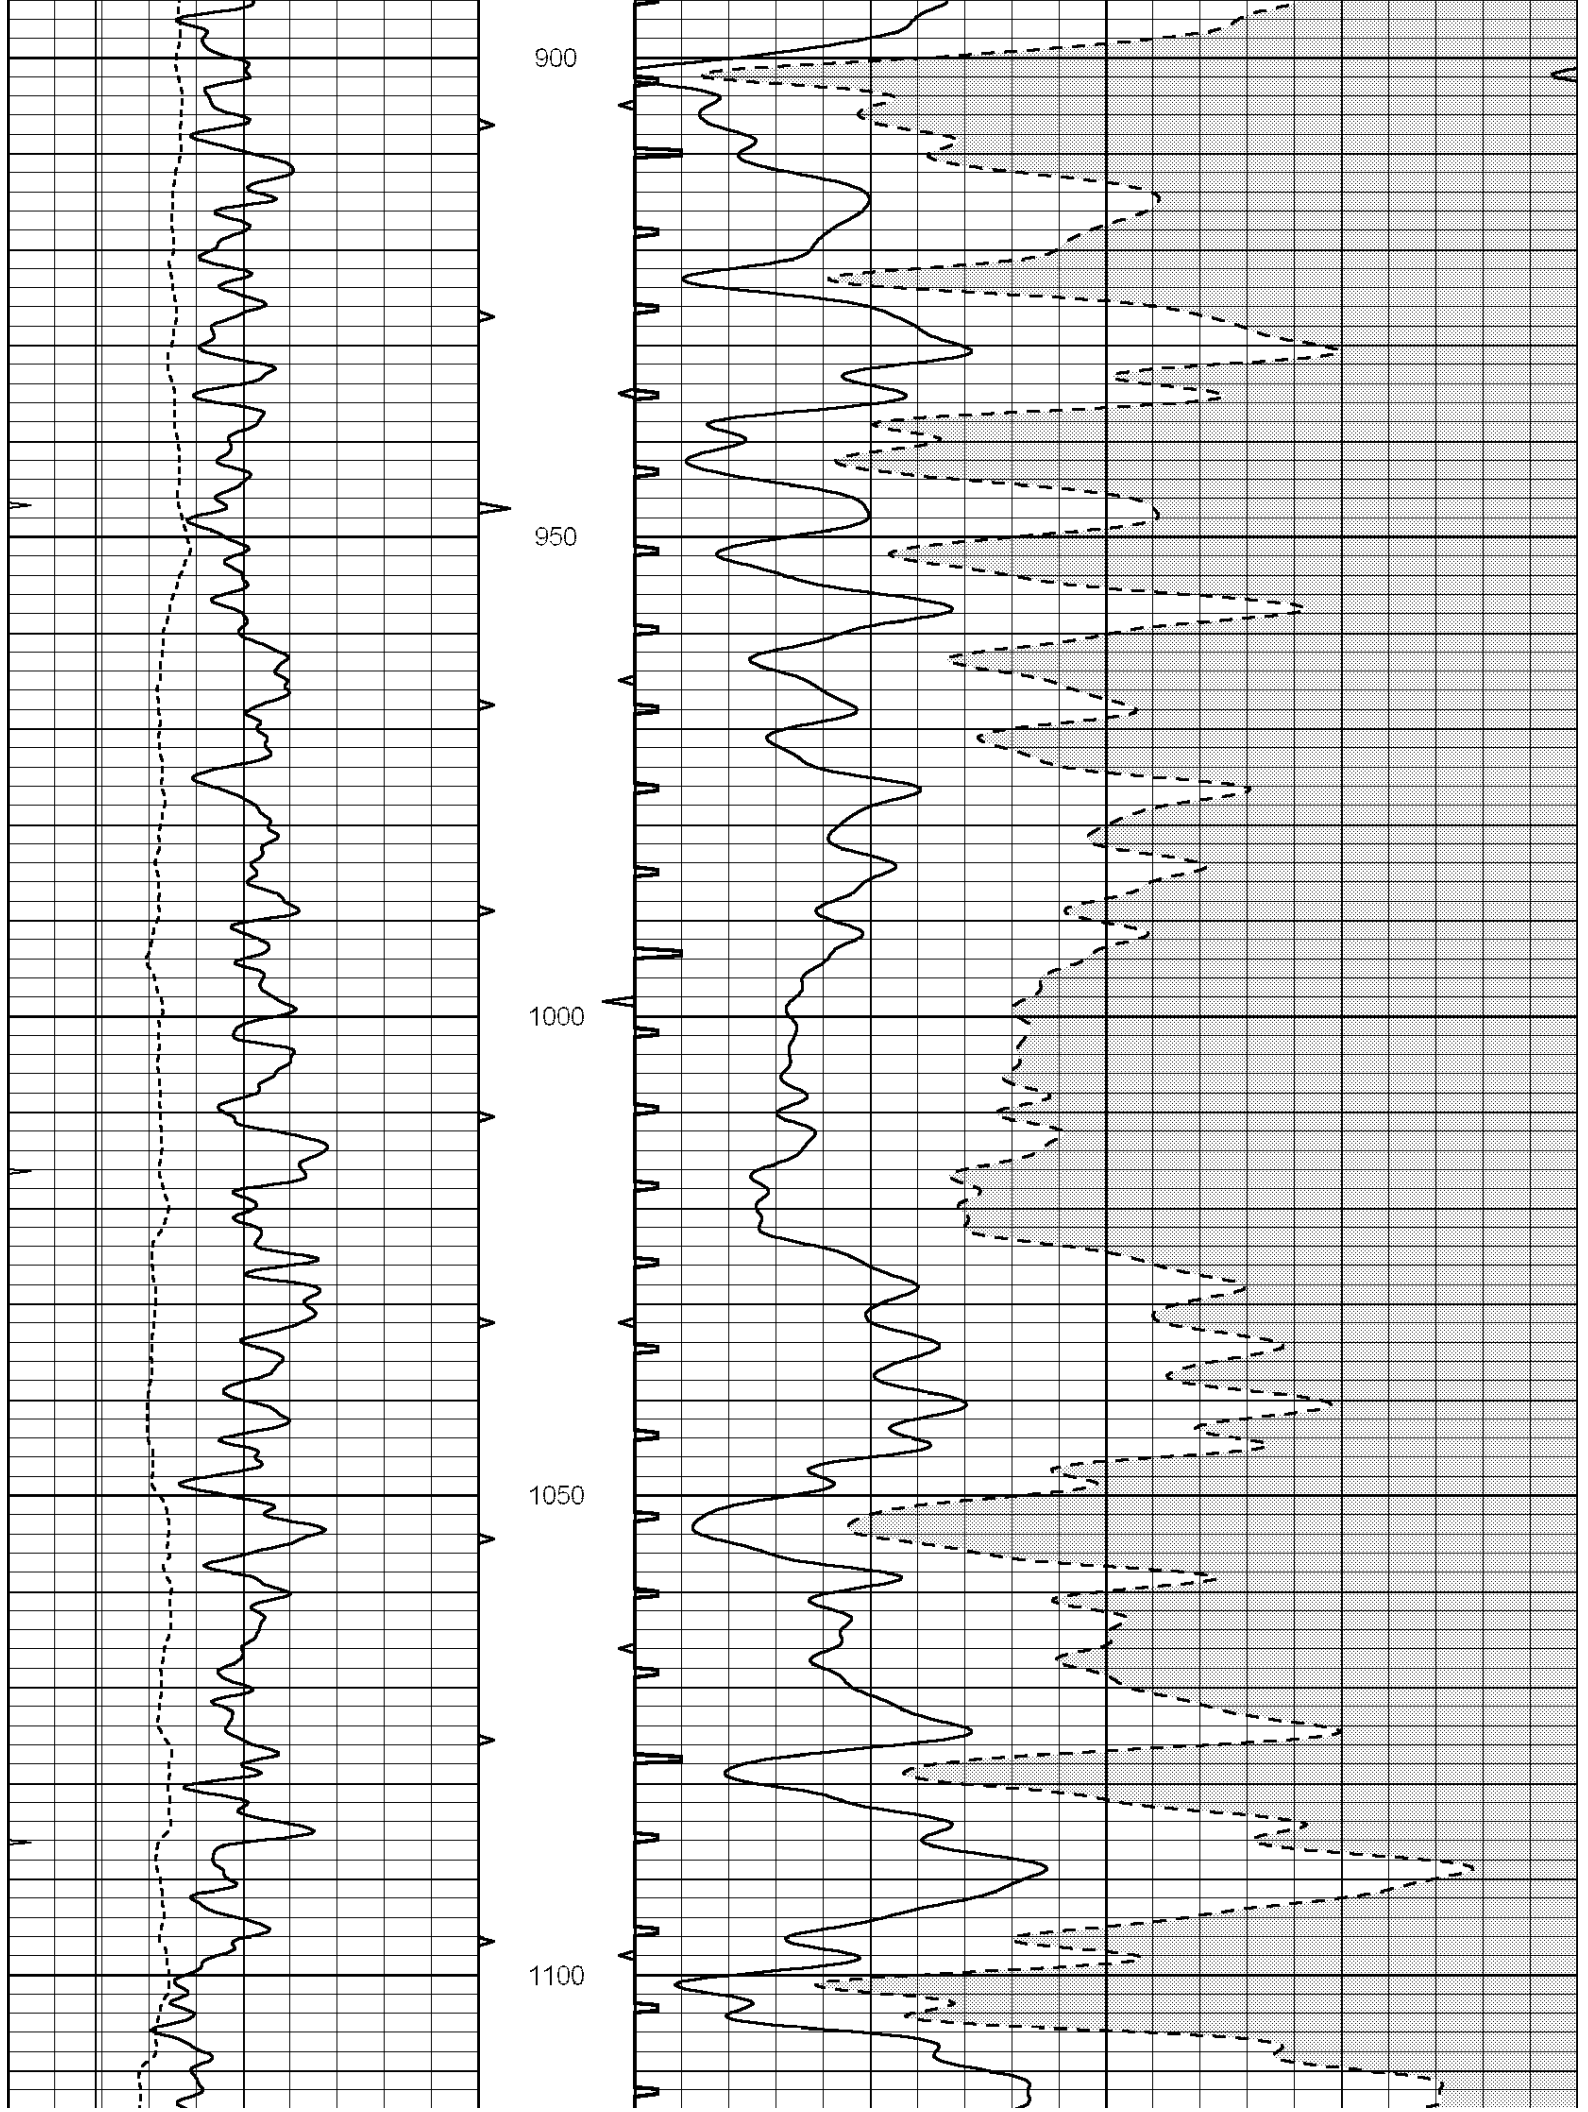

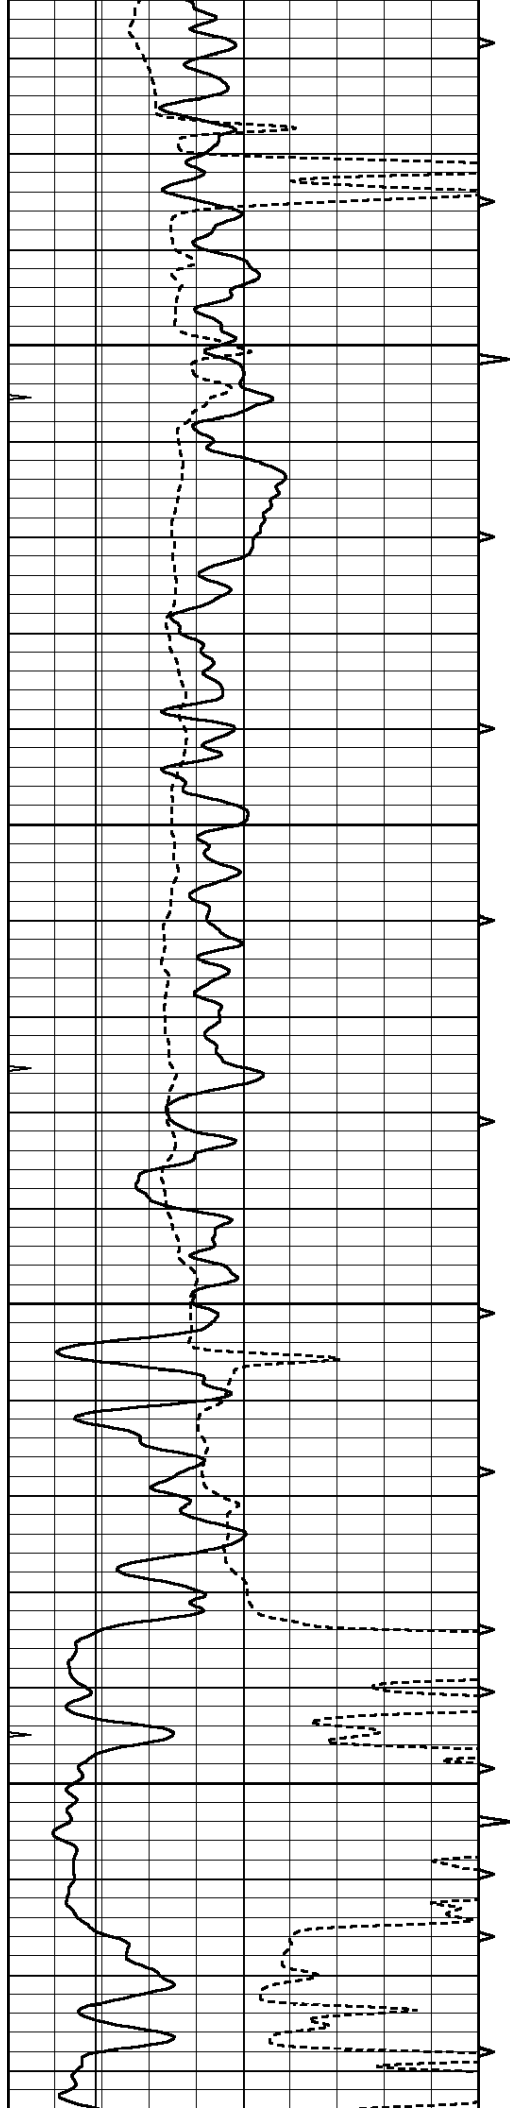



1150



1200


1250

1300

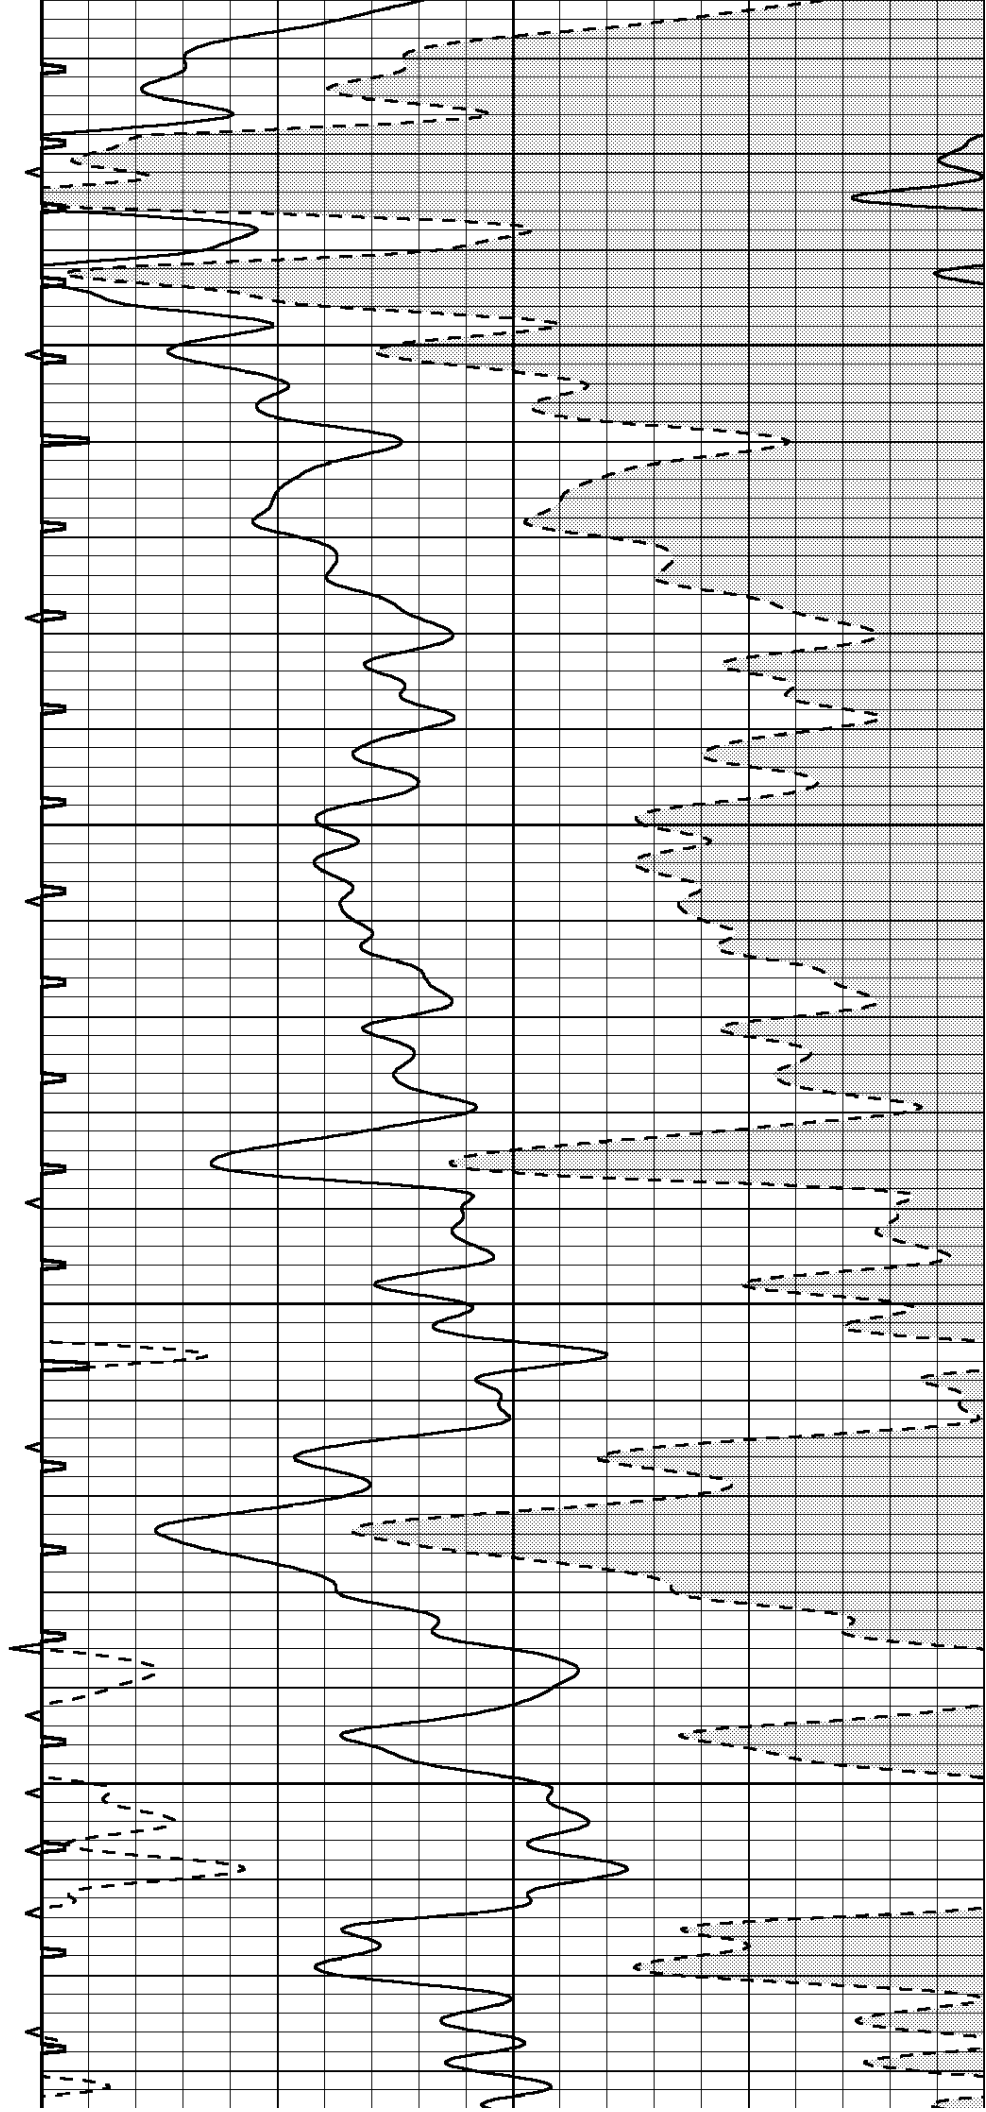

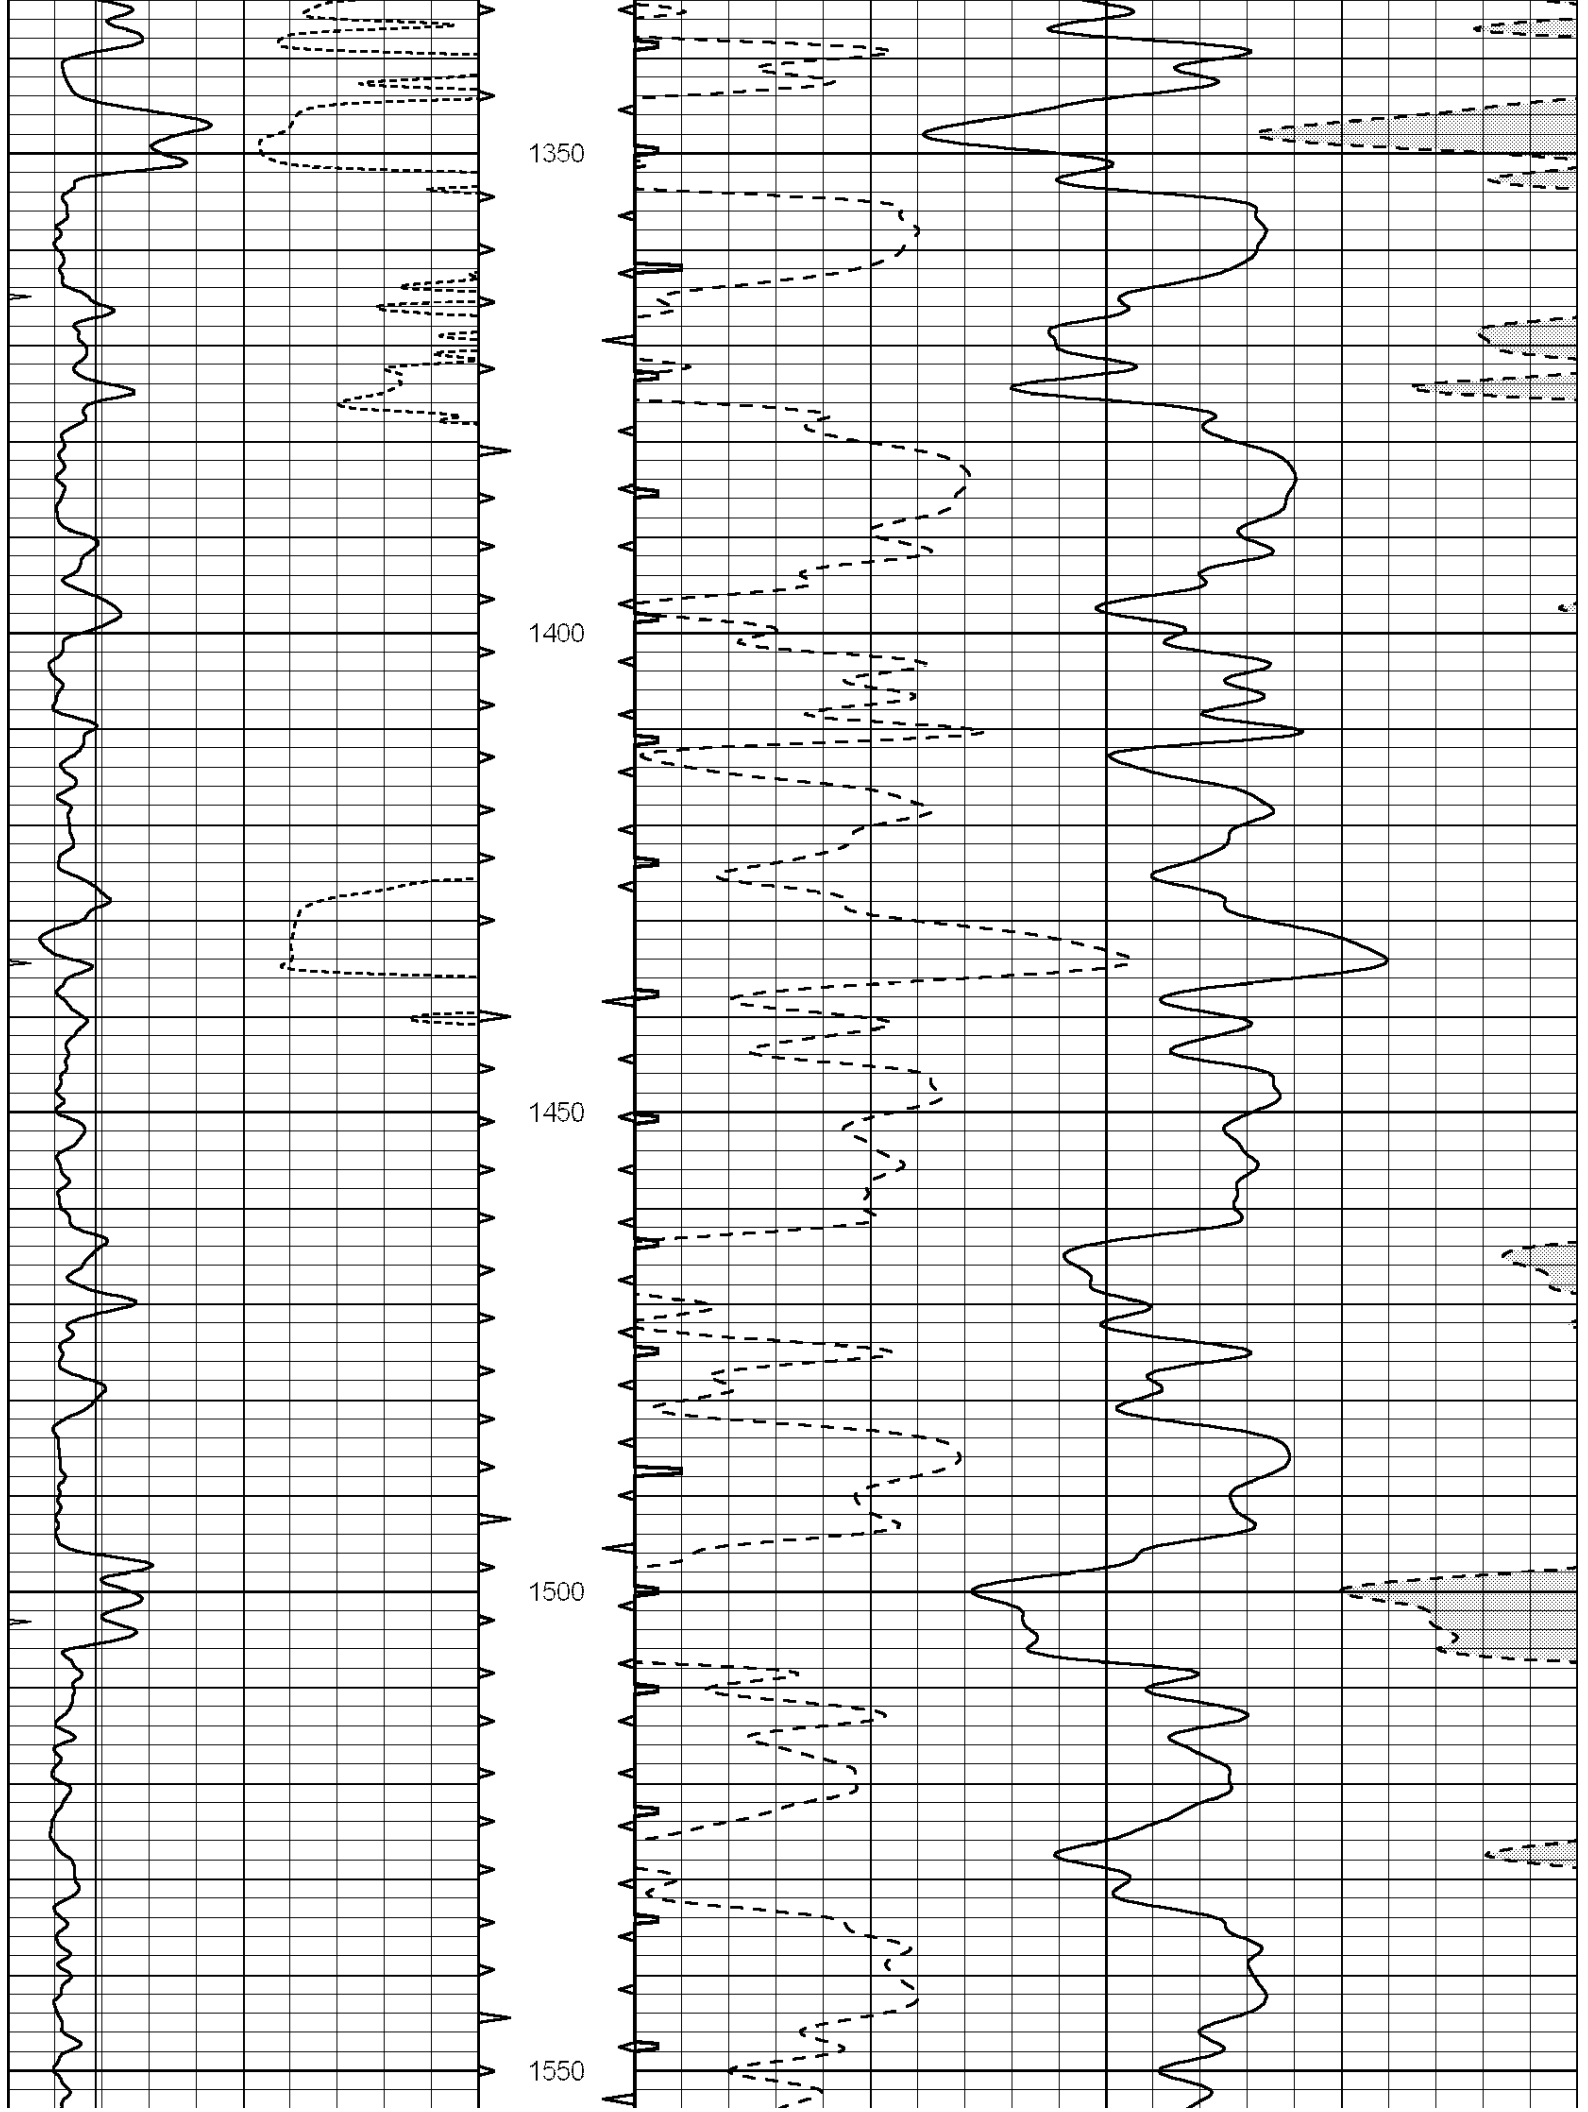

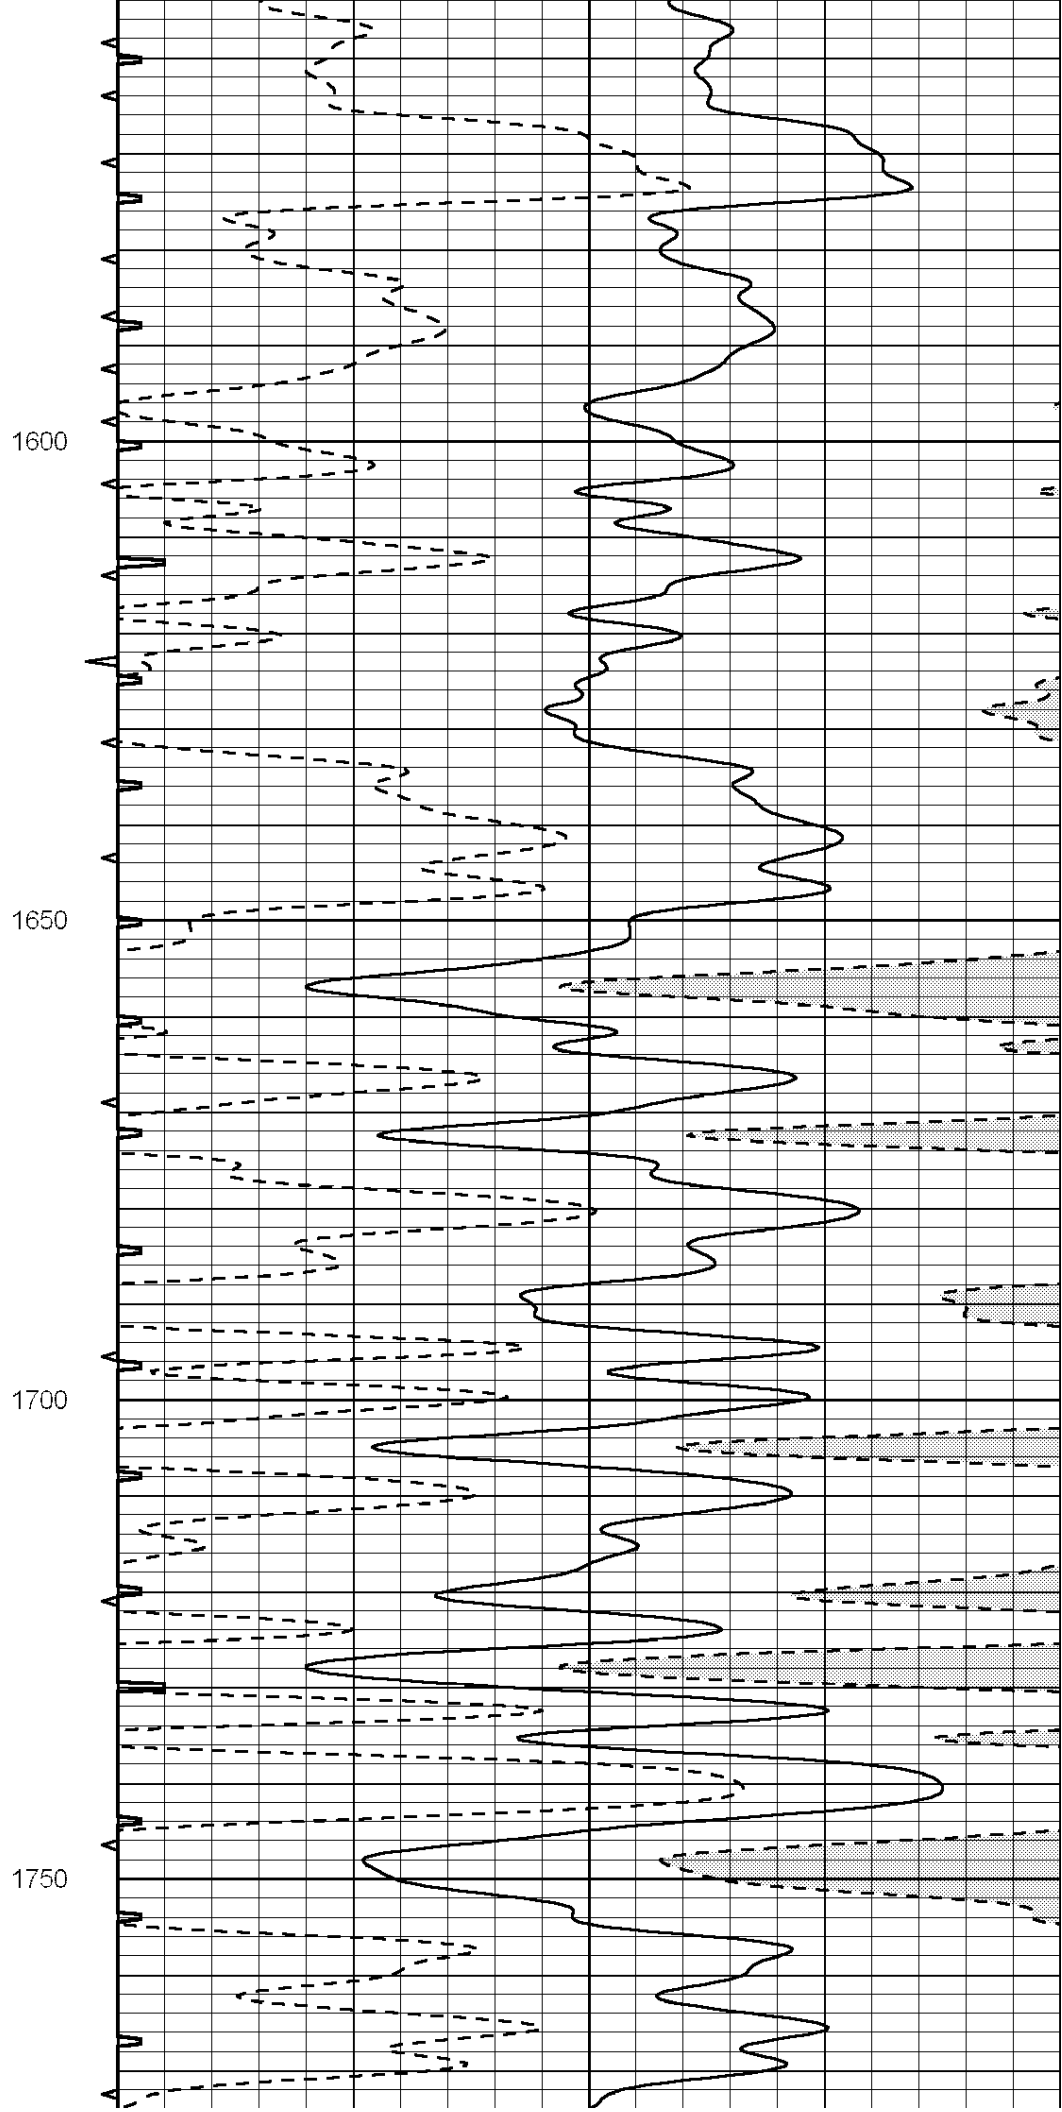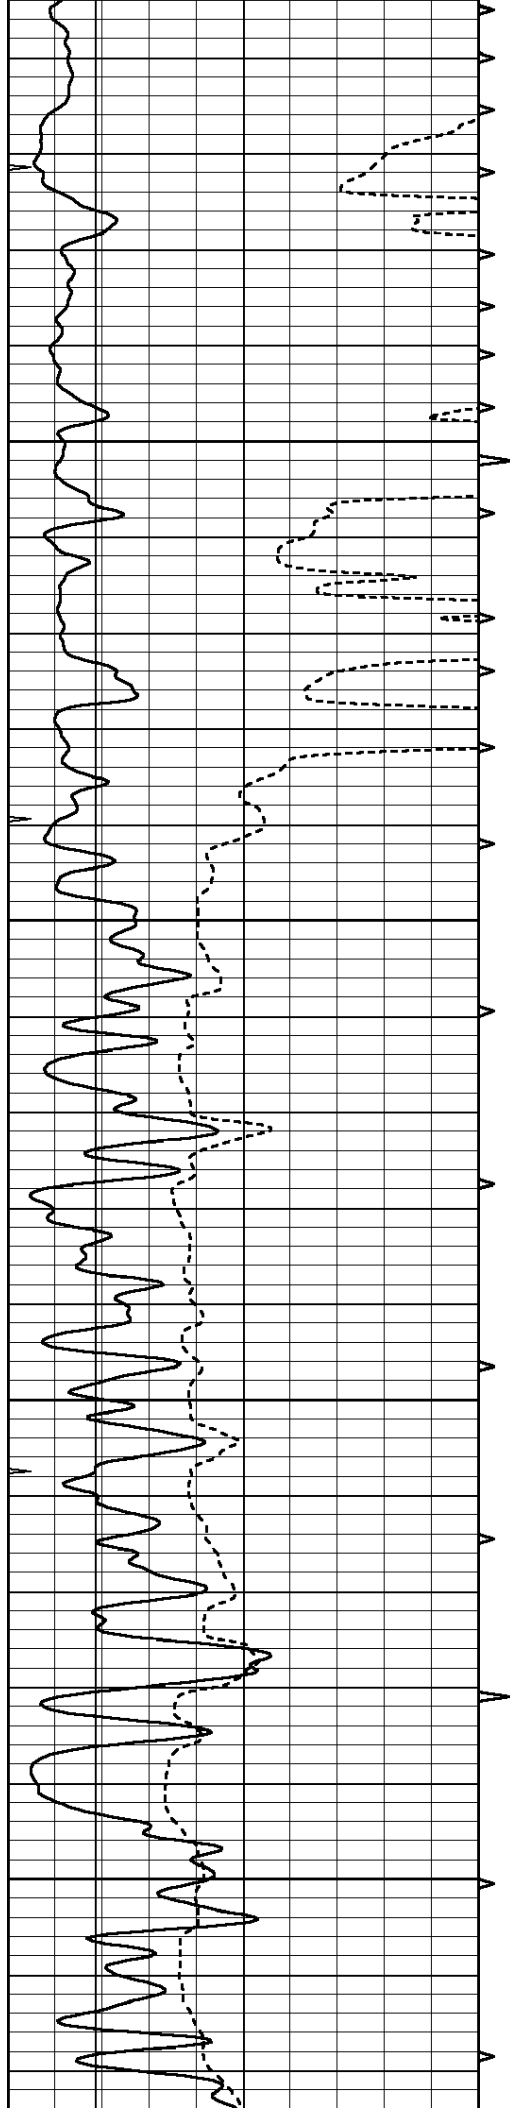

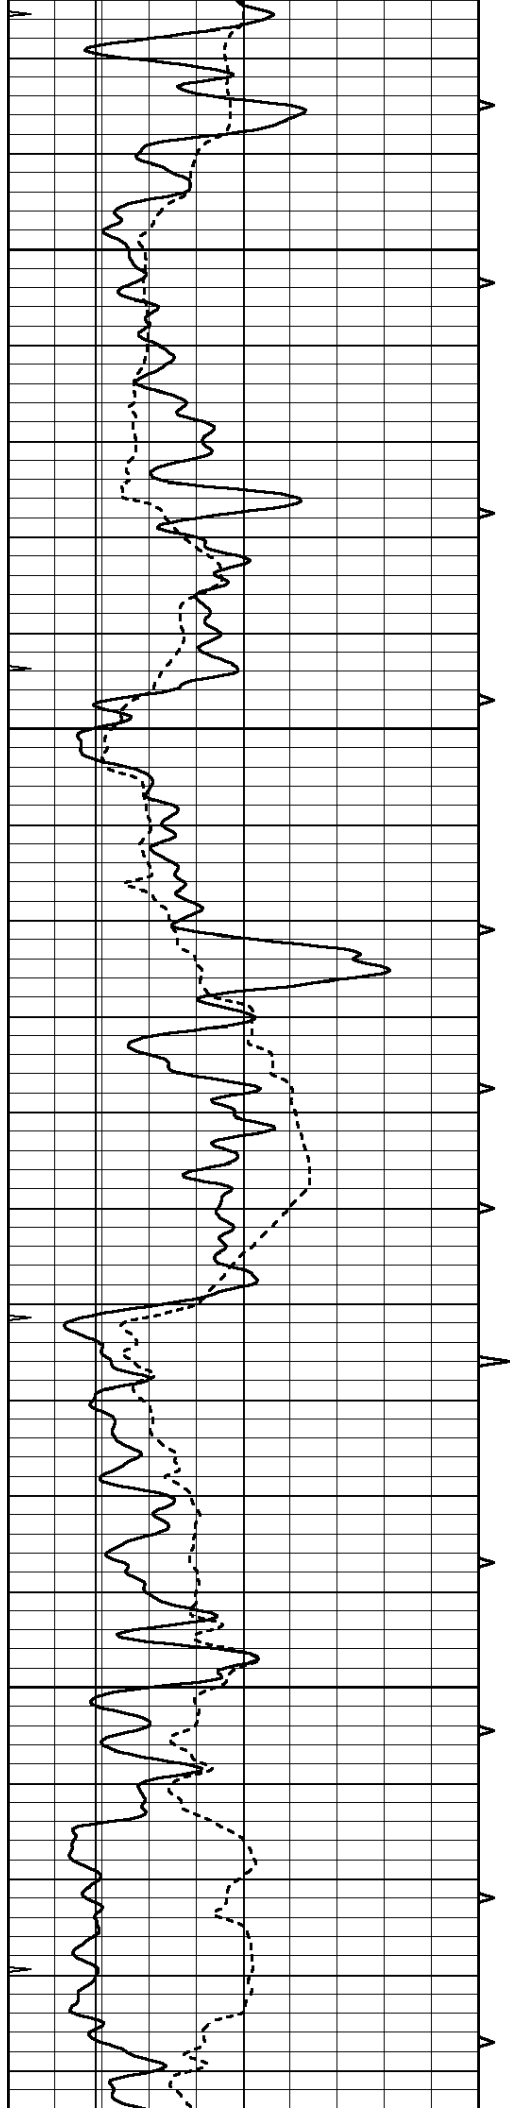




1800


1850

1900

1950

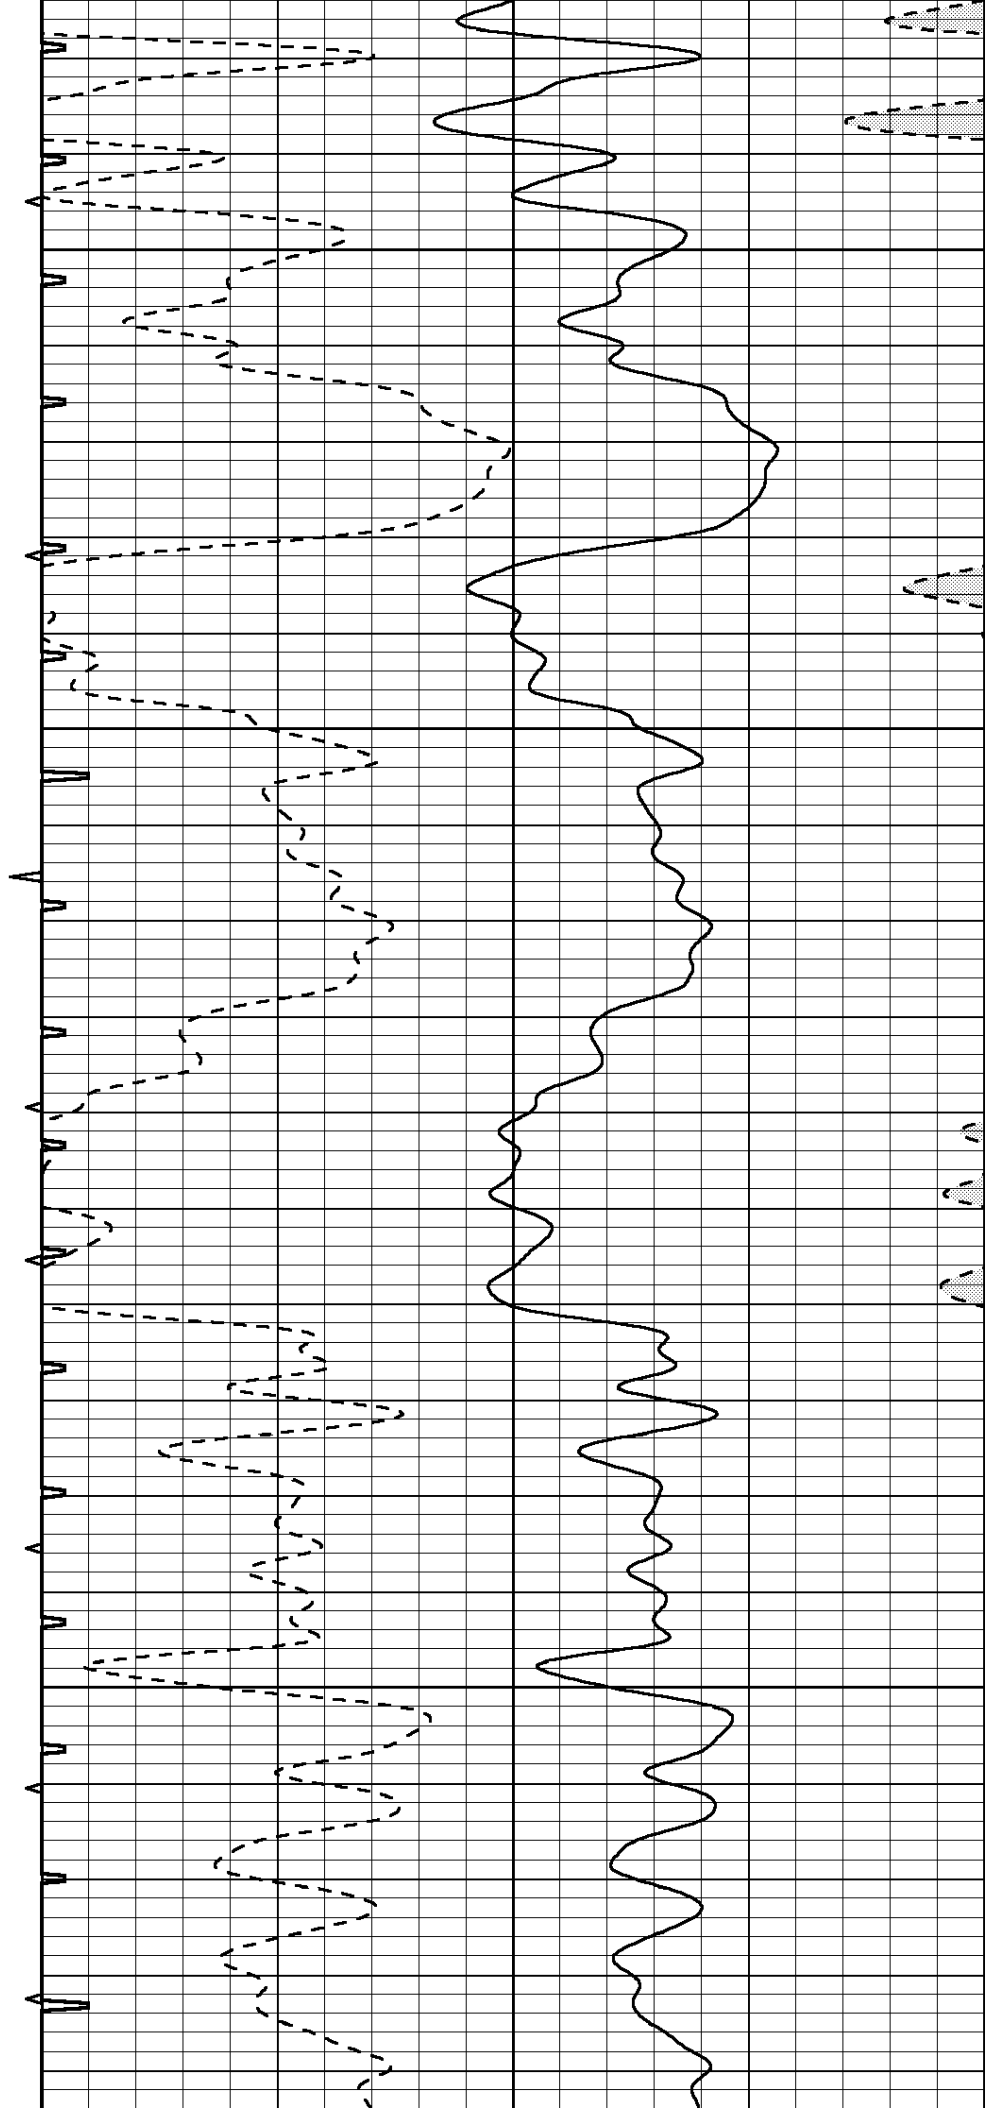

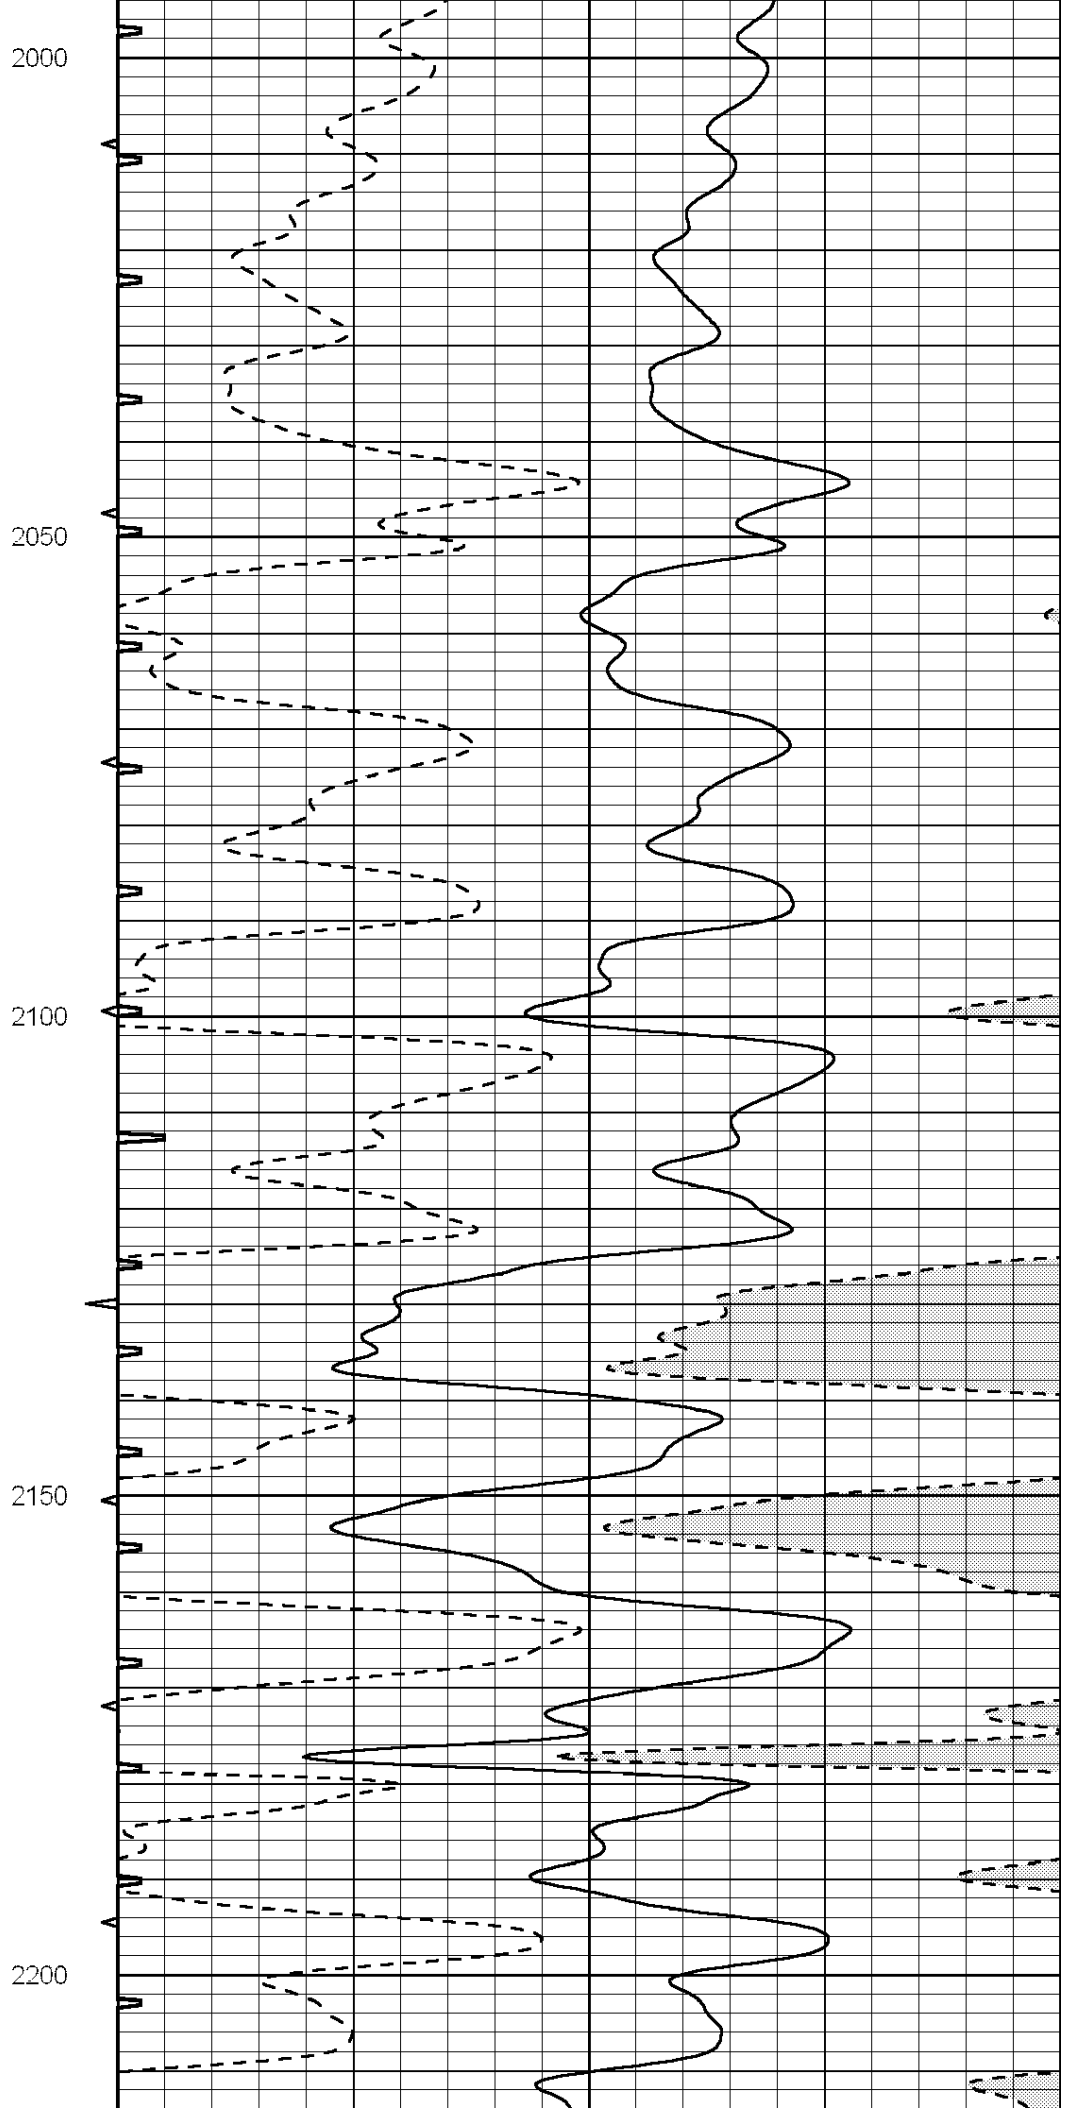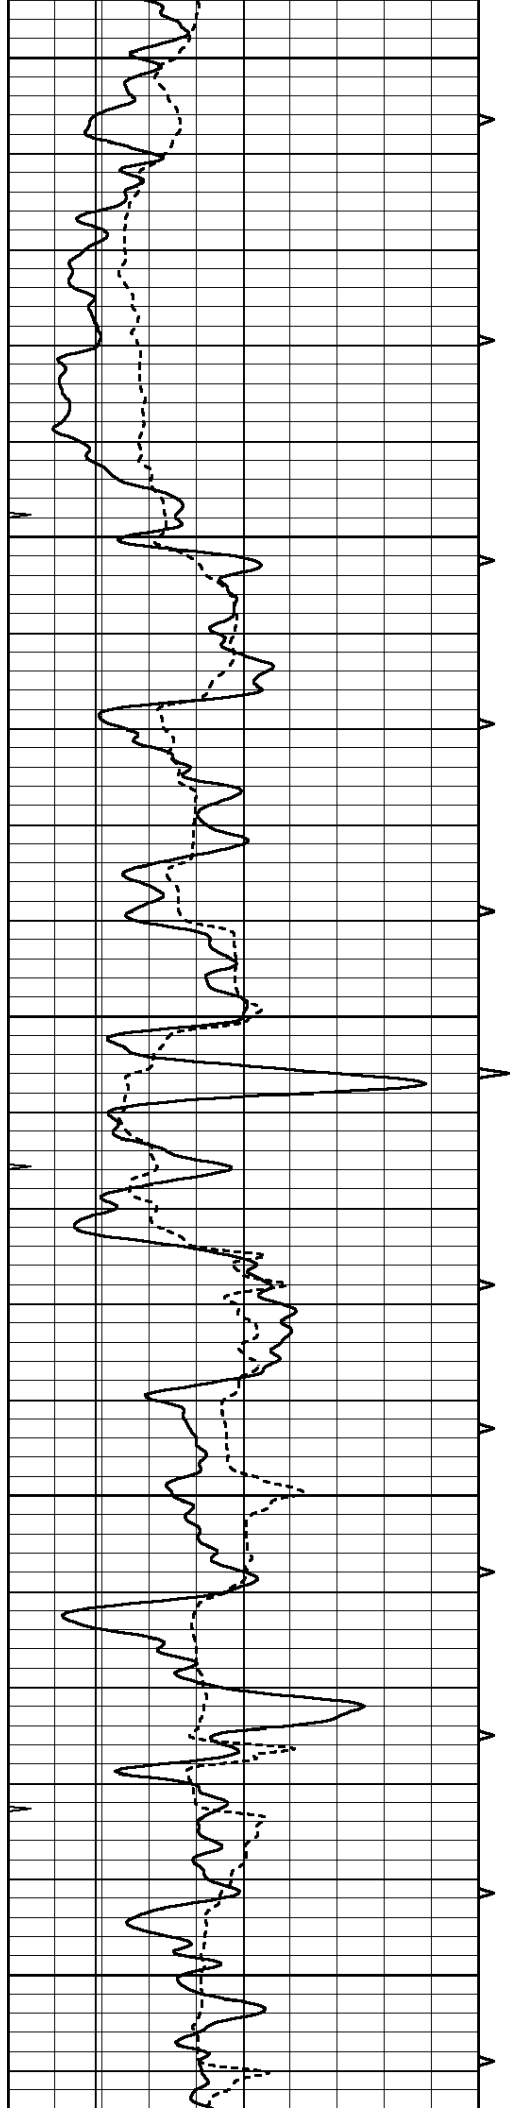

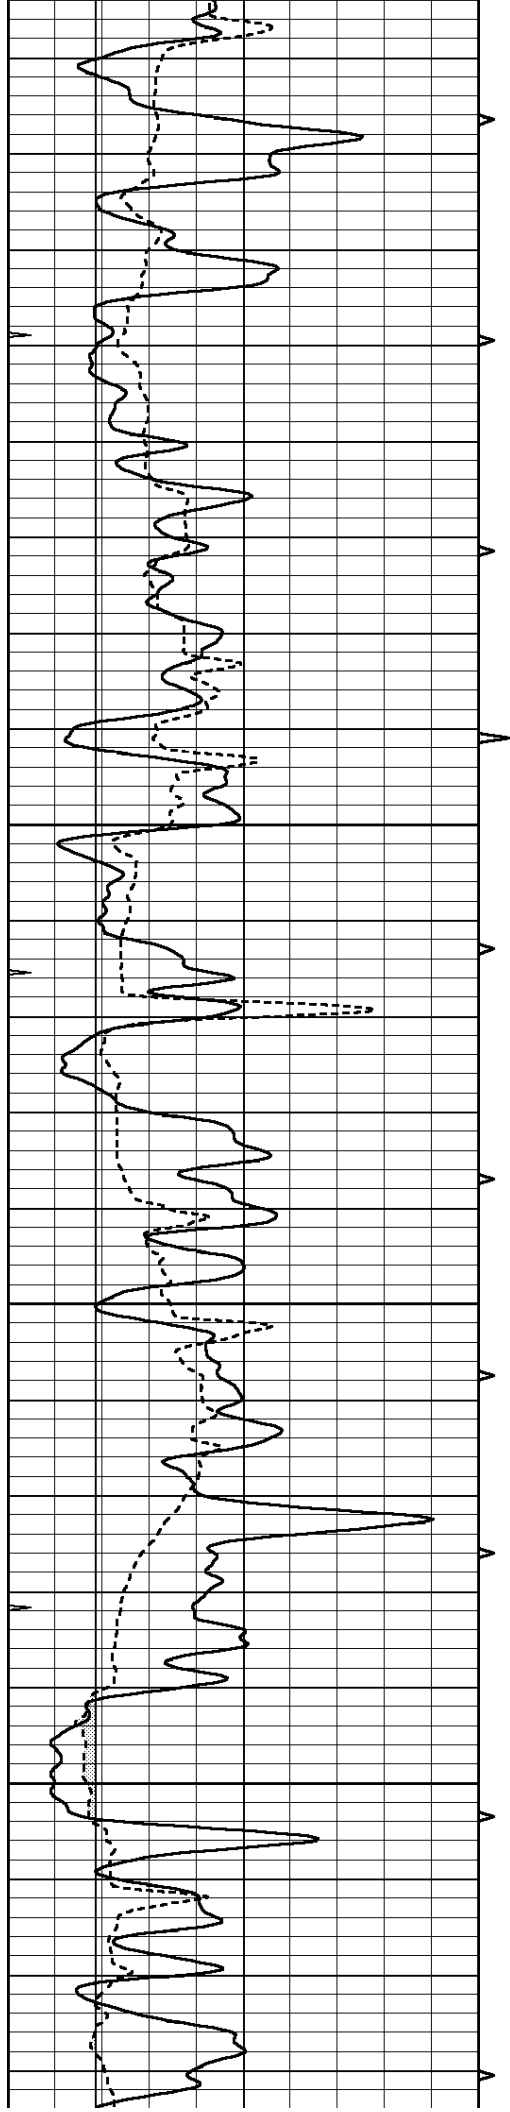




2250


2300

2350

2400

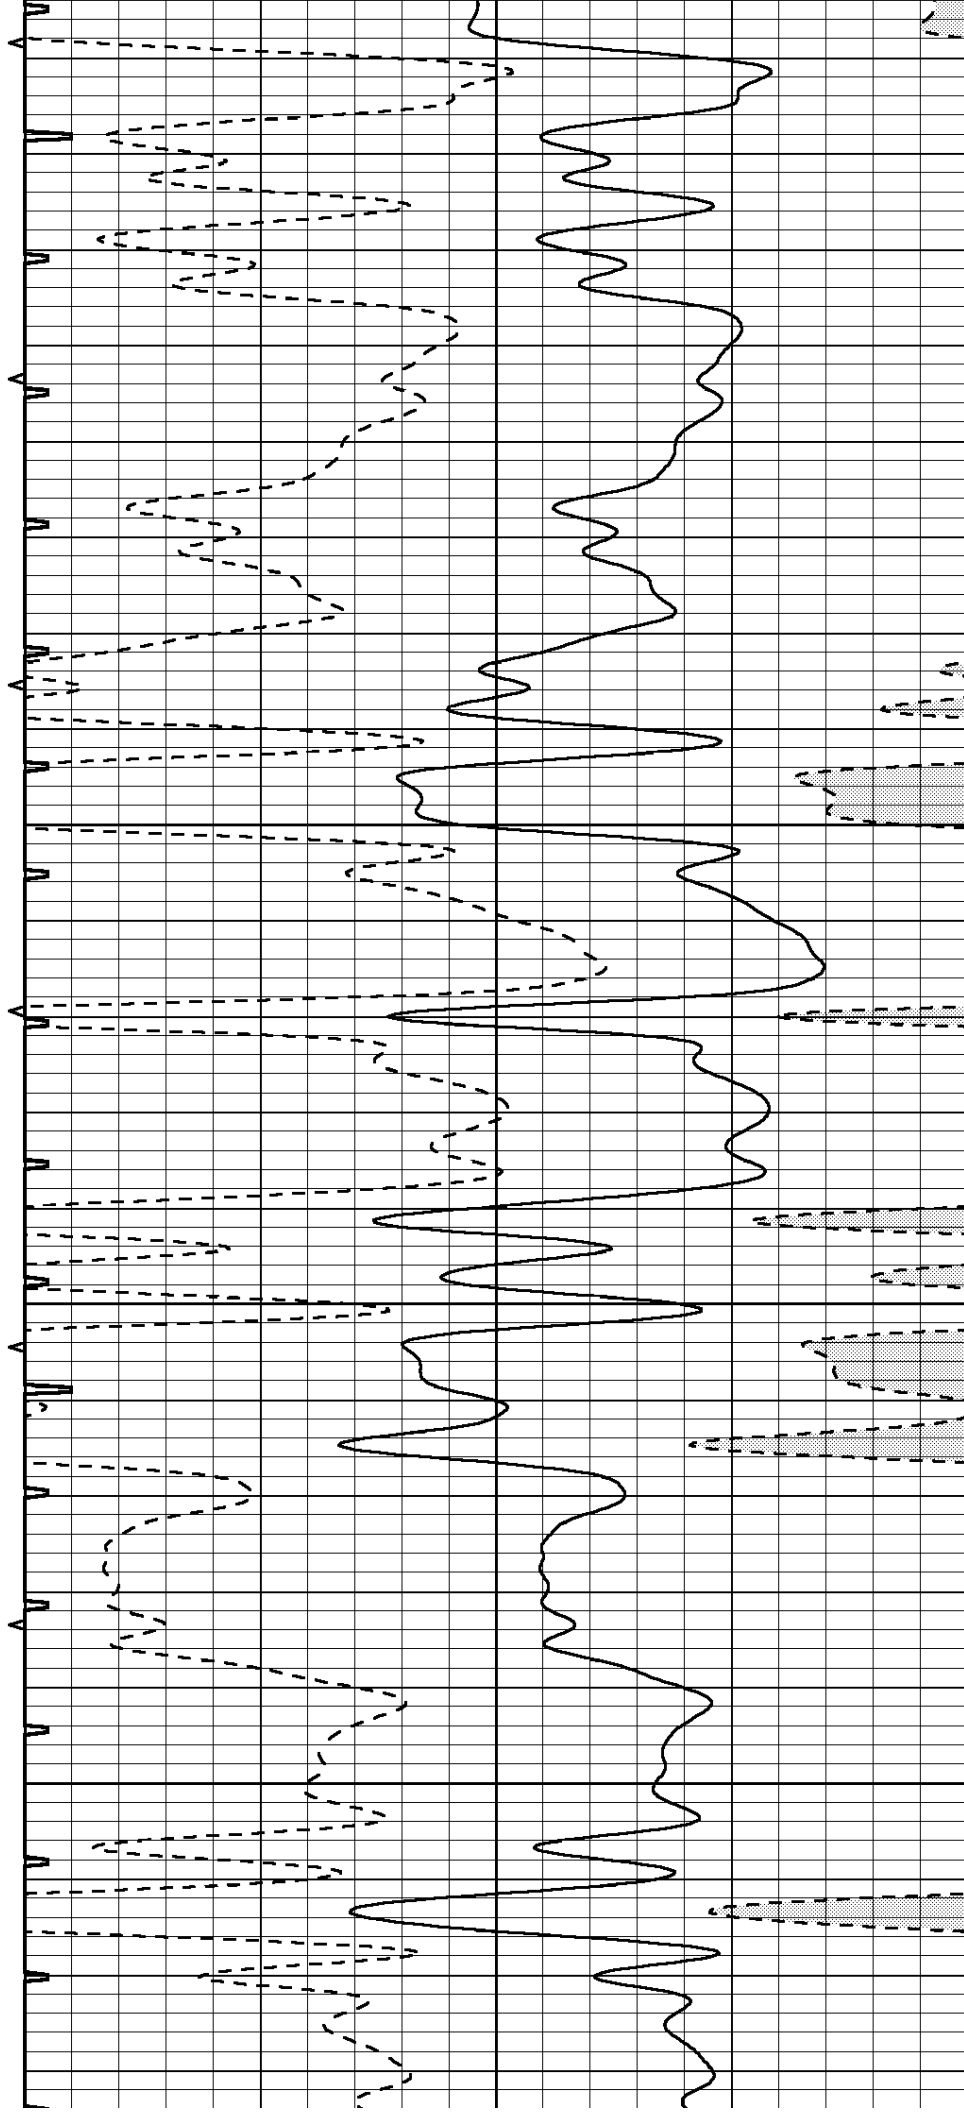

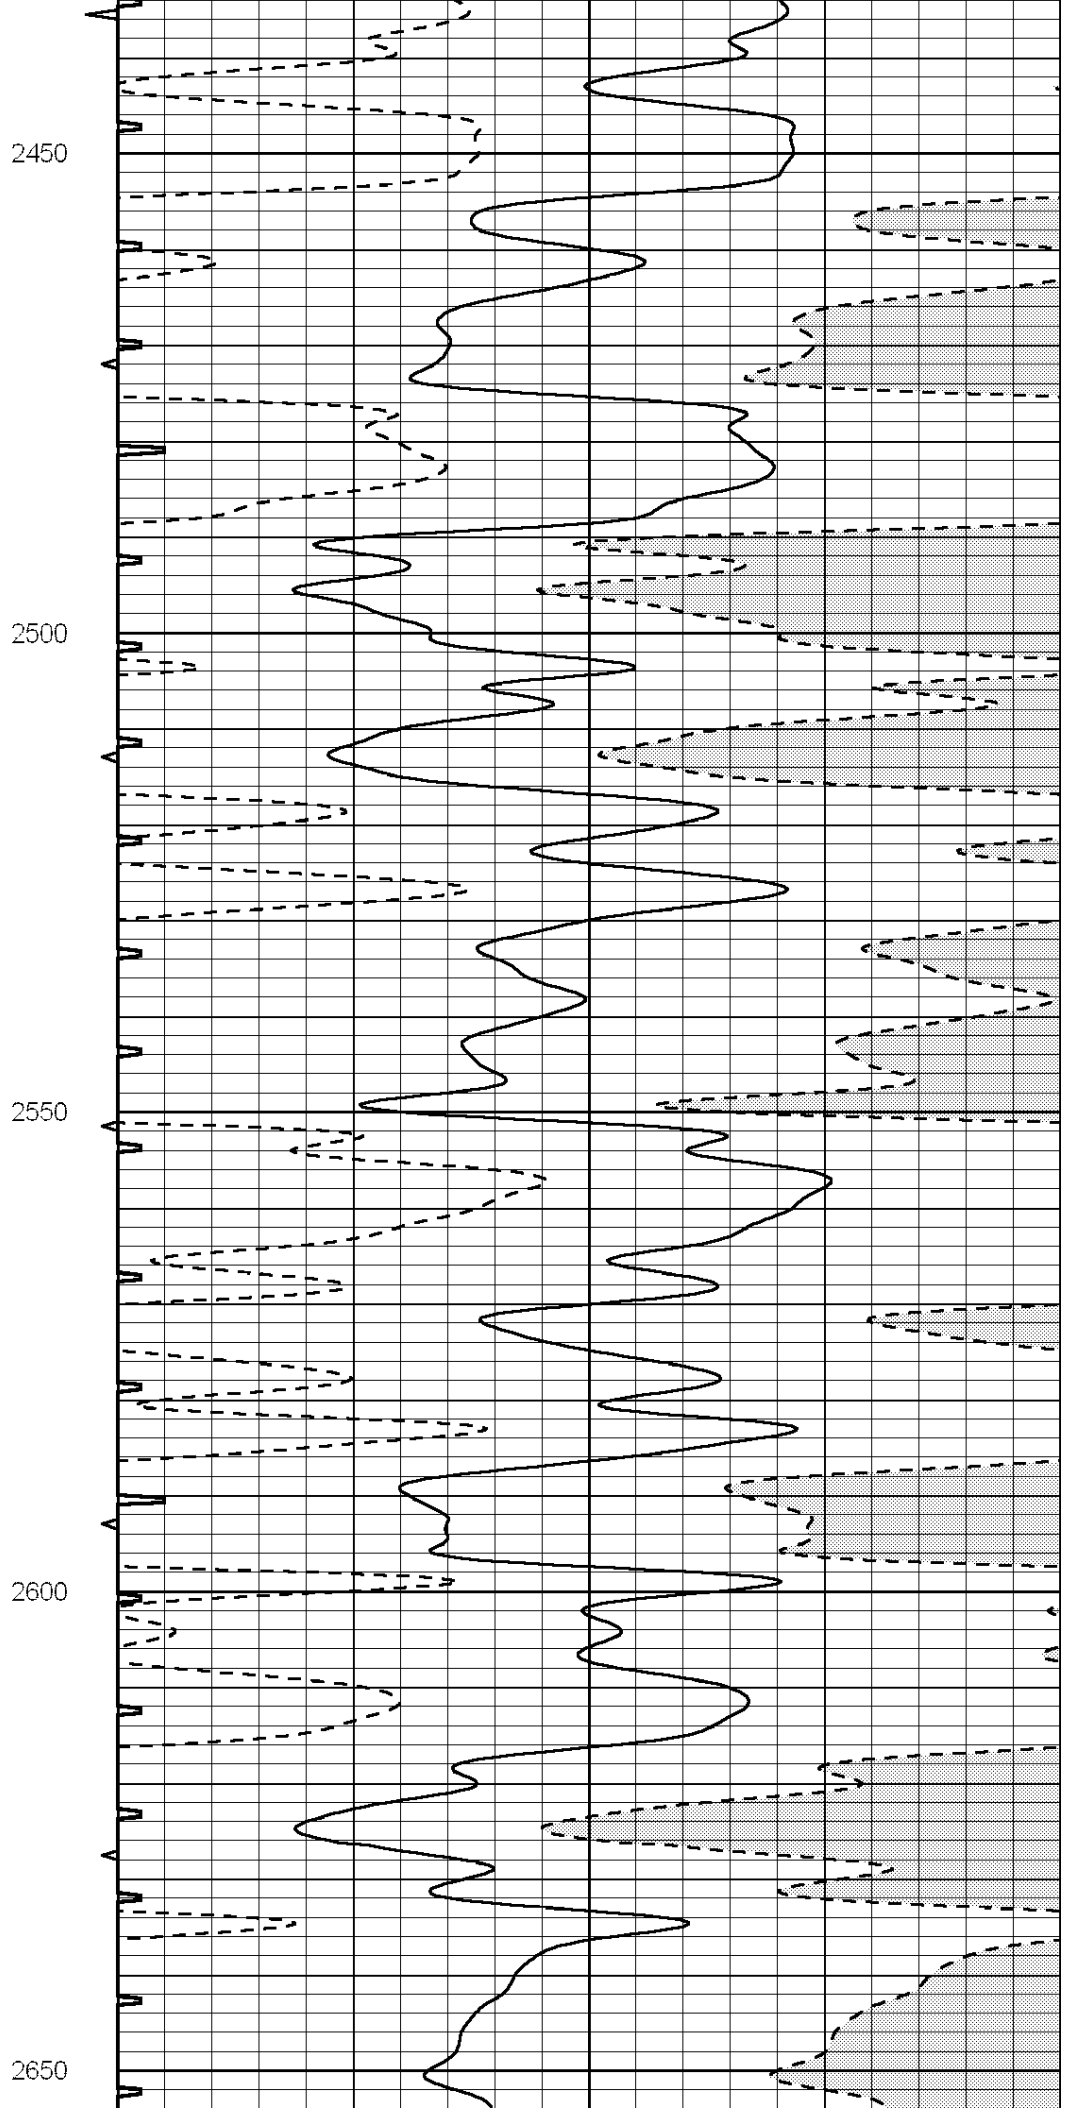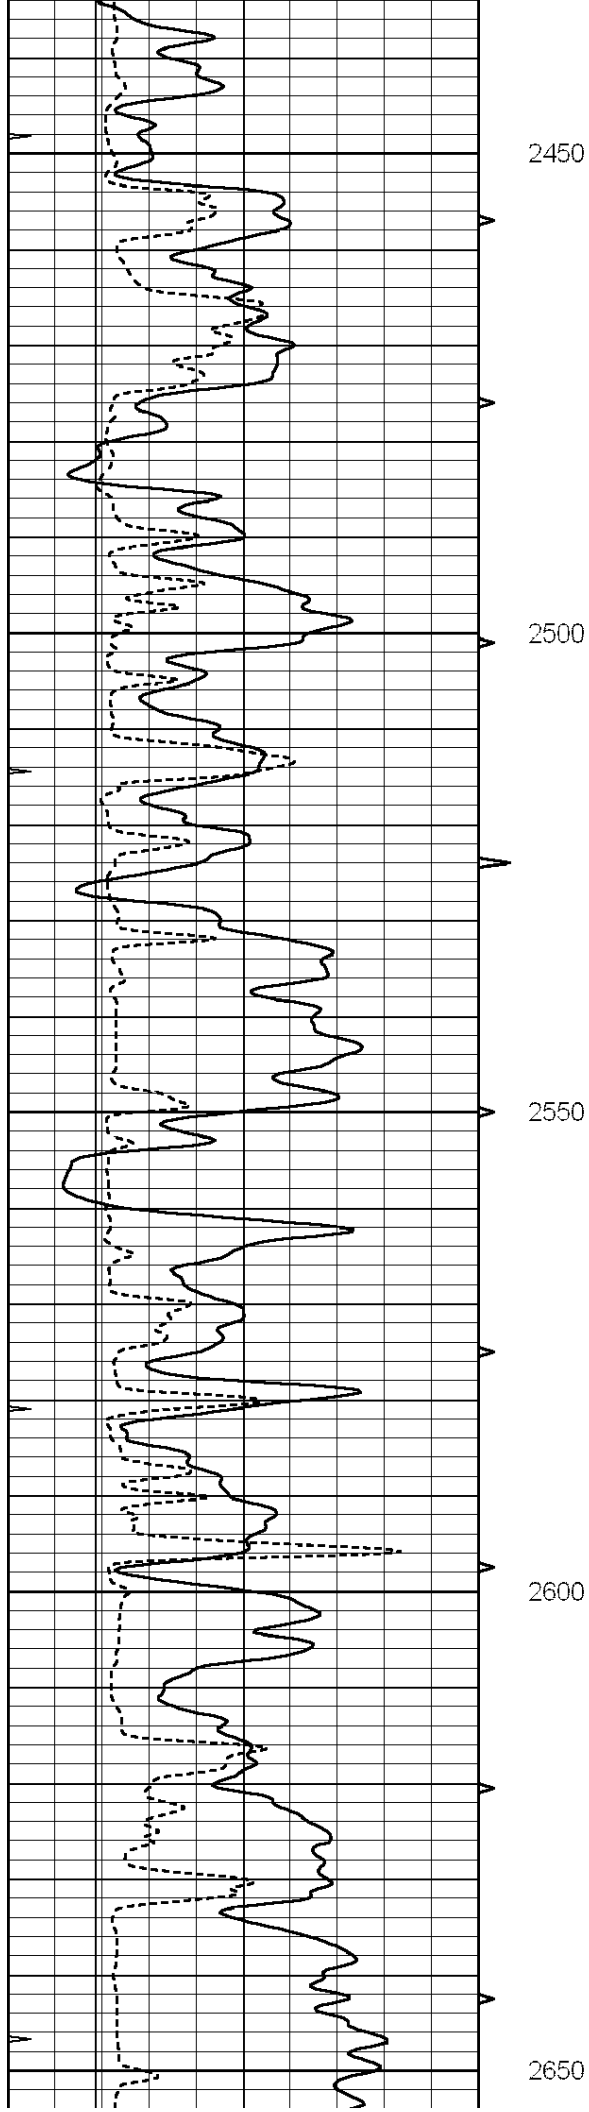

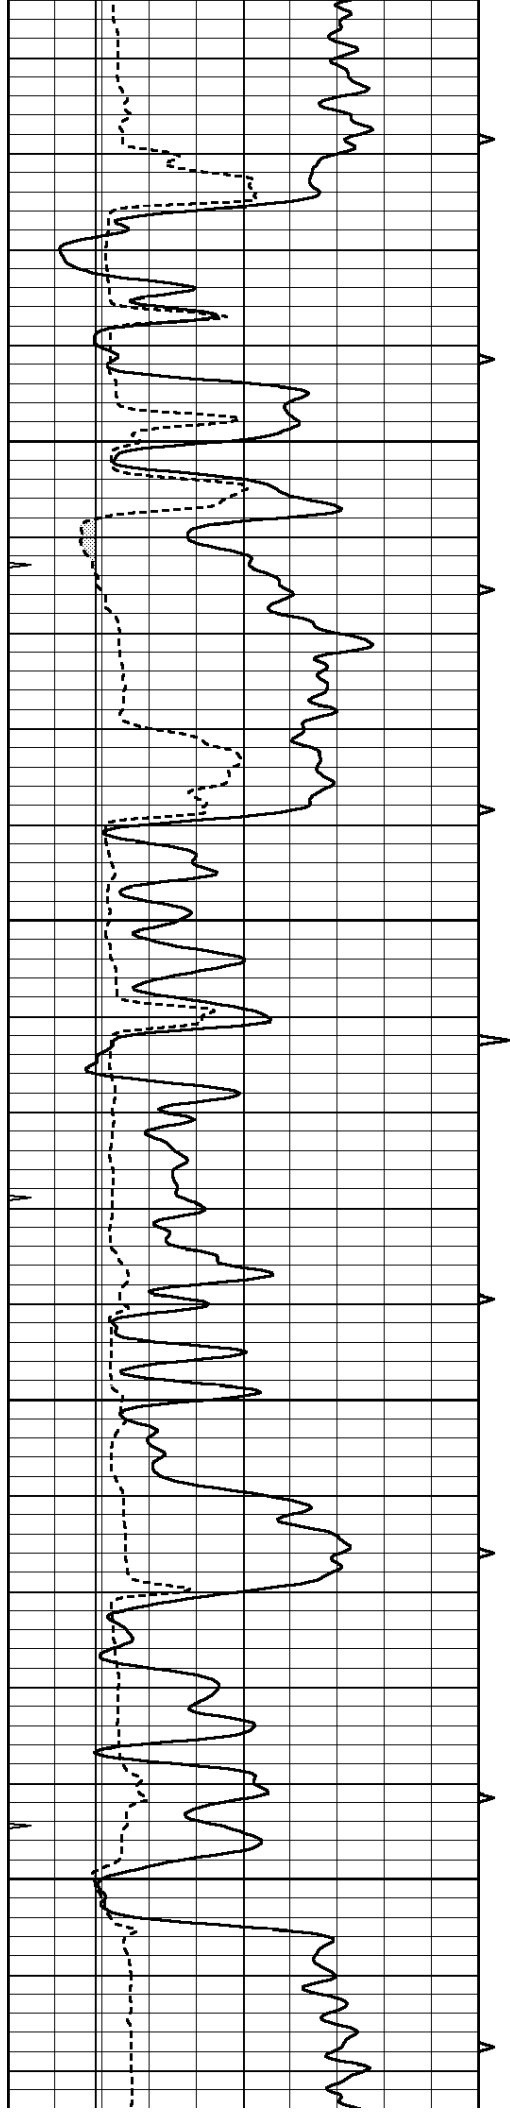




2700



2750


2800

2850

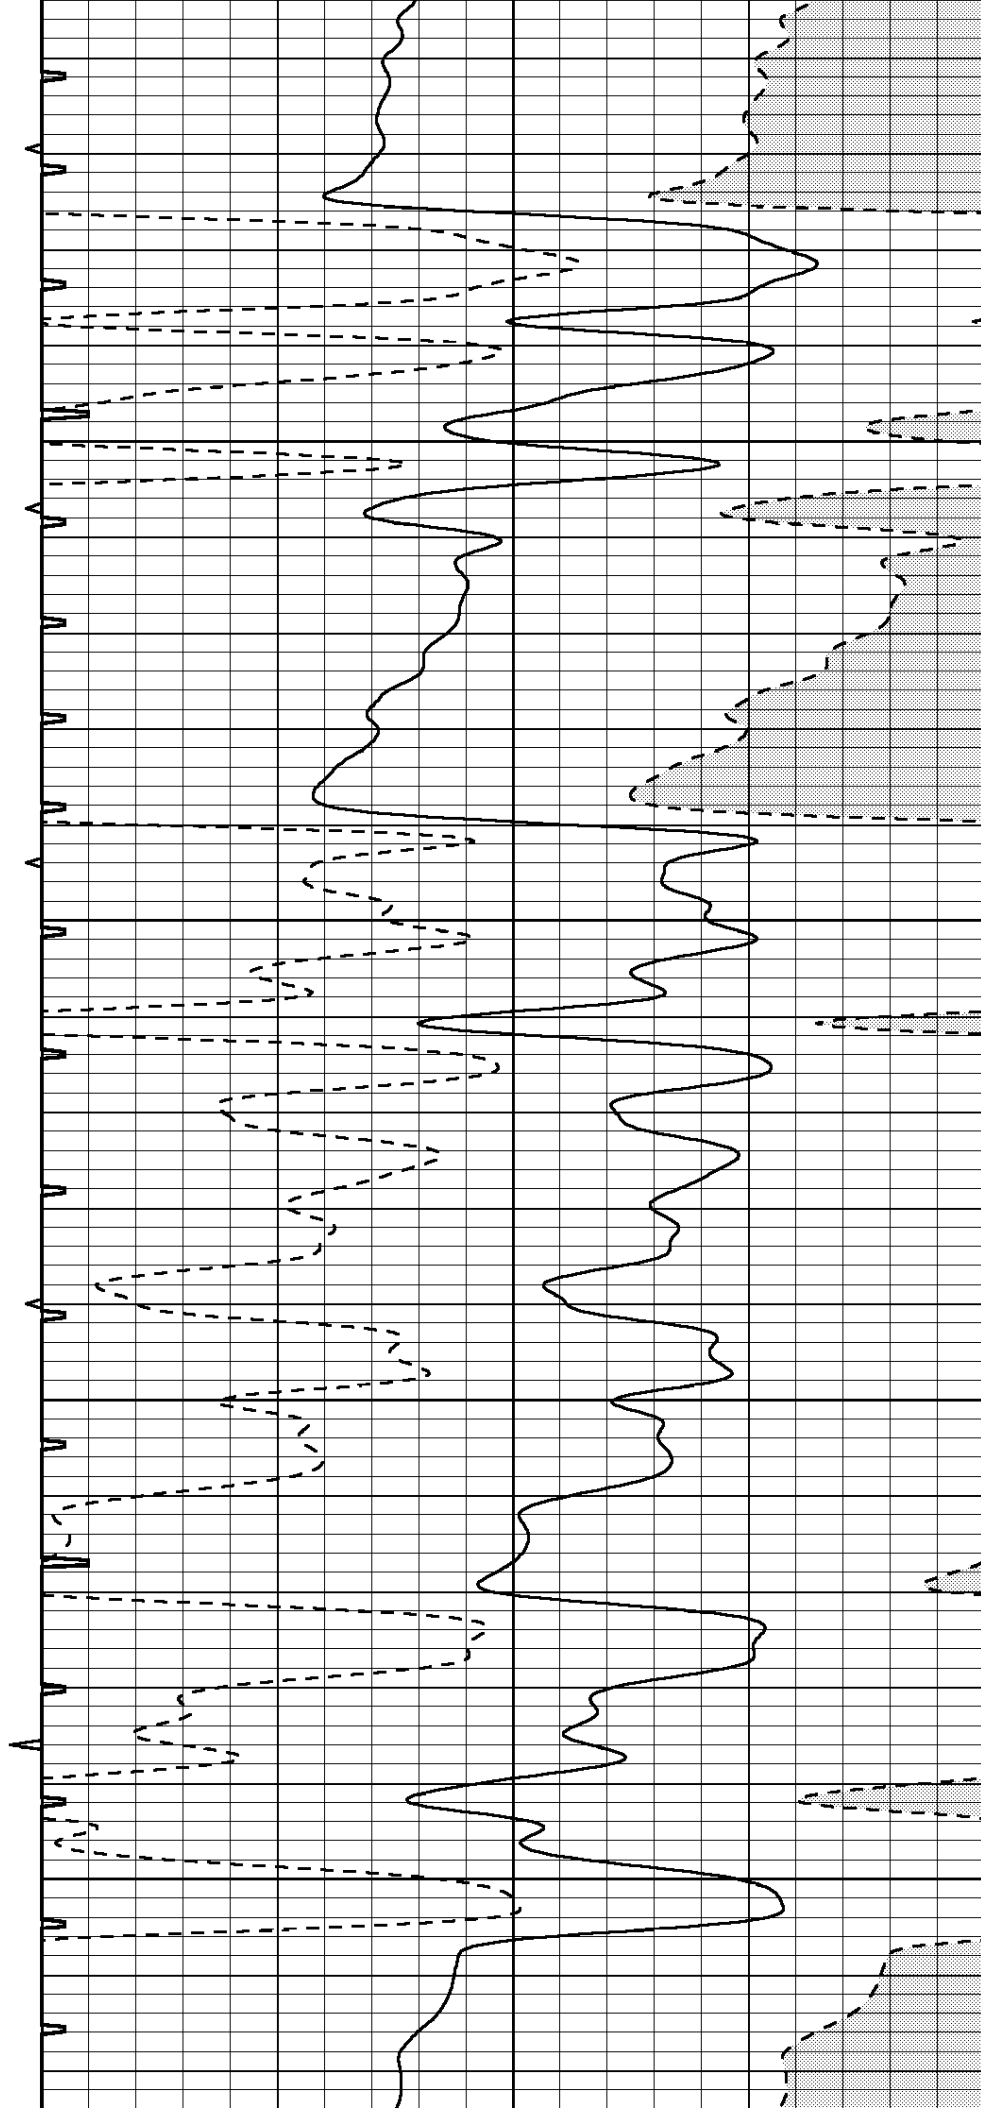

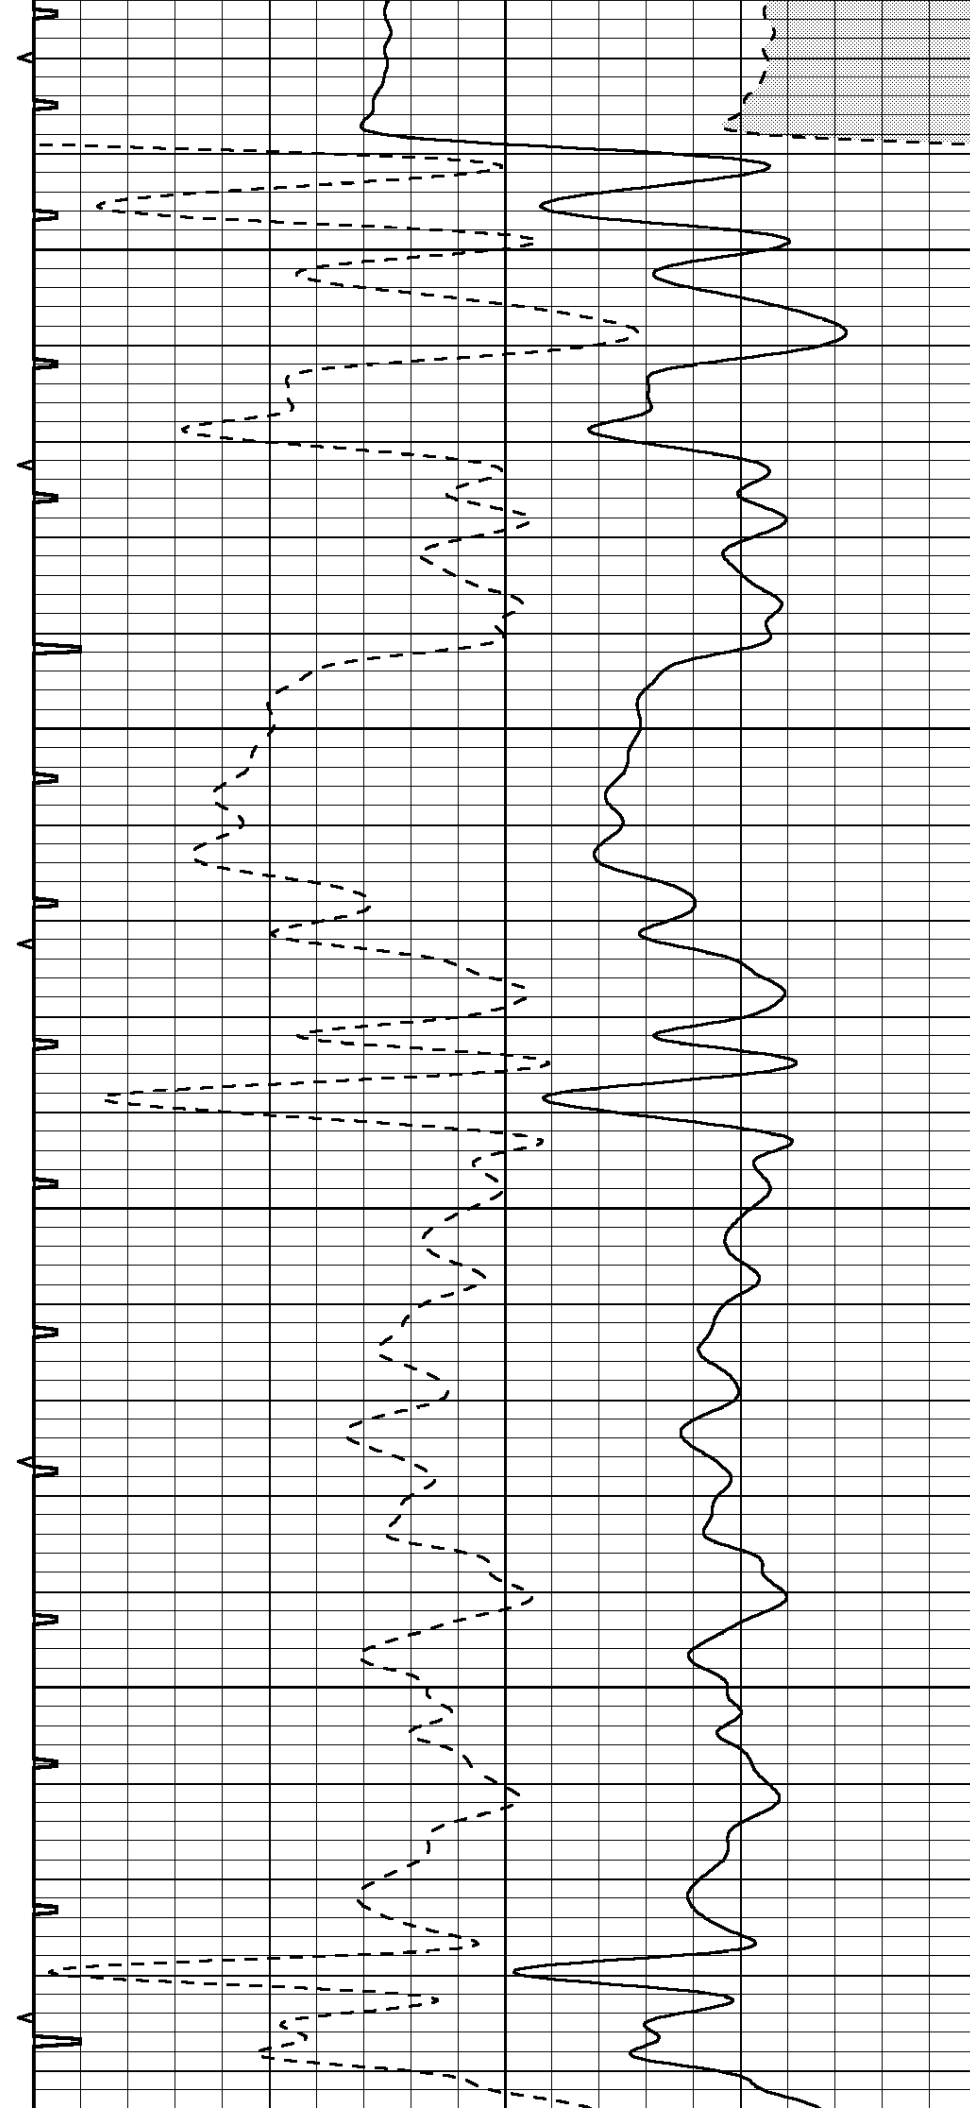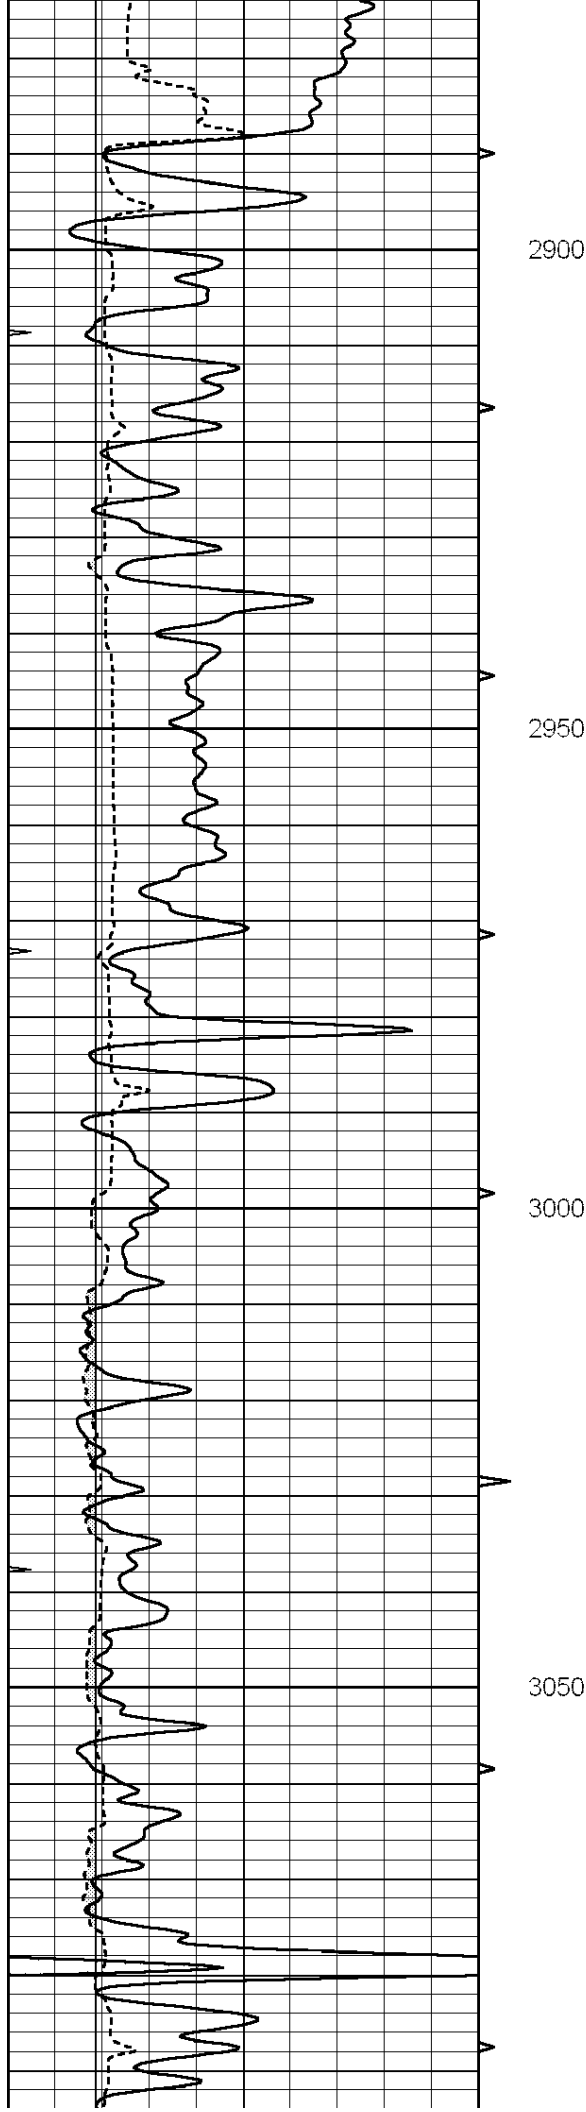

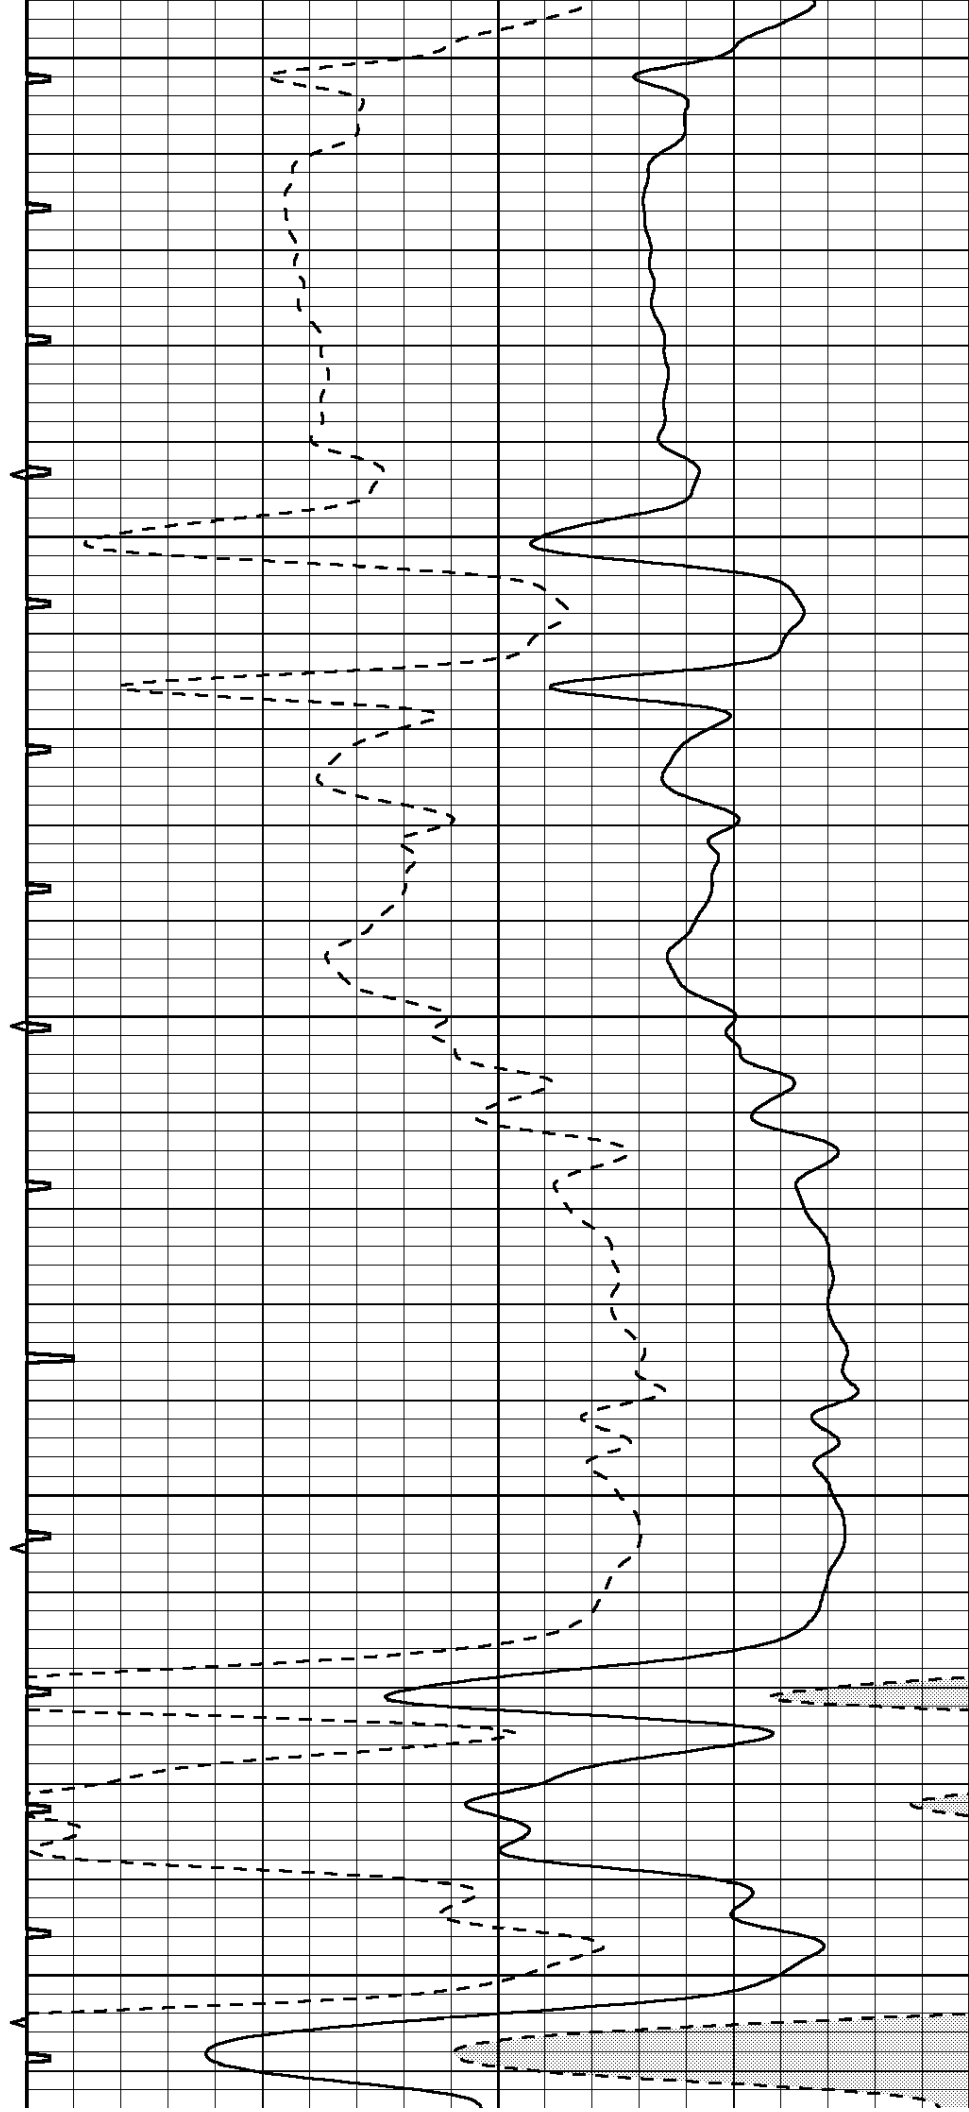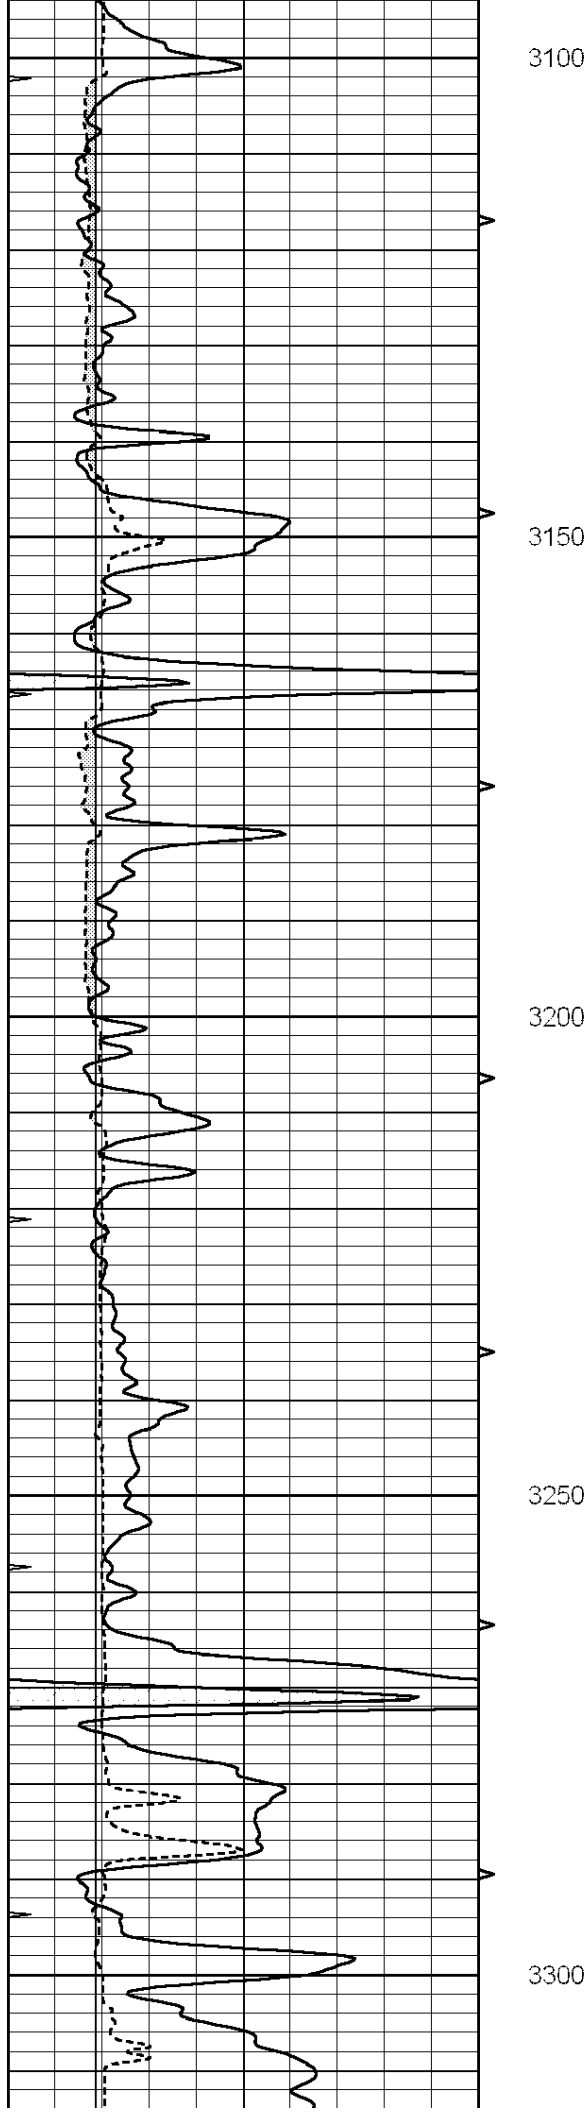

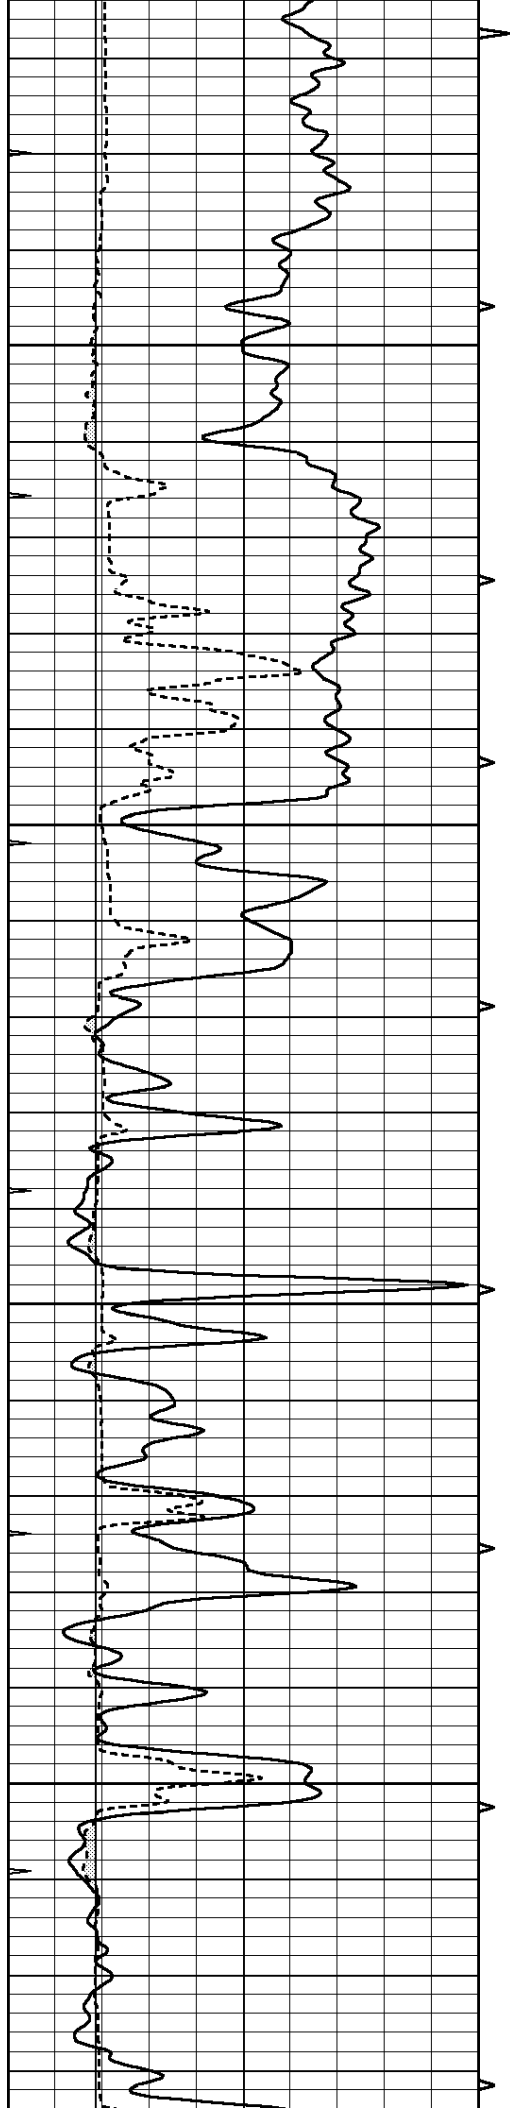



3350

3400

3450

3500

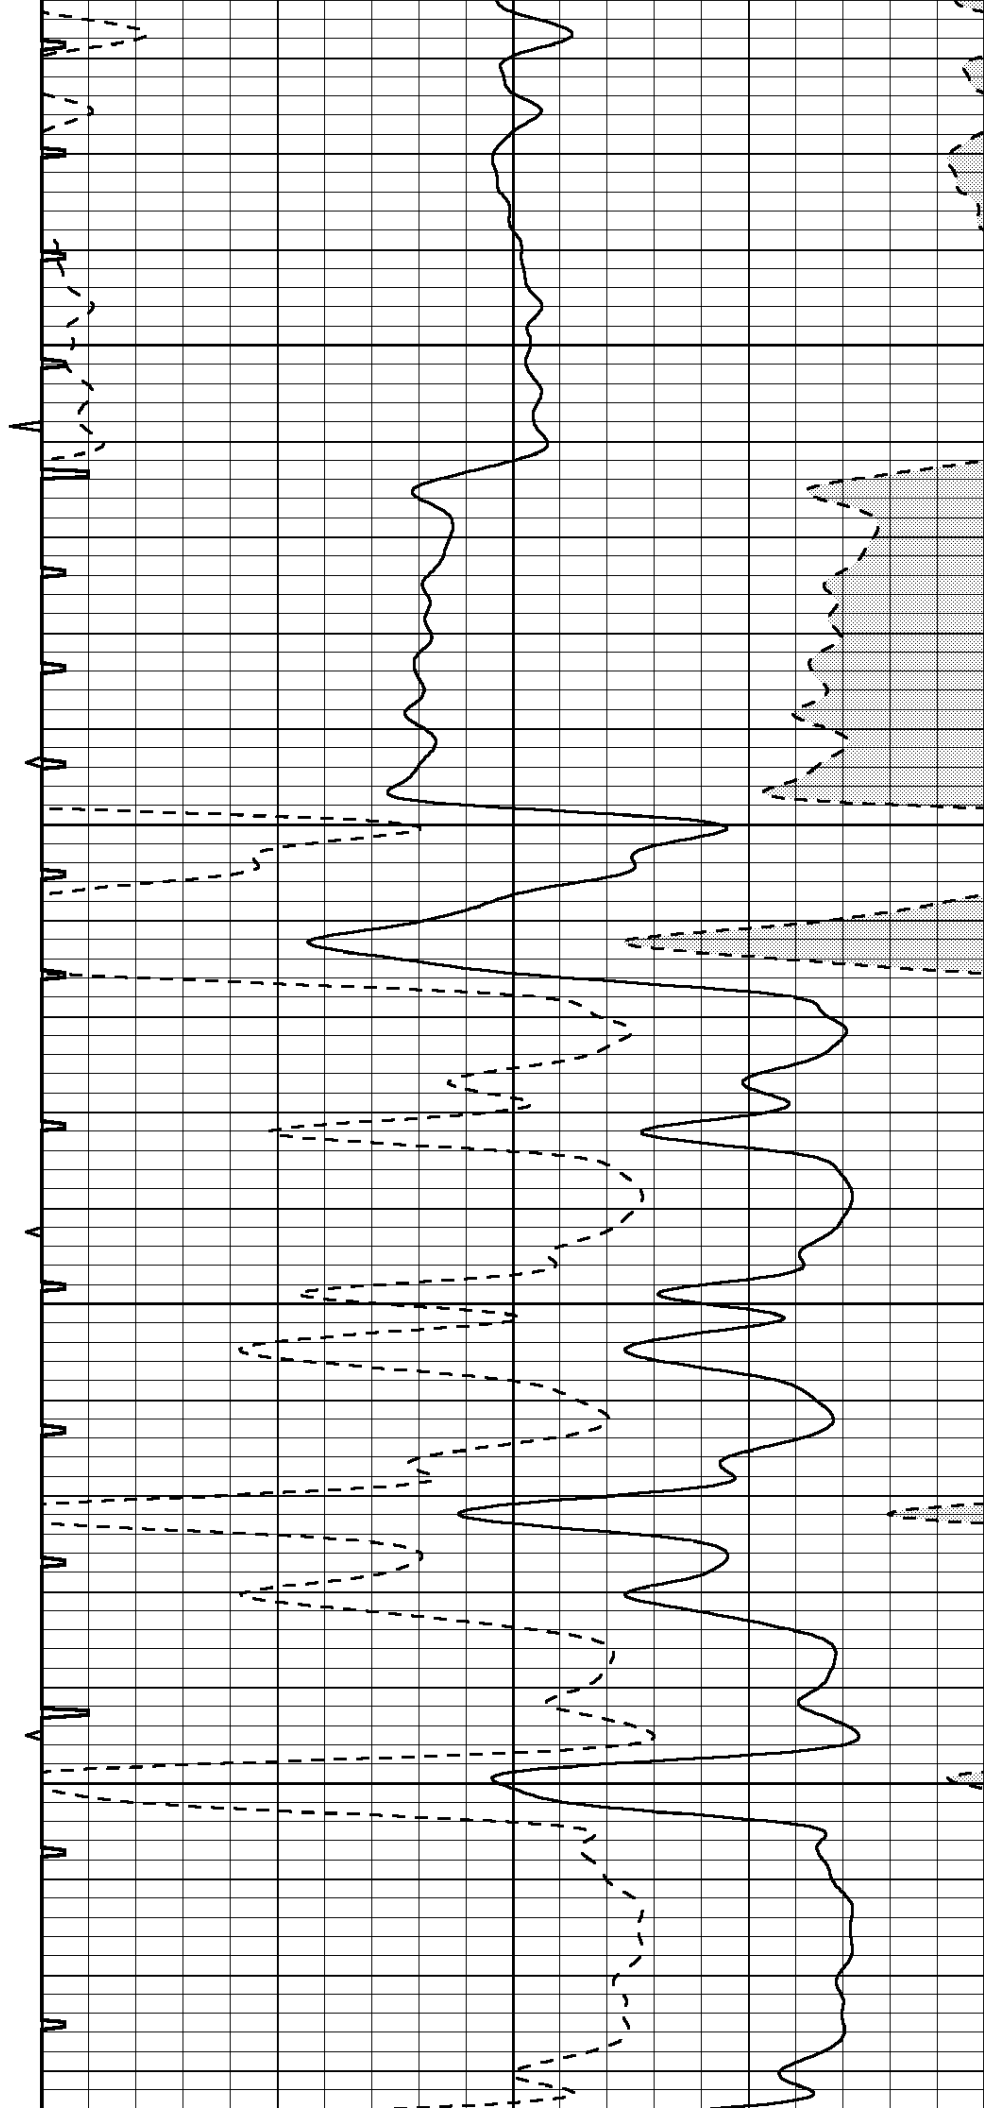

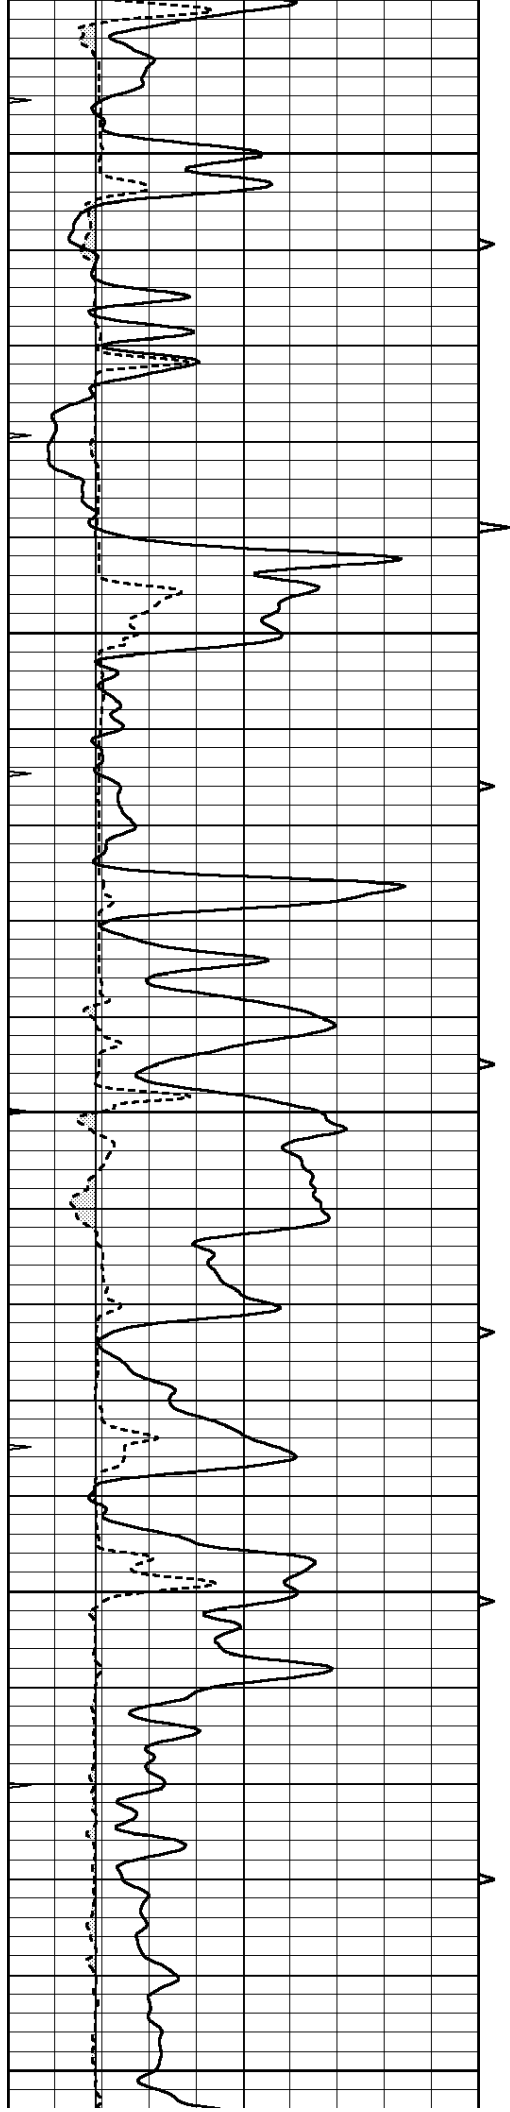


3550



3600

3650

3700


3750

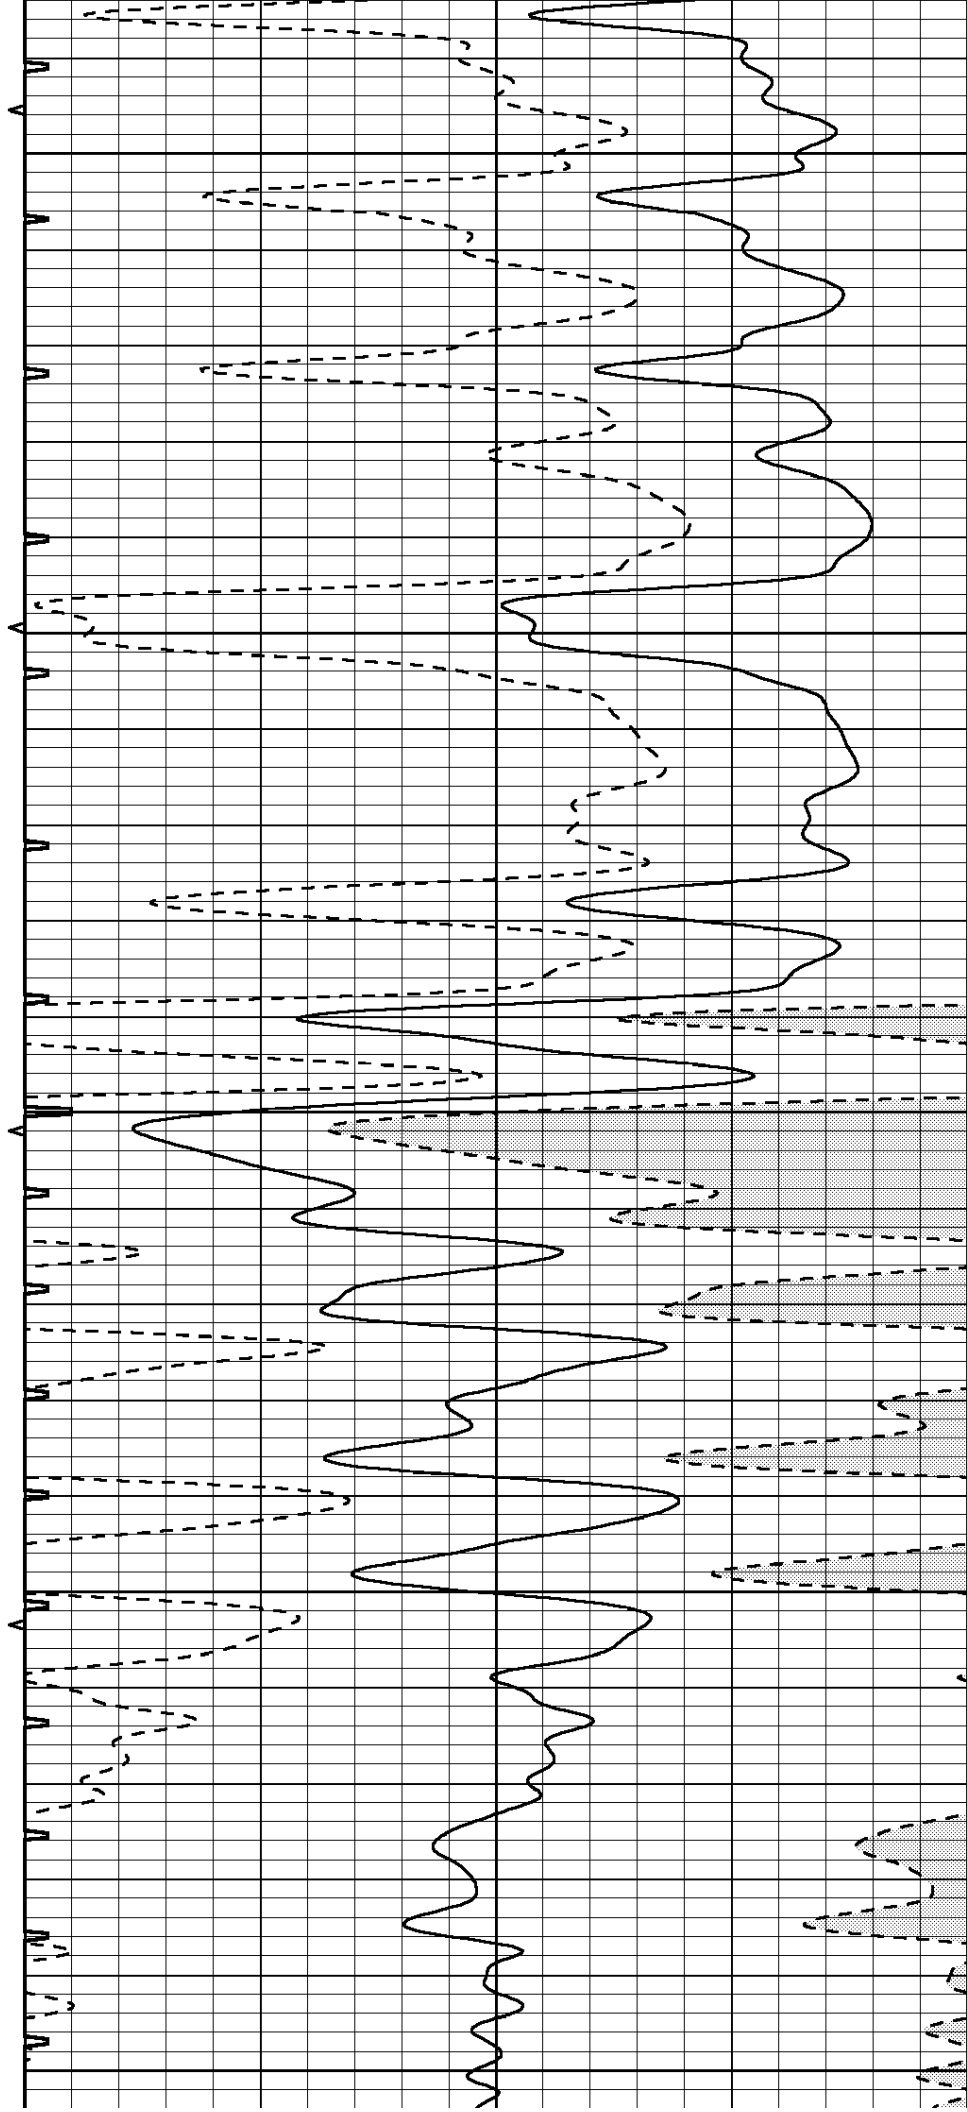

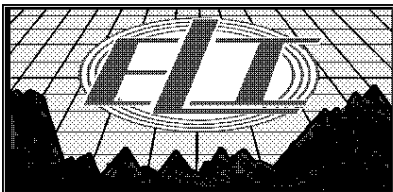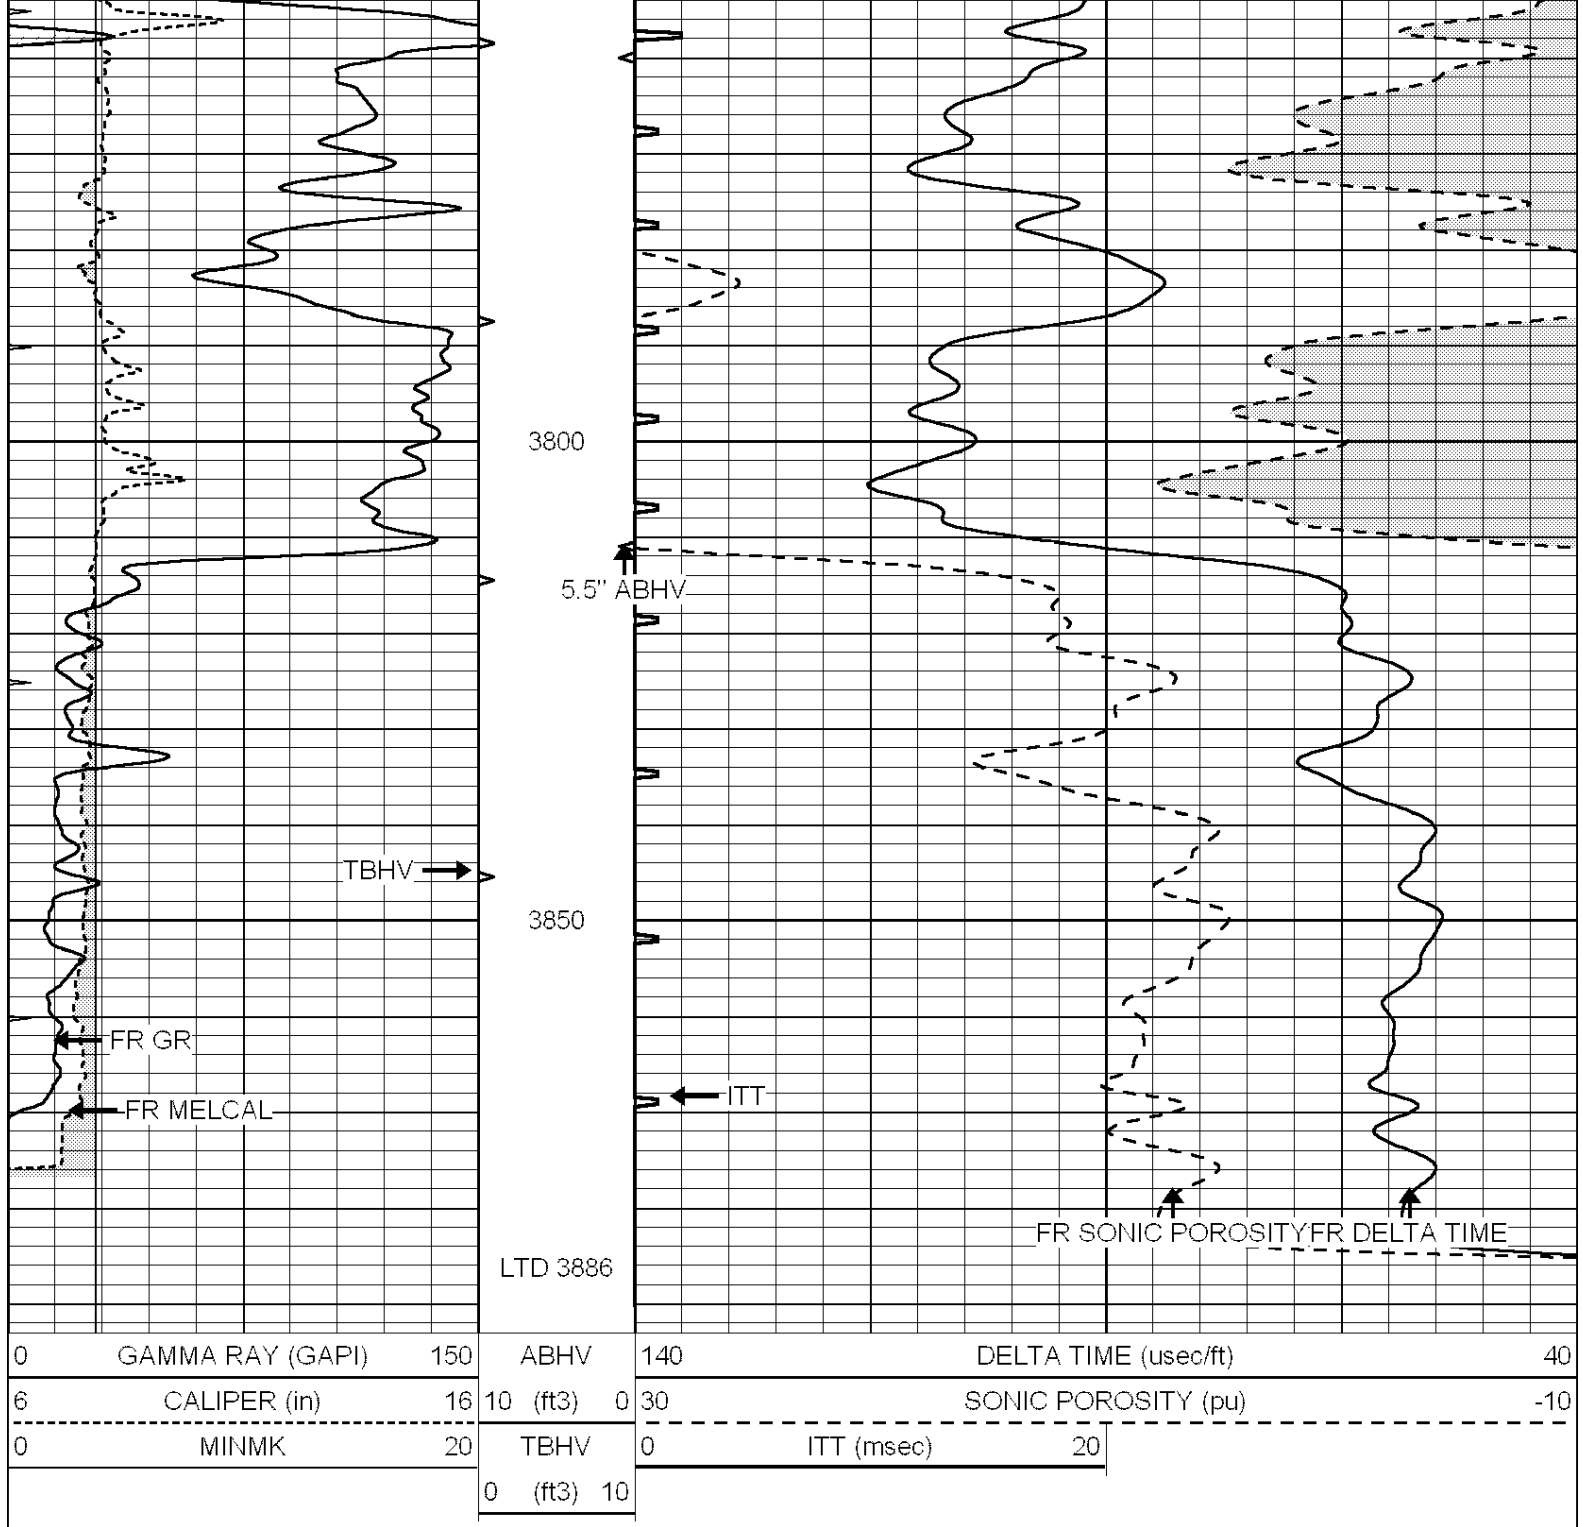


REPEAT SECTION

Database File: 3329ddn.db
 Dataset Pathname: pass5.3
 Presentation Format: slt
 Dataset Creation: Sat Jan 05 14:24:48 2019
 Charted by: Depth in Feet scaled 1:240

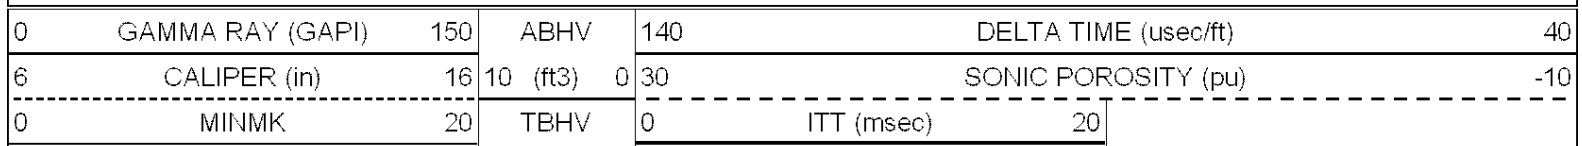

0 (ft3) 10

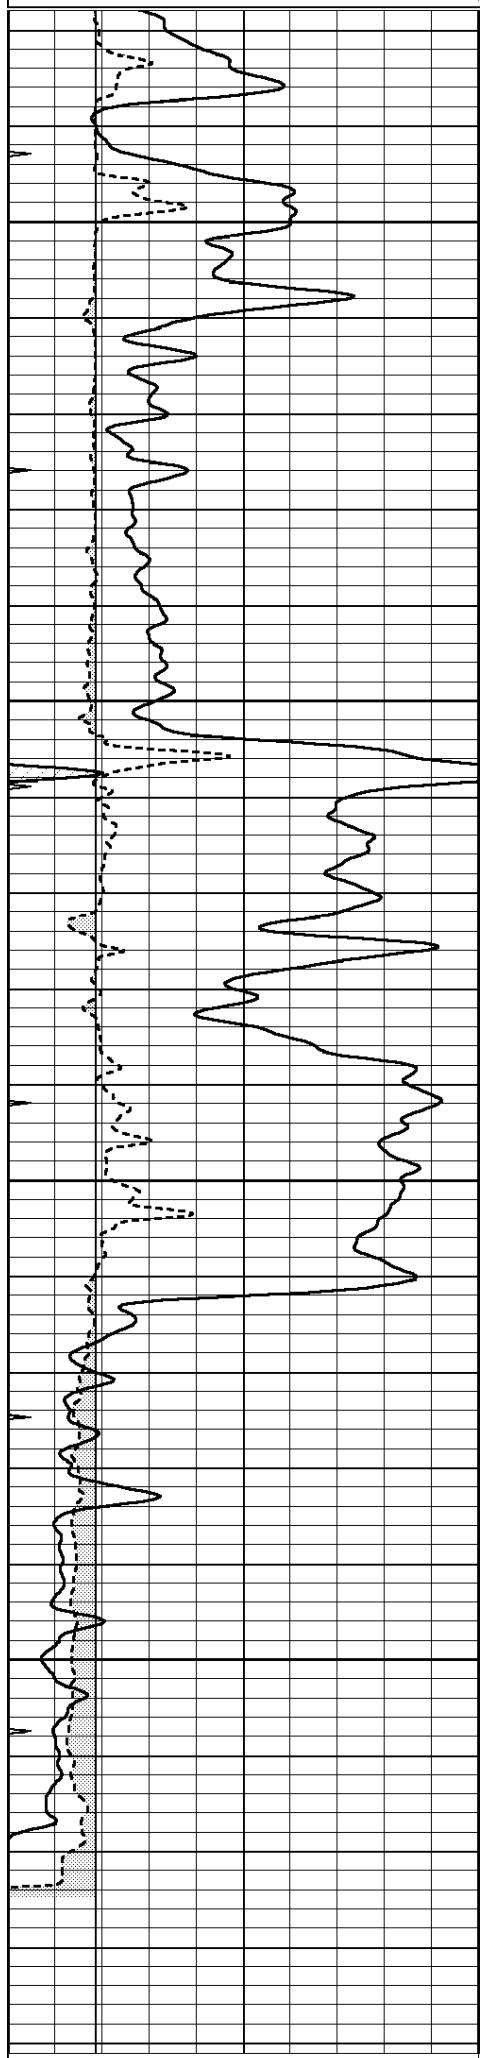


3700

3750

3800

3850

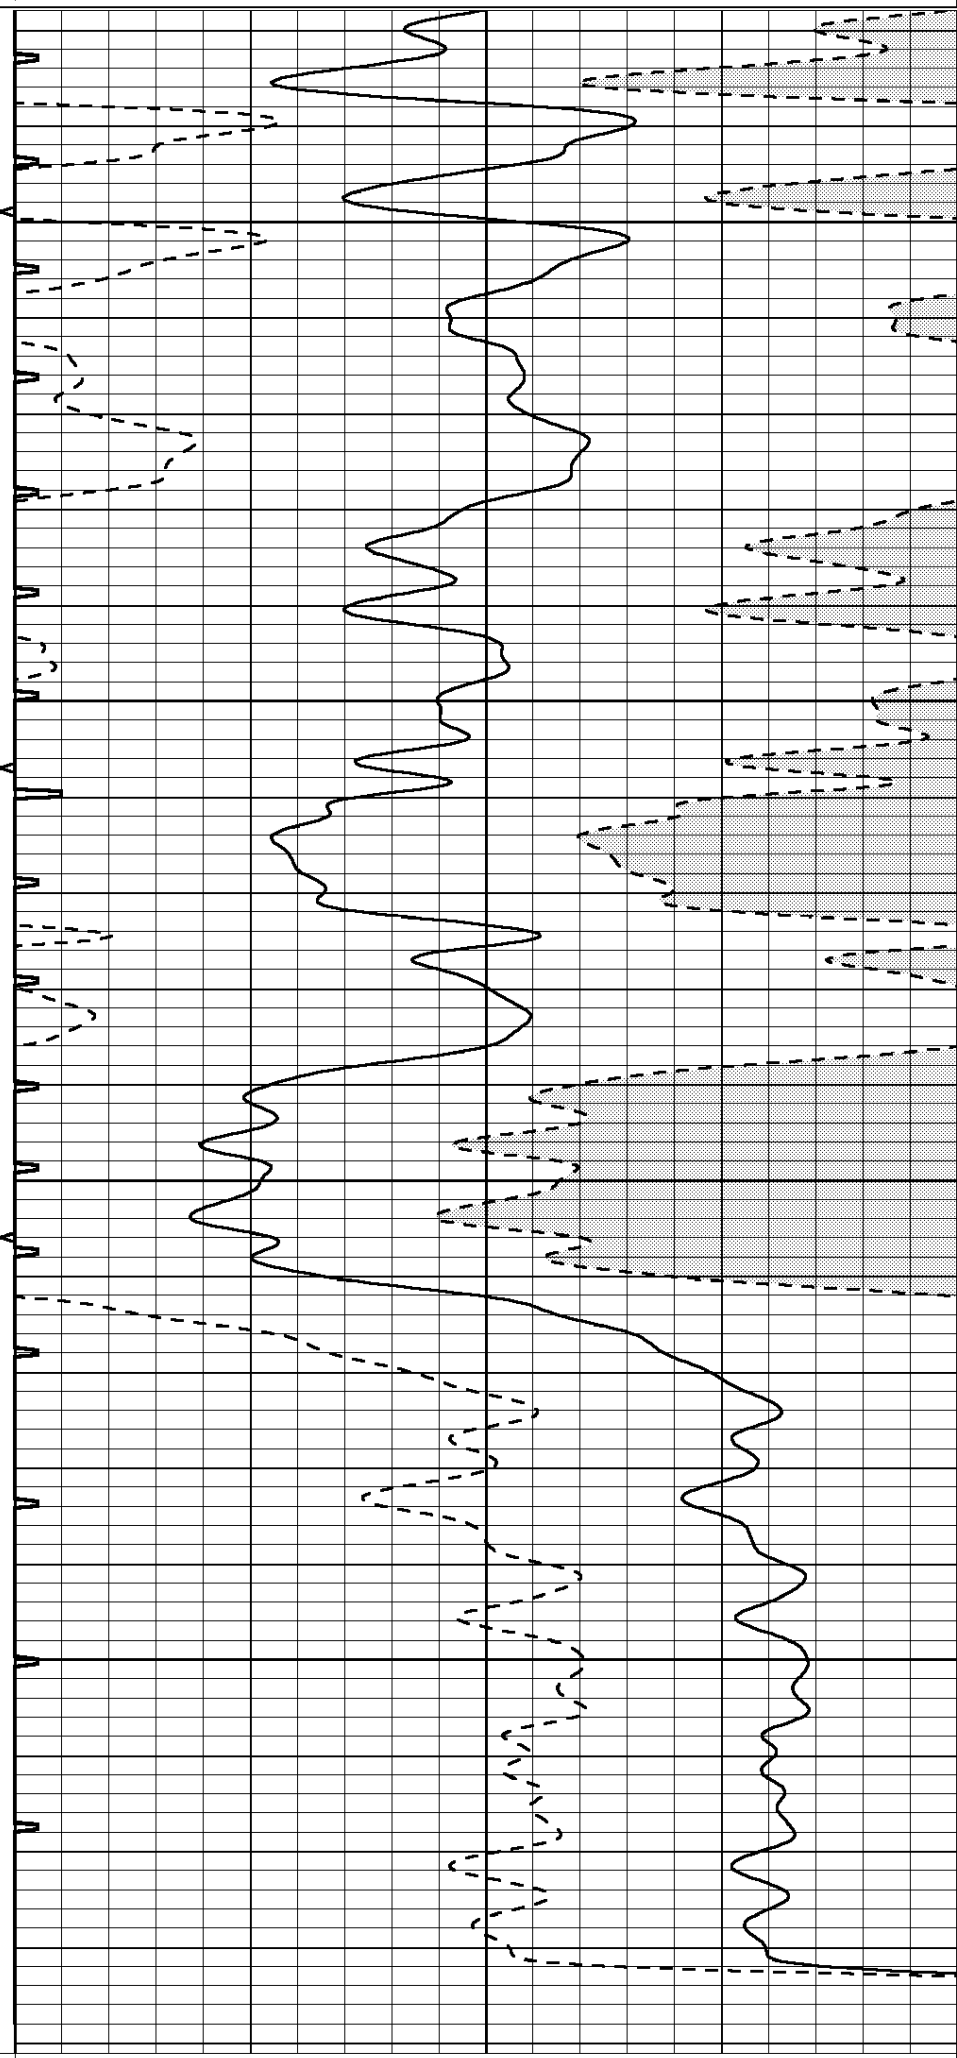

0	GAMMA RAY (GAPI)	150	ABHV	140	DELTA TIME (usec/ft)	40
6	CALIPER (in)	16	10 (ft3) 0	30	SONIC POROSITY (pu)	-10
0	MINMK	20	TBHV	0	ITT (msec)	20
			0 (ft3) 10			