



DUAL INDUCTION LOG

Company	MAI OIL OPERATIONS, INC.		
Well	D & D UNIT #1		
Field	RIVERSIDE EAST		
County	NESS	State	KANSAS
Location:	APL # : 15-135-25950-0000 2310' FSL & 252' FWL W/2 - NW - NW - SW		Other Services CDL/CNL MEL
Permanent Datum	GROUND LEVEL	Elevation	2209
Log Measured From	KELLY BUSHING	8' A.G.L.	
Drilling Measured From	KELLY BUSHING		
SEC 16 TWP 20S RGE 22W			
Date	5/23/17		
Run Number	ONE		
Depth Driller	4450		
Depth Logger	4450		
Bottom Logged Interval	4448		
Top Log Interval	00		
Casing Driller	8 5/8"@263'		
Casing Logger	263		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 8,900 PPM	
Density / Viscosity	9.3/56		
pH / Fluid Loss	8.0/12.0		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.600@70F		
Rmf @ Meas. Temp	.450@70F		
Rmc @ Meas. Temp	.720@70F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.350@120F		
Time Circulation Stopped	2.5 HOURS		
Time Logger on Bottom	3:00 A.M.		
Maximum Recorded Temperature	120F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	JIM MUSGROVE		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
NESS CITY, KS., 8S. ON HWY 283 TO "RD. 40", 7E. TO "Z RD.", 1/2S., E. INTO



MAIN SECTION


Database File: 1424ddn.db
Dataset Pathname: pass3.3
Presentation Format: dil2
Dataset Creation: Tue May 23 04:13:01 2017 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1


0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50


1000	CILD (mmho/m)	0
------	---------------	---

50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

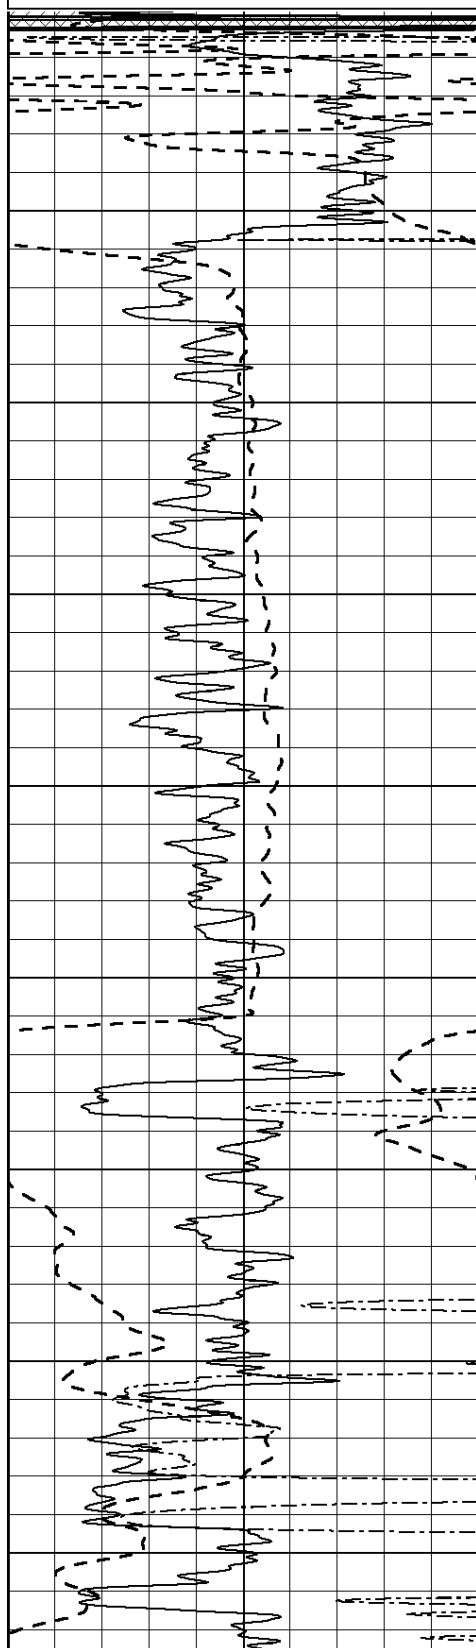

0
50
100
150
200
250
300
350
400

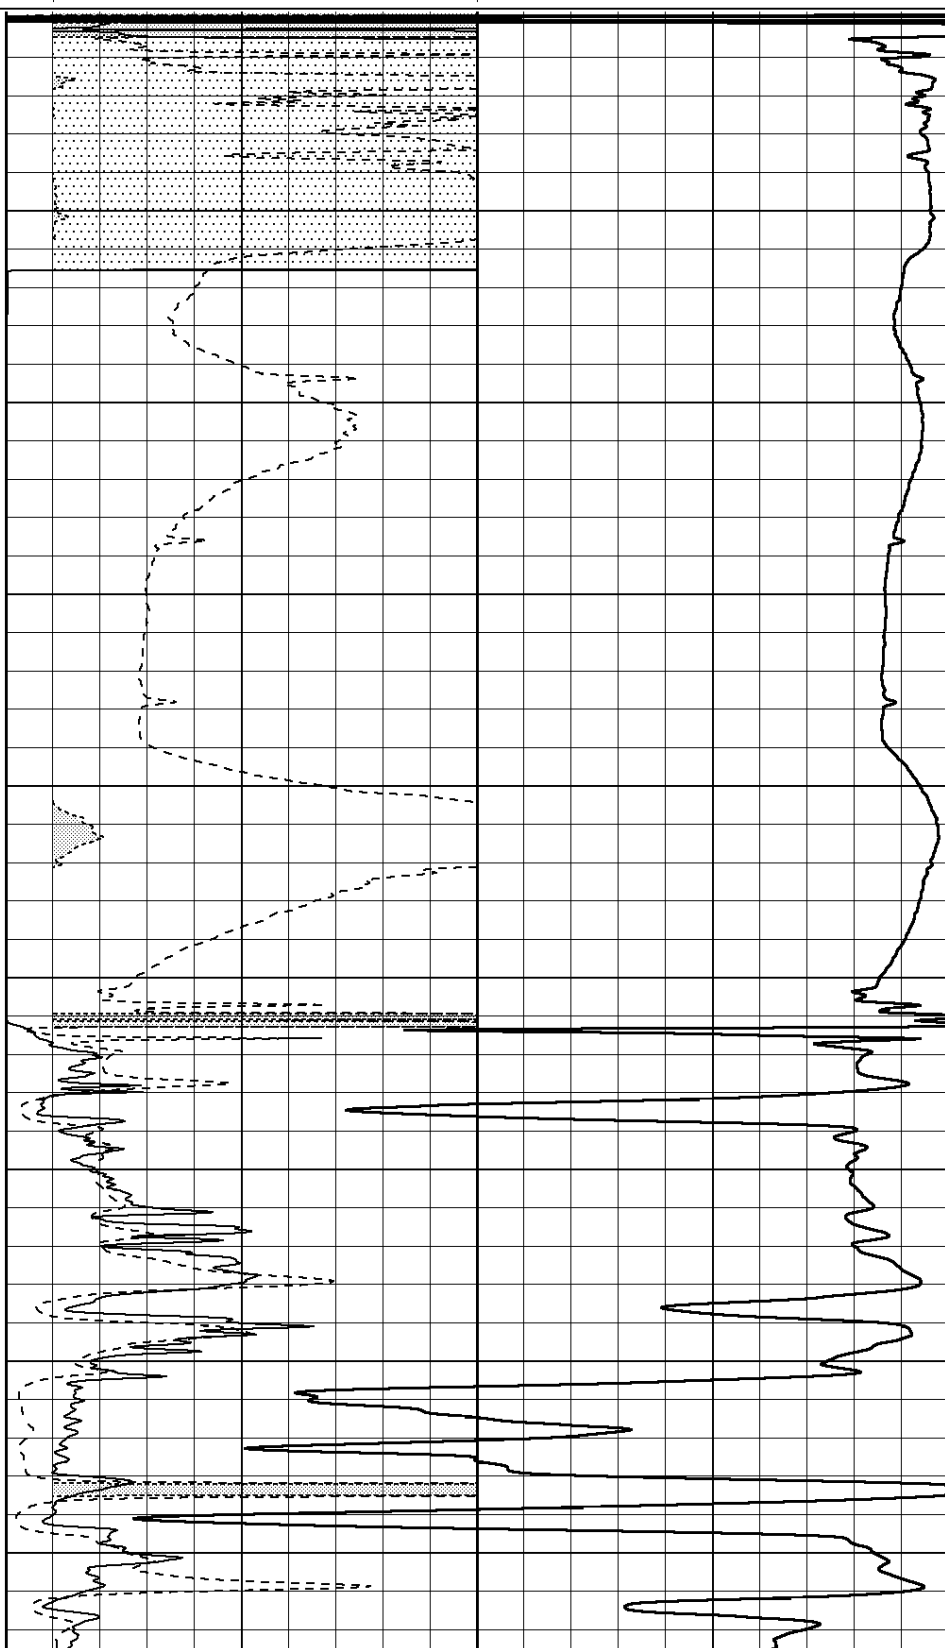

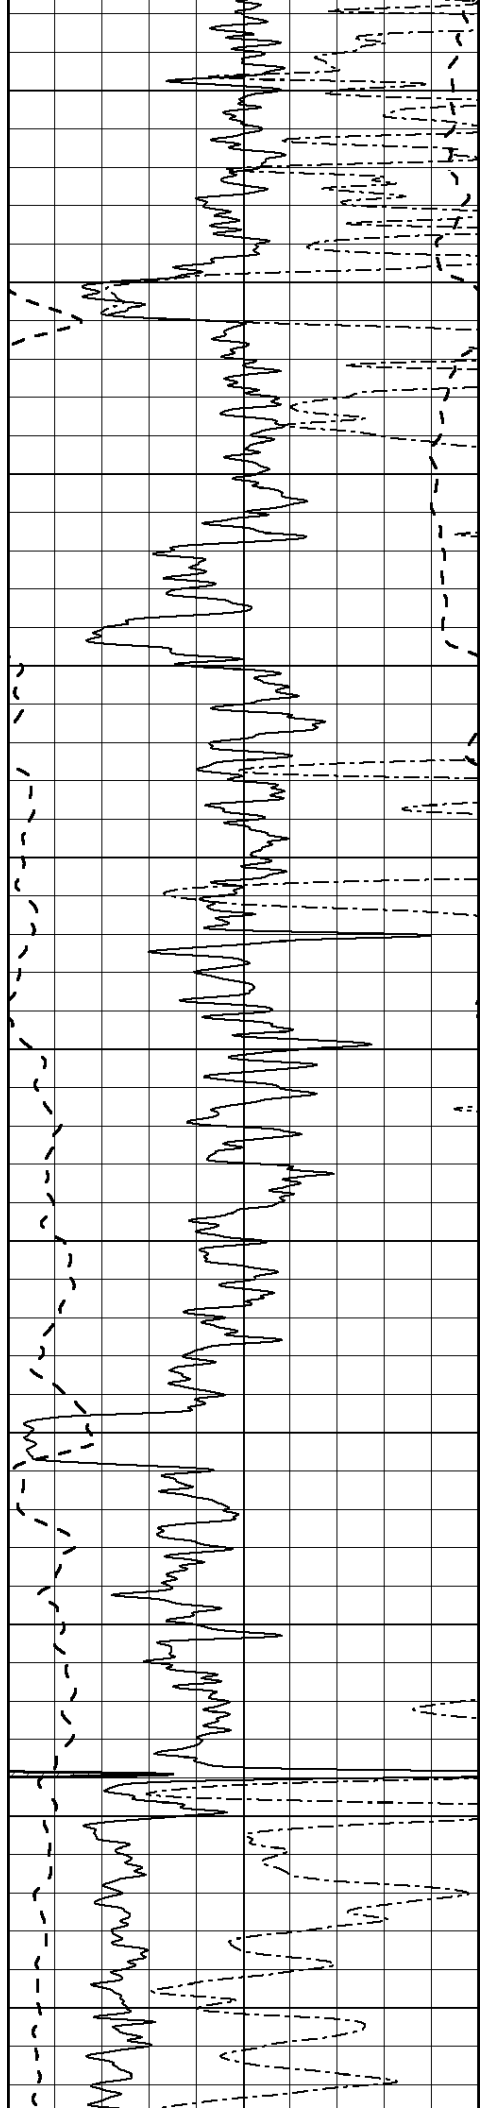

450

500

550

600

650

700


750



800


850

900

950

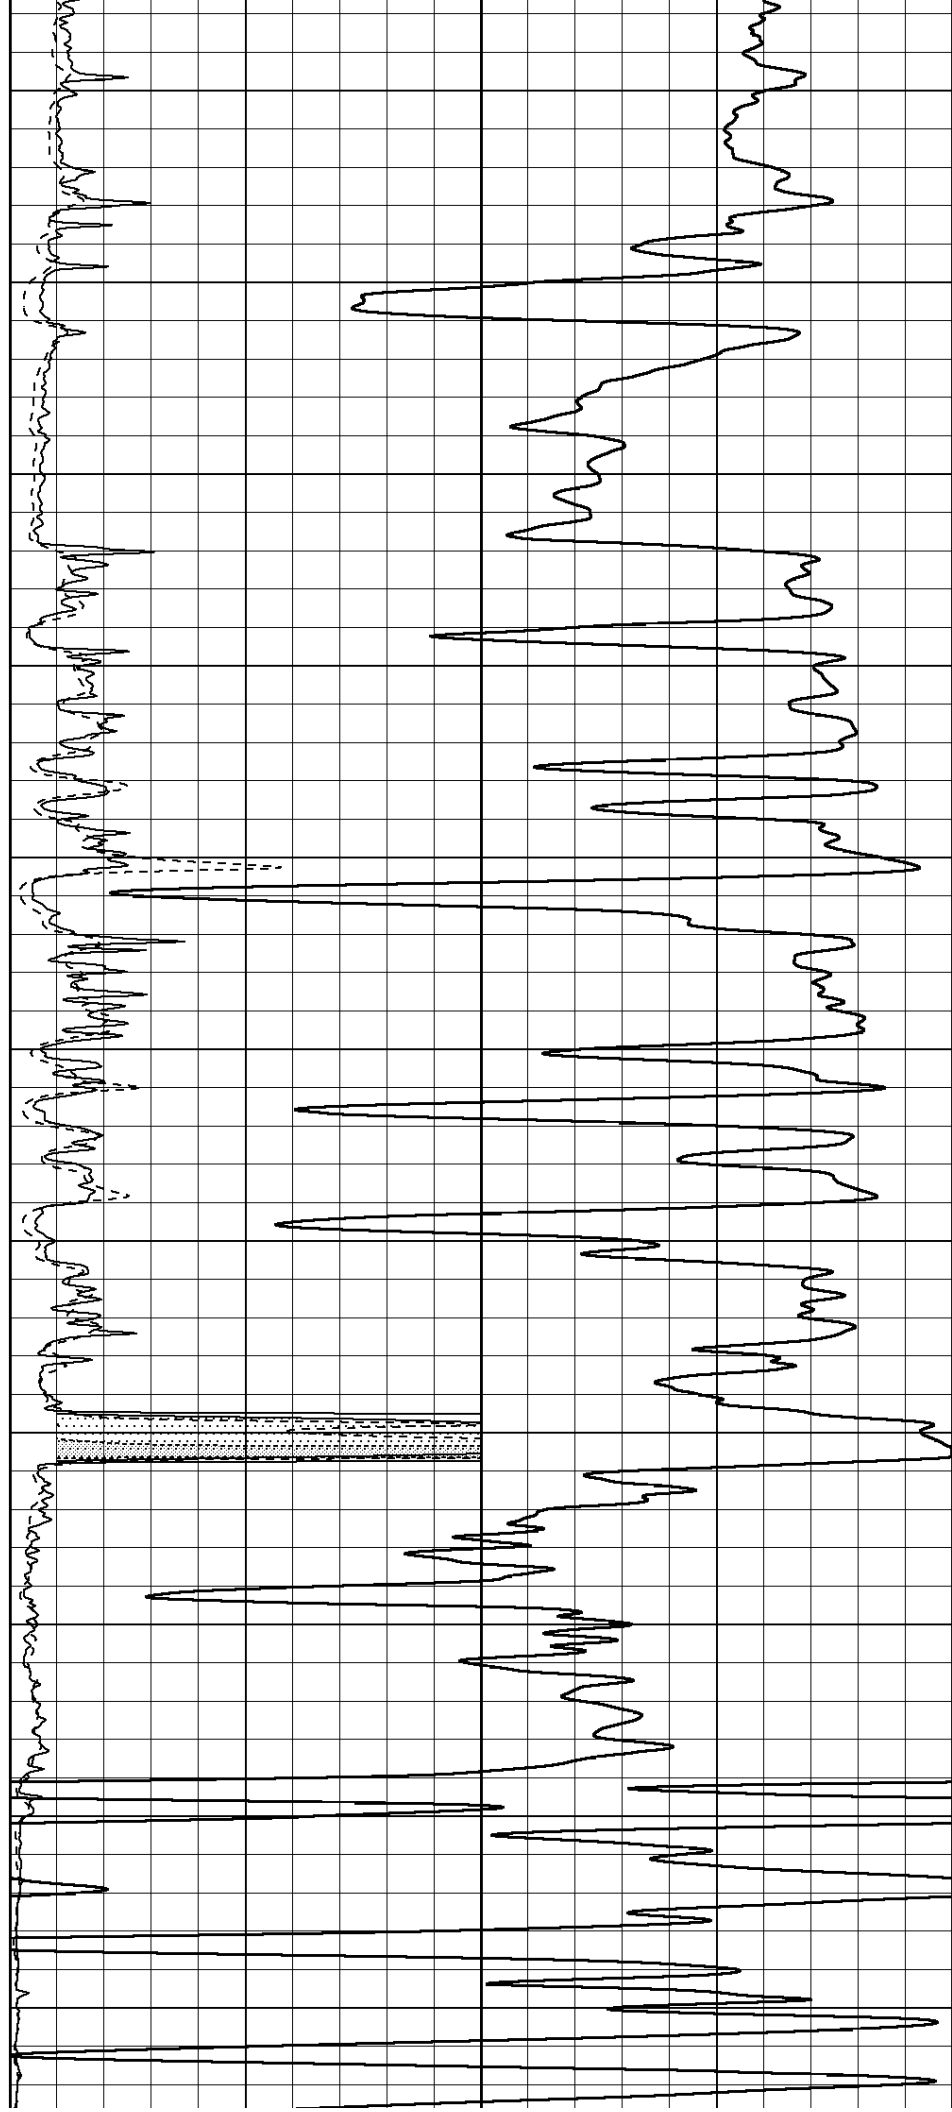

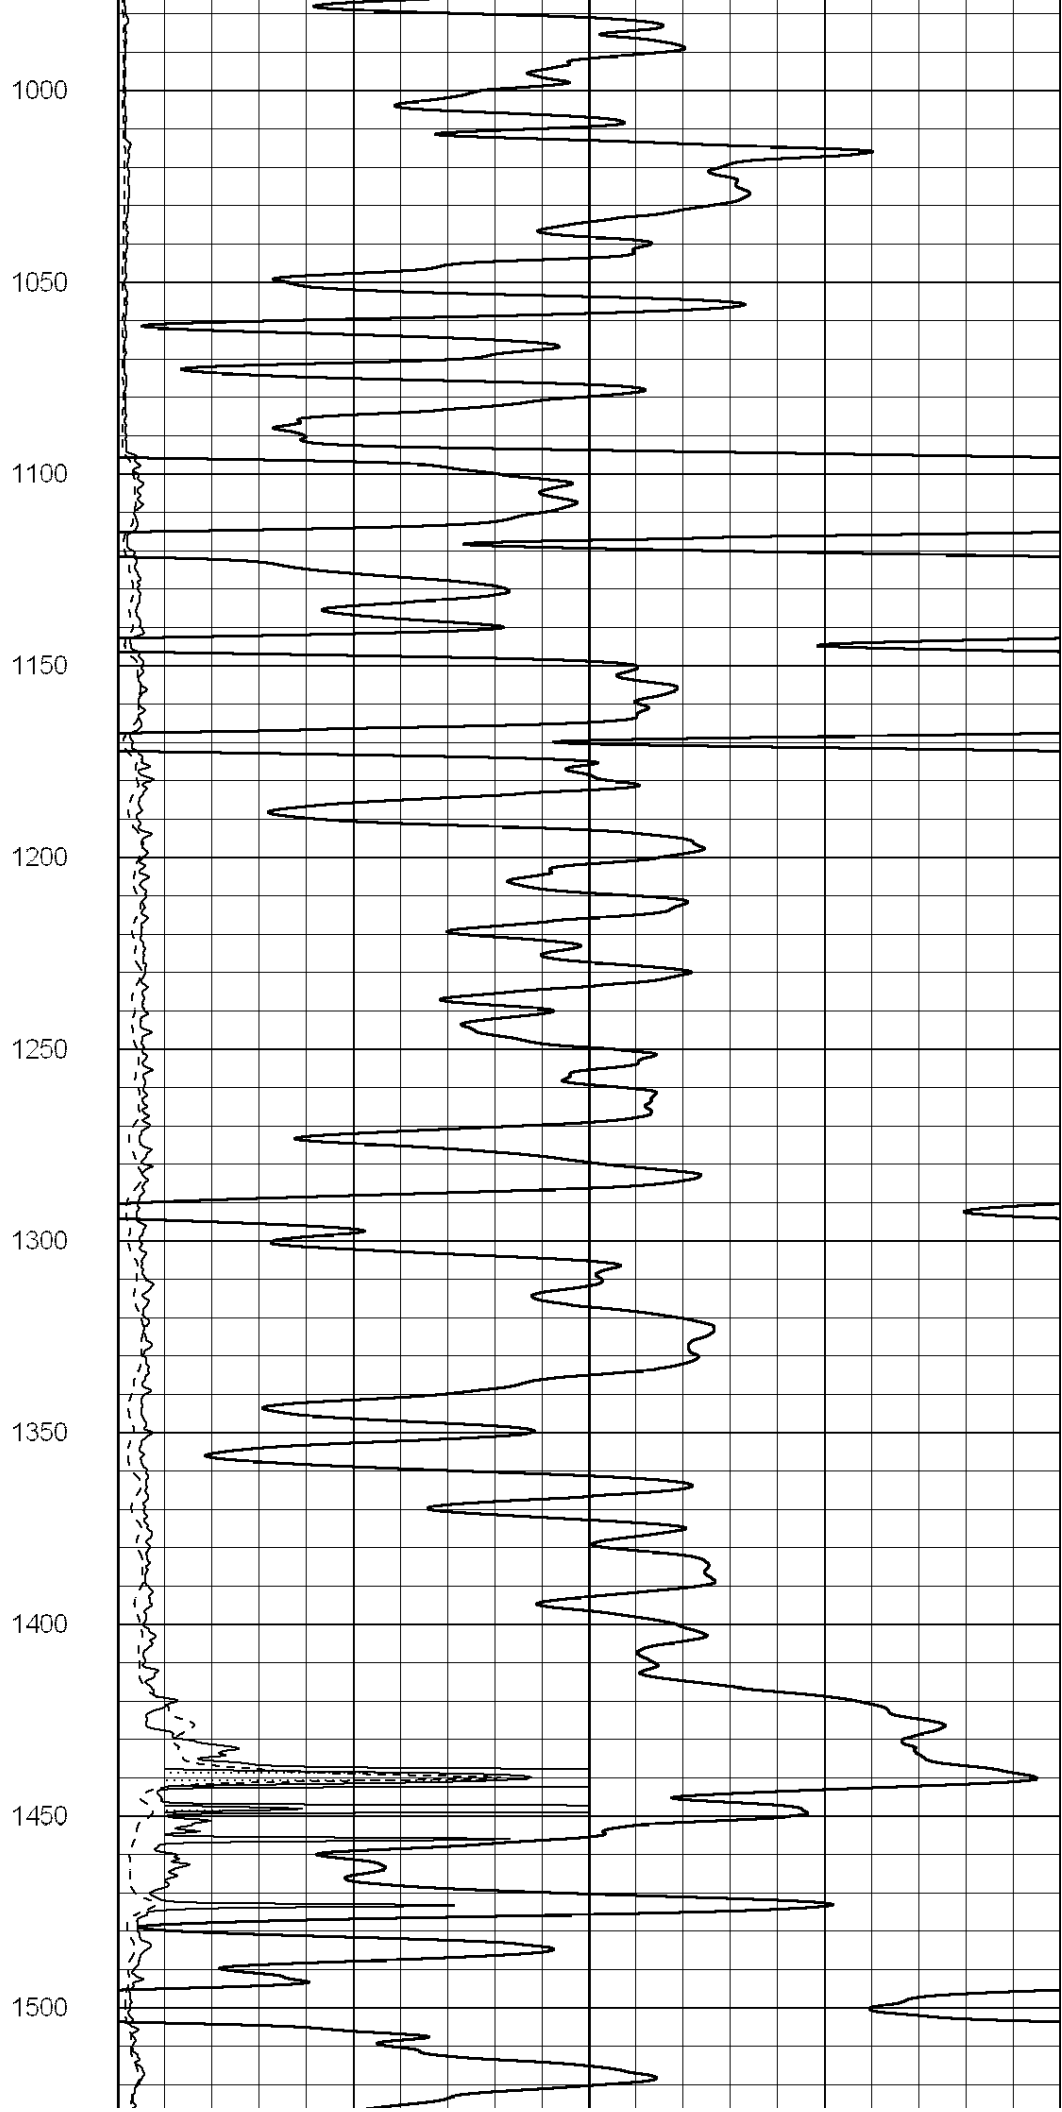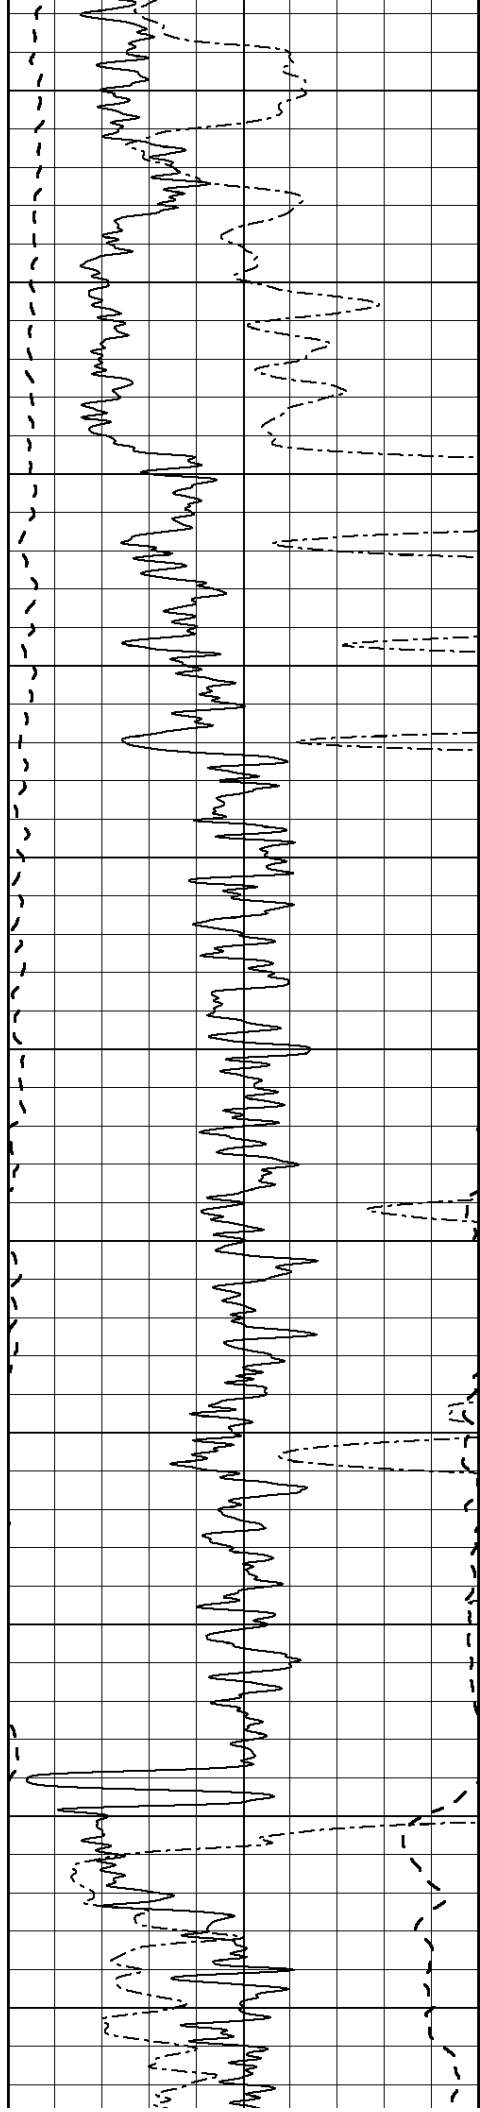

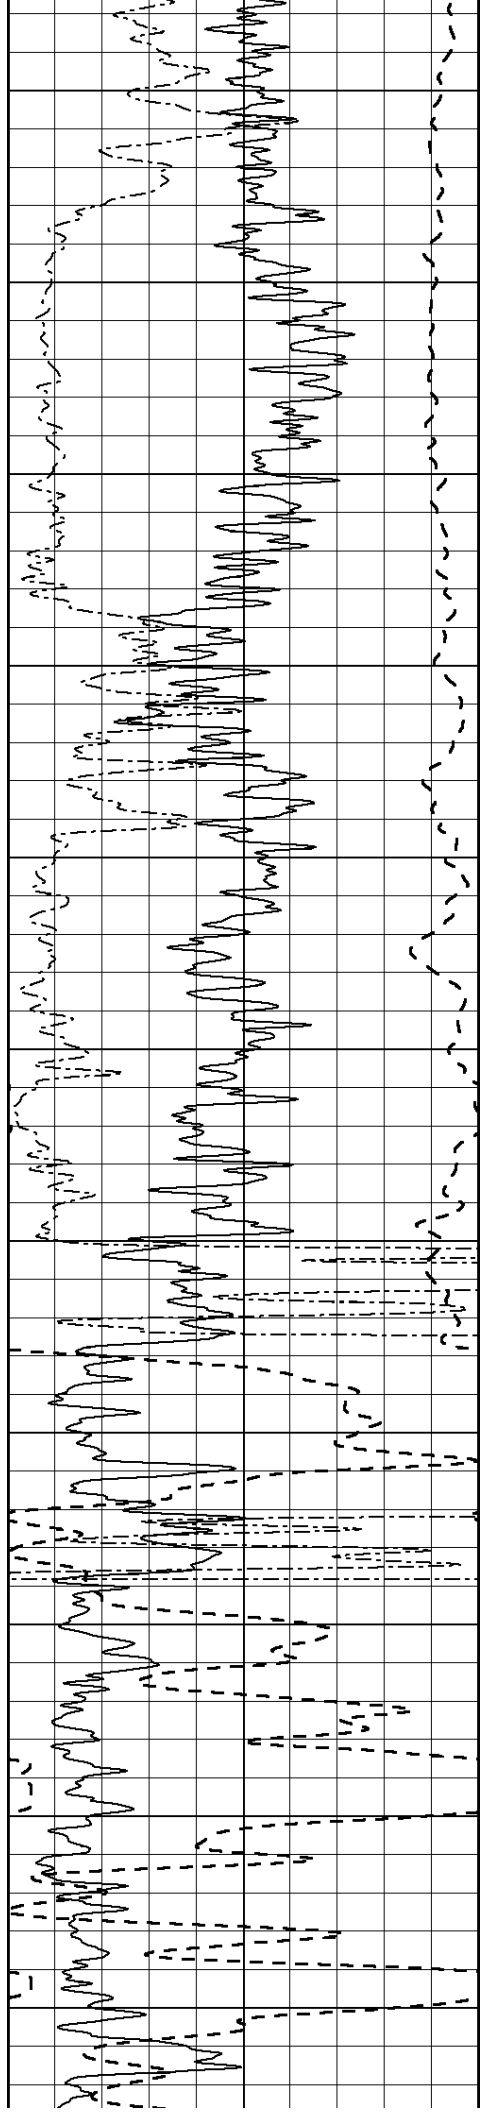

1550

1600

1650

1700

1750

1800


1850


1900

1950

2000

2050

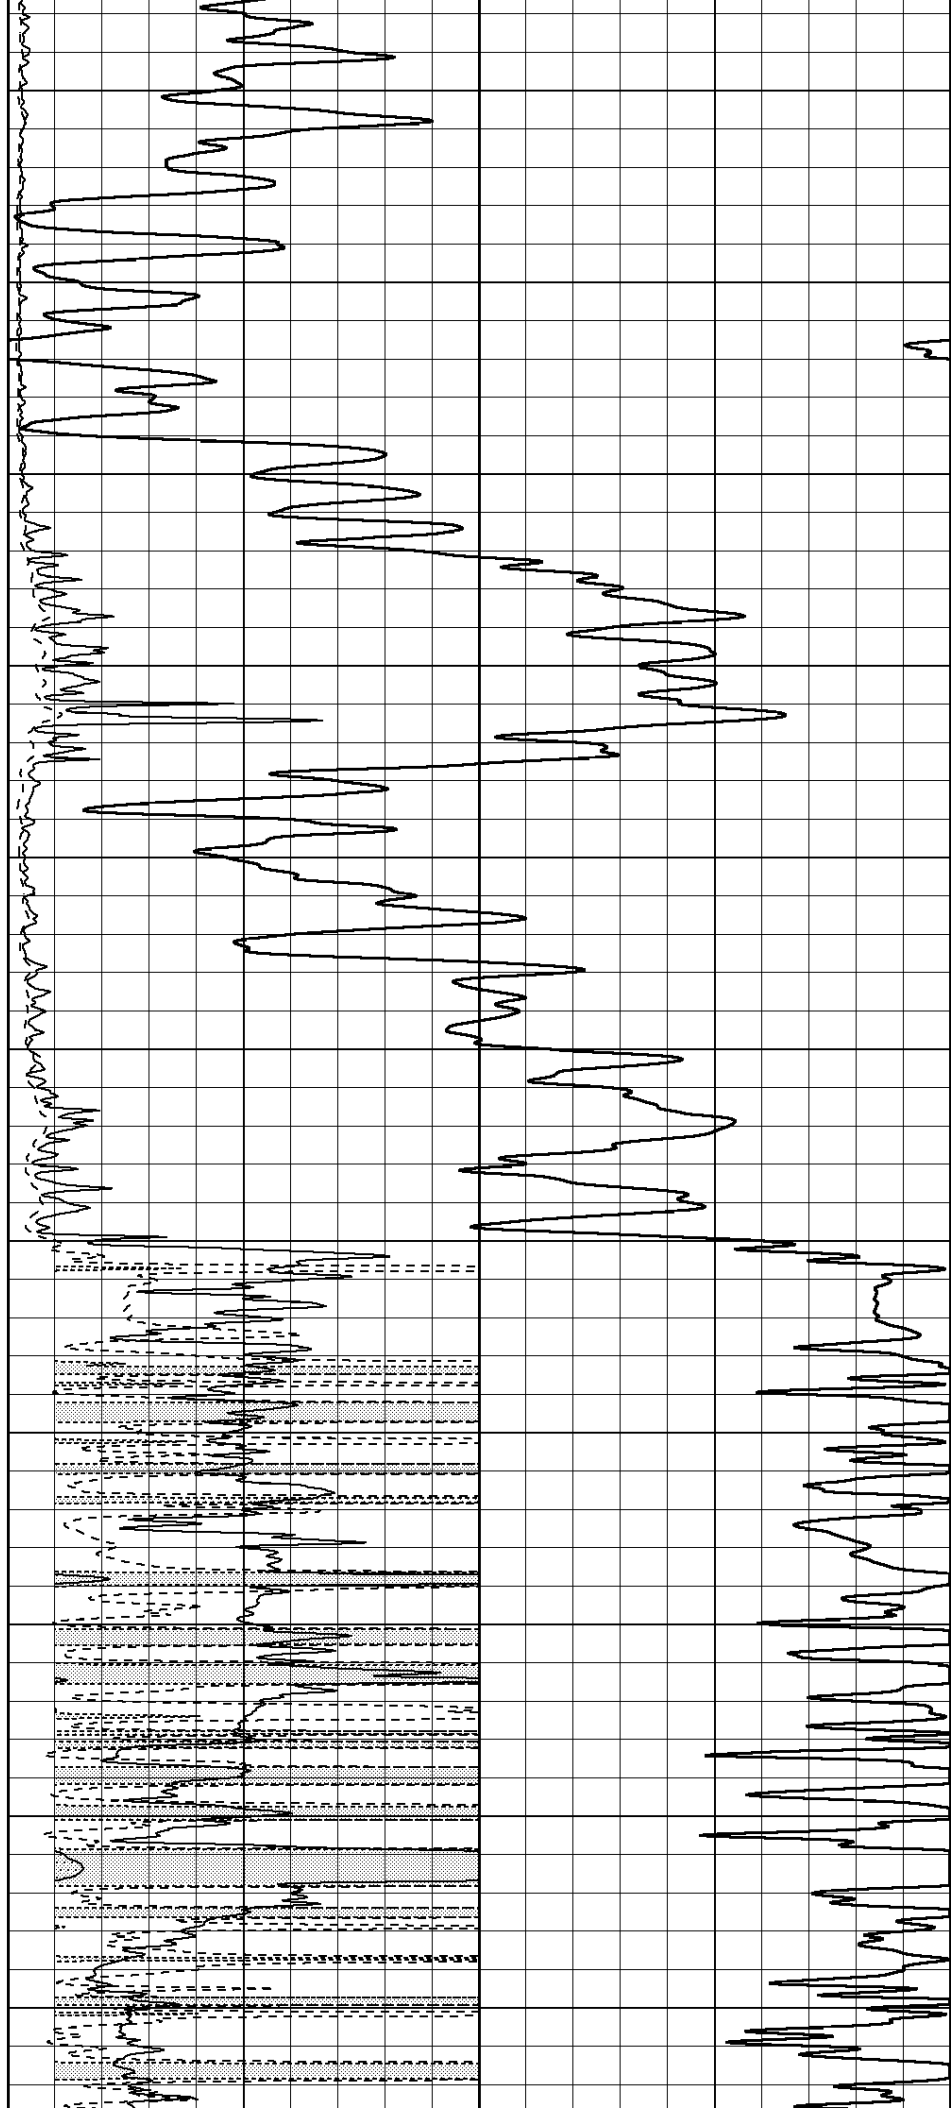

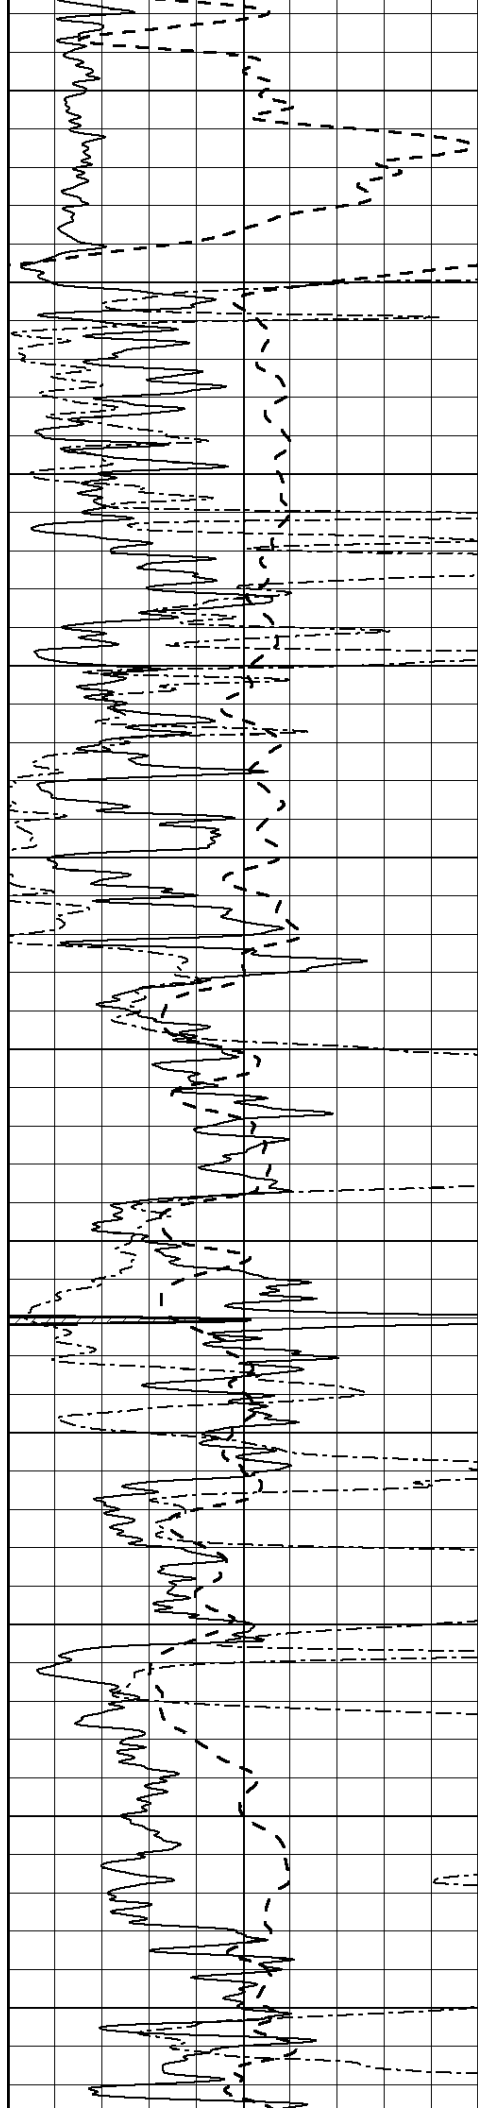

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

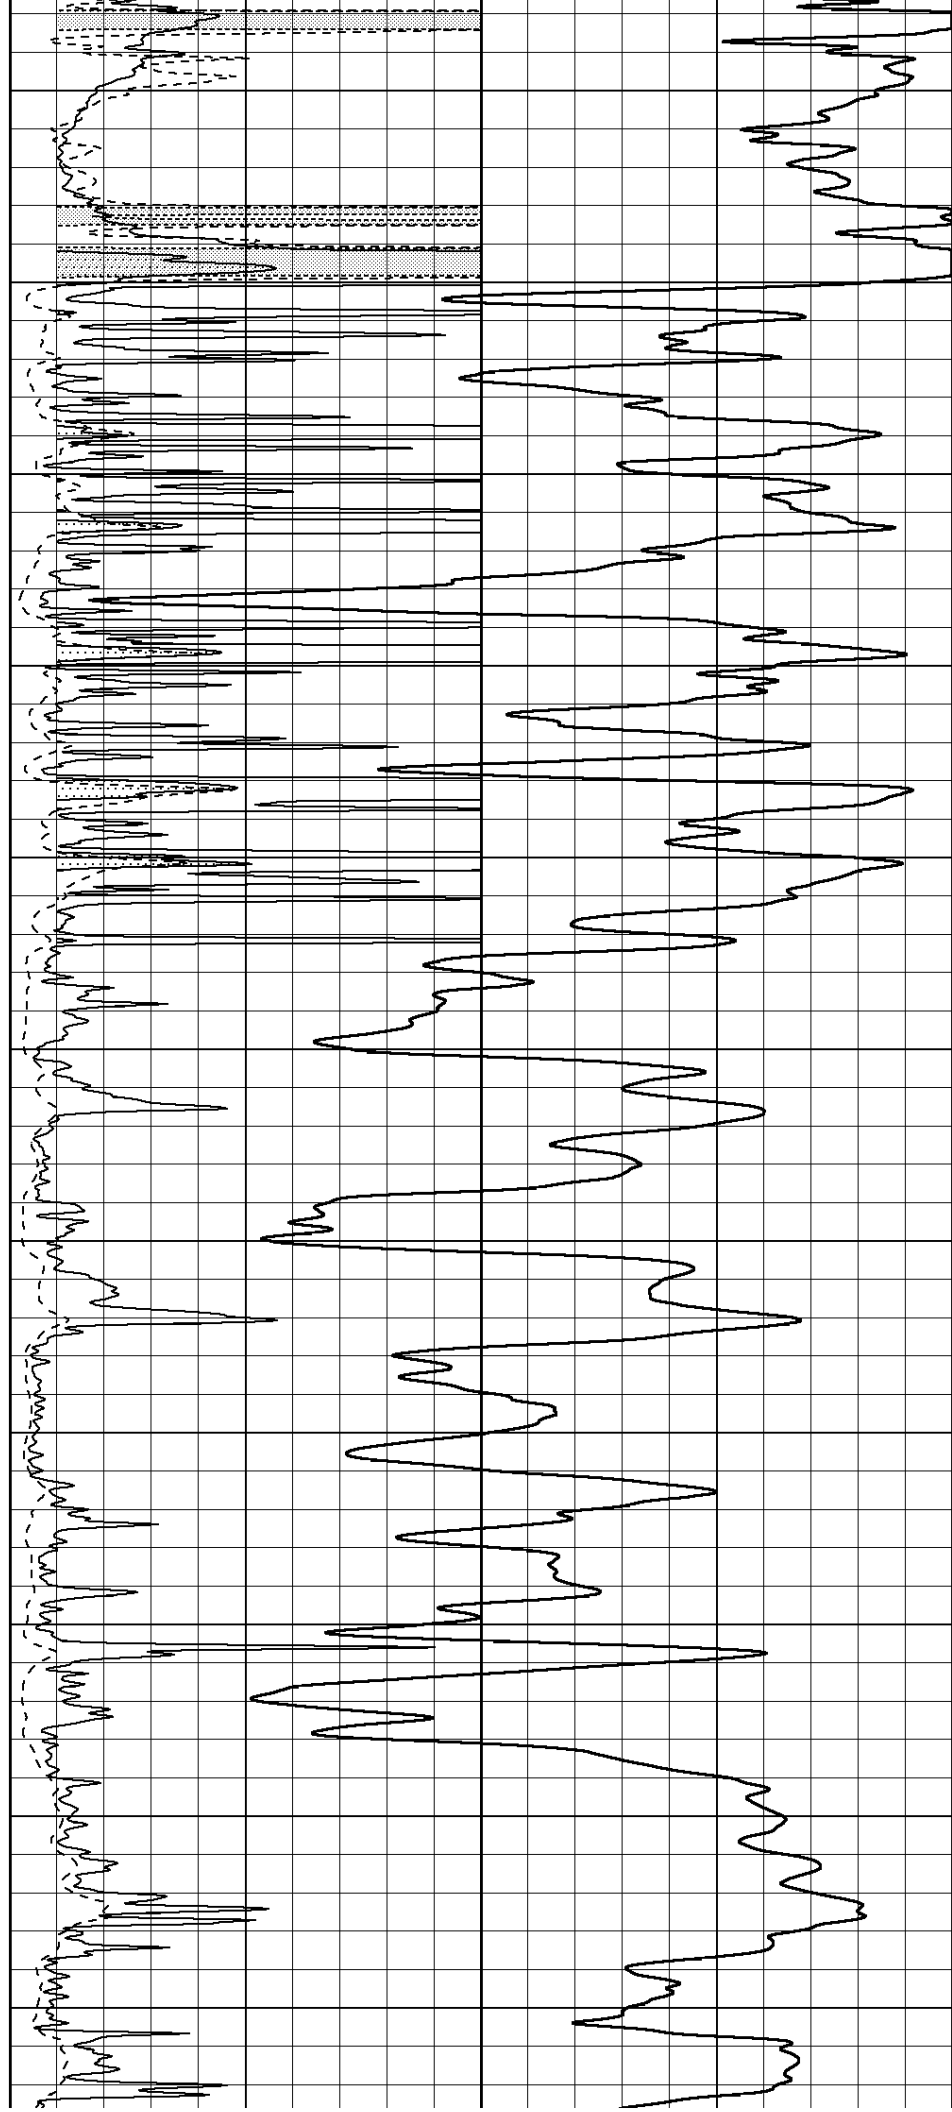

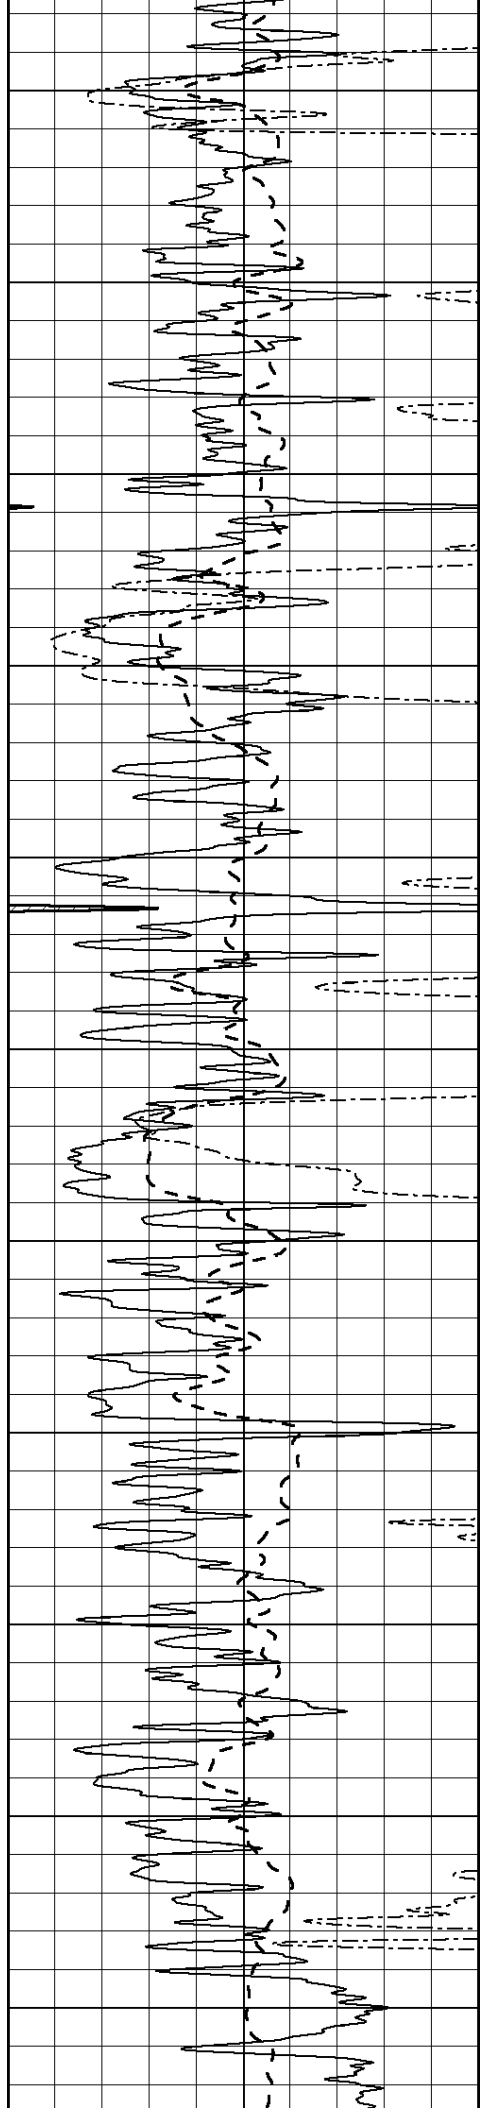

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

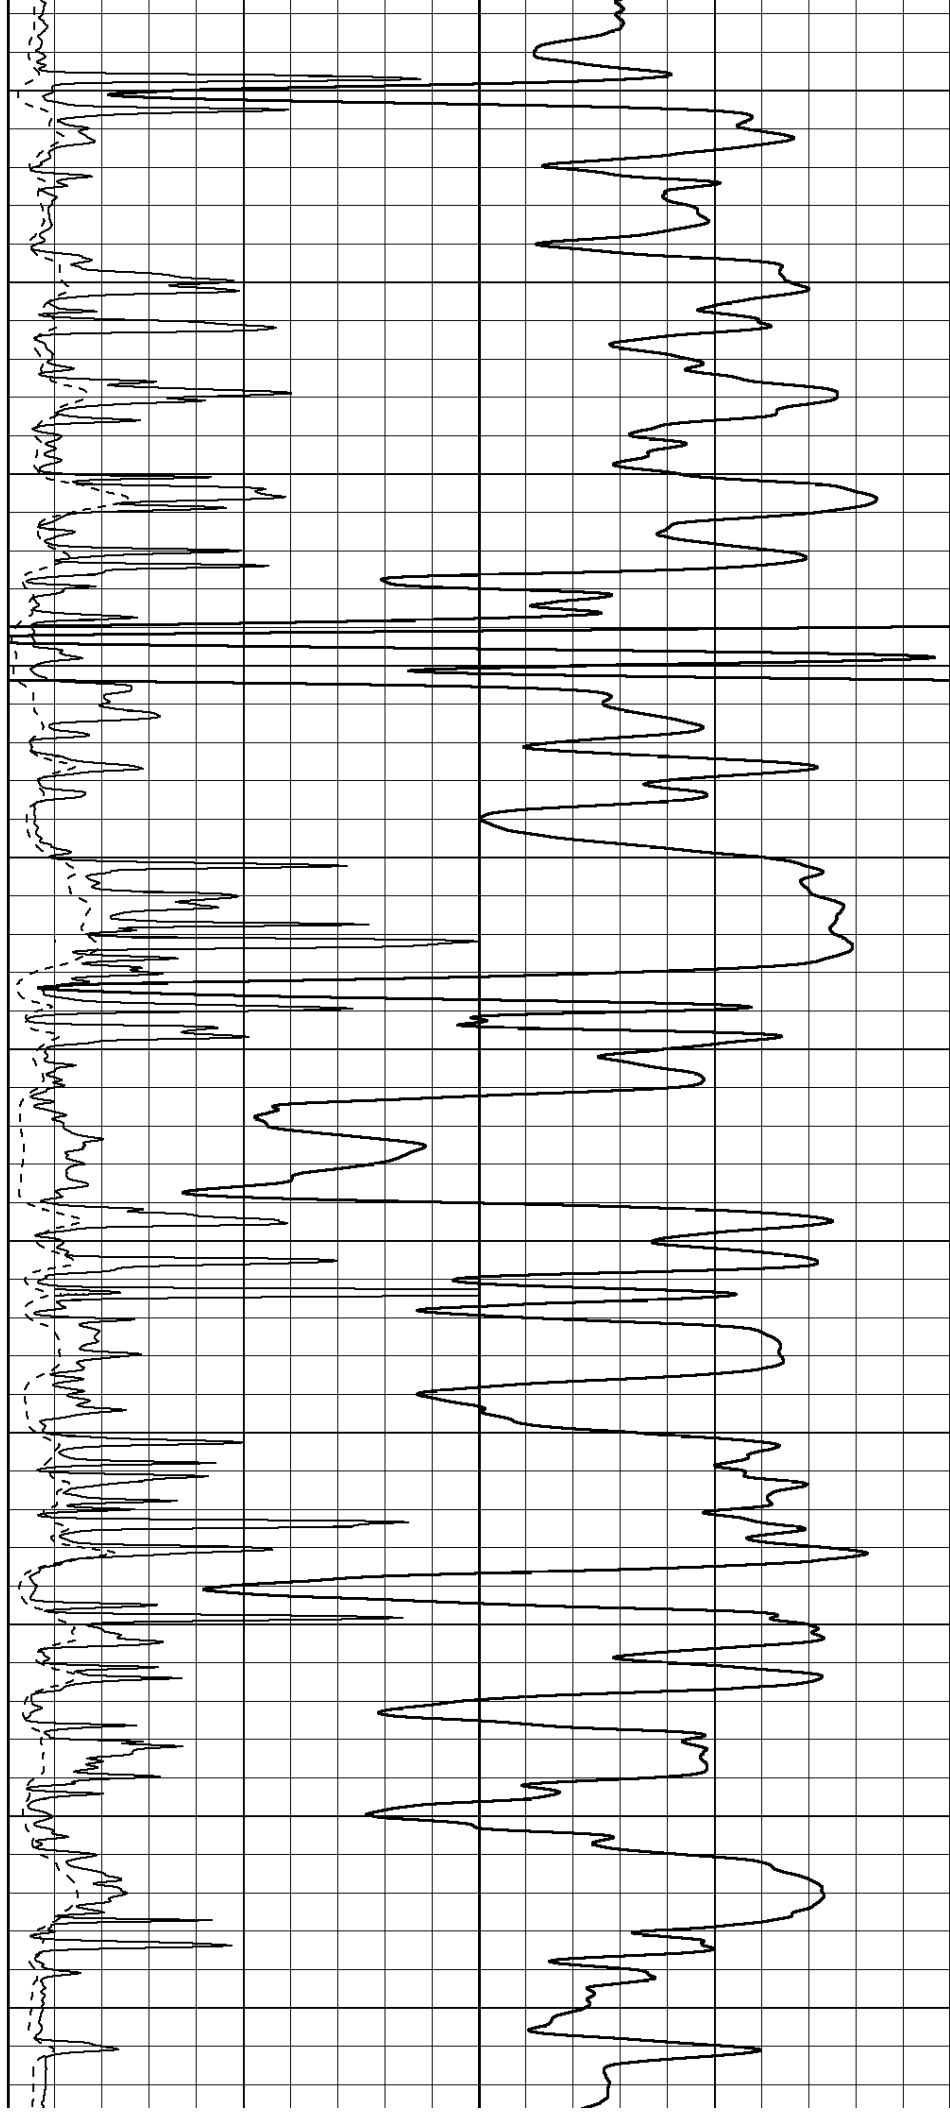

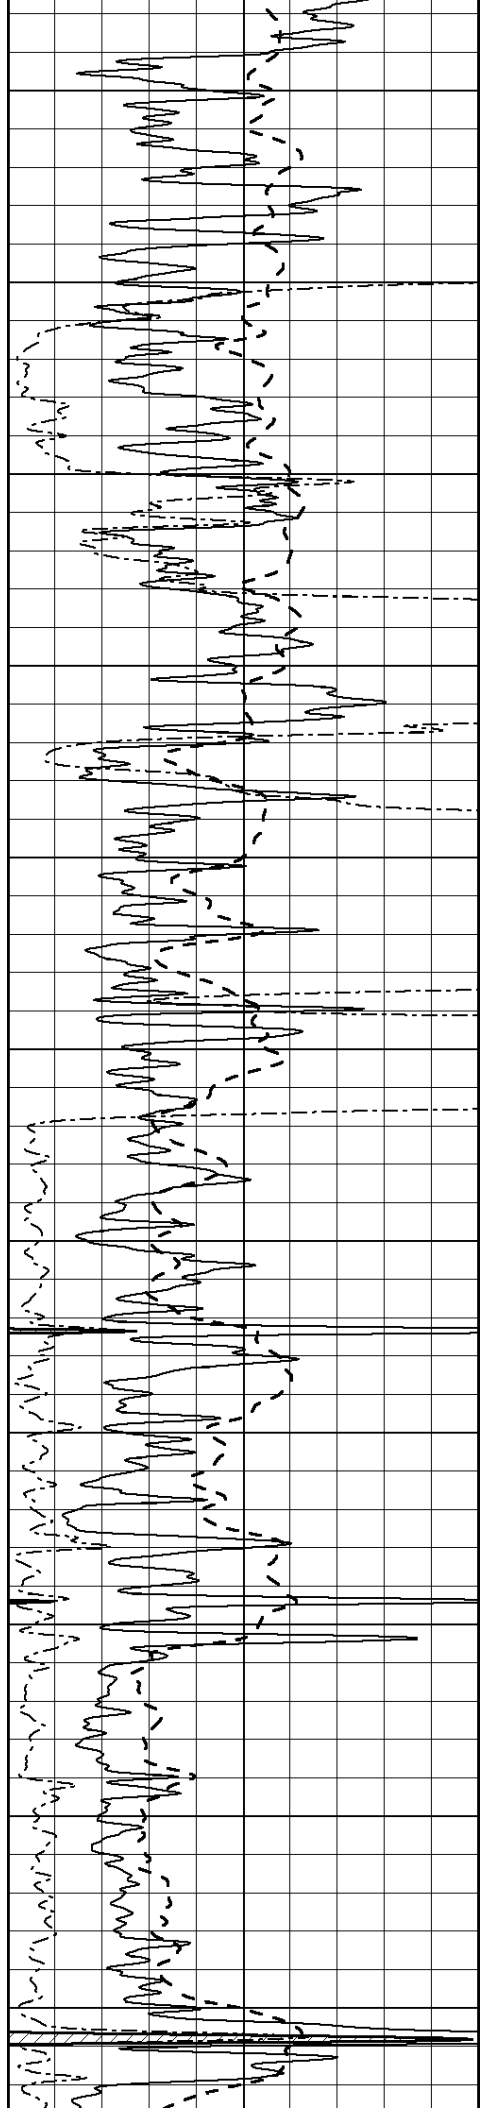

3200

3250

3300

3350

3400

3450


3500


3550

3600

3650

3700

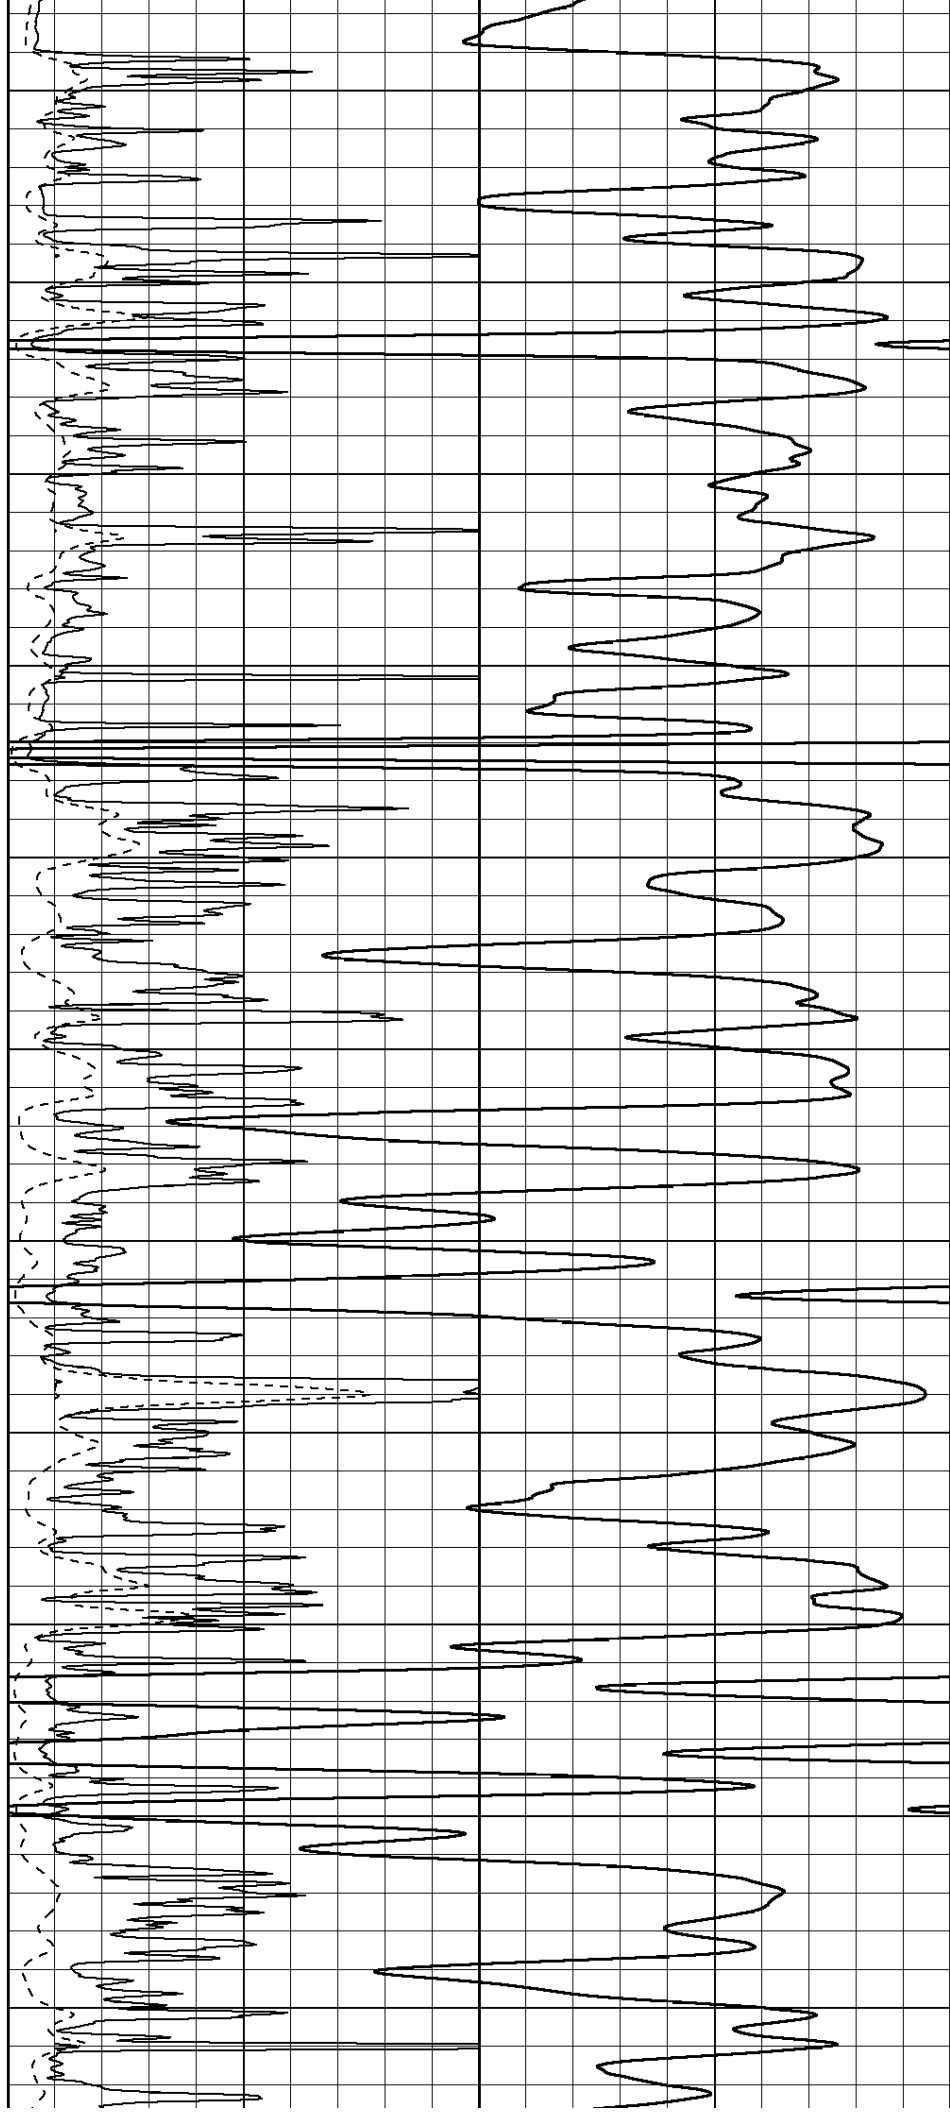

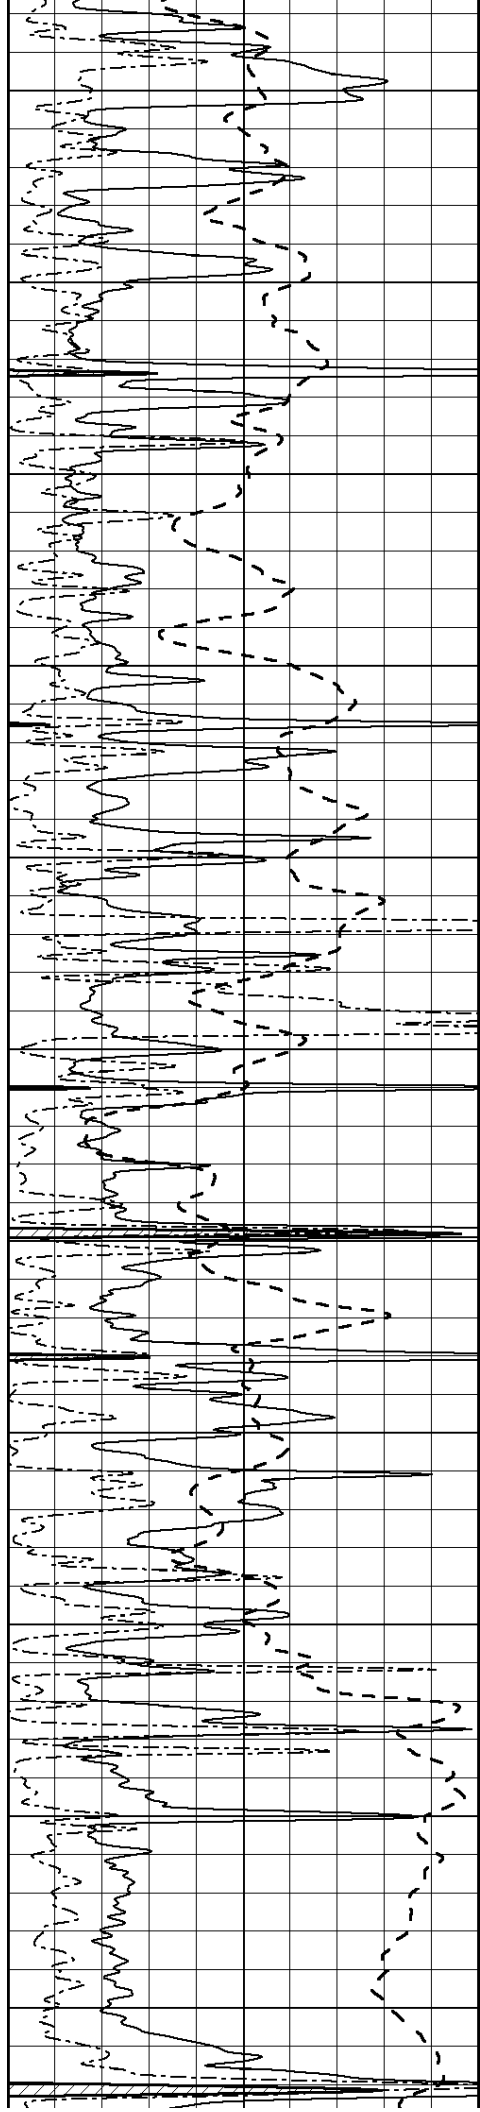

3750

3800

3850

3900

3950

4000



4050


4100

4150

4200


4250

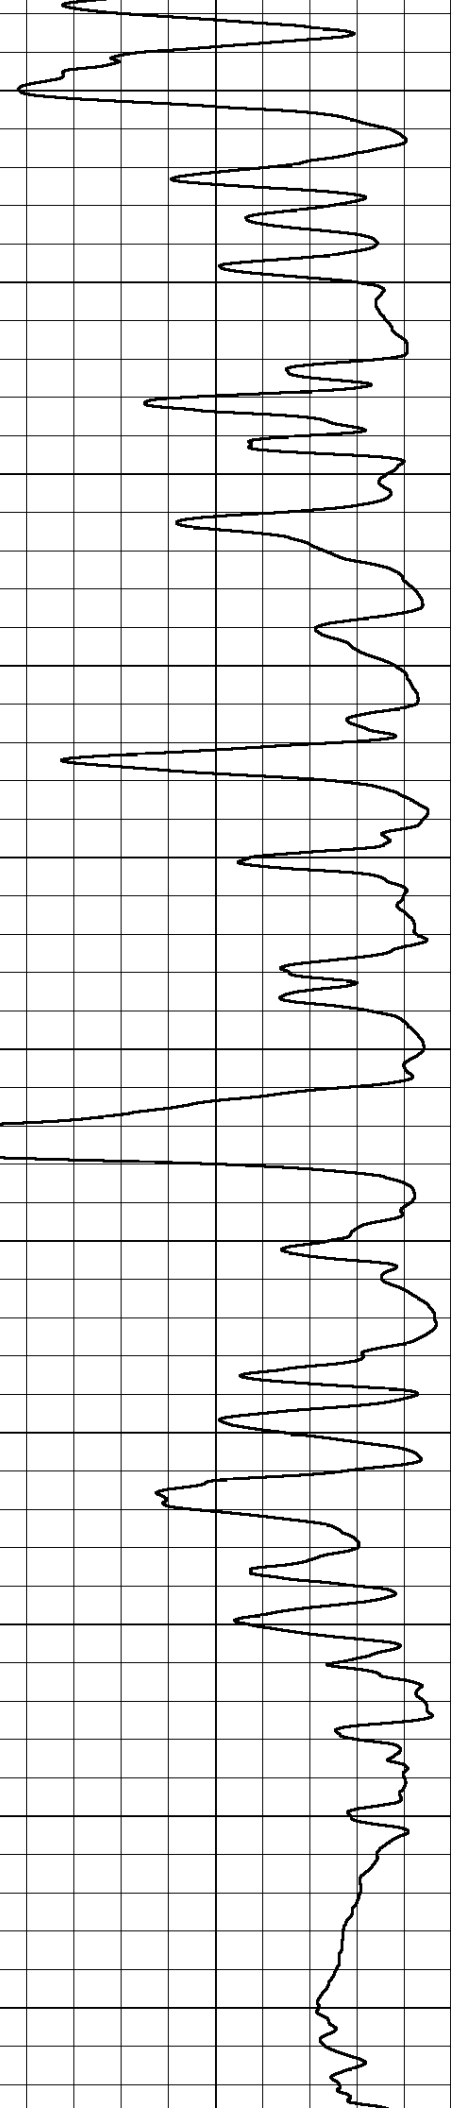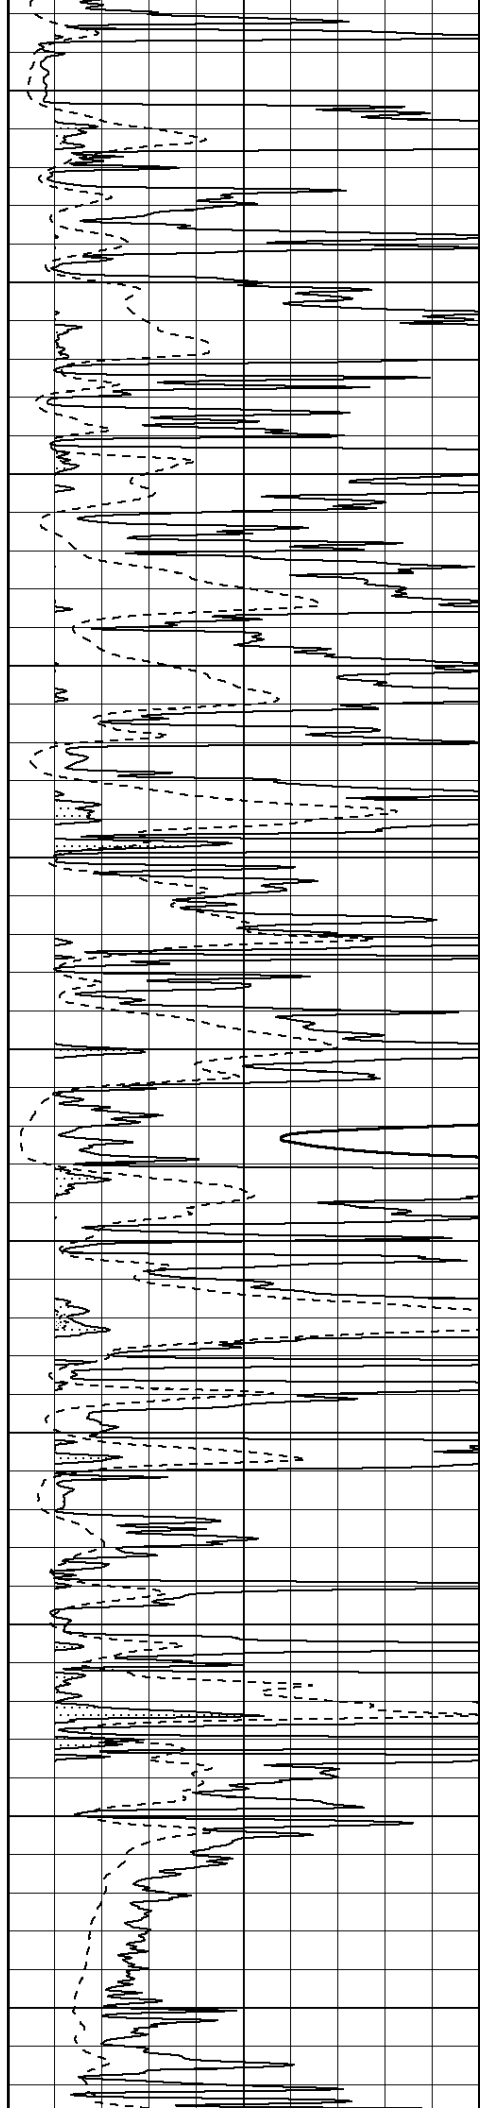

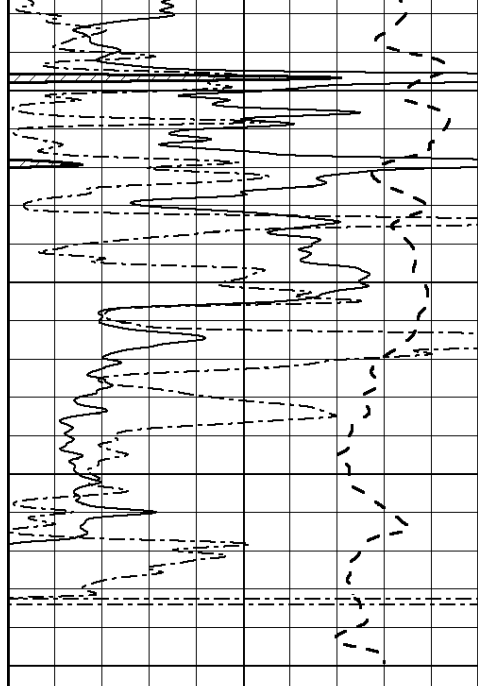

0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1


4300
4350
4400
4450

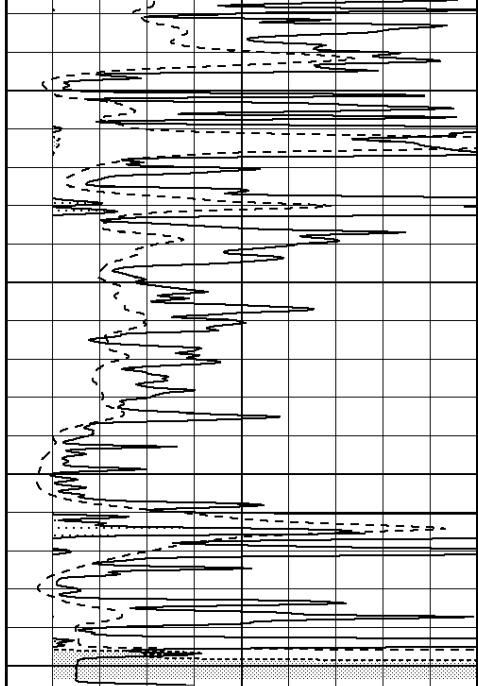

0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50
1000	CILD (mmho/m)	0
50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

CILD (mmho/m)

0

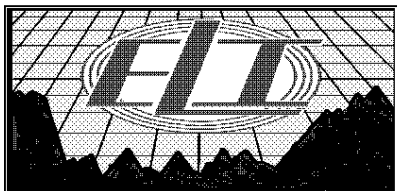


ANHYDRITE


Database File: 1424ddn.db
Dataset Pathname: pass3.4
Presentation Format: _dil
Dataset Creation: Tue May 23 04:16:13 2017 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

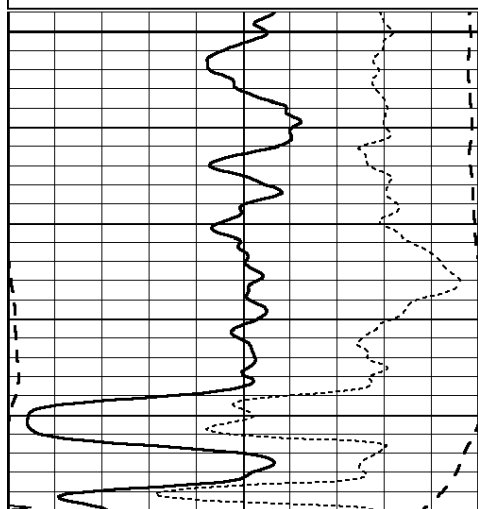


1400
1450

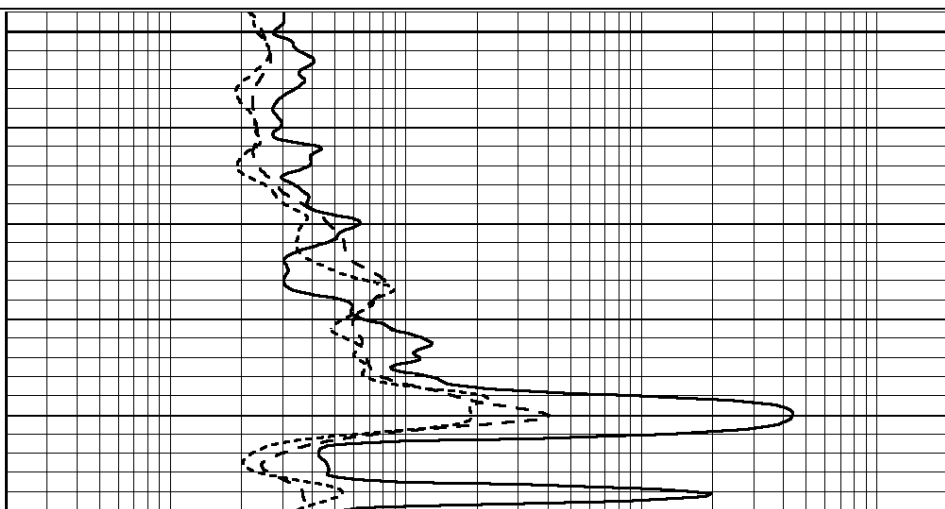

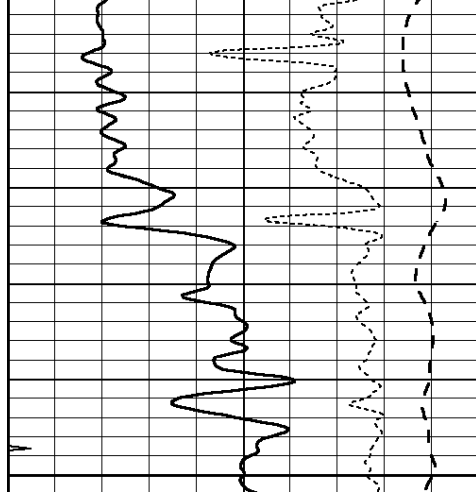


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

1500

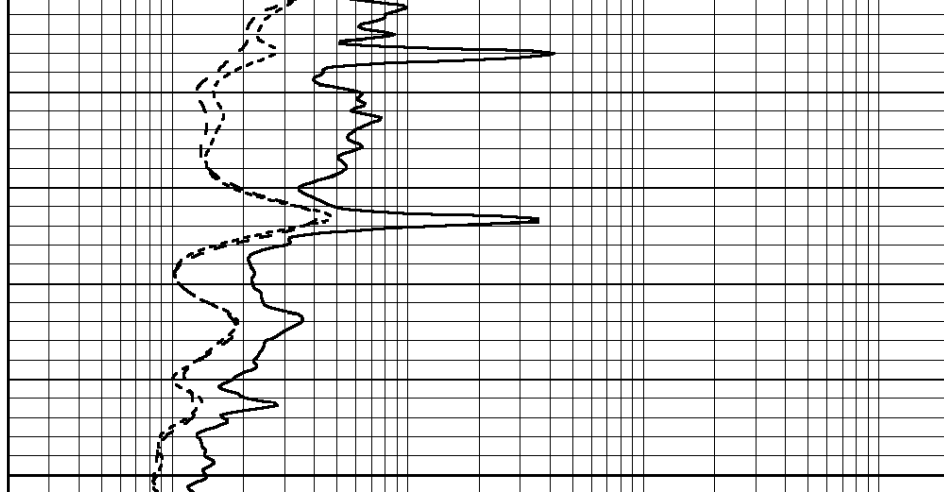

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

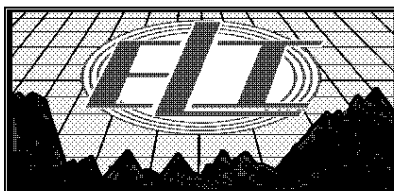


MAIN SECTION

Database File: 1424ddn.db
 Dataset Pathname: pass3.3
 Presentation Format: _dil
 Dataset Creation: Tue May 23 04:13:01 2017 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

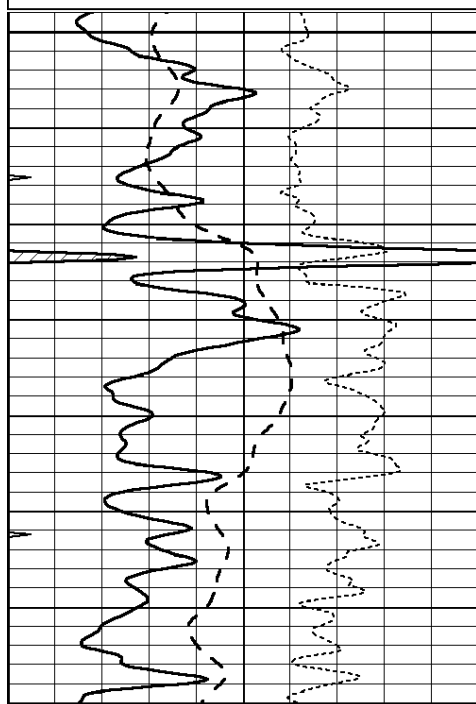

3500

3550

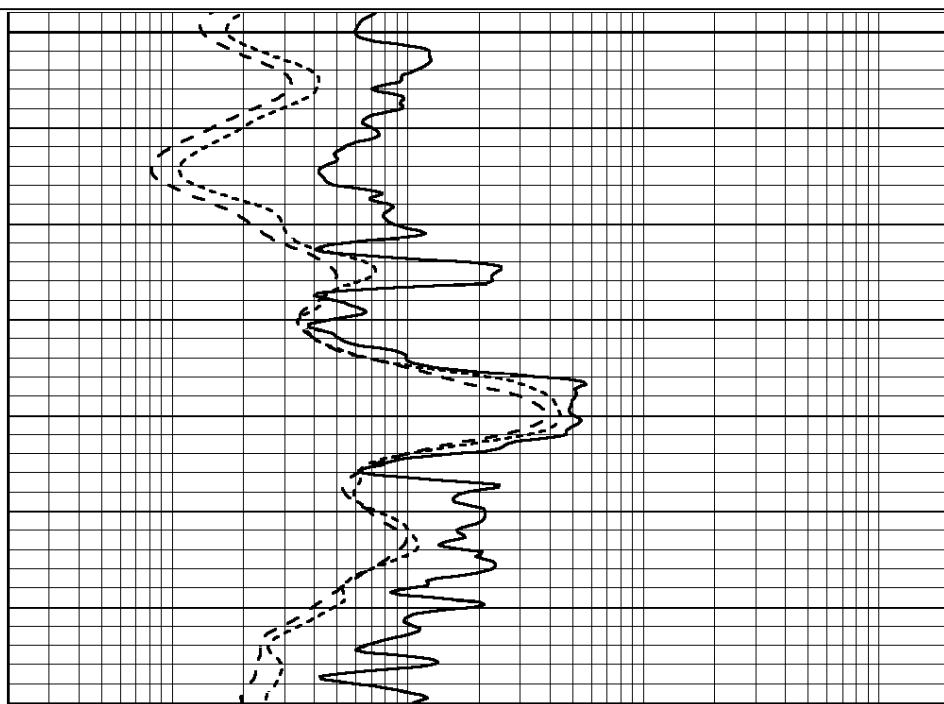

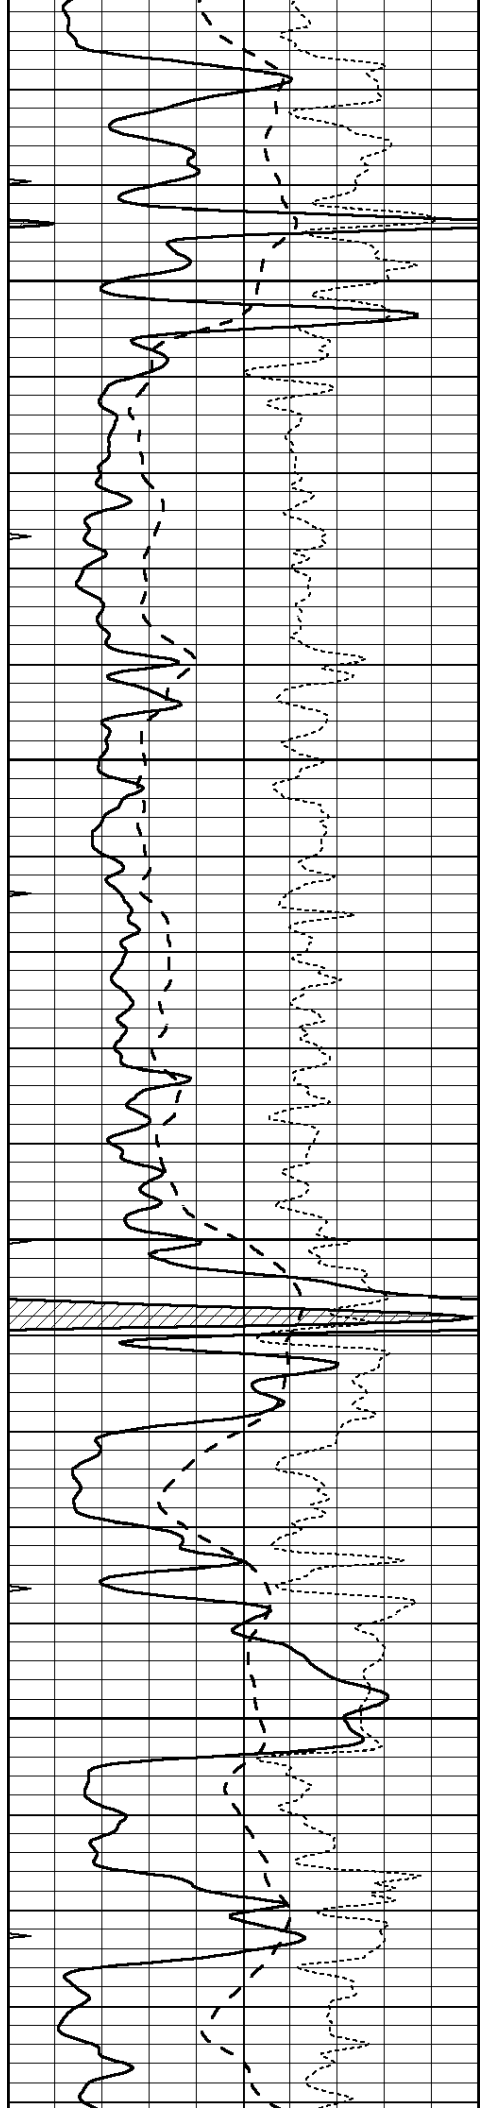



3600

3650

3700

3750

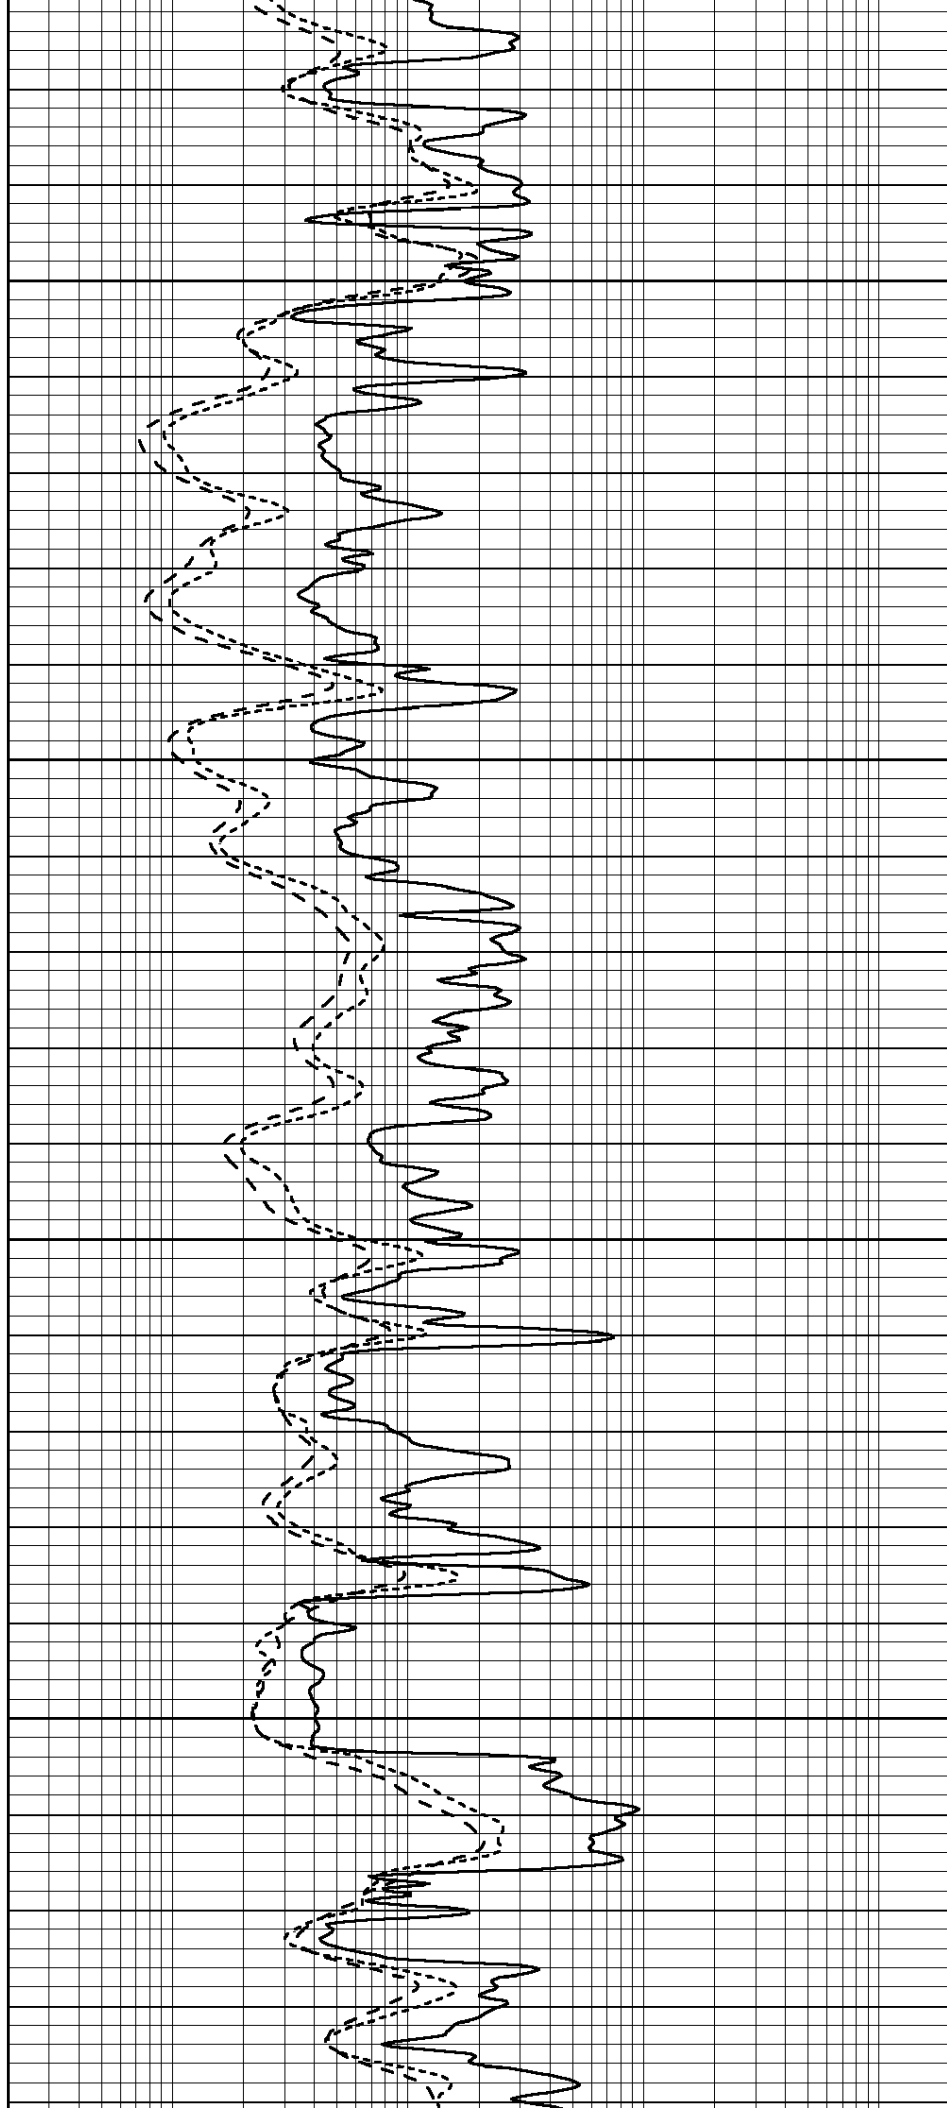

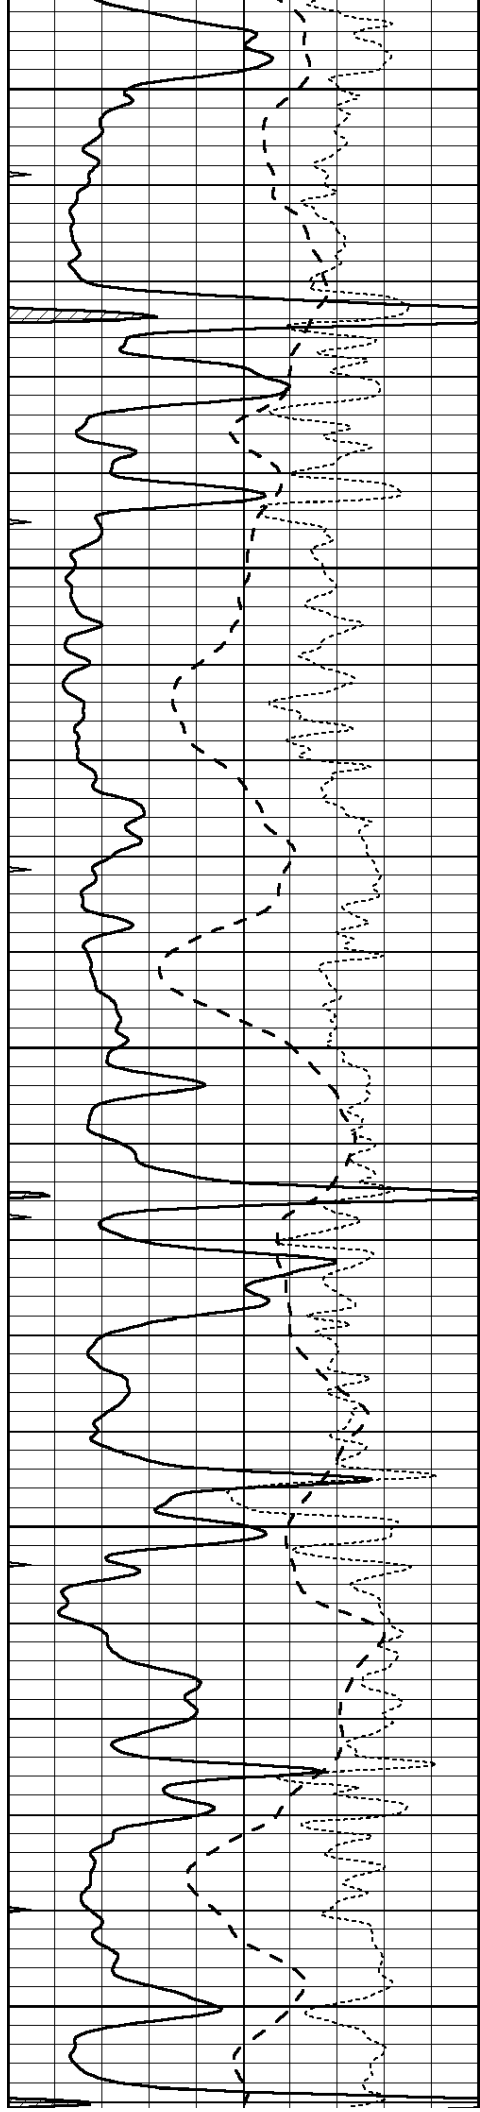


3800


3850

3900

3950

4000

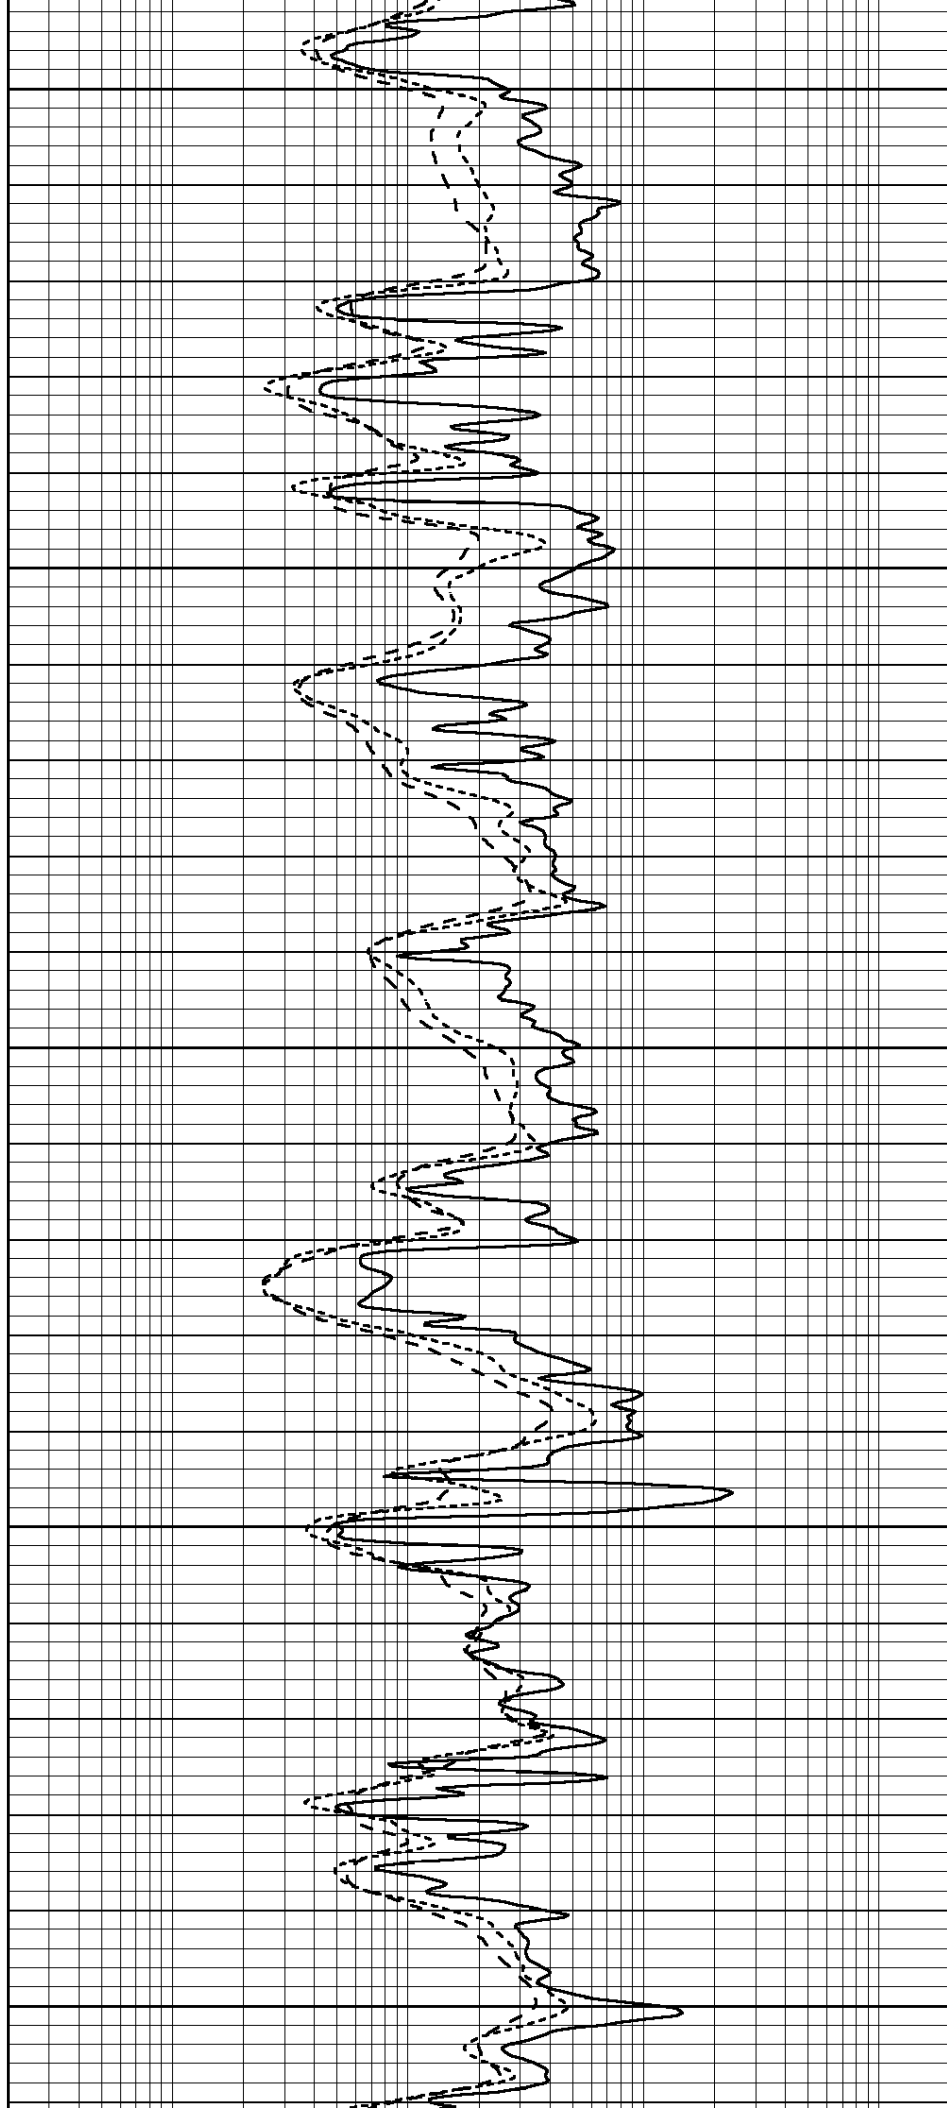

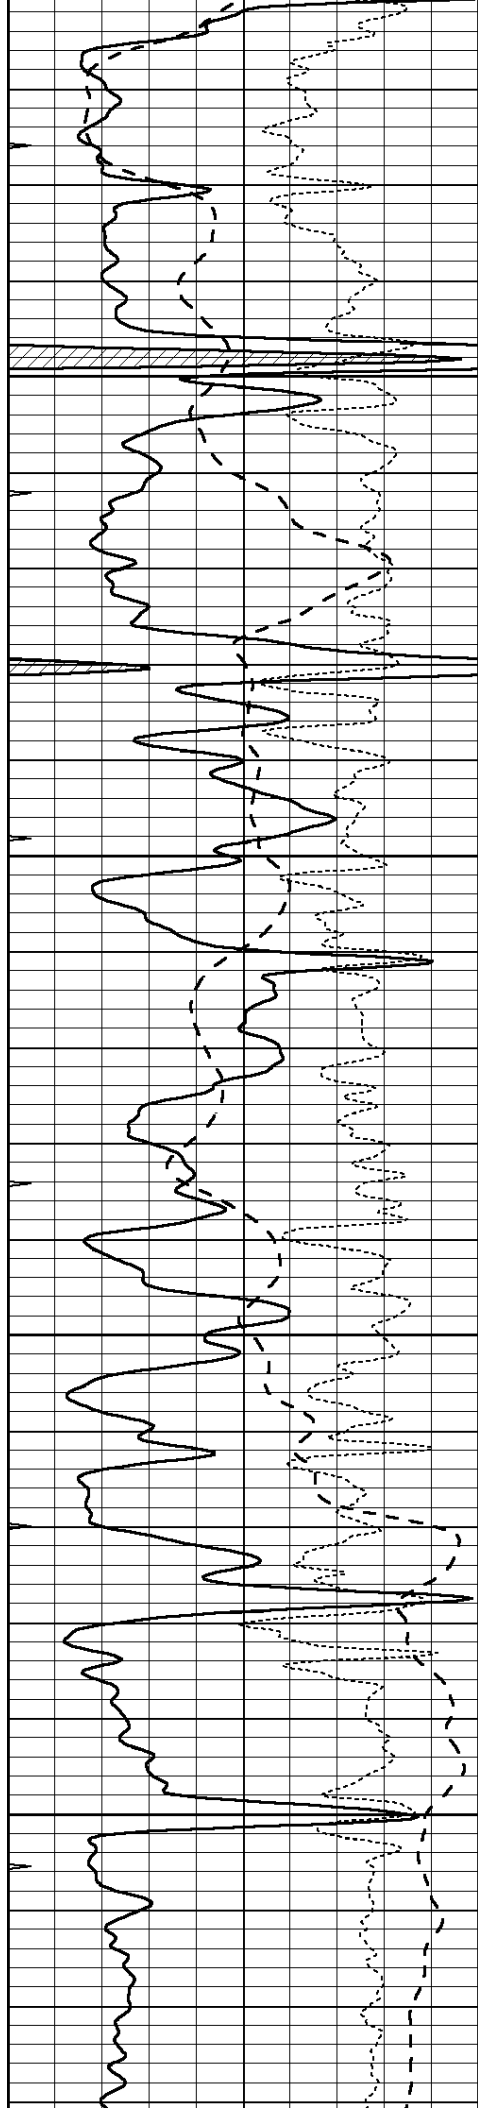



4050

4100

4150

4200

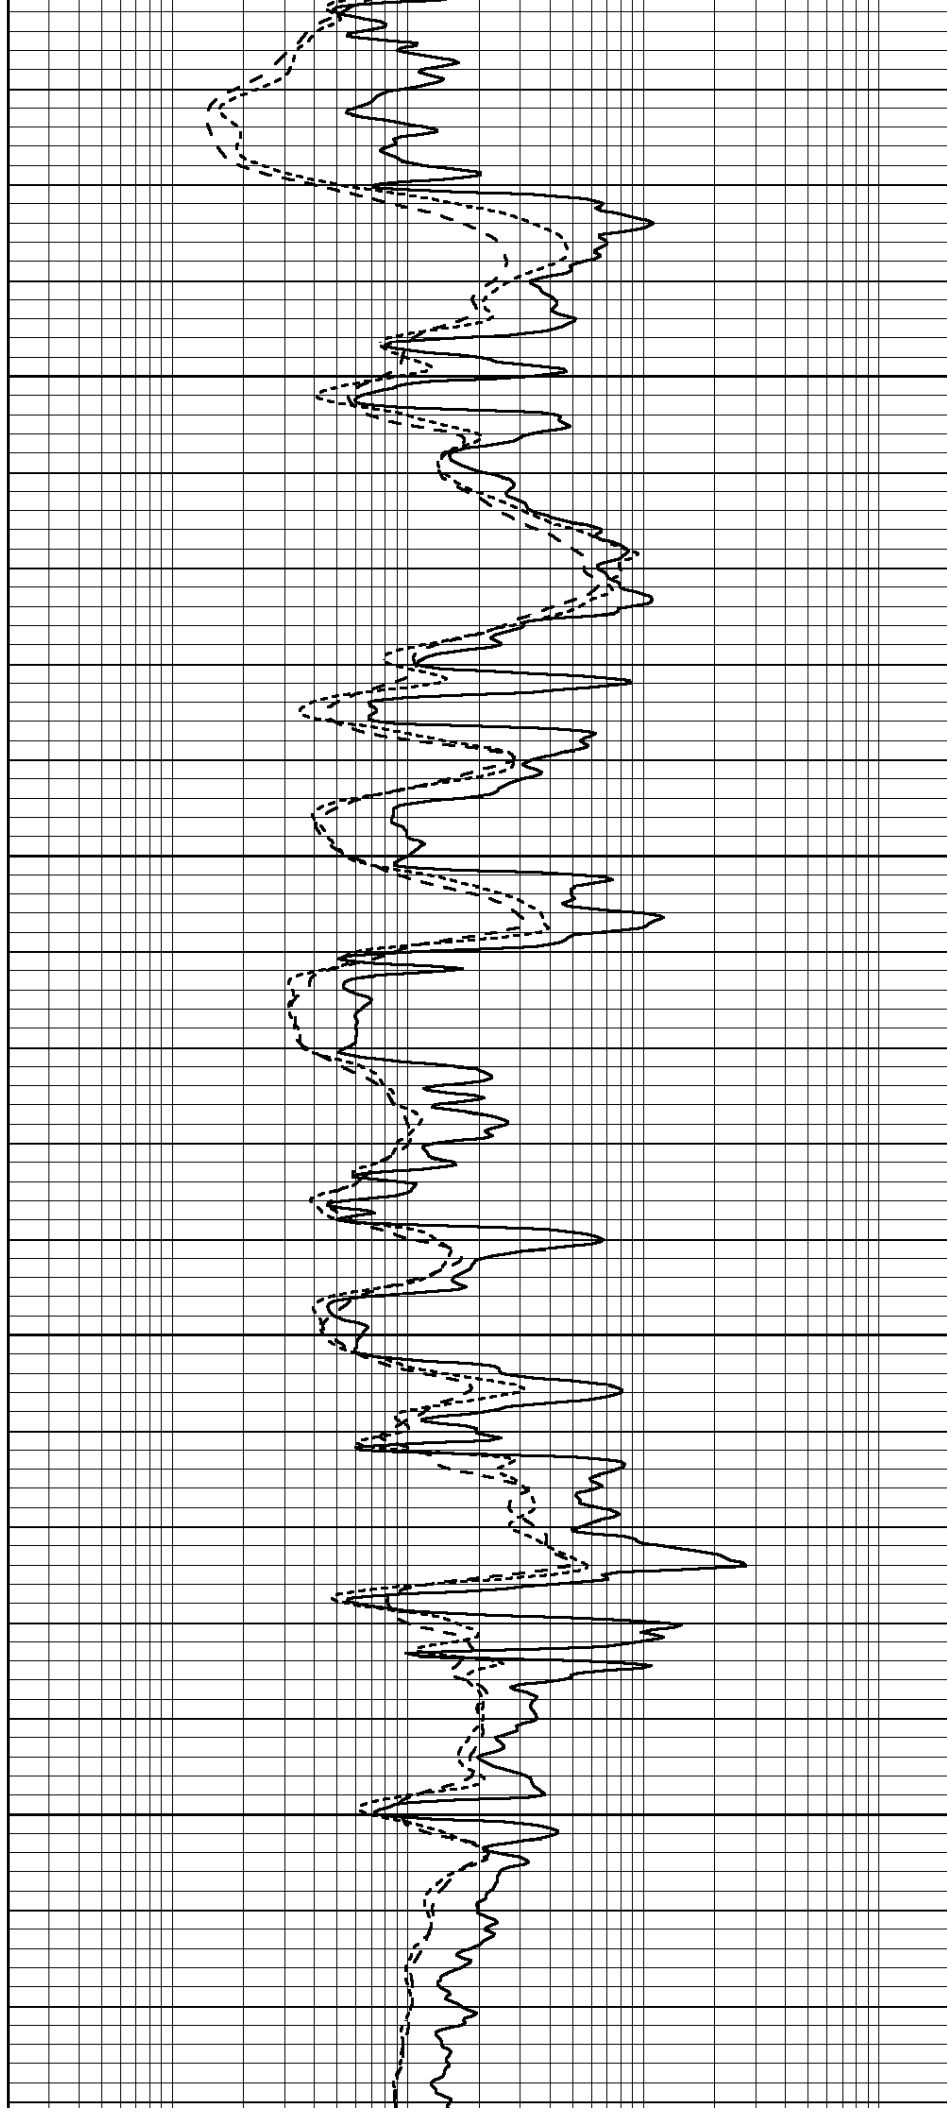

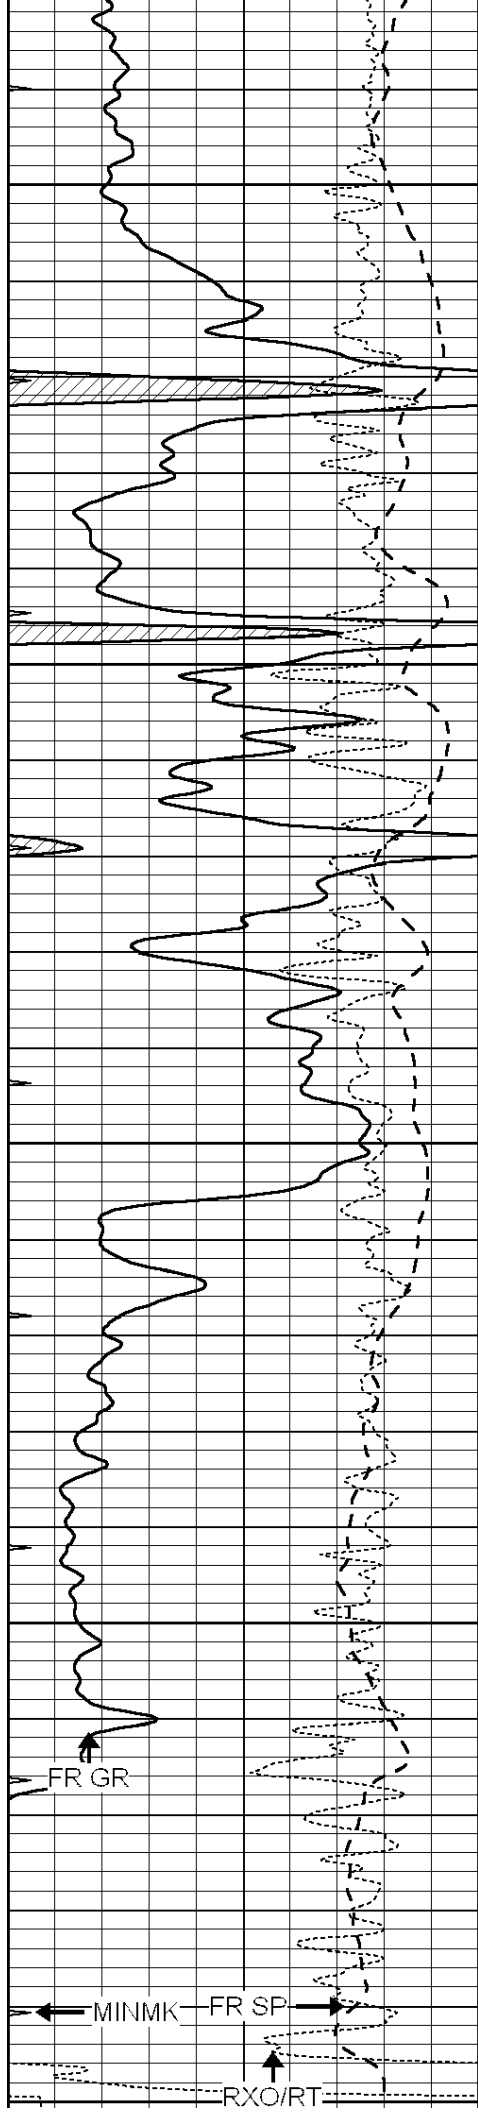

4250

4300

4350

4400


4450

FR GR

MINMK

FR SP

RXO/RT

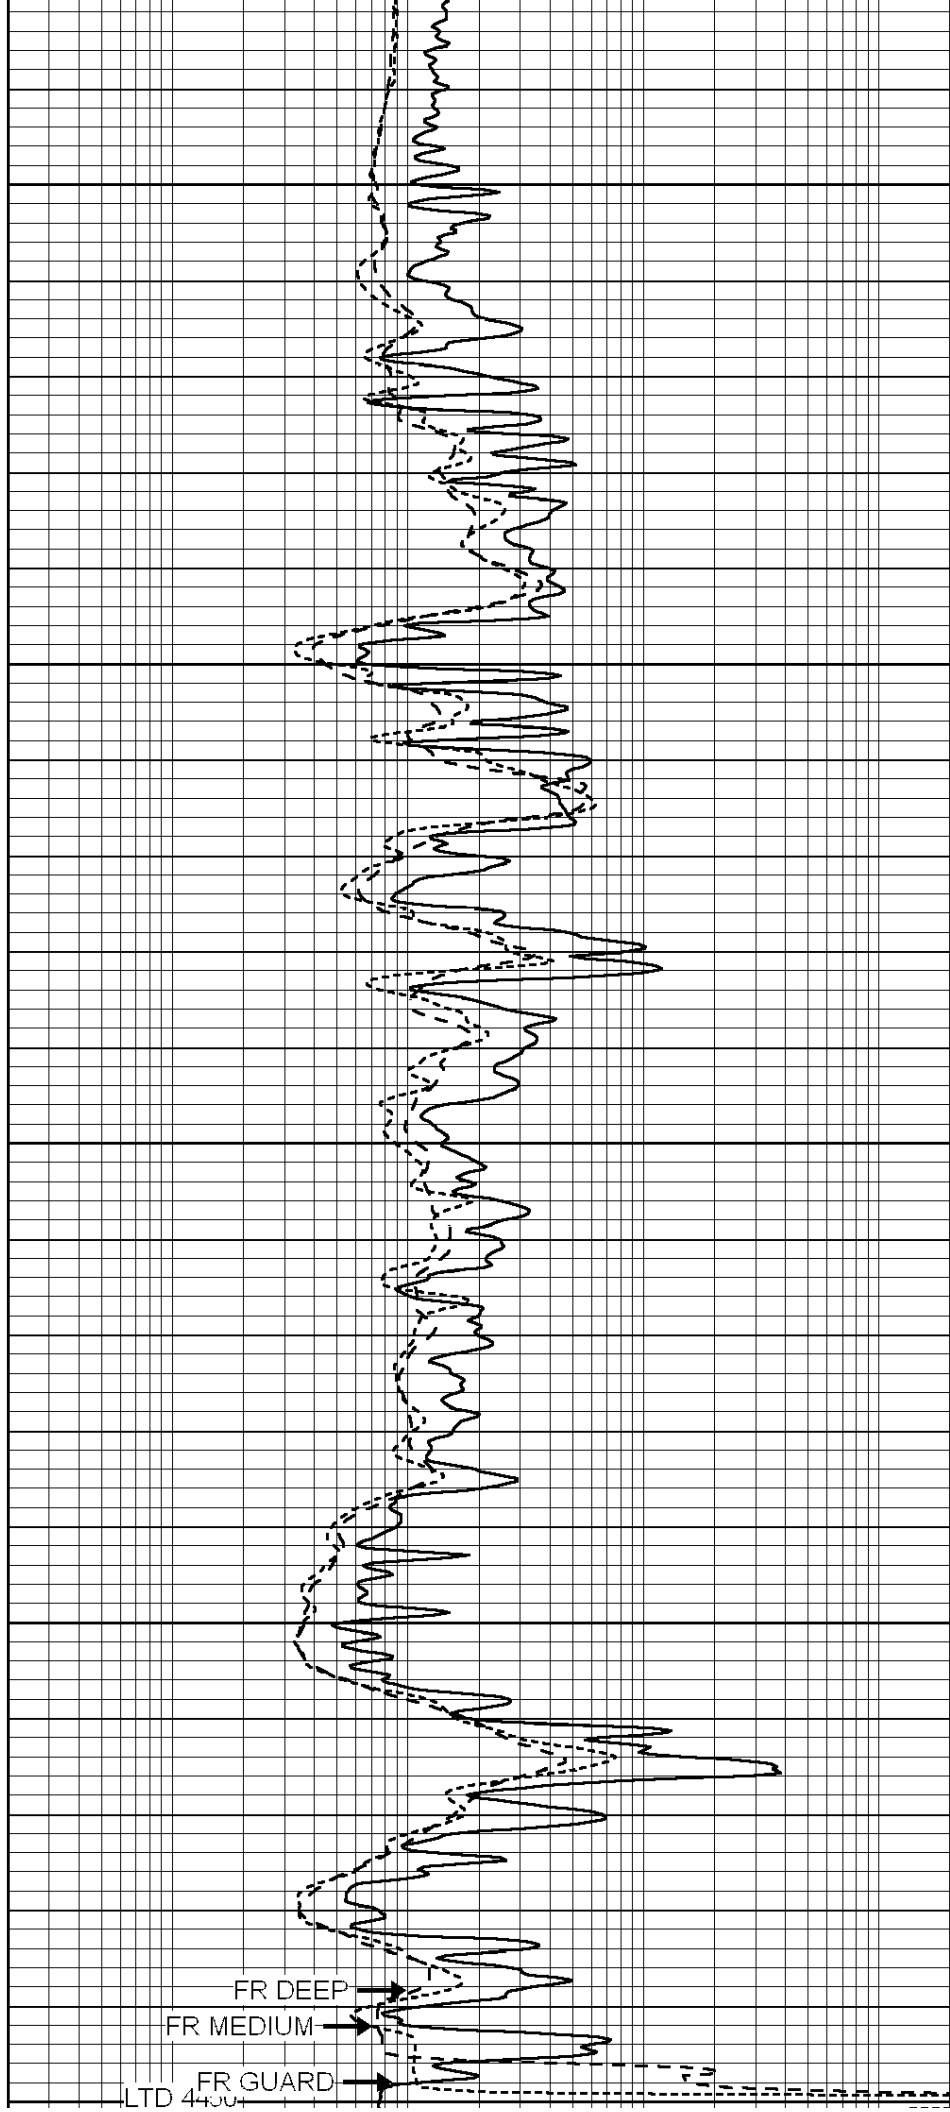

FR DEEP


FR MEDIUM

FR GUARD

LTD 4400

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

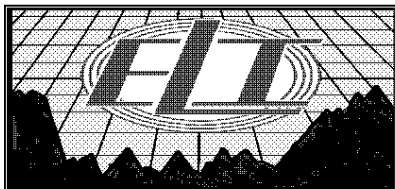


REPEAT SECTION

Database File: 1424ddn.db
 Dataset Pathname: pass2.2
 Presentation Format: _dil
 Dataset Creation: Tue May 23 03:17:05 2017 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

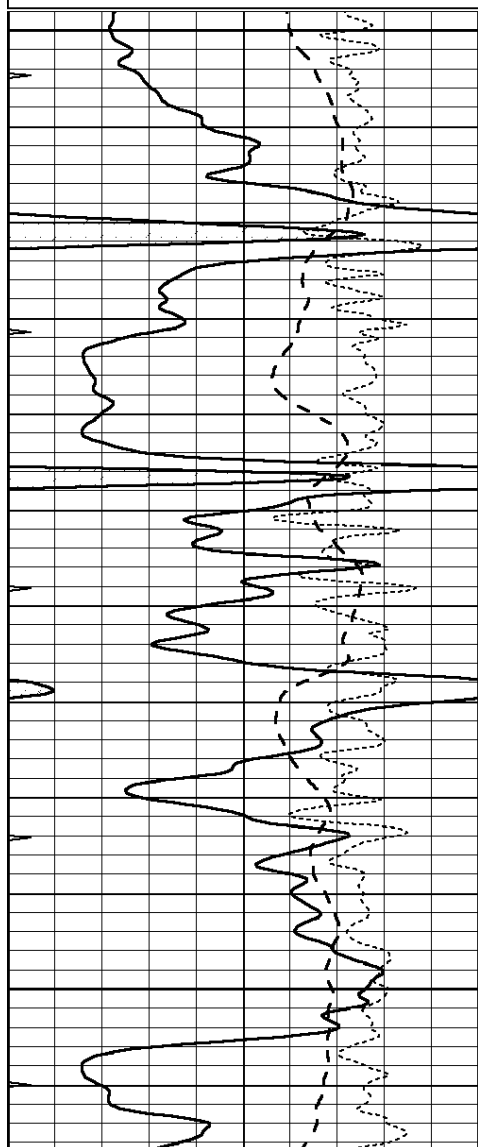


4250

4300

4350

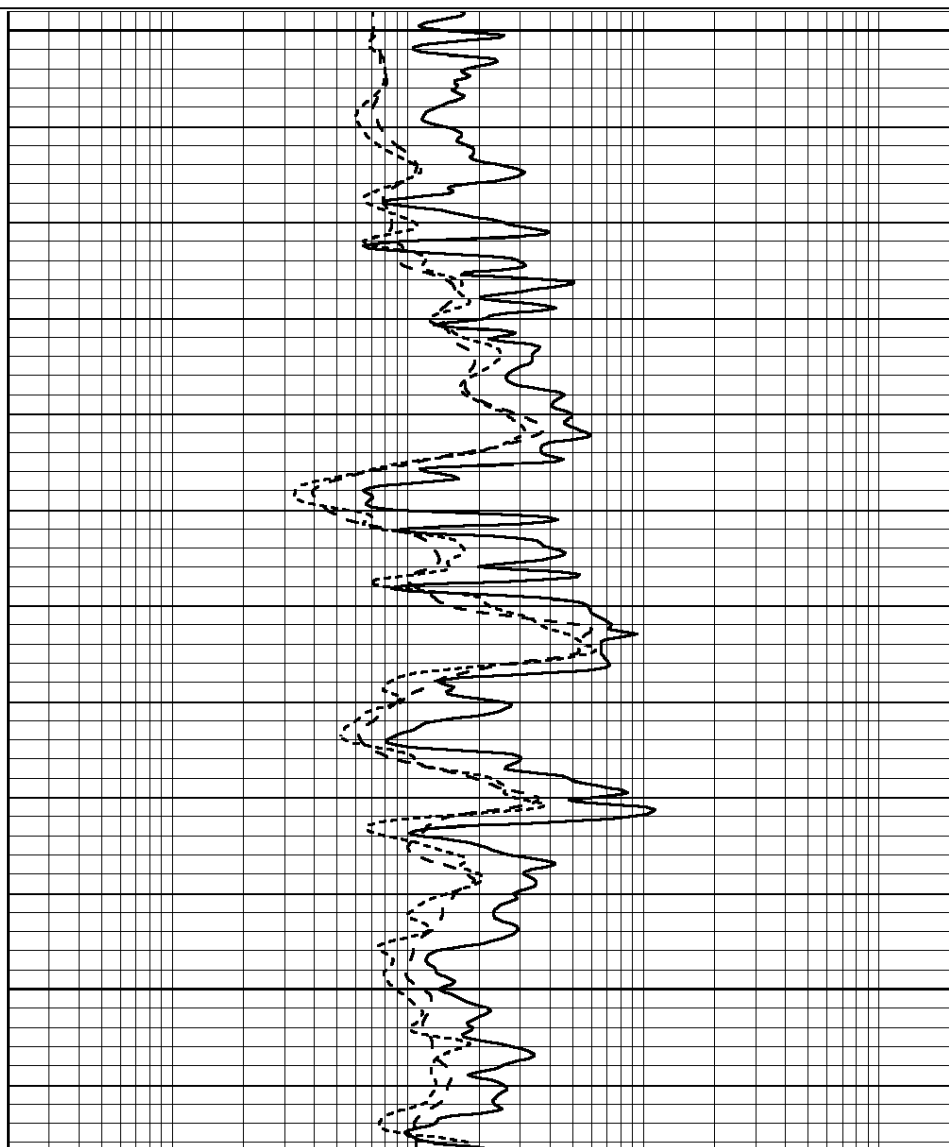

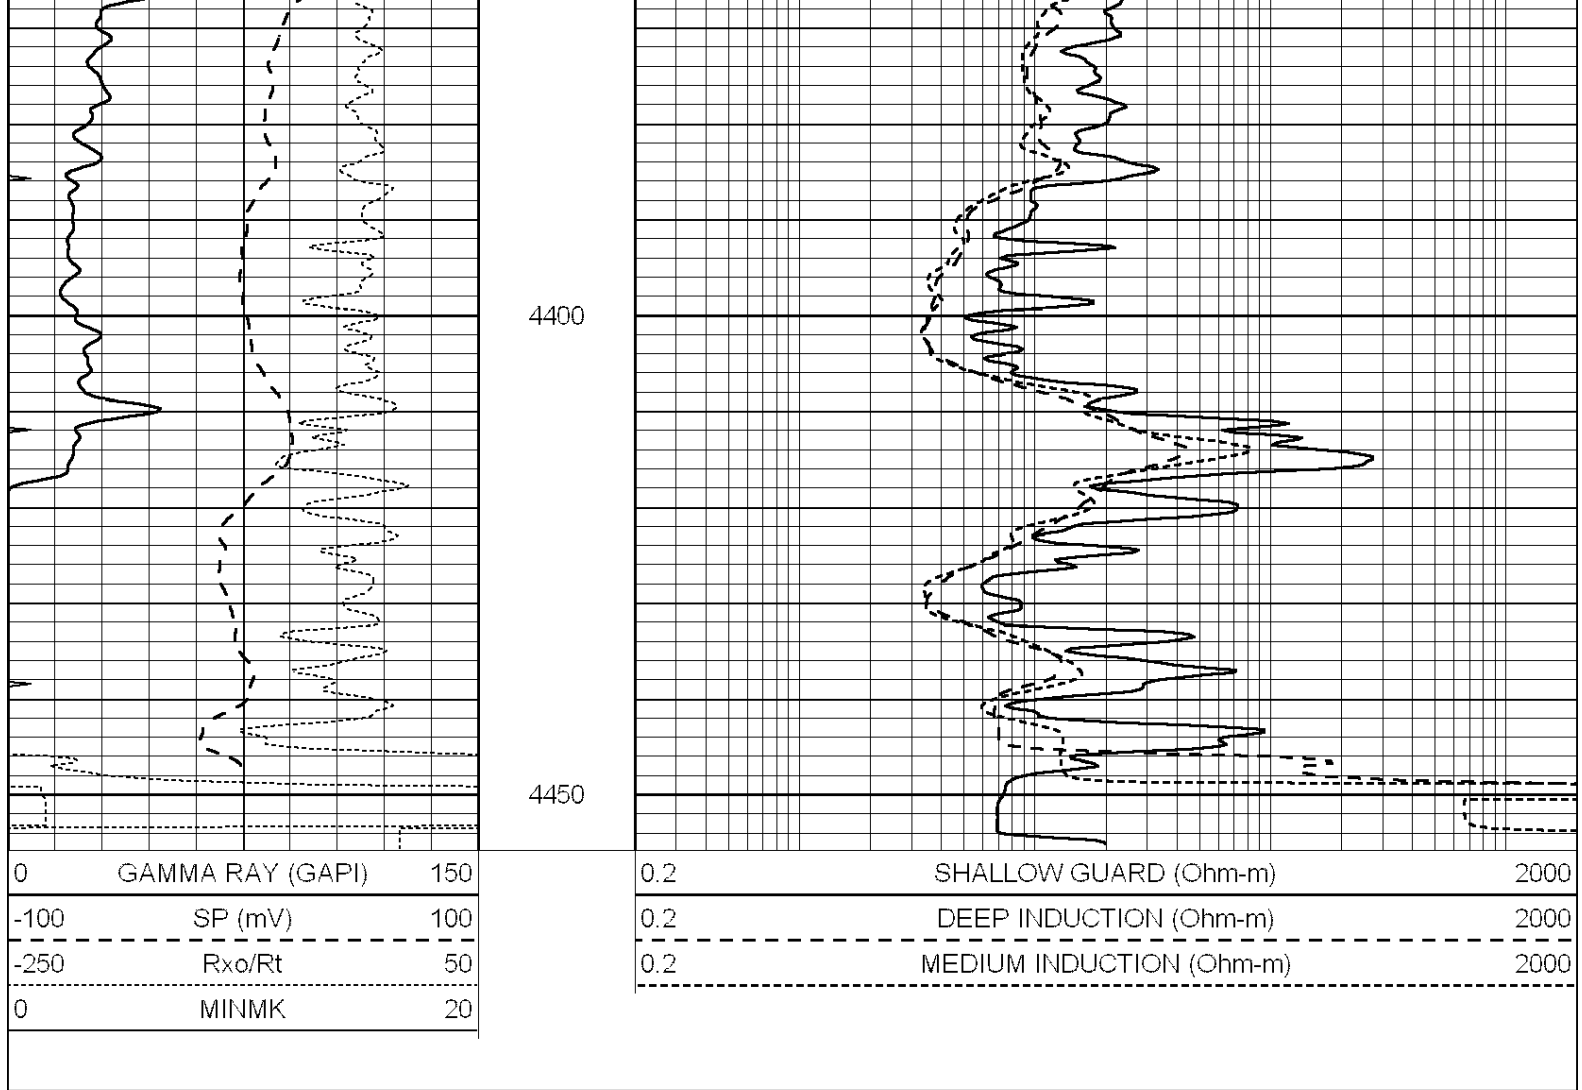

Calibration Report								
Database File:	1424ddn.db							
Dataset Pathname:	pass3.3							
Dataset Creation:	Tue May 23 04:13:01 2017 by Calc SOC 120430							
Dual Induction Calibration Report								
Serial-Model:			PROBE7-DILG					
Surface Cal Performed:			Mon May 15 11:30:04 2017					
Downhole Cal Performed:			Mon Jul 28 12:02:56 2008					
After Survey Verification Performed:			Mon Jul 28 12:02:56 2008					
Surface Calibration								
Readings			References			Results		
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	-2.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-46.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102
Downhole Calibration								
Readings			References			Results		
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	100.000	500.000	mmho/m	1.000	0.000

Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report								
Serial: 004N			Model: PRB					

Master Calibration					Performed Fri May 30 11:01:00 2014			
	Background	Magnesium	Aluminum	Sandstone				
Window 1	1378.8	10804.6	3492.0	12453.4				cps
Window 2	1262.4	9313.5	3076.7	10594.7				cps
Window 3	1077.6	5668.7	2076.0	6314.8				cps
Window 4	306.4	313.0	306.4	315.6				cps
Long Space	0.0	8051.0	1814.3	9332.3				cps
Short Space	1.9	1706.1	1146.0	1707.6				cps
Rho		1.7100	2.5900	1.3800				g/cc
Pe		0.0000	2.5700	1.5500				
Rib Angle	: 45.0	Rib Slope	: 1.002	Density/Spine Ratio			: 0.571	
Spine Angle	: 75.0	Spine Slope	: 3.745	Spine Intercept			: -18.9	

Before Survey Verification					Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0				cps
Window 2	0.0	0.0	0.0	0.0				cps
Window 3	0.0	0.0	0.0	0.0				cps
Window 4	0.0	0.0	0.0	0.0				cps
Long Space	0.0	0.0	0.0	0.0				cps
Short Space	0.0	0.0	0.0	0.0				cps
Measured Rho		0.0000	0.0000	0.0000				g/cc
Measured Correction		0.0000	0.0000	0.0000				g/cc
Measured Pe			0.0000	0.0000				

After Survey Verification					Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0				cps
Window 2	0.0	0.0	0.0	0.0				cps
Window 3	0.0	0.0	0.0	0.0				cps
Window 4	0.0	0.0	0.0	0.0				cps
Long Space	0.0	0.0	0.0	0.0				cps
Short Space	0.0	0.0	0.0	0.0				cps
Measured Rho		0.0000	0.0000	0.0000				g/cc
Measured Correction		0.0000	0.0000	0.0000				g/cc
Measured Pe			0.0000	0.0000				

Compensated Neutron Calibration Report								
--	--	--	--	--	--	--	--	--

Serial Number:			070808					
----------------	--	--	--------	--	--	--	--	--

	Tool Model:	Probe	
PRE-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu
POST-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu
Gamma Ray Calibration Report			
Serial Number:	070558		
Tool Model:	OPEN_GR		
Performed:	Fri May 05 12:55:28 2017		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.2800	GAPI/cps	