PIONEER
Pioneer Energy Services

MICRORESISTIVITY LOG

Company CONCORDE RESOURCES CORP
Well MCDANIEL #1-27
Field WILDCAT
County LOGAN
State KANSAS

Location: API #: 15-109-21492-00-00
2360' FSL & 1572' FWL
SEC 27 TWP 15S RGE 34W

Other Services
CNL/CDL
DIL

Permanent Datum GROUND LEVEL Elevation 2996'
Log Measured From KELLY BUSHING
Drilling Measured From KELLY BUSHING

Elevation
K.B. 3006'
D.F. N/A
G.L. 2996'

Date	3/18/2017		
Run Number	ONE		
Depth Driller	4707'		
Depth Logger	4708'		
Bottom Logged Interval	4707'		
Top Log Interval	3600'		
Casing Driller	8.625" @ 307'		
Casing Logger	306'		
Bit Size	7.875"		
Type Fluid in Hole	CHEMICAL		
Salinity,ppm CL	3500		
Density / Viscosity	9.0 53		
pH / Fluid Loss	10.5 8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	0.80 @ 72		
Rmf @ Meas. Temp	0.60 @ 72		
Rmc @ Meas. Temp	1.08 @ 72		
Source of Rmf / Rmc	CHARTS		
Rm @ BHT	0.47 @ 123		
Operating Rig Time	3 HOURS		
Max Rec. Temp. F	123		
Equipment Number	91		
Location	COLBY		
Recorded By	D. SCHMIDT		
Witnessed By	LARRY NICHOLSON		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and Pioneer Wireline Services, LLC cannot and does not guarantee the accuracy or correctness of any interpretation, and Pioneer Wireline Services, LLC will not be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees.

Comments

N/A DENOTES NOT AVAILABLE OR NON-APPLICABLE.

OAKLEY,
SOUTH TO GOLD RD, WEST TO 380 RD,
SOUTH TO DAKOTA RD, WEST TO 340, SOUTH TO ELK,
WEST TO 320, SOUTH TO BISON, 1/2 WEST,
NORTH INTO

Log Measured From: KELLY BUSHING 10 Ft. Above Permanent Datum

THANK YOU FOR USING PIONEER ENERGY SERVICES
www.pioneeres.com 785-625-3858

Your Pioneer Energy Services Crew	This Log Record Was Witnessed By
Engineer: D. SCHMIDT	Primary Witness: LARRY NICHOLSON
Operator:	Secondary Witness:
Operator:	Secondary Witness:
Operator:	Secondary Witness:

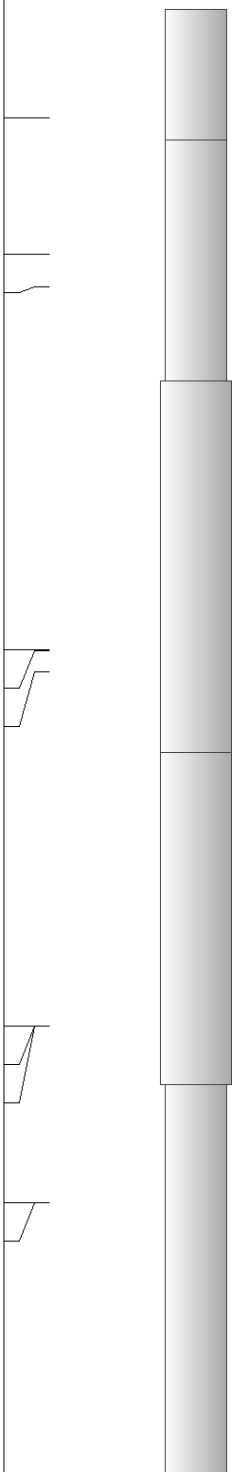
Log Variables

Database C:\ProgramData\Warrior\Data\concorde_mcdaniel_1-27.db
Dataset field/well/STKML/pass3.7/_vars_

Top - Bottom

M	A	SZCOR	NPORSEL	FLUIDDEN g/cc	MATRXDEN g/cc	SPSHIFT mV	SNDERRM mmho/m
2	1	Off	Limestone	1	2.71	455	0

SNDERR mmho/m	SRFTEMP degF	CASETHCK in	CASEOD in	PERFS	TDEPTH ft	BOTTEMP degF	BOREID in
0	74	0	5.5	0	4708	123	7.875

Sensor	Offset (ft)	Schematic	Description	Length (ft)	O.D. (in)	Weight (lb
GR	40.58		GR-M&W (89)	3.00	3.50	50.00
CNLSC	37.48		CNT-M&W (207-MW)	5.50	3.50	100.00
CNSSC	36.73					
			CDL-M&W (90-1031)	8.50	4.00	250.00
LSD	28.43					
DCAL	28.42					
SSD	27.93					
			ML-PSIML (PSI-01) GO Micro log tools converted to Simplec electronics	7.58	4.00	65.00
MCAL	19.83					
MI	19.83					
MN	19.83					
RLL3F	15.80					
RLL3	15.80					

CILD	8.00		DIL-M&W (PSI 13)	18.50	3.50	220.00
CILM	4.70					
SP	0.20					

Dataset: concorde_mcdaniel_1-27.db: field/well/STKML/pass3.7
Total length: 43.08 ft
Total weight: 685.00 lb
O.D.: 4.00 in

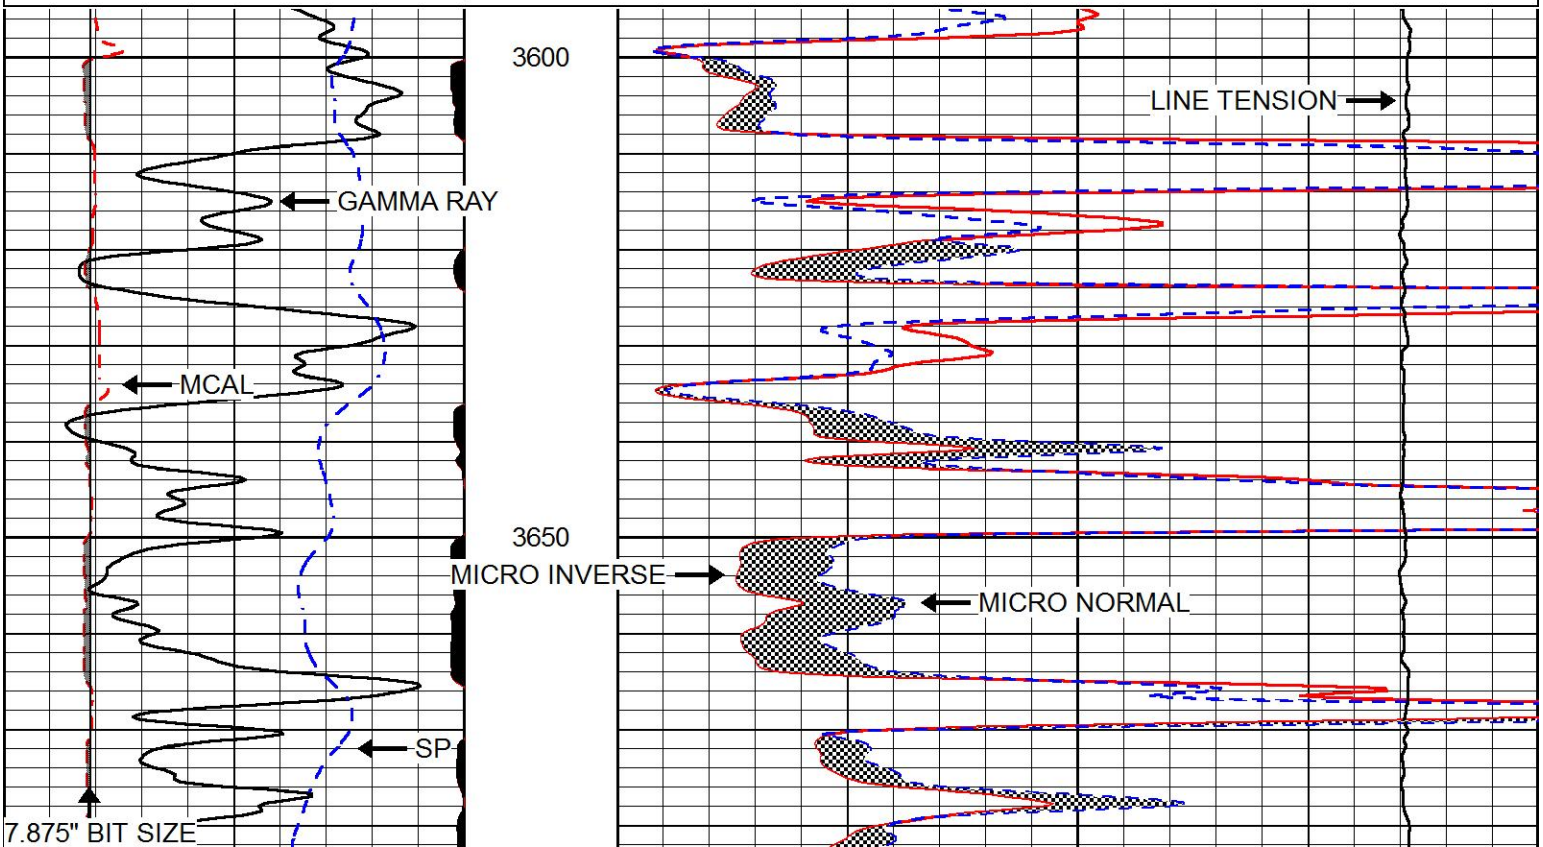
PIONEER
Pioneer Energy Services

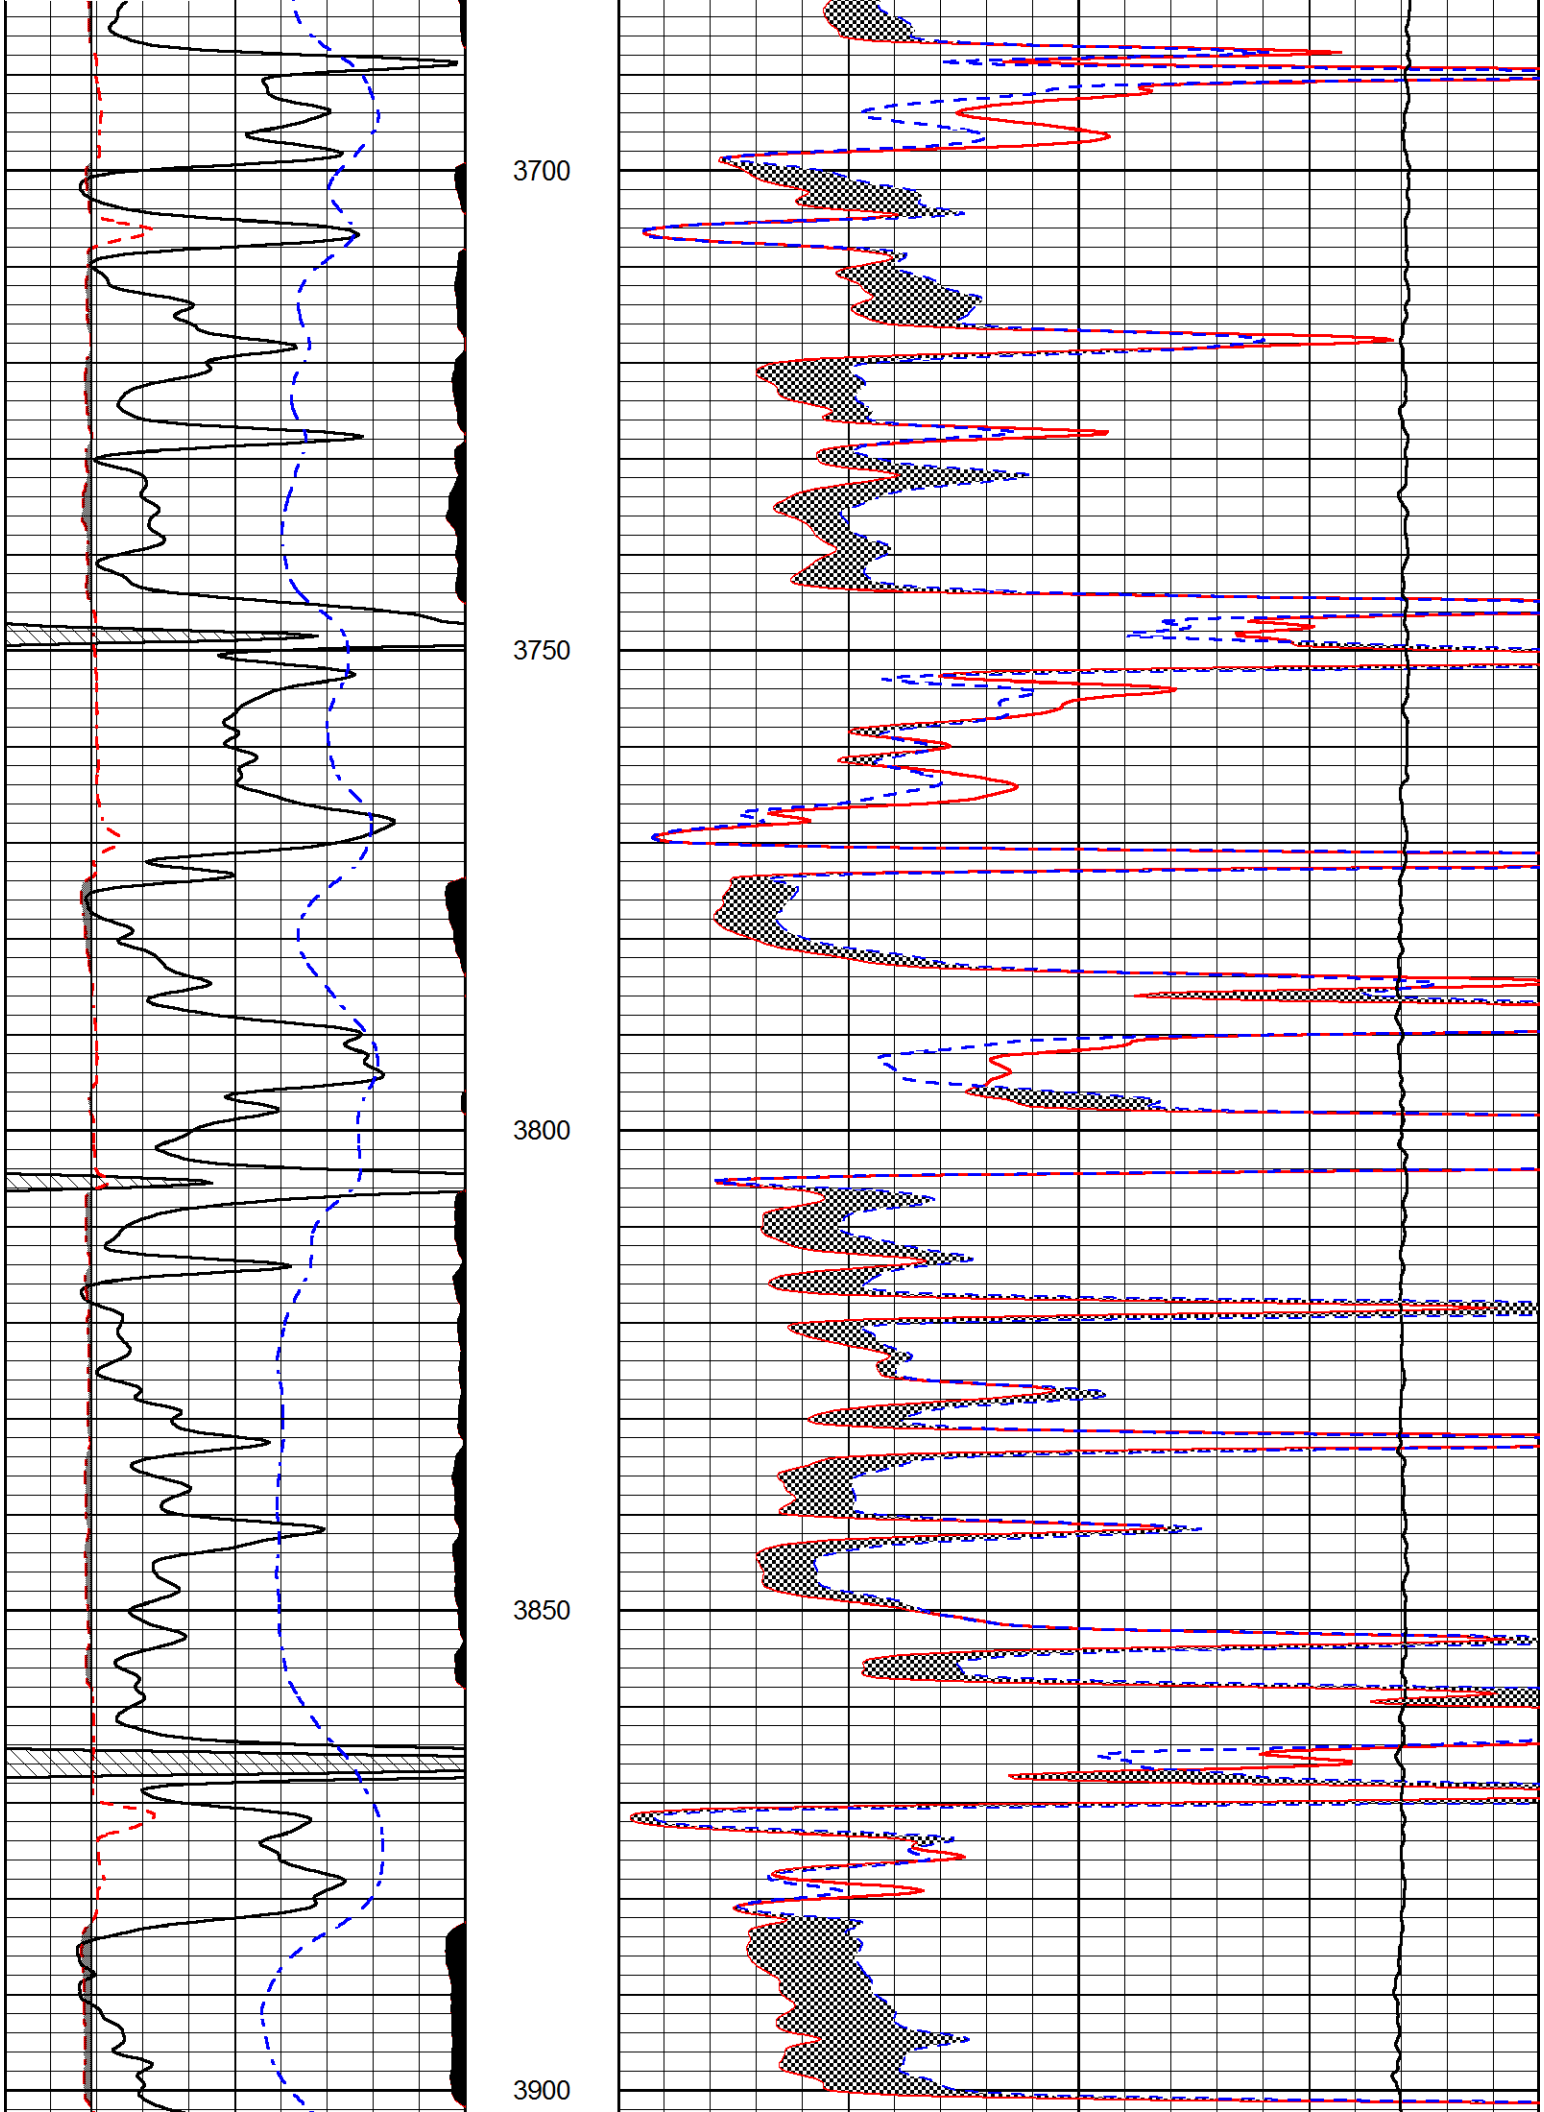
MAIN PASS

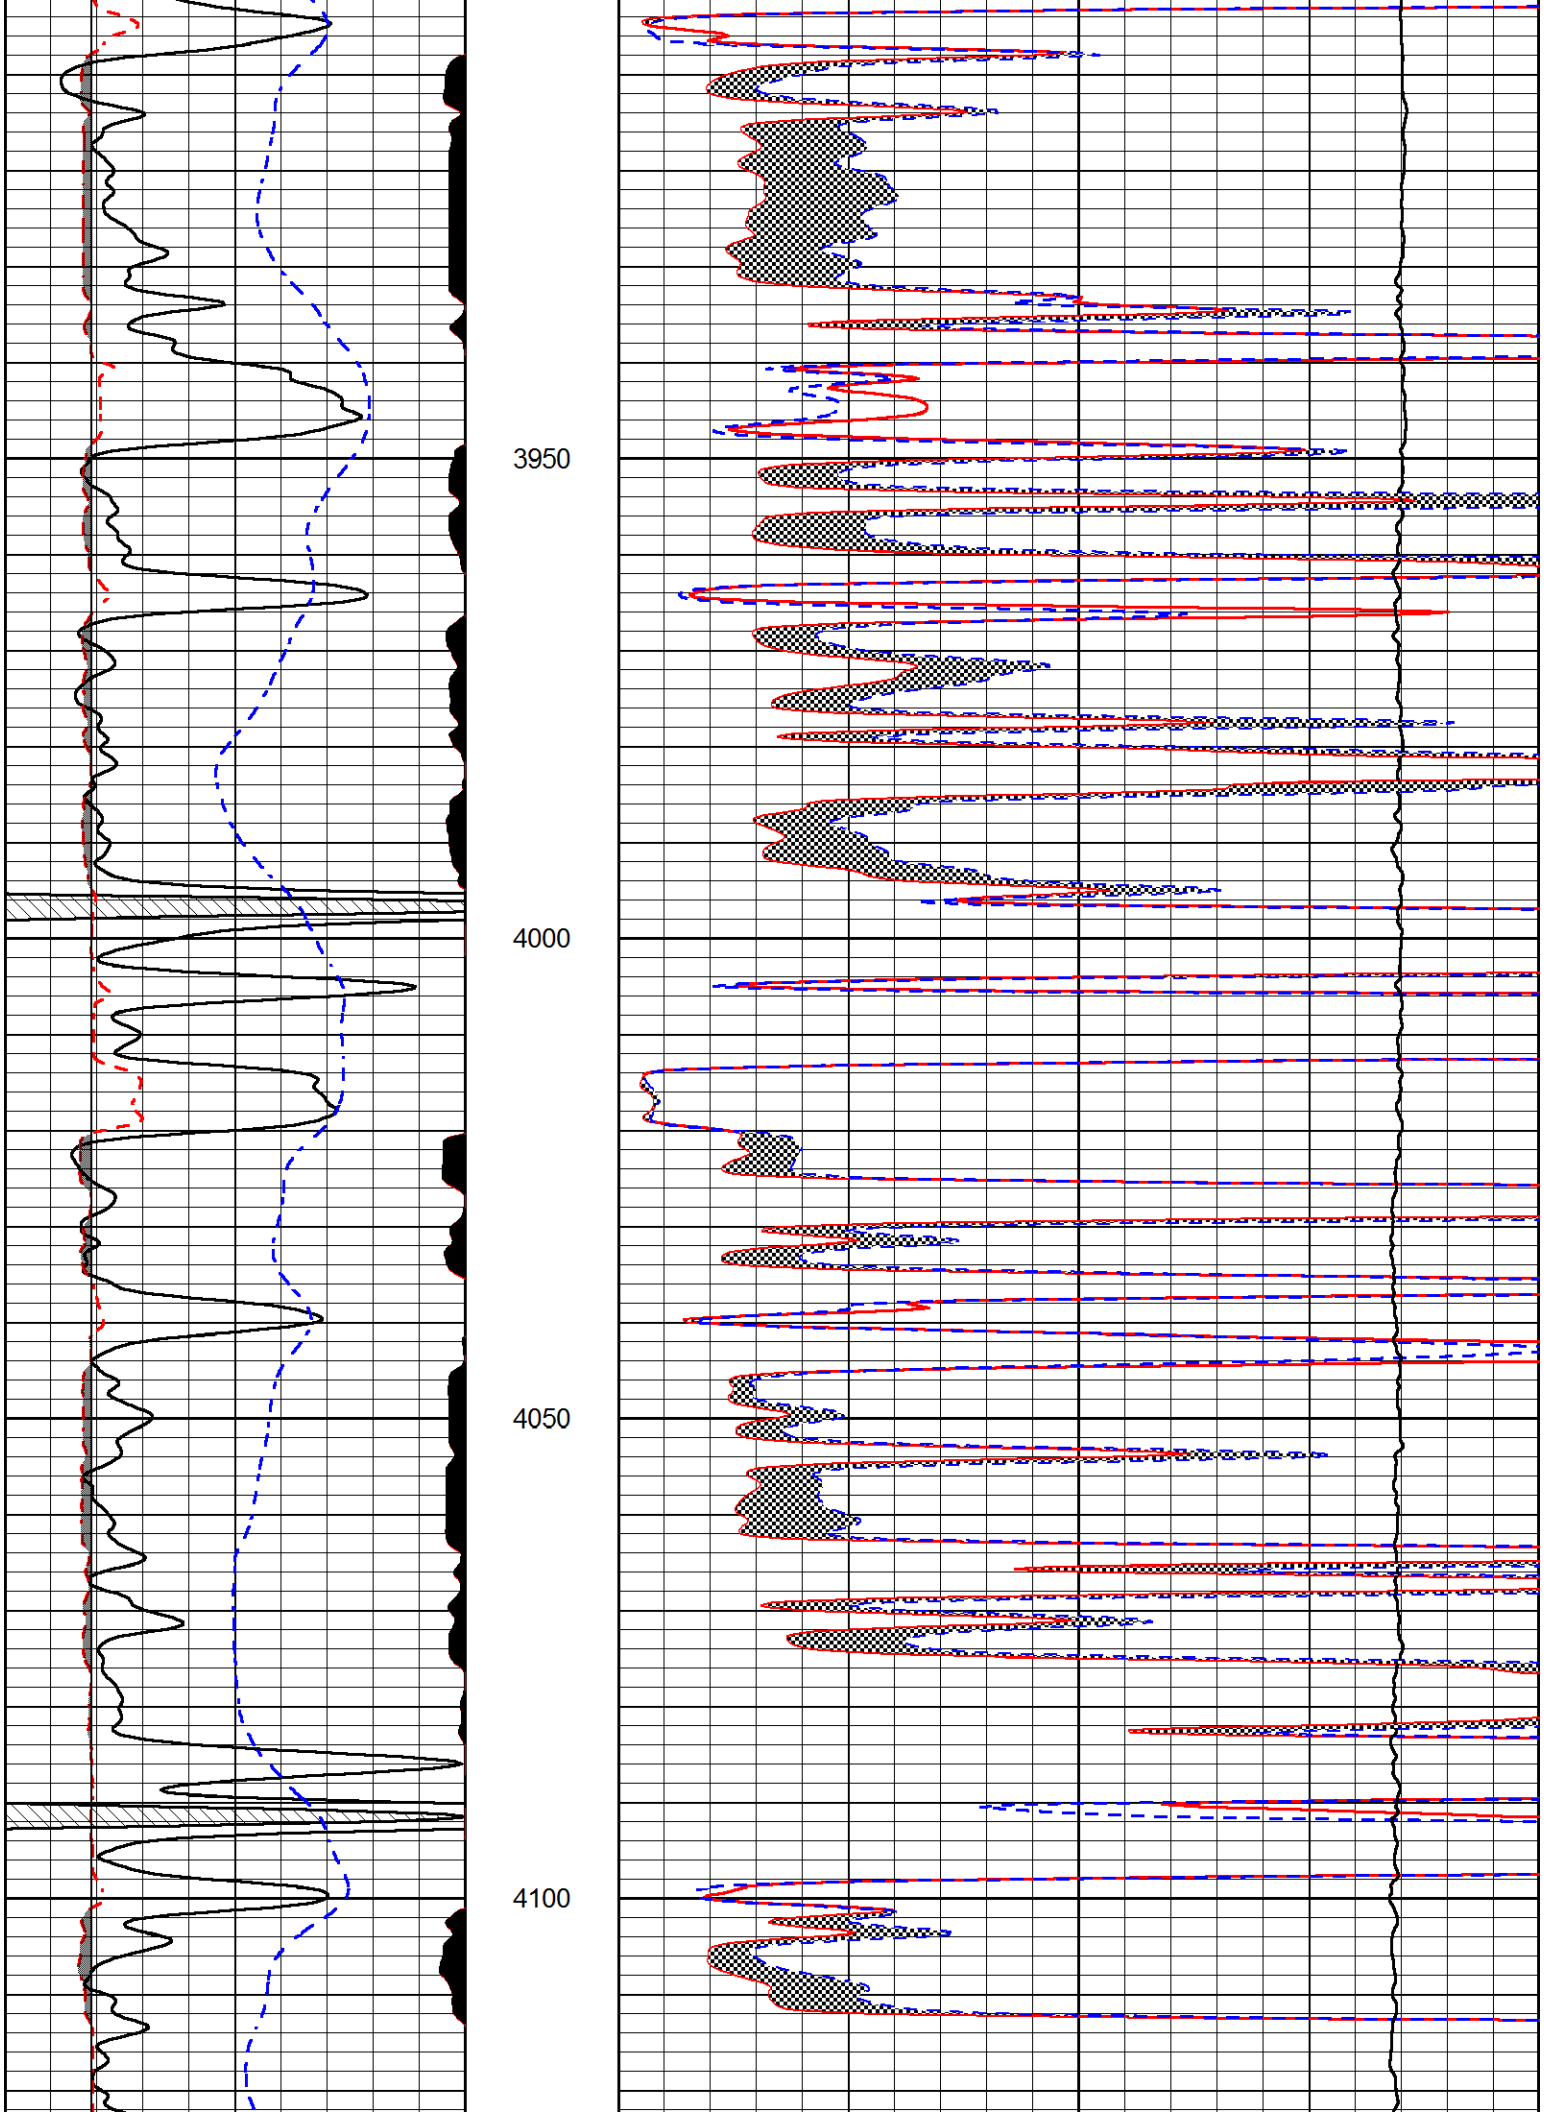
Database File	concorde_mcdaniel_1-27.db
Dataset Pathname	STKML/pass3.7
Presentation Format	micro
Dataset Creation	Sat Mar 18 22:53:33 2017
Charted by	Depth in Feet scaled 1:240

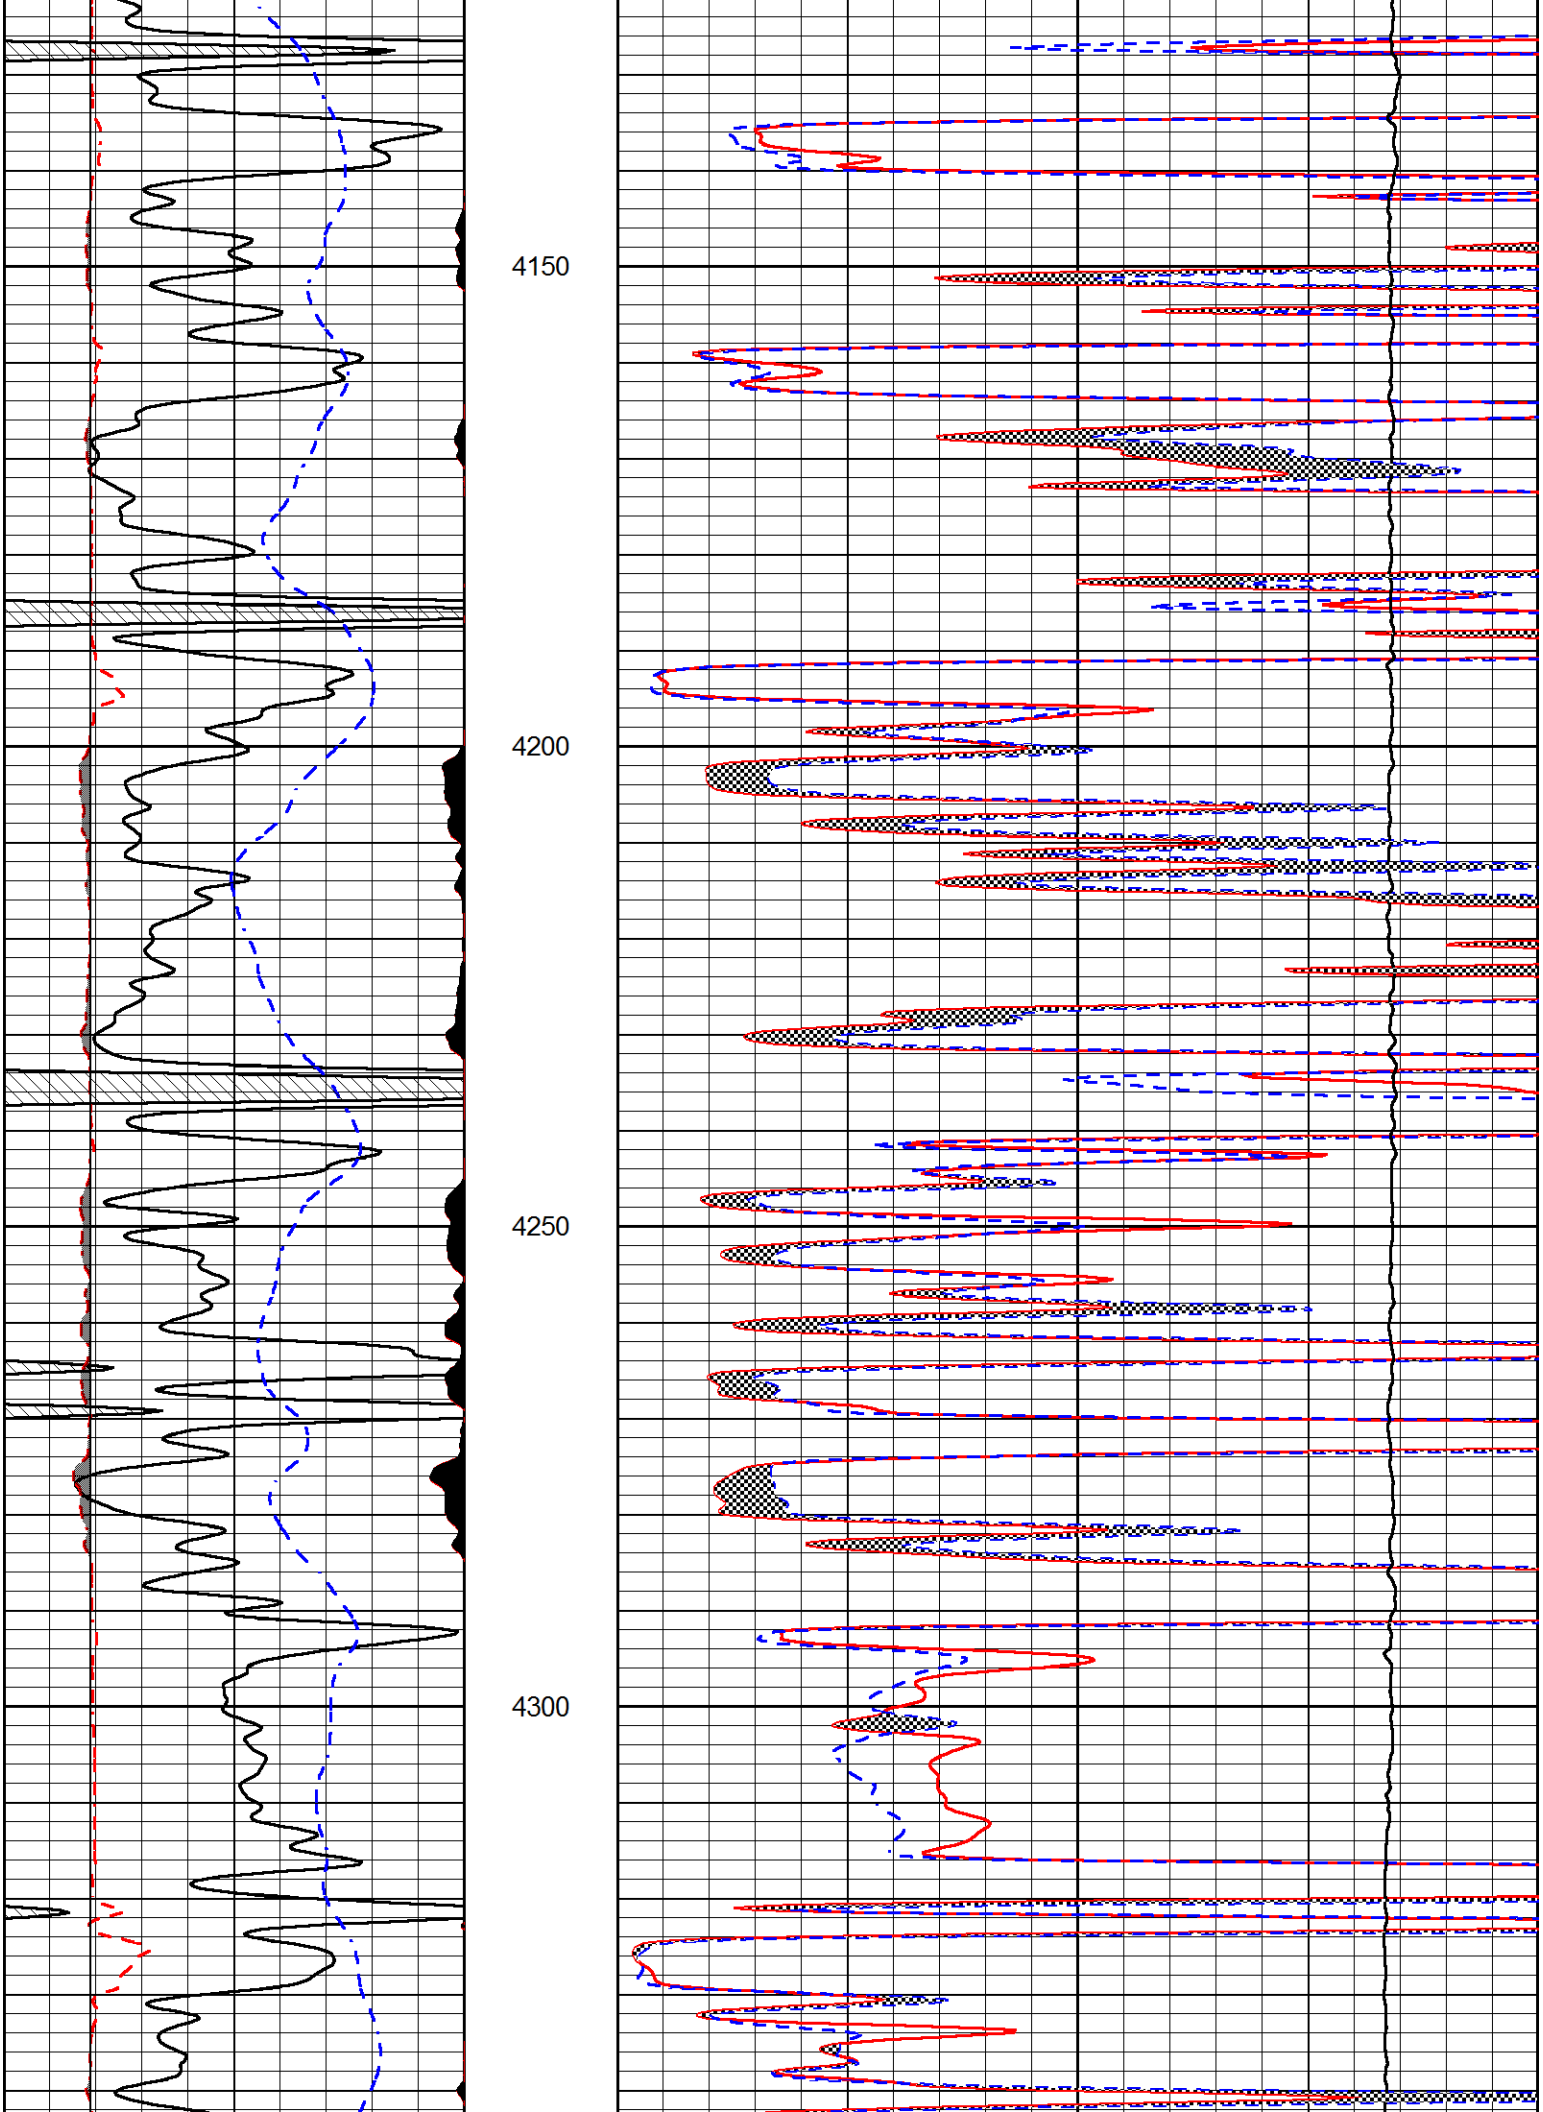
0	Gamma Ray (GAPI)	150
6	MCAL (in)	16
2.875	mcal (in)	7.875
6	Bit Size (in)	16
-200	SP (mV)	0

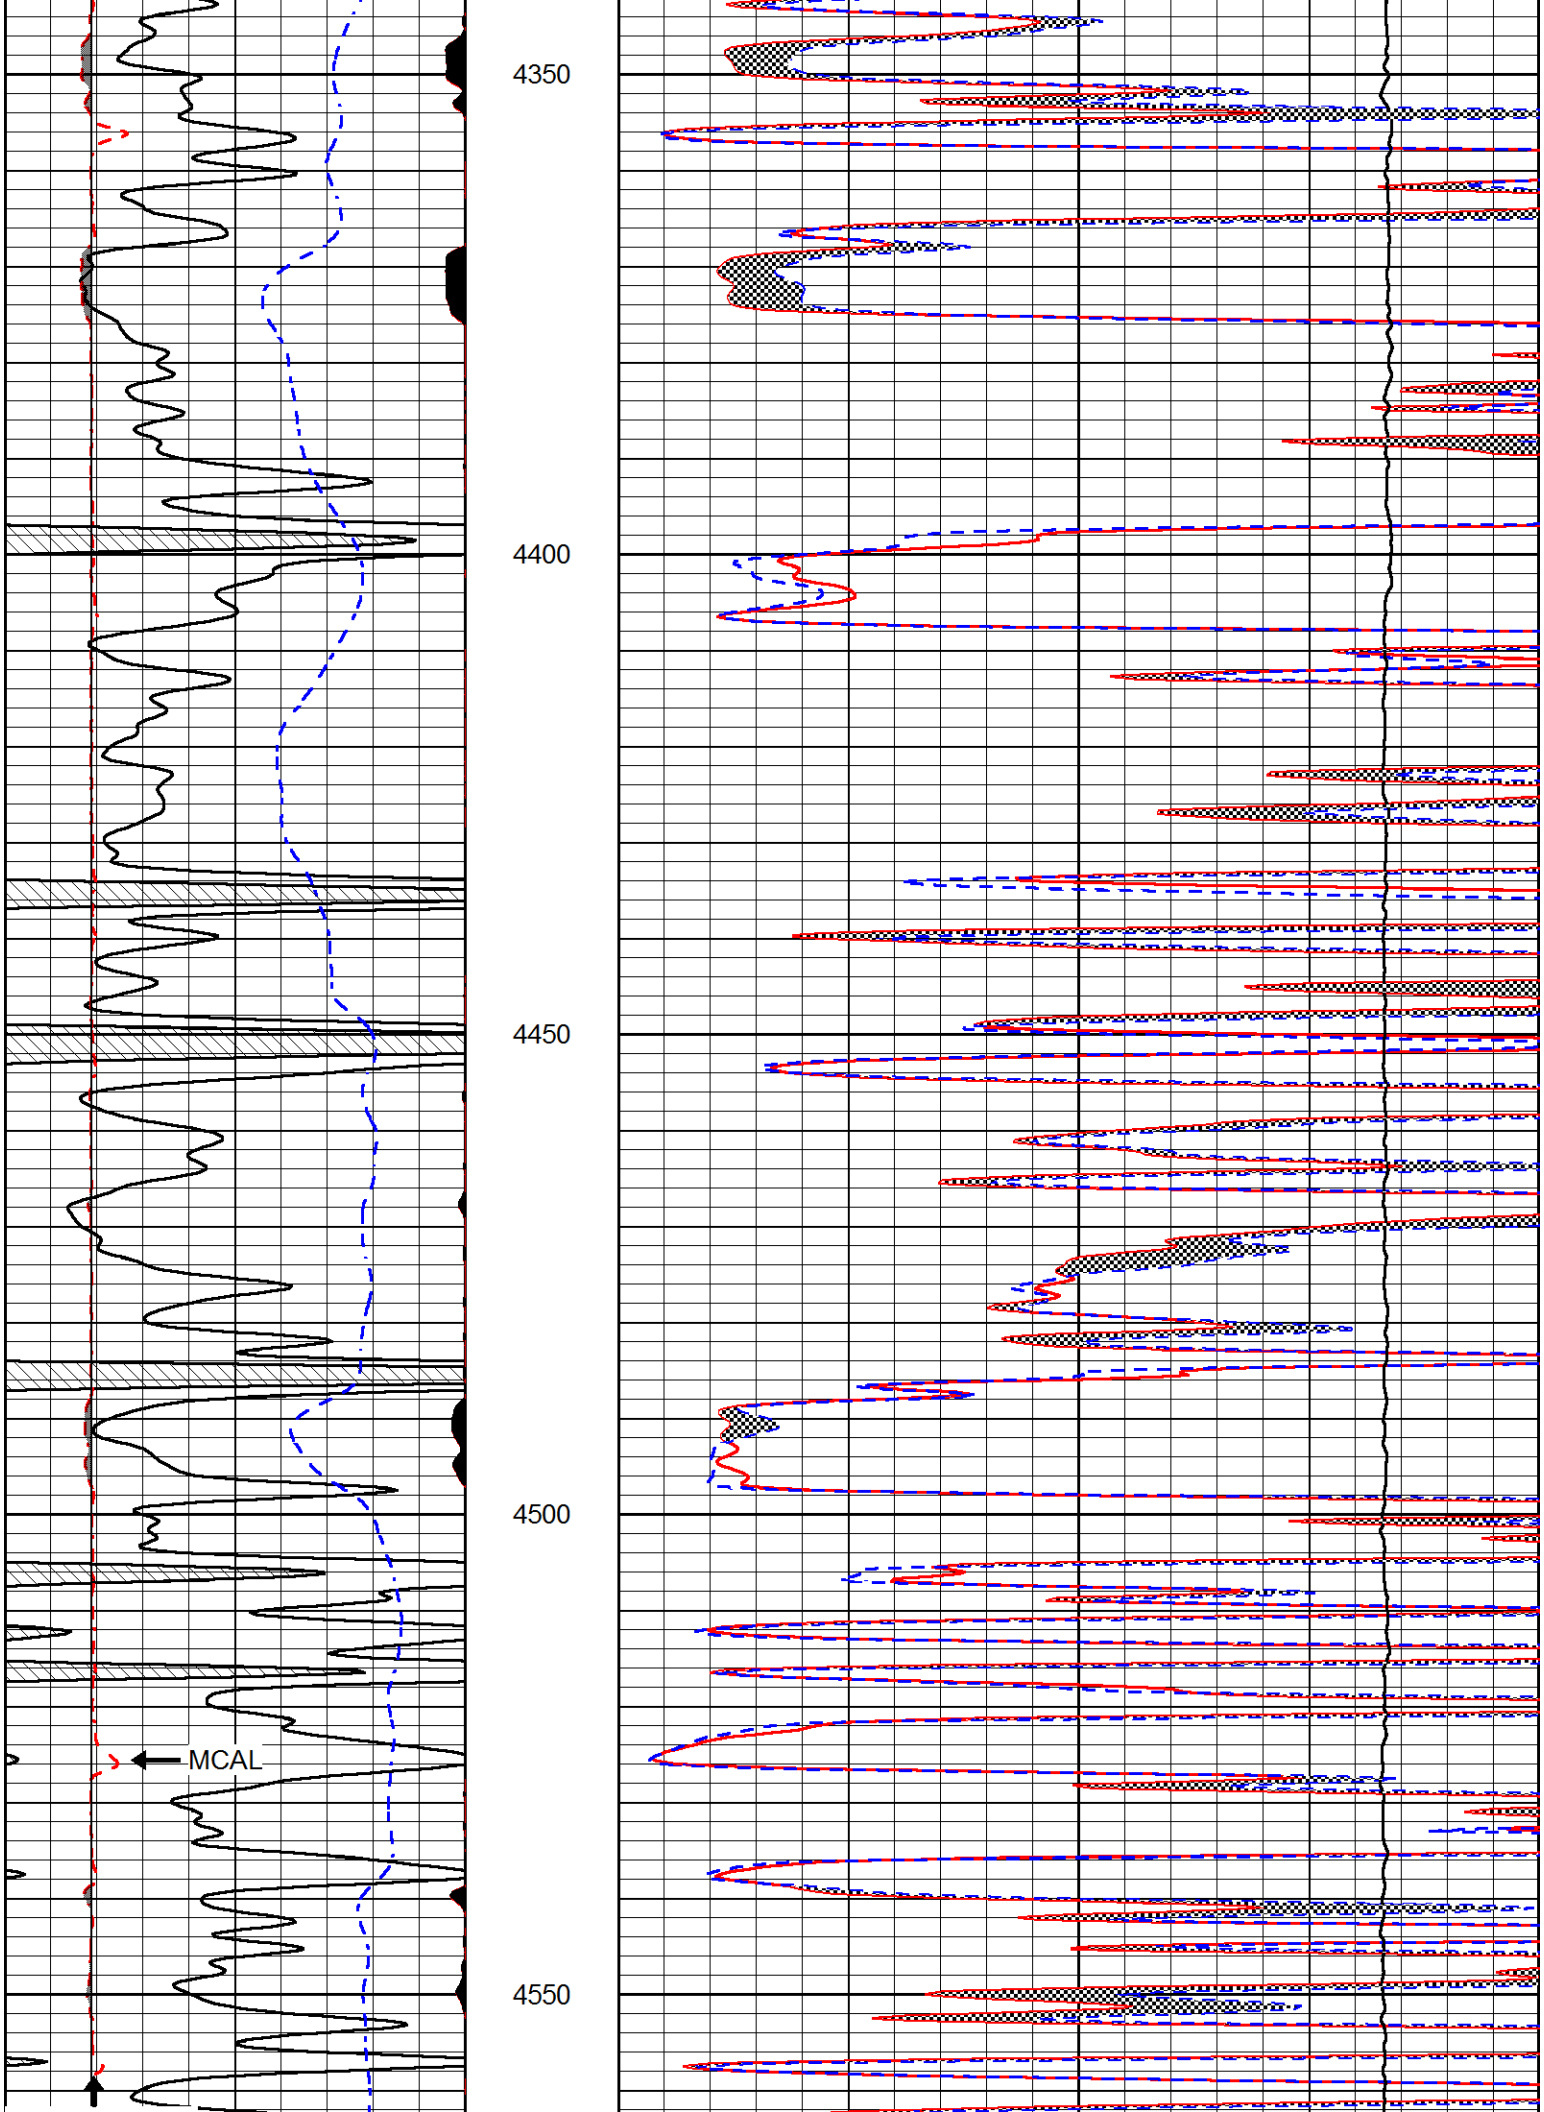
0	Micro Inverese 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0

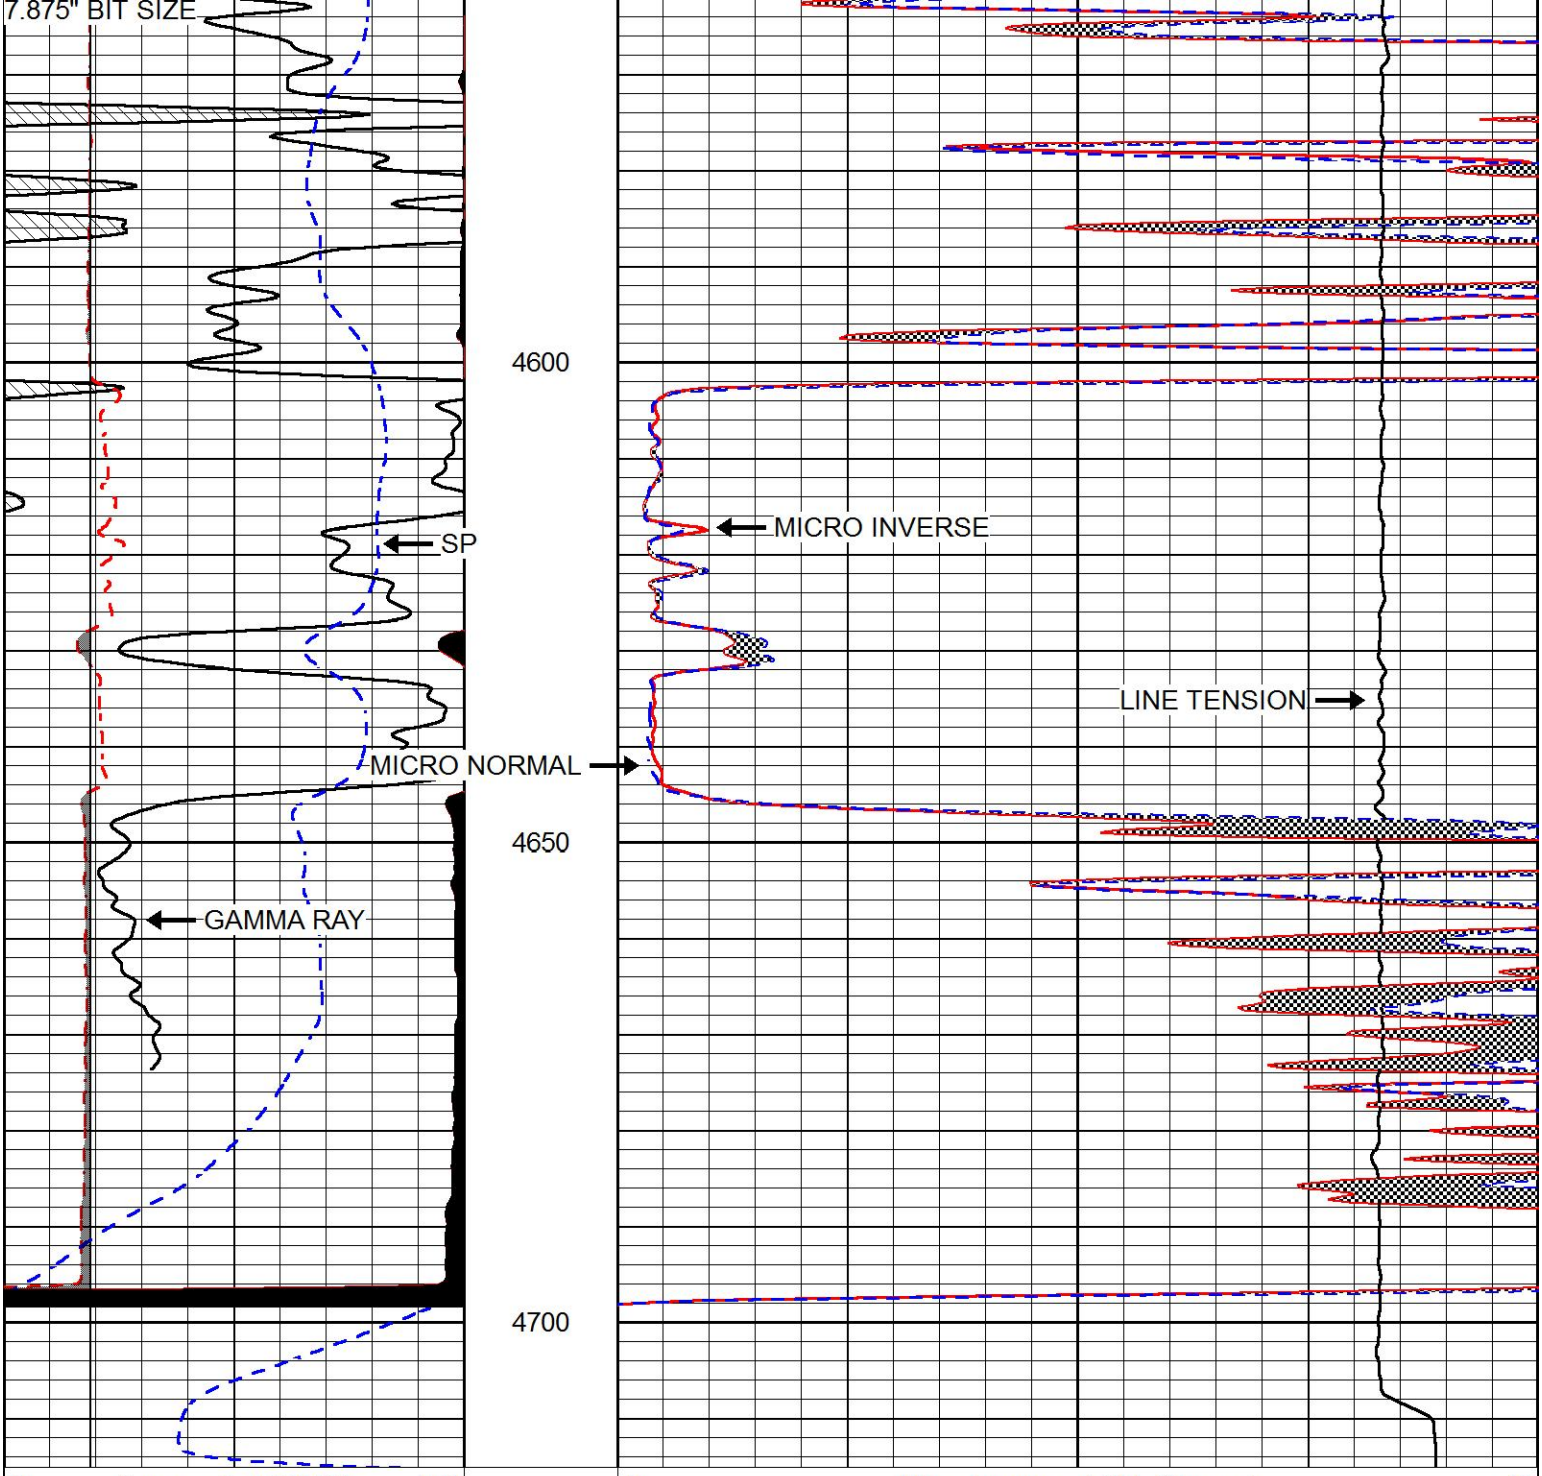



3700
3750
3800
3850
3900


3950
4000
4050
4100


4150
4200
4250
4300


4350
4400
4450
4500
4550
MCAL



0	Gamma Ray (GAPI)	150
6	MCAL (in)	16
2.875	mcal (in)	7.875
6	Bit Size (in)	16
-200	SP (mV)	0

0	Micro Inverese 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0

PIONEER
Pioneer Energy Services

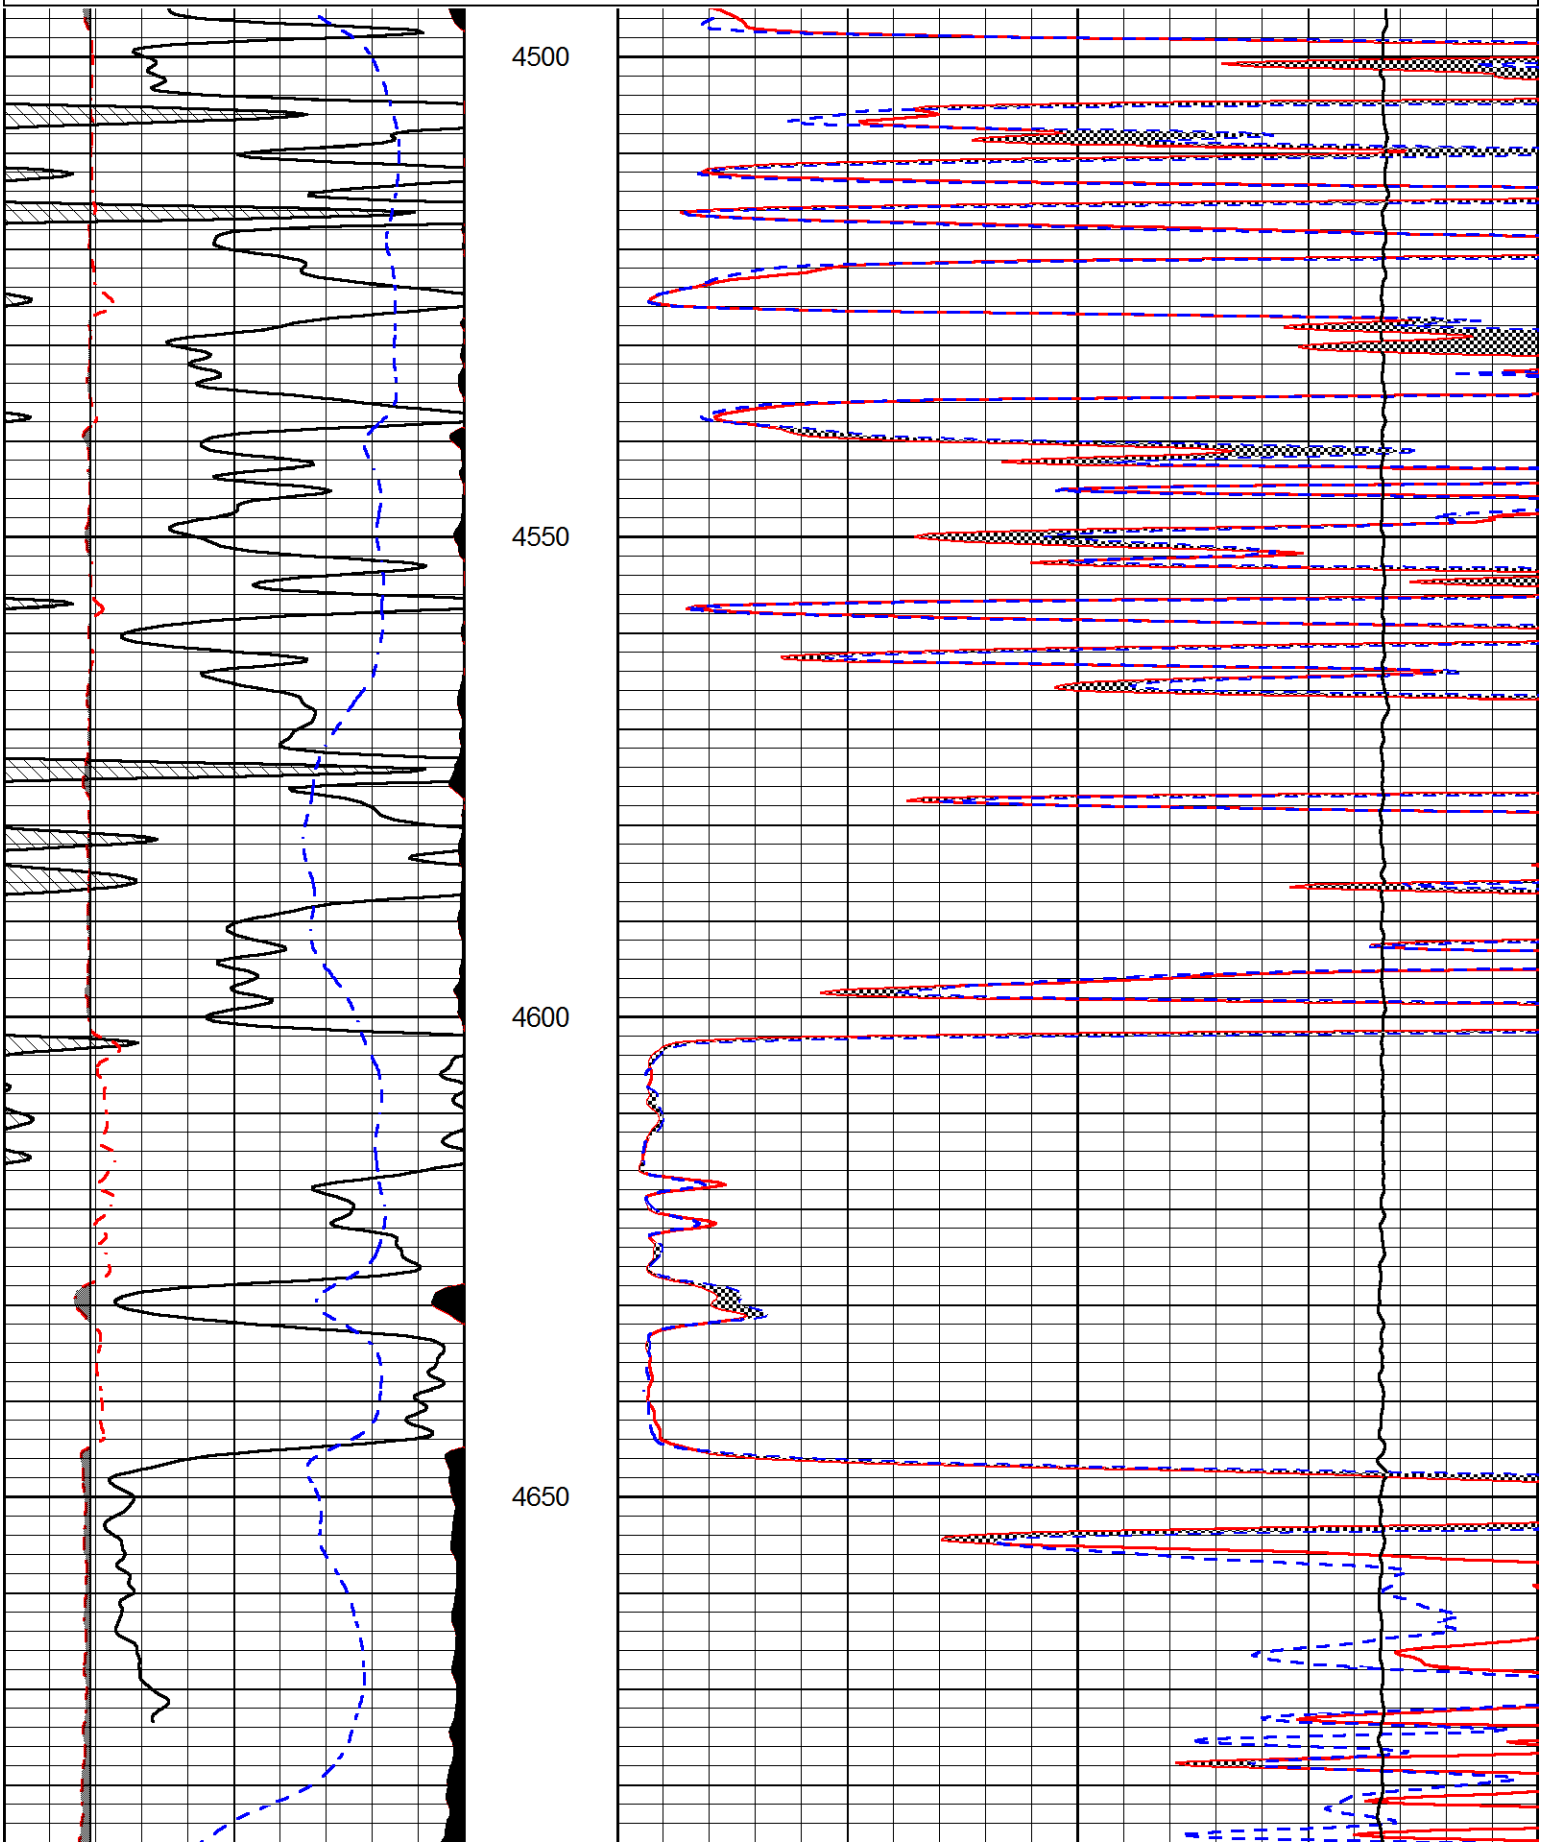
REPEAT SECTION

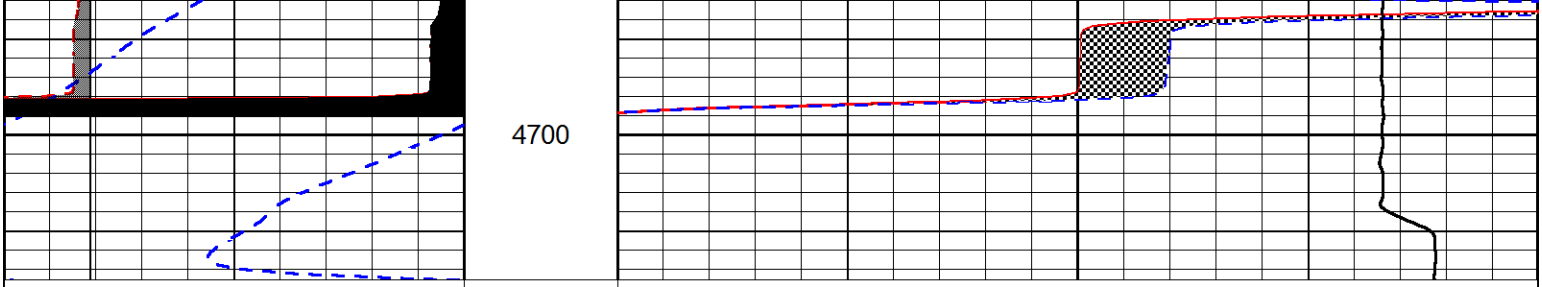
Database File	concorde_mcdaniel_1-27.db
Dataset Pathname	STKML/pass2.1
Presentation Format	micro
Dataset Creation	Sat Mar 18 22:59:20 2017
Charted by	Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	150
6	MCAL (in)	16
2.875	mcal (in)	7.875
6	Bit Size (in)	16
-200	SP (mV)	0

0	Micro Inverese 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0





0	Gamma Ray (GAPI)	150
6	MCAL (in)	16
2.875	mcal (in)	7.875
6	Bit Size (in)	16
-200	SP (mV)	0

0	Micro Inverese 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0

Calibration Report

Database File: concorde_mcdaniel_1-27.db
Dataset Pathname: STKML/pass3.7
Dataset Creation: Sat Mar 18 22:53:33 2017

Dual Induction Calibration Report

Serial-Model: PSI 13-M&W
Calibration Performed: Wed Mar 01 02:22:22 2017

	Readings		References			Results	
Loop:	Air	Loop	Air	Loop		Gain	Offset
Deep	166.796	835.089	0.000	255.800	mmho/m	0.950	-34.000
Medium	142.009	1348.560	0.000	255.800	mmho/m	0.800	-30.500

Microlog Calibration Report

Serial-Model: PSI-01-PSIML
Performed: Mon Mar 13 21:58:07 2017

	Readings		References			Results	
	Zero	Cal	Zero	Cal		m	b
Normal	0.0000	1.0000	0.0000	1.0000	Ohm-m	36000.0000	-1.3000
Inverse	0.0000	1.0000	0.0000	1.0000	Ohm-m	42000.0000	-0.8000
Caliper	1.0001	1.1397	6.5000	18.5000	in	70.0000	-65.7500

Compensated Density Calibration Report

Serial-Model: 90-1031-M&W
Source / Verifier: 16955B / 2ci
Master Calibration Performed: Mon Mar 13 21:58:19 2017

Master Calibration

	Density		Far Detector	Near Detector	
Magnesium	1.755	g/cc	5174.18	6425.27	cps
Aluminum	2.665	g/cc	963.17	4037.42	cps

Spine Angle = 74.55
Density/Spine Ratio = 0.522

	Size		Reading
Small Ring	6.00	in	1.83
Large Ring	16.00	in	1.48

Compensated Neutron Calibration Report

Serial Number:	207-MW
Tool Model:	M&W
Calibration Performed:	Thu Mar 2 10:30:30 2017

Detector	Readings		Target		Normalization
Short Space	6240.00	cps	1000.00	cps	1.6025
Long Space	460.00	cps	1000.00	cps	1.9500

Gamma Ray Calibration Report

Serial Number:	89	
Tool Model:	M&W	
Calibration Performed:	Thu Mar 02 20:45:00 2017	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.6000	GAPI/cps

PIONEER
Pioneer Energy Services

Company	CONCORDE RESOURCES CORP
Well	MCDANIEL #1-27
Field	WILDCAT
County	LOGAN
State	KANSAS