

RECEIVED  
KANSAS CORPORATION COMMISSION  
APR 11 2006

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION  
**WELL PLUGGING APPLICATION**  
Please TYPE Form and File ONE Copy

Form CP-1  
September 2003  
This Form must be Typed  
Form must be Signed  
All blanks must be Filled

CONSERVATION DIVISION  
WICHITA, KS

API # 15 - 003-24235-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date 09/26/2003.

Well Operator: Meritage KCM Exploration, LLC KCC License #: 33138  
Address: 1050 17th Street Suite 975 City: Denver  
(Owner / Company Name) (Operator's)

State: Colorado Zip Code: 80265 Contact Phone: (303) 534 - 9513

Lease: Gretencord Well #: 26-34 Sec. 26 Twp. 19 S. R. 19  East  West  
- NW - SW - SE Spot Location / QQQQ County: Anderson

800 Feet (in exact footage) From  North /  South (from nearest outside section corner) Line of Section (Not Lease Line)  
1550 Feet (in exact footage) From  East /  West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One:  Oil Well  Gas Well  D&A  Cathodic  Water Supply Well  
 SWD Docket # \_\_\_\_\_  ENHR Docket # \_\_\_\_\_  Other: \_\_\_\_\_

Conductor Casing Size: \_\_\_\_\_ Set at: \_\_\_\_\_ Cemented with: \_\_\_\_\_ Sacks  
Surface Casing Size: 8 5/8" 32# Set at: 22' Cemented with: 4 Sacks  
Production Casing Size: 5.5" 17# Set at: 1224' Cemented with: 165 Sacks

List (ALL) Perforations and Bridgeplug Sets: 844'-846', 859.5'-861.5', 881'-883', 889'-891', 904'-906', 913'-915', 932.5'-934.5', 1144.5'-1147', 1150.5'-1153', 1157.5'-1159.5', 1170'-1172'

Elevation: 1012' ( G.L. /  K.B.) T.D.: 1235' PBTD: 1221' Anhydrite Depth: \_\_\_\_\_  
(Stone Corral Formation)

Condition of Well:  Good  Poor  Casing Leak  Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Circulate 60/40 Class A/Pozimix cement with 0.5 sacks cotton seed hulls from PBTD to 700'; circulate 60/40 Class A/Pozimix cement from 700' to 4' below ground level; cut casing and weld steel plate 4' below ground level; grade surface level.

Is Well Log attached to this application as required?  Yes  No Is ACO-1 filed?  Yes  No

If not explain why? \_\_\_\_\_

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Larry Bryant Phone: (970) 301 - 1411

Address: 115 North Oak City / State: Garnett, Kansas


Plugging Contractor: Consolidated Oil Well Services, Inc. KCC License #: 31440  
(Company Name) (Contractor's)

Address: 1322 South Grant Chanute, Kansas 66720 Phone: (620) 431 - 9210

Proposed Date and Hour of Plugging (if known?): \_\_\_\_\_

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent  
Date: 3/22/06 Authorized Operator / Agent: [Signature]  
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

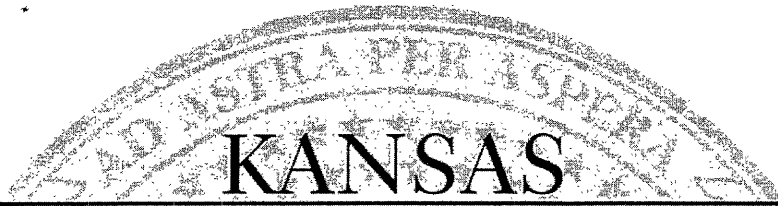

CORPORATION COMMISSION

Kathleen Sebelius, Governor    Brian J. Moline, Chair    Robert E. Krehbiel, Commissioner    Michael C. Moffet, Commissioner

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

Meritage KCM Exploration, LLC  
Independence Plaza  
1050 17th Street - Suite 975  
Denver, CO 80265

April 13, 2006

Re: GRETENCORD #26-34  
API 15-003-24235-00-00  
SWSE 26-19S-19E, 800 FSL 1550 FEL  
ANDERSON COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.


Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

Sincerely

  
David P. Williams  
Production Supervisor

District: #3  
1500 W. 7th  
Chanute, KS 67220  
(620) 432-2300