

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy

RECEIVED
APR 03 2006
Form CP-1
September 2003
This Form must be Typed
This Form must be Signed
Blanks must be Filled
KCC WICHITA

API # 15 - 041-20,069-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

Indicate original spud or completion date _____.

Well Operator: Bruce Oil Company KCC License #: 5610
(Owner / Company Name) (Operator's)

Address: 1704 Limestone Road City: McPherson

State: Kansas Zip Code: 67460 Contact Phone: (620) 241 - 2938

Lease: Riordan Well #: 6 Sec. 6 Twp. 15 S. R. 1 East West

C - SE - NE - SW Spot Location / QQQQ County: Dickinson

1650 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

2310 3089 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 8 5/8 Set at: 163' Cemented with: 150 Sacks

Production Casing Size: 4 1/2 Set at: 2622 Cemented with: 50 Sacks

List (ALL) Perforations and Bridgeplug Sets: perforations 2595-2597

Elevation: 1296 (G.L. / K.B.) T.D.: 2622 PBTD: _____ Anhydrite Depth: N/A
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Sand off bottom to 50 feet above open hole or perforations, put 4 sax cement on sand, rip off and pull casing, set bridge plug at 250 feet, fill hole to surface with cement slurry.

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? _____

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Lonny Bruce, Operating Manager

Phone: (620) 241 - 2938

Address: 406 Ponderosa Ct. City / State: McPherson, Kansas 67460

Plugging Contractor: Sunflower Well Service KCC License #: 30280
(Company Name) (Contractor's)

Address: P.O. Box 341, Canton, Kansas 67428 Phone: (620) 628 - 4723

Proposed Date and Hour of Plugging (if known?): _____

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 3/31/06 Authorized Operator / Agent: Lonny Bruce
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

B.M. & S. OIL

BOX 316

#5 RIORDAN

6-15-1E
SE NE SW


CANTON, KS 67428

CONTR KANSAS DRLG. & WELL SERV. CTY DICKINSON

GEOL HARRY HOPKINS FIELD ASH GROVE

ELV 1296 KB SPD 8/4/82 CARD ISSUED 12/23/82 IP P 3 BO & 25 BWPD

1291 GL
API 15-041-20,069



DRLRS	Tops	Depth/Datum
LKC	1924+ 628
MISS	2570-1274
RTD	2622-1326


8 5/8 " 163/150SX; 4 1/2 " 2622/50SX

NO DSTS

MICT - CO, PF (MISS) 2595-97, W / 1 SPF, AC 750G (15%), SWB
LD, SET 2 3/8 " TBG AT 2603, POP, P 3 BO & 25 BWPD, (GR
34°), 11/23/82

INDEPENDENT OIL & GAS SERVICE
WICHITA, KANSAS

RECEIVED
APR 03 2006
KCC WICHITA

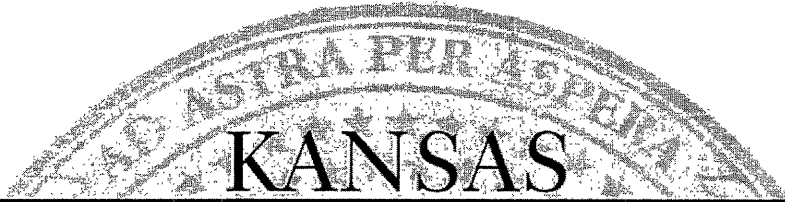

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Bruce Oil Company, L.L.C.
1704 Limestone Rd.
McPherson, KS 67460

April 04, 2006

Re: RIORDAN #6
API 15-041-20069-00-00
S2NESW 6-15S-1E, 1656 FSL 3089 FEL
DICKINSON COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #2
3450 N. Rock Road, Suite 601
Wichita, KS 67226
(316) 630-4000

Sincerely,
Handwritten signature of David P. Williams in black ink.

David P. Williams
Production Supervisor