

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-185-13005-00-00  
Spot: SENENW Sec/Twnshp/Rge: 3-22S-13W  
990 feet from N Section Line, 2310 feet from W Section Line  
Lease Name: GATES A Well #: 1  
County: STAFFORD Total Vertical Depth: 3620 feet

Operator License No.: 5893  
Op Name: PRATT WELL SERVICE, INC.  
Address: PO BOX 847  
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comment
L1		3510		
PROD	5.5	3788	0	WITH 125 SX CMT
SURF	8.625	250		WITH 175 SX CMT

31117.65

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 04/04/2006 10:00 AM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: JOE MAES Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND TO 3400' & 4 SX CMT. PERFORATE AT 760'. CIRCULATE CMT TO SURFACE. CHECK BACKSIDE.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 04/04/2006 11:50 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 3400' & 4 SX CMT. PERFORATE AT 760'. RAN TUBING TO 775'.  
PUMPED 45 SX CMT DOWN TUBING. PULLED TUBING. SQUEEZED DOWN 4 1/2"  
WITH 15 SX CMT. MAXIMUM PRESSURE 900 PSIG. SHUT IN PRESSURE 500 PSIG.  
PRESSURED TESTED 5 1/2" X 4 1/2" ANNULUS TO 800 PSIG. NO ENTRY. PUMPED  
DOWN 8 5/8" X 5 1/2" ANNULUS WITH 100 SX CMT. MAXIMUM PRESSURE 300  
PSIG. SHUT IN PRESSURE 100 PSIG.

Perfs:


Top	Bot	Thru	Comments
3549	3556		
3527	3532		
3507	3510		
0	0		

RECEIVED  
APR 17 2006  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: TBG

District: 01

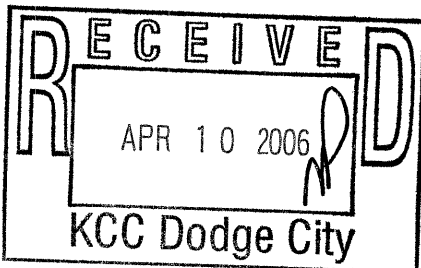

Signed

*Richard W. Lacey*

(TECHNICIAN)

INVOICED

DATE

4-17-06

INV. NO

2006061494

Form CP-2

PLG