

DUAL RECEIVER CEMENT BOND LOG

Company DIXON OPERATING COMPANY, LLC
Well CURTIS #1-4
Field RATTLESNAKE CREEK
County STAFFORD
State KANSAS Country U.S.A.

Location: API # : 15-185-23987-0000

Other Services

330' FSL & 3960' FEL

SEC 4 TWP 23S RGE 12W

Permanent Datum GROUND LEVEL Elevation 1843
Log Measured From KELLY BUSHING 9' A.G.L.
Drilling Measured From KELLY BUSHING

Elevation
K.B. 1852
D.F. 1850
G.L. 1843

Date 6/19/17

Run Number ONE

Depth Driller 3825

Depth Logger 3797

Bottom Logged Interval 3795

Top Log Interval 2350

Open Hole Size WATER

Type Fluid

Density / Viscosity

Max. Recorded Temp. 2440

Estimated Cement Top

Time Well Ready

Time Logger on Bottom

Equipment Number 923362

Location HAYS, KANSAS

Recorded By DANGOTTSCHALK

Witnessed By T.J. DIXON

Run Number

1 12 1/4" 0 347

2 7 7/8" 347 3825

Casing Record

Surface String 8 5/8"

Prot. String 5.5"

Production String

Liner

<<< Fold Here >>>




All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

THANK YOU FOR USING E.L.I. WIRELINE SERVICES HAYS, KANSAS (785)628-6395
DIRECTIONS
ST. JOHN - 3 NORTH TO 70 RD. - 5 EAST TO 50 RD. - 1 NORTH - 1/4 EAST - NORTH INTO

Database File: 1272bgr.db
Dataset Pathname: pass1.8
Presentation Format: dcbl02
Dataset Creation: Mon Jun 19 22:03:37 2017
Charted by: Depth in Feet scaled 1:240

Charted by: _____ Depth in Feet scaled 1:2.15								
0	Gamma Ray (GAPI)	150	0	3' Amplitude (mV)	100	200	5FT VDL	1000
200	5' Travel Time (usec)	1000	9	CCL	-1			
-----			0	Amplified Amplitude (mV)	20			

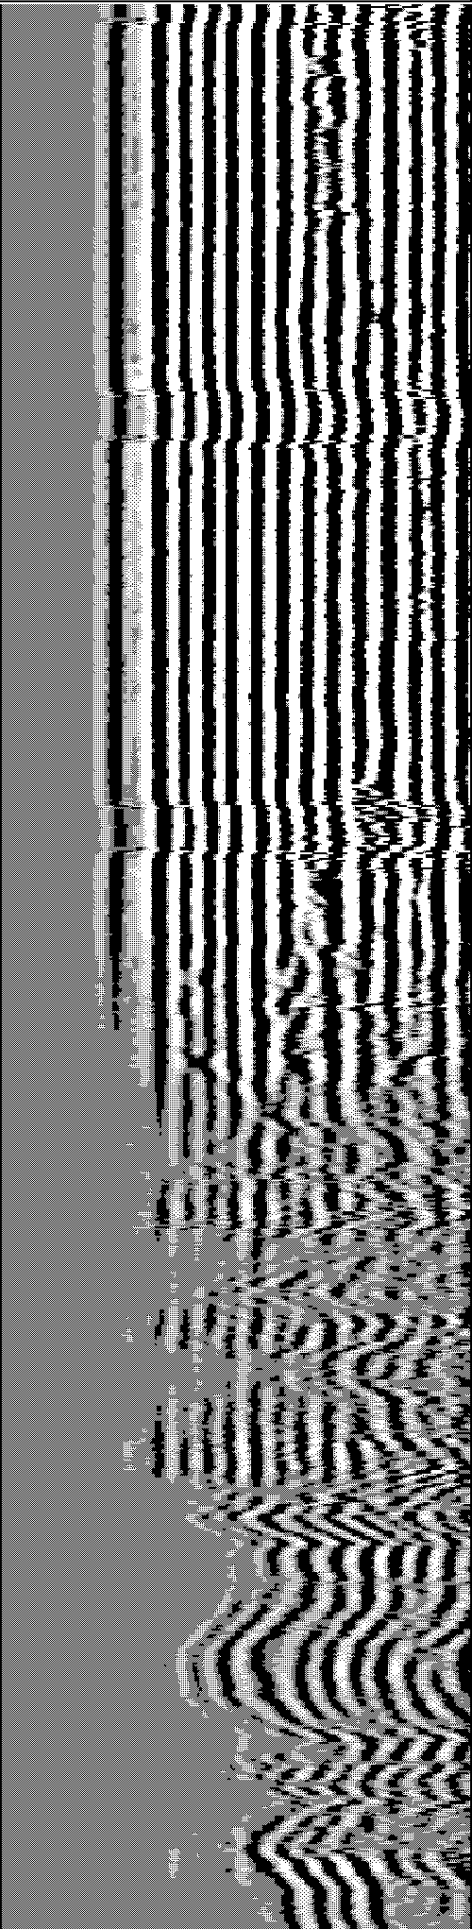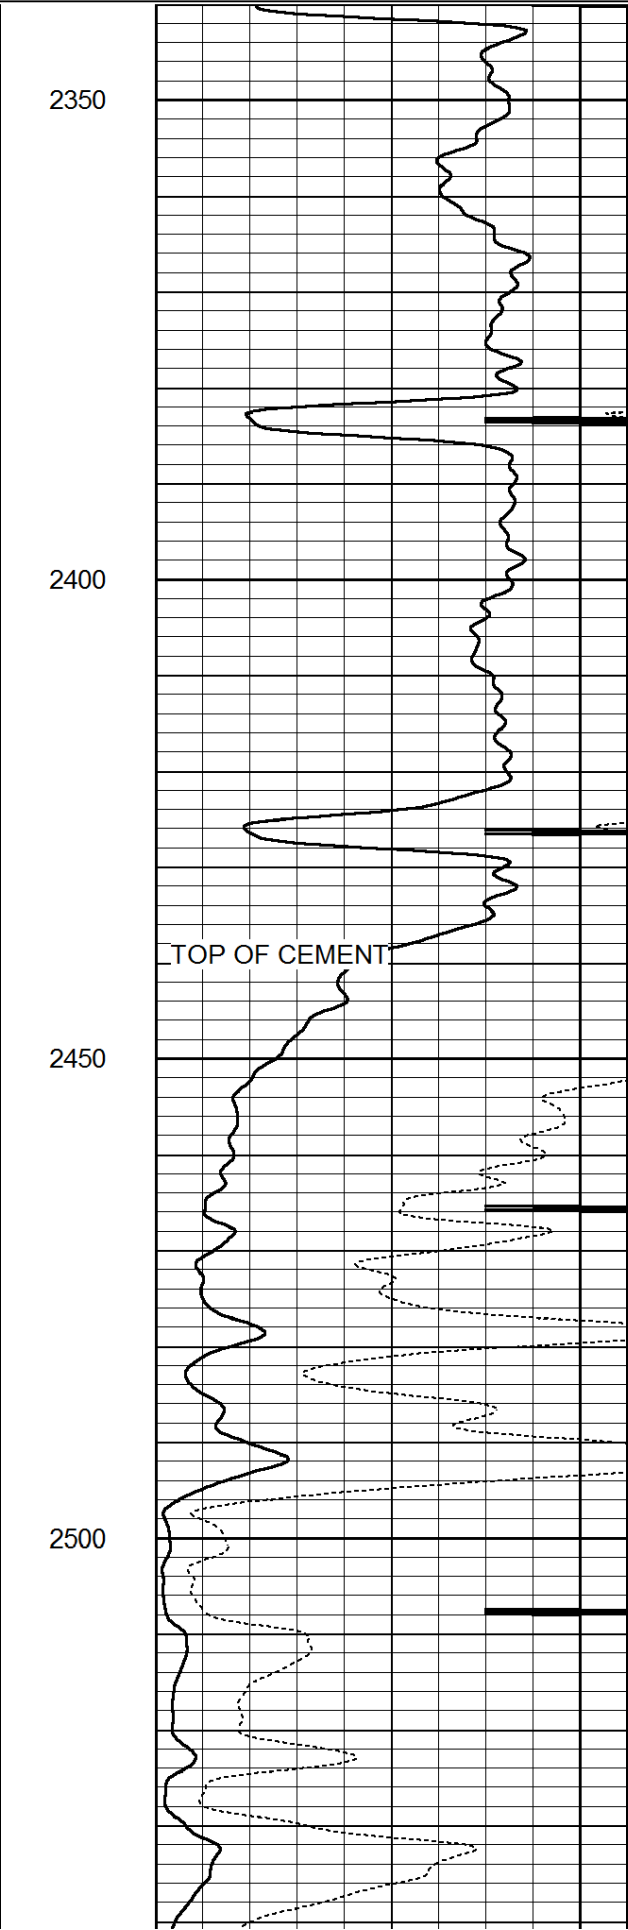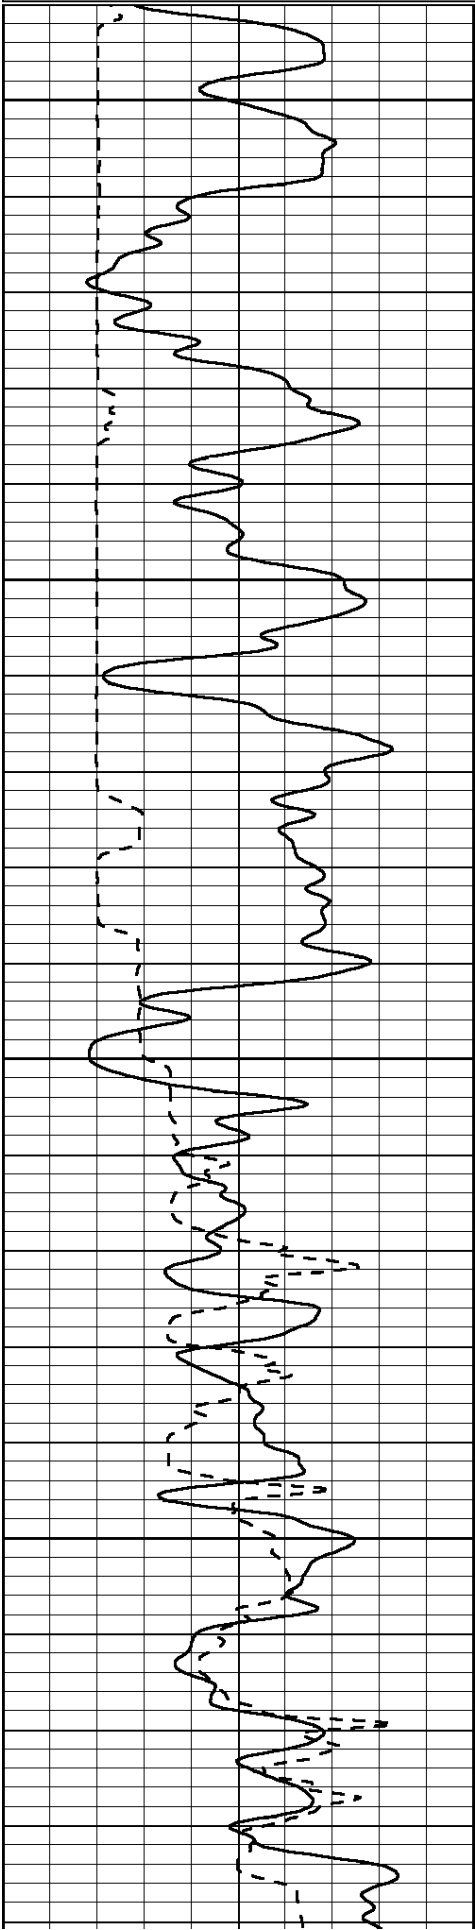

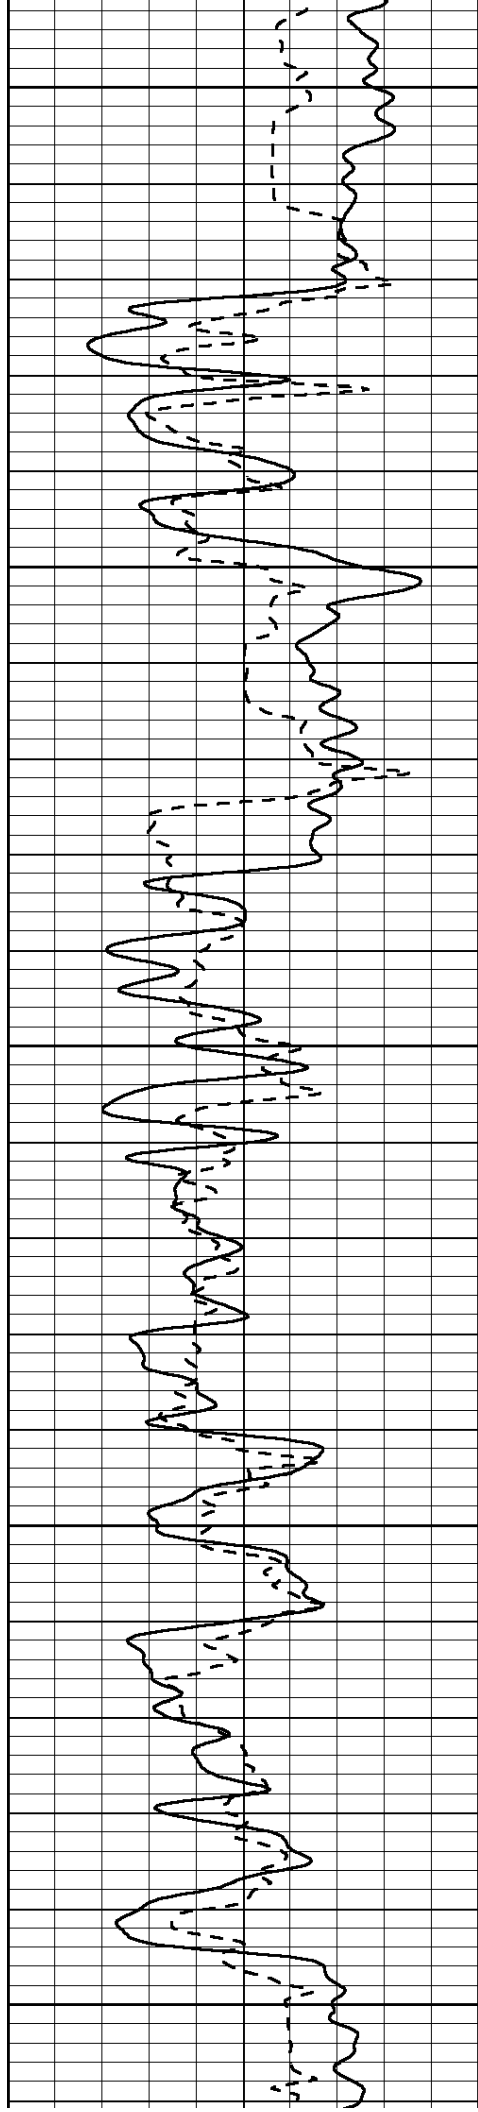



2550


2600

2650

2700

2750

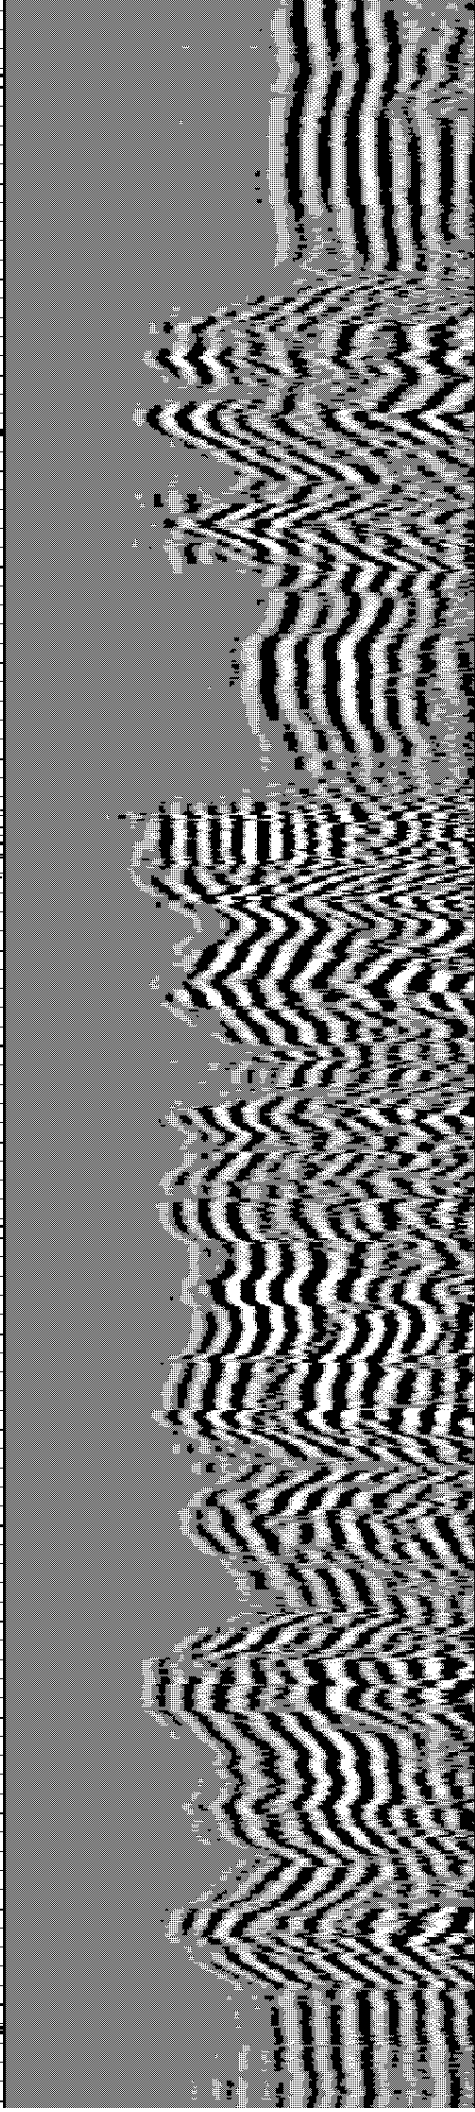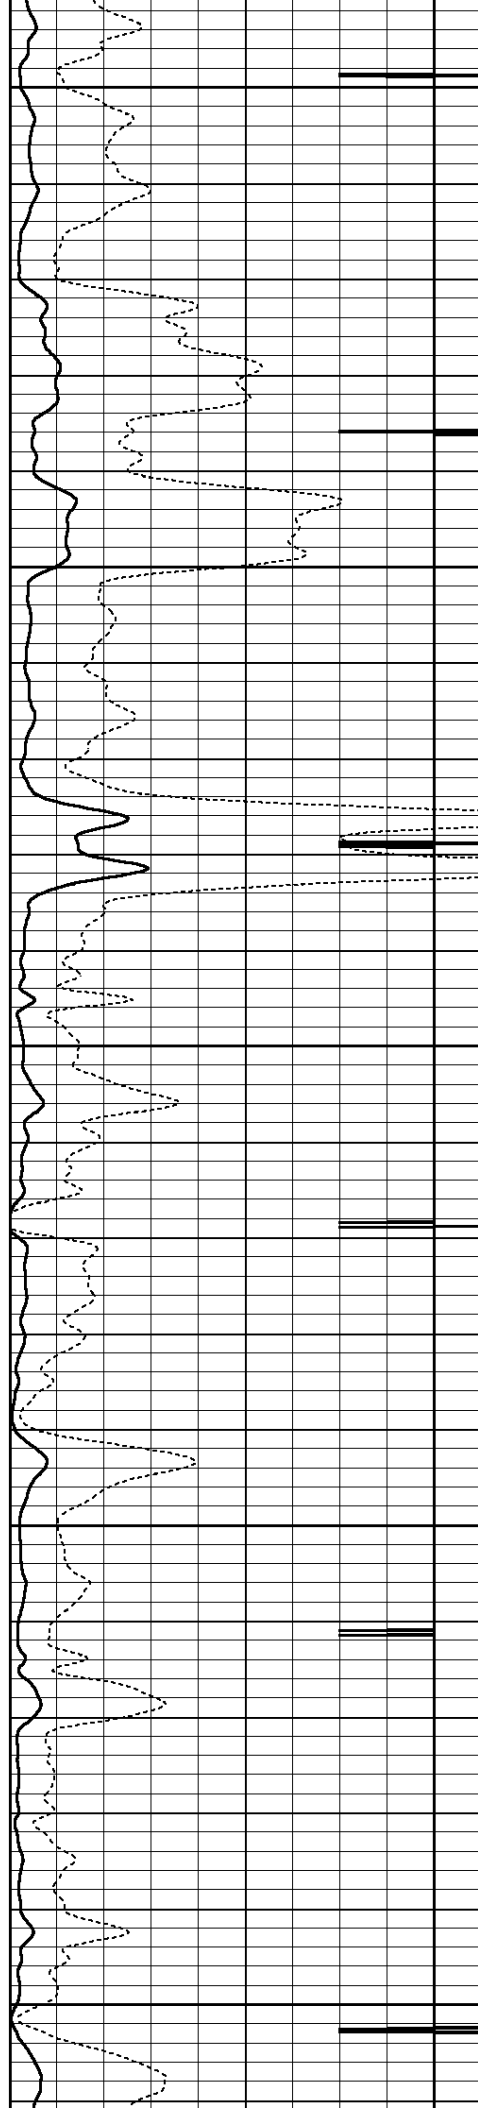


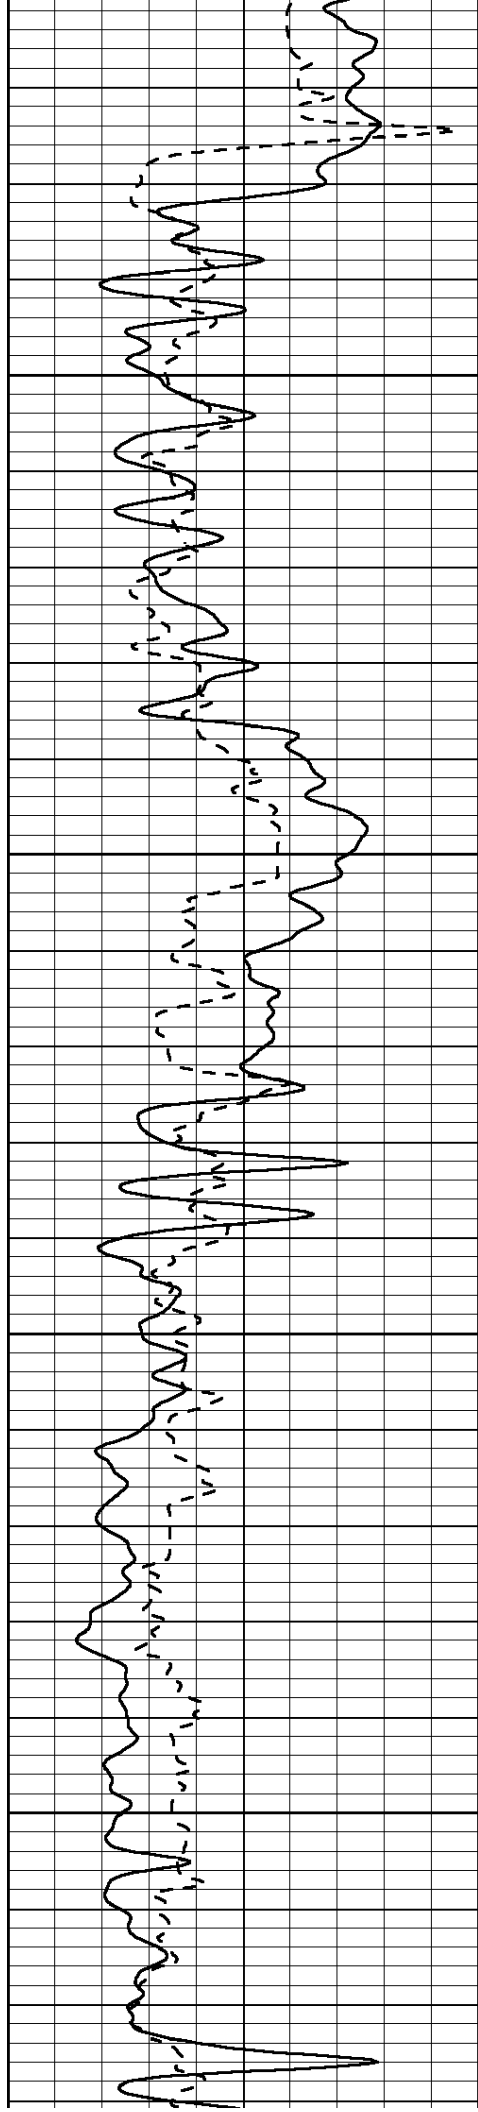



2800

2850

2900

2950

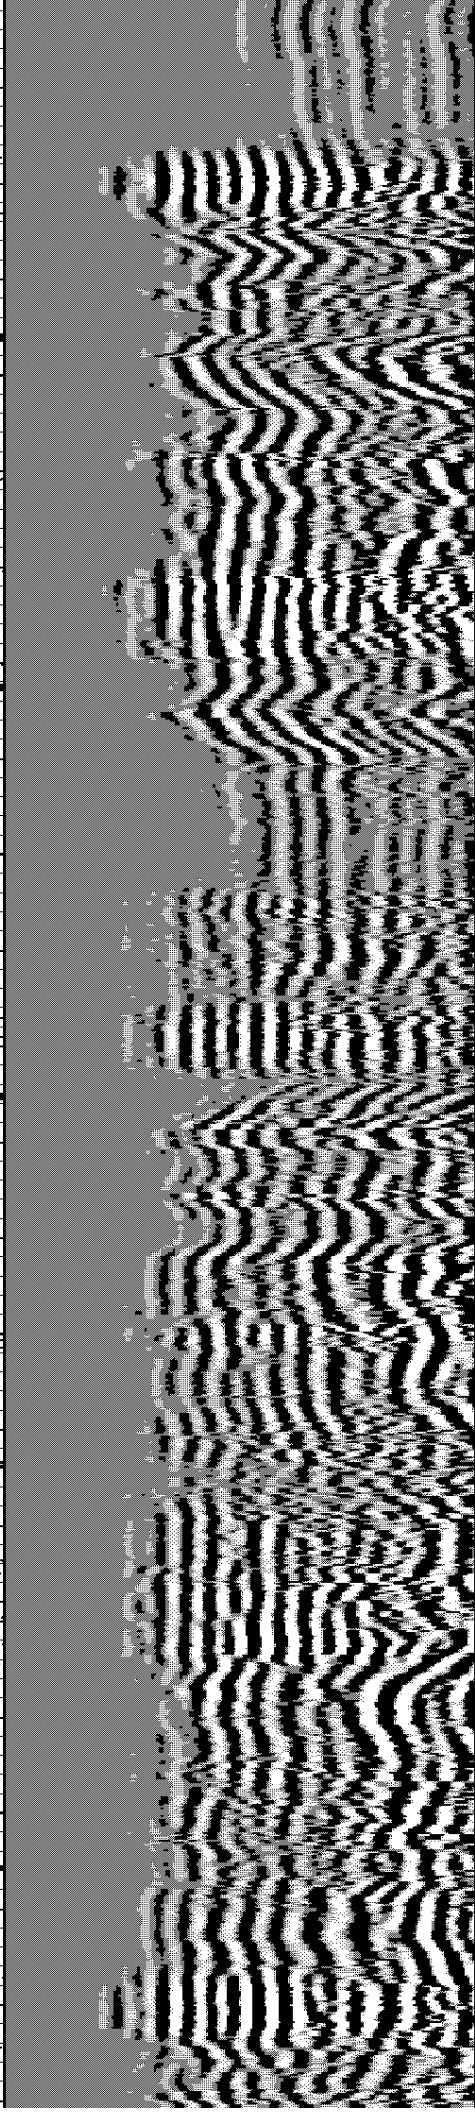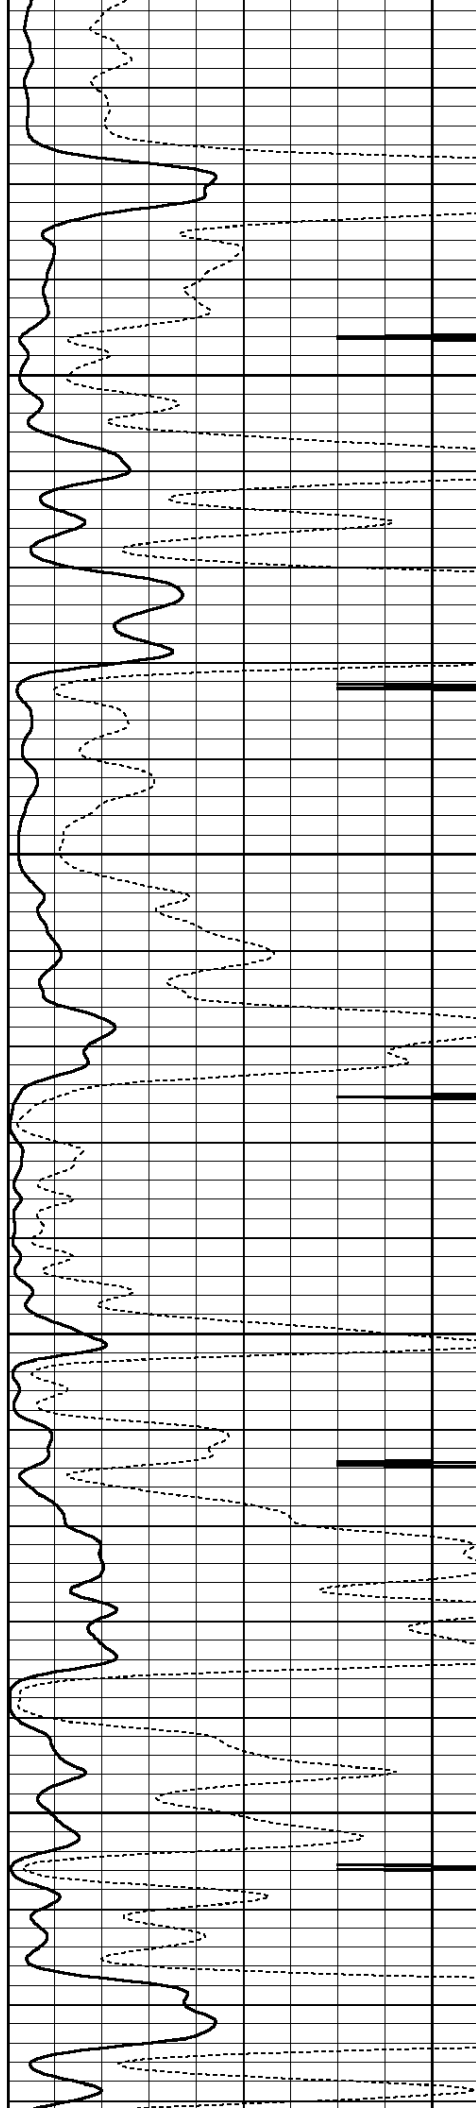

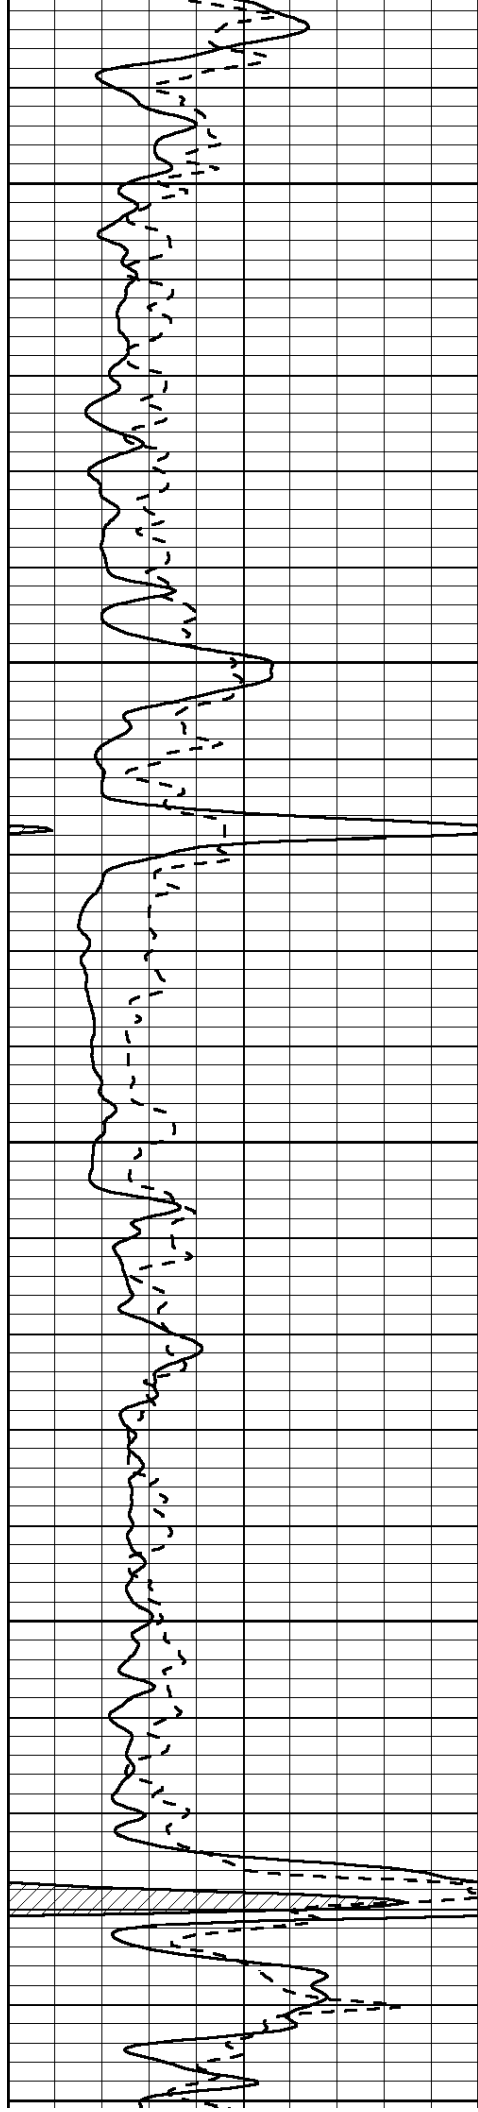



3000




3050


3100

3150

3200

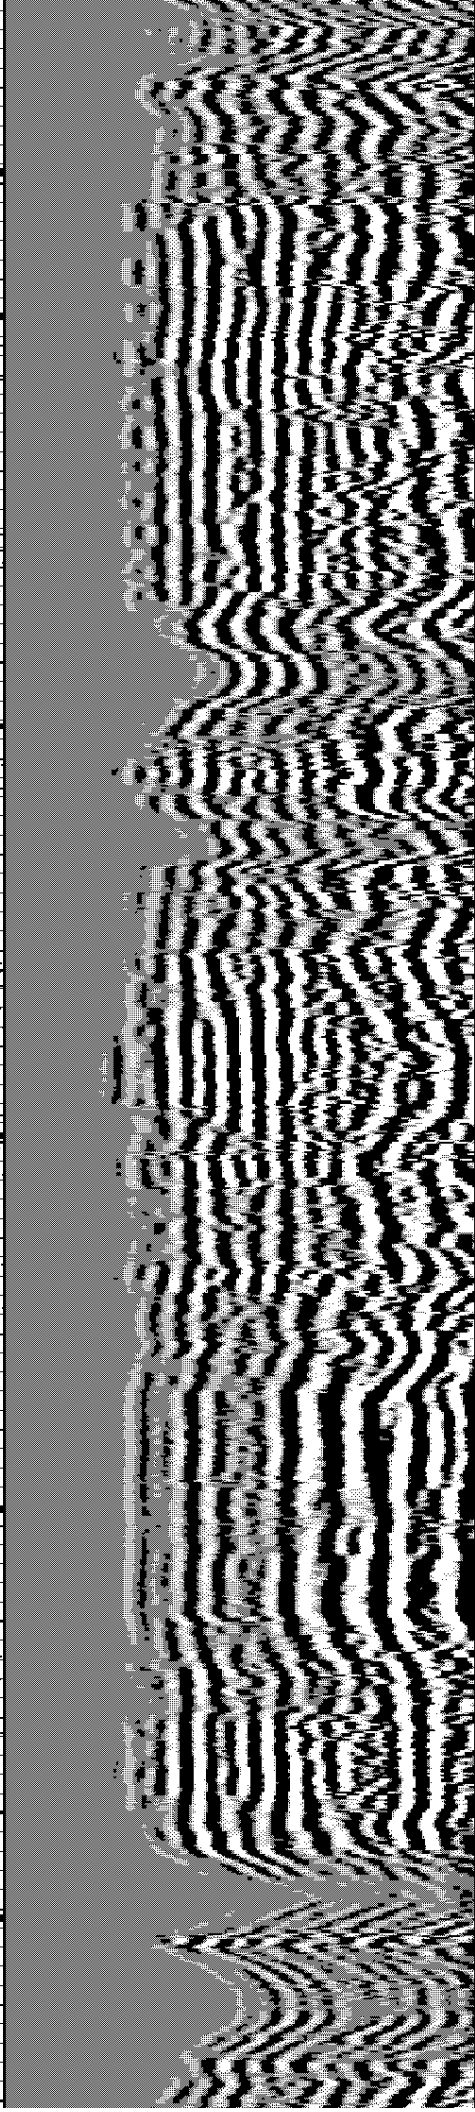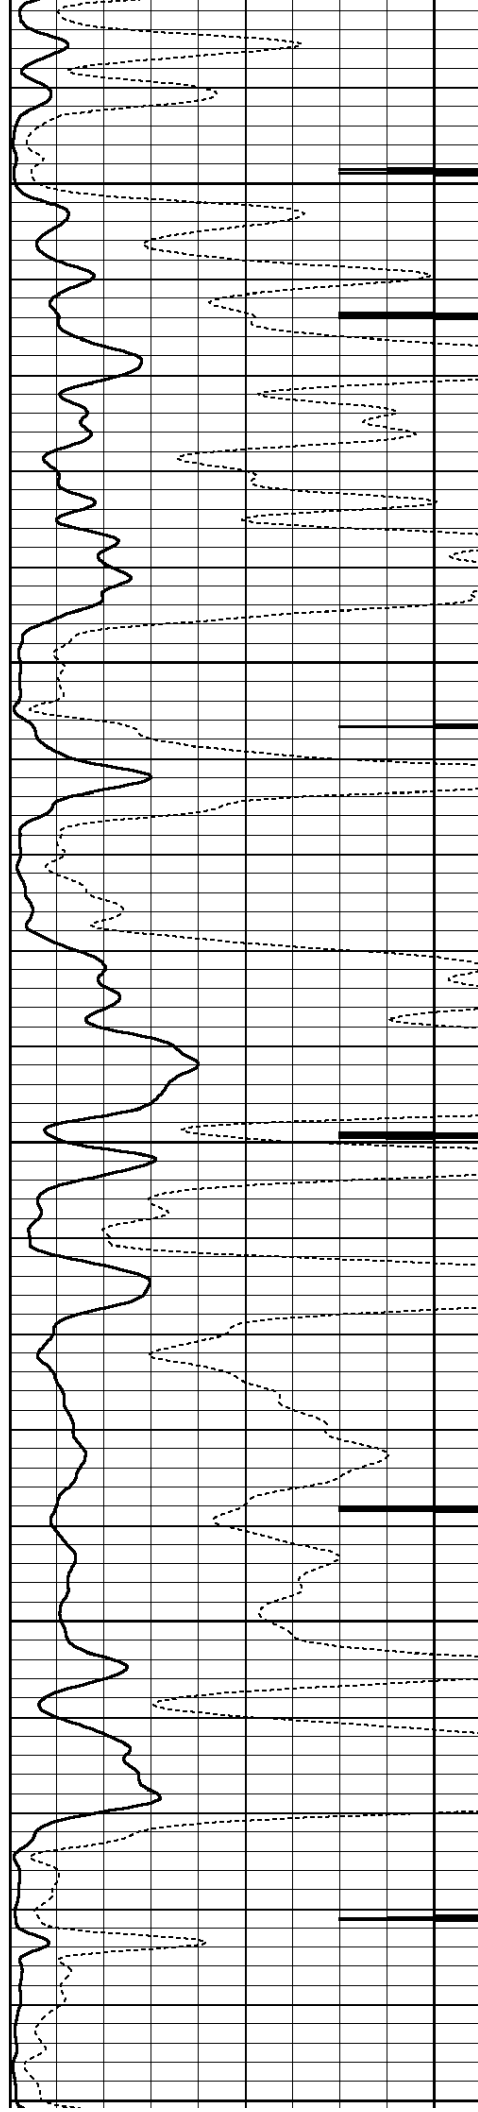

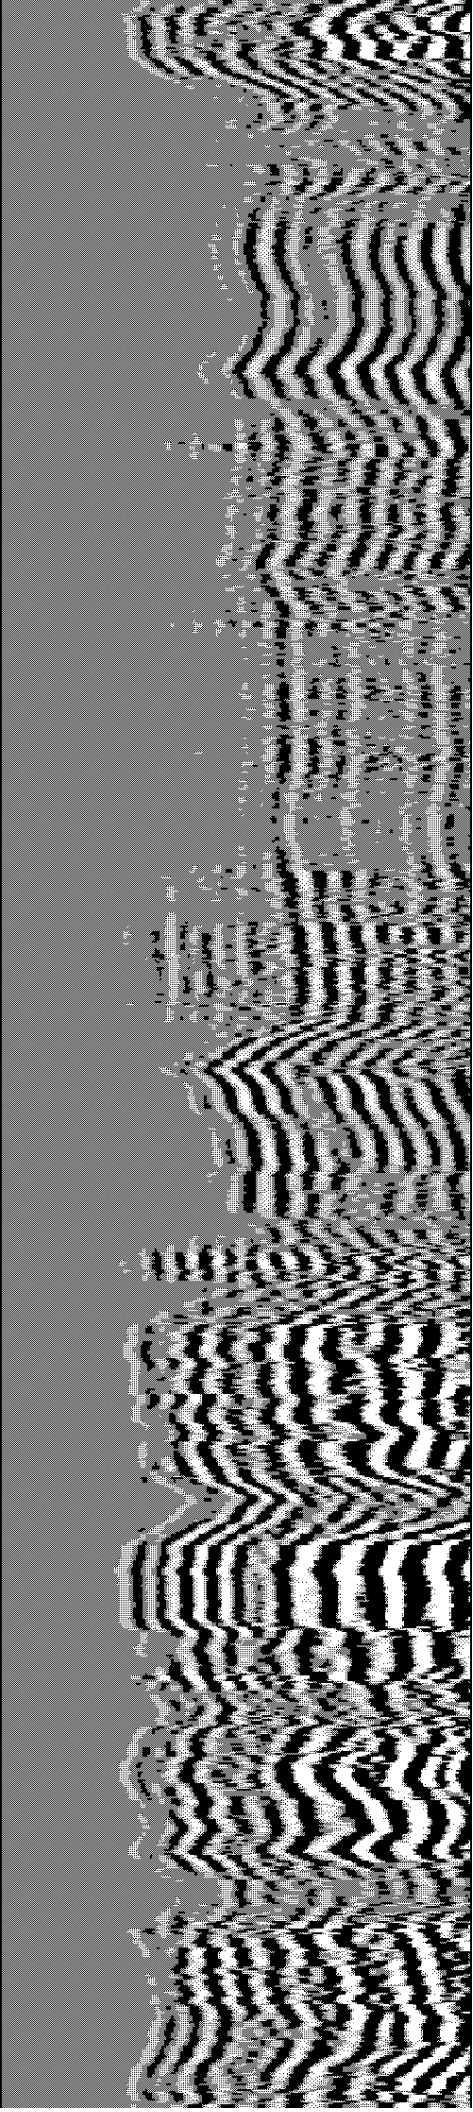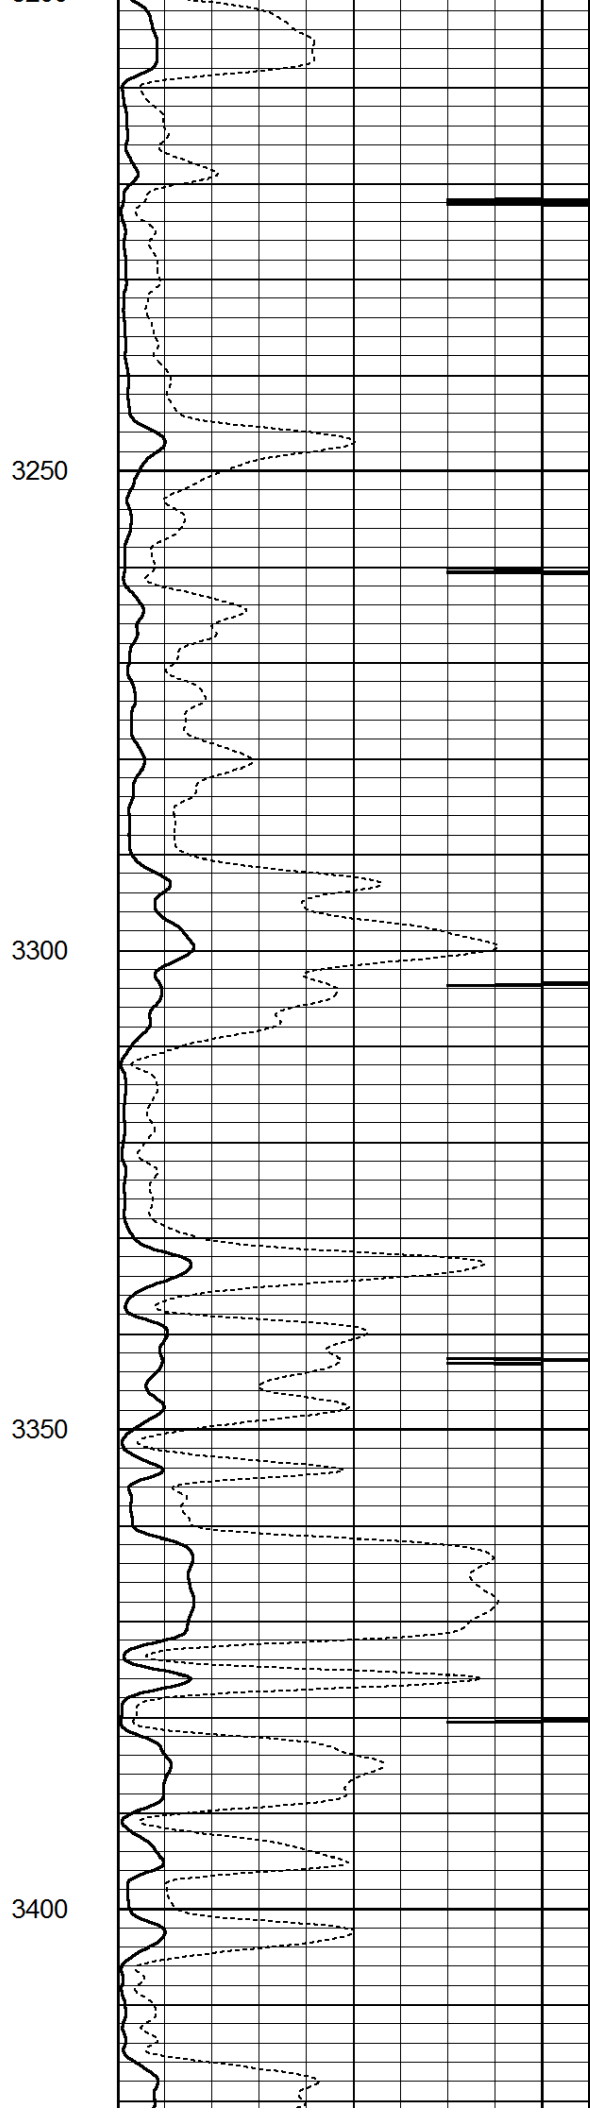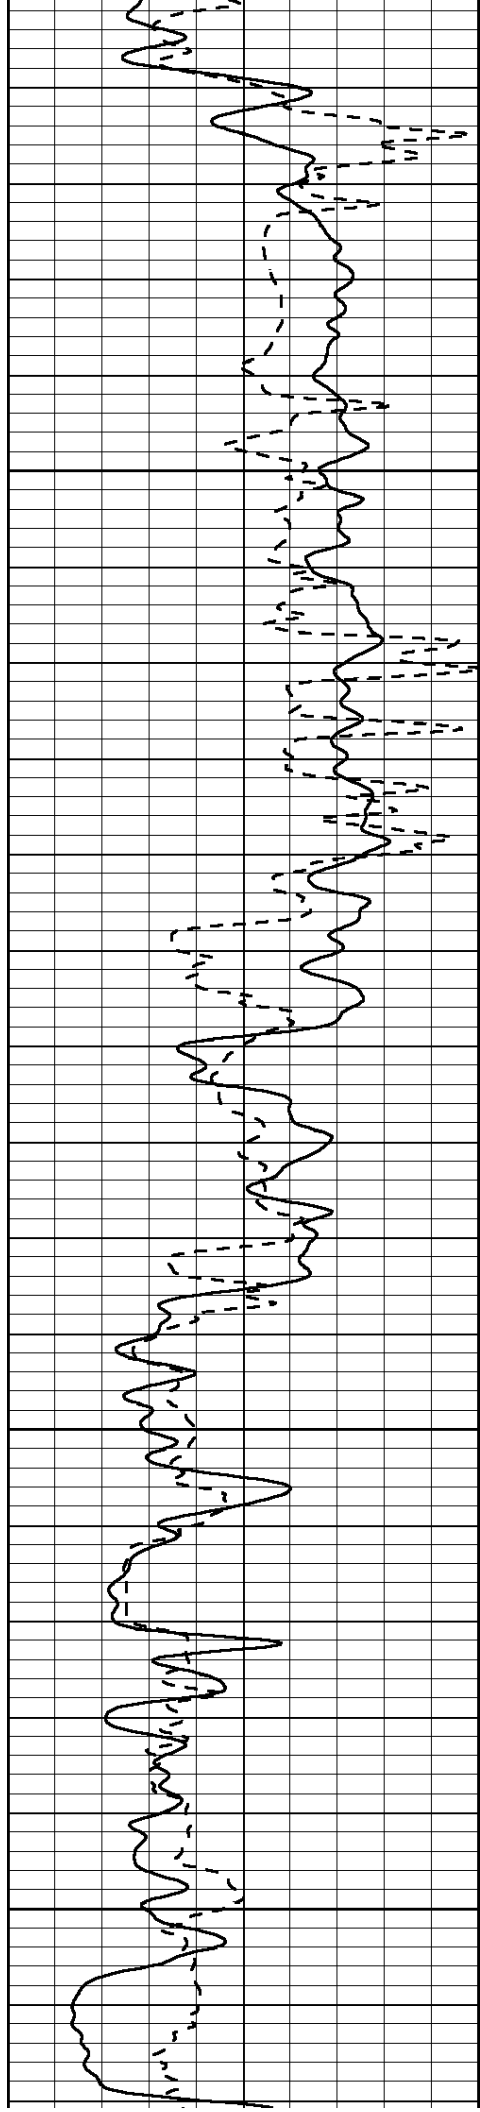

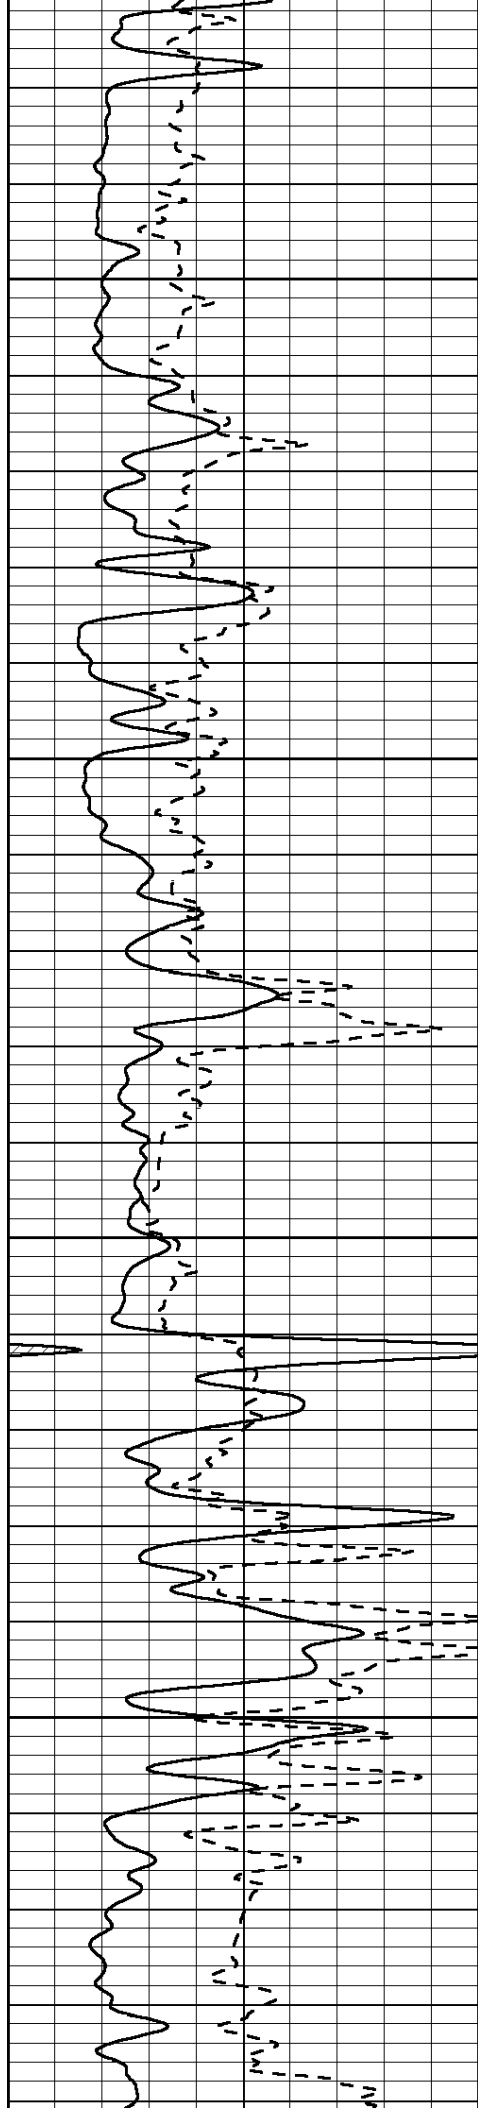

3450

3500

3550

3600

