



**COMPENSATED  
DENSITY / NEUTRON  
LOG**

Company R L INVESTMENT, LLC.  
Well SCHWARTZ "A" #2  
Field SCHWARTZ  
County THOMAS  
State KANSAS

Company R L INVESTMENT, LLC.  
Well SCHWARTZ "A" #2  
Field SCHWARTZ  
County THOMAS State KANSAS

Location: API # : 15-193-20993-0000  
Permanent Datum GROUND LEVEL Elevation 2944  
Log Measured From KELLY BUSHING 7' A.G.L.  
Drilling Measured From KELLY BUSHING  
SEC 1 TWP 9S RGE 31W  
Elevation  
K.B. 2951  
D.F. 2949  
G.L. 2944

Date	4/29/17
Run Number	ONE
Depth Driller	4620
Depth Logger	4620
Bottom Logged Interval	4596
Top Log Interval	3500
Casing Driller	8 5/8"@234'
Casing Logger	232
Bit Size	7 7/8"
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.3/73
pH / Fluid Loss	10.5/7.2
Source of Sample	FLOWLINE
Rim @ Meas. Temp	1.50@80F
Rmf @ Meas. Temp	1.13@80F
Rmc @ Meas. Temp	1.80@80F
Source of Rmf / Rmc	MEASUREMENT
Rim @ BHT	.984@122F
Time Circulation Stopped	2.5 HOURS
Time Logger on Bottom	2:15 A.M.
Maximum Recorded Temperature	122F
Equipment Number	922339
Location	HAYS, KANSAS
Recorded By	JEFF LUEBBERS
Witnessed By	PAT DEENIHAN

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

**Comments**


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395  
DIRECTIONS  
MENLO, KS., 4S., 3/4W., N. INTO





**MAIN SECTION**


Database File: 1417ddn.db  
 Dataset Pathname: pass3.5  
 Presentation Format: den\_neu  
 Dataset Creation: Sat Apr 29 03:45:05 2017 by Calc SOC 120430  
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		


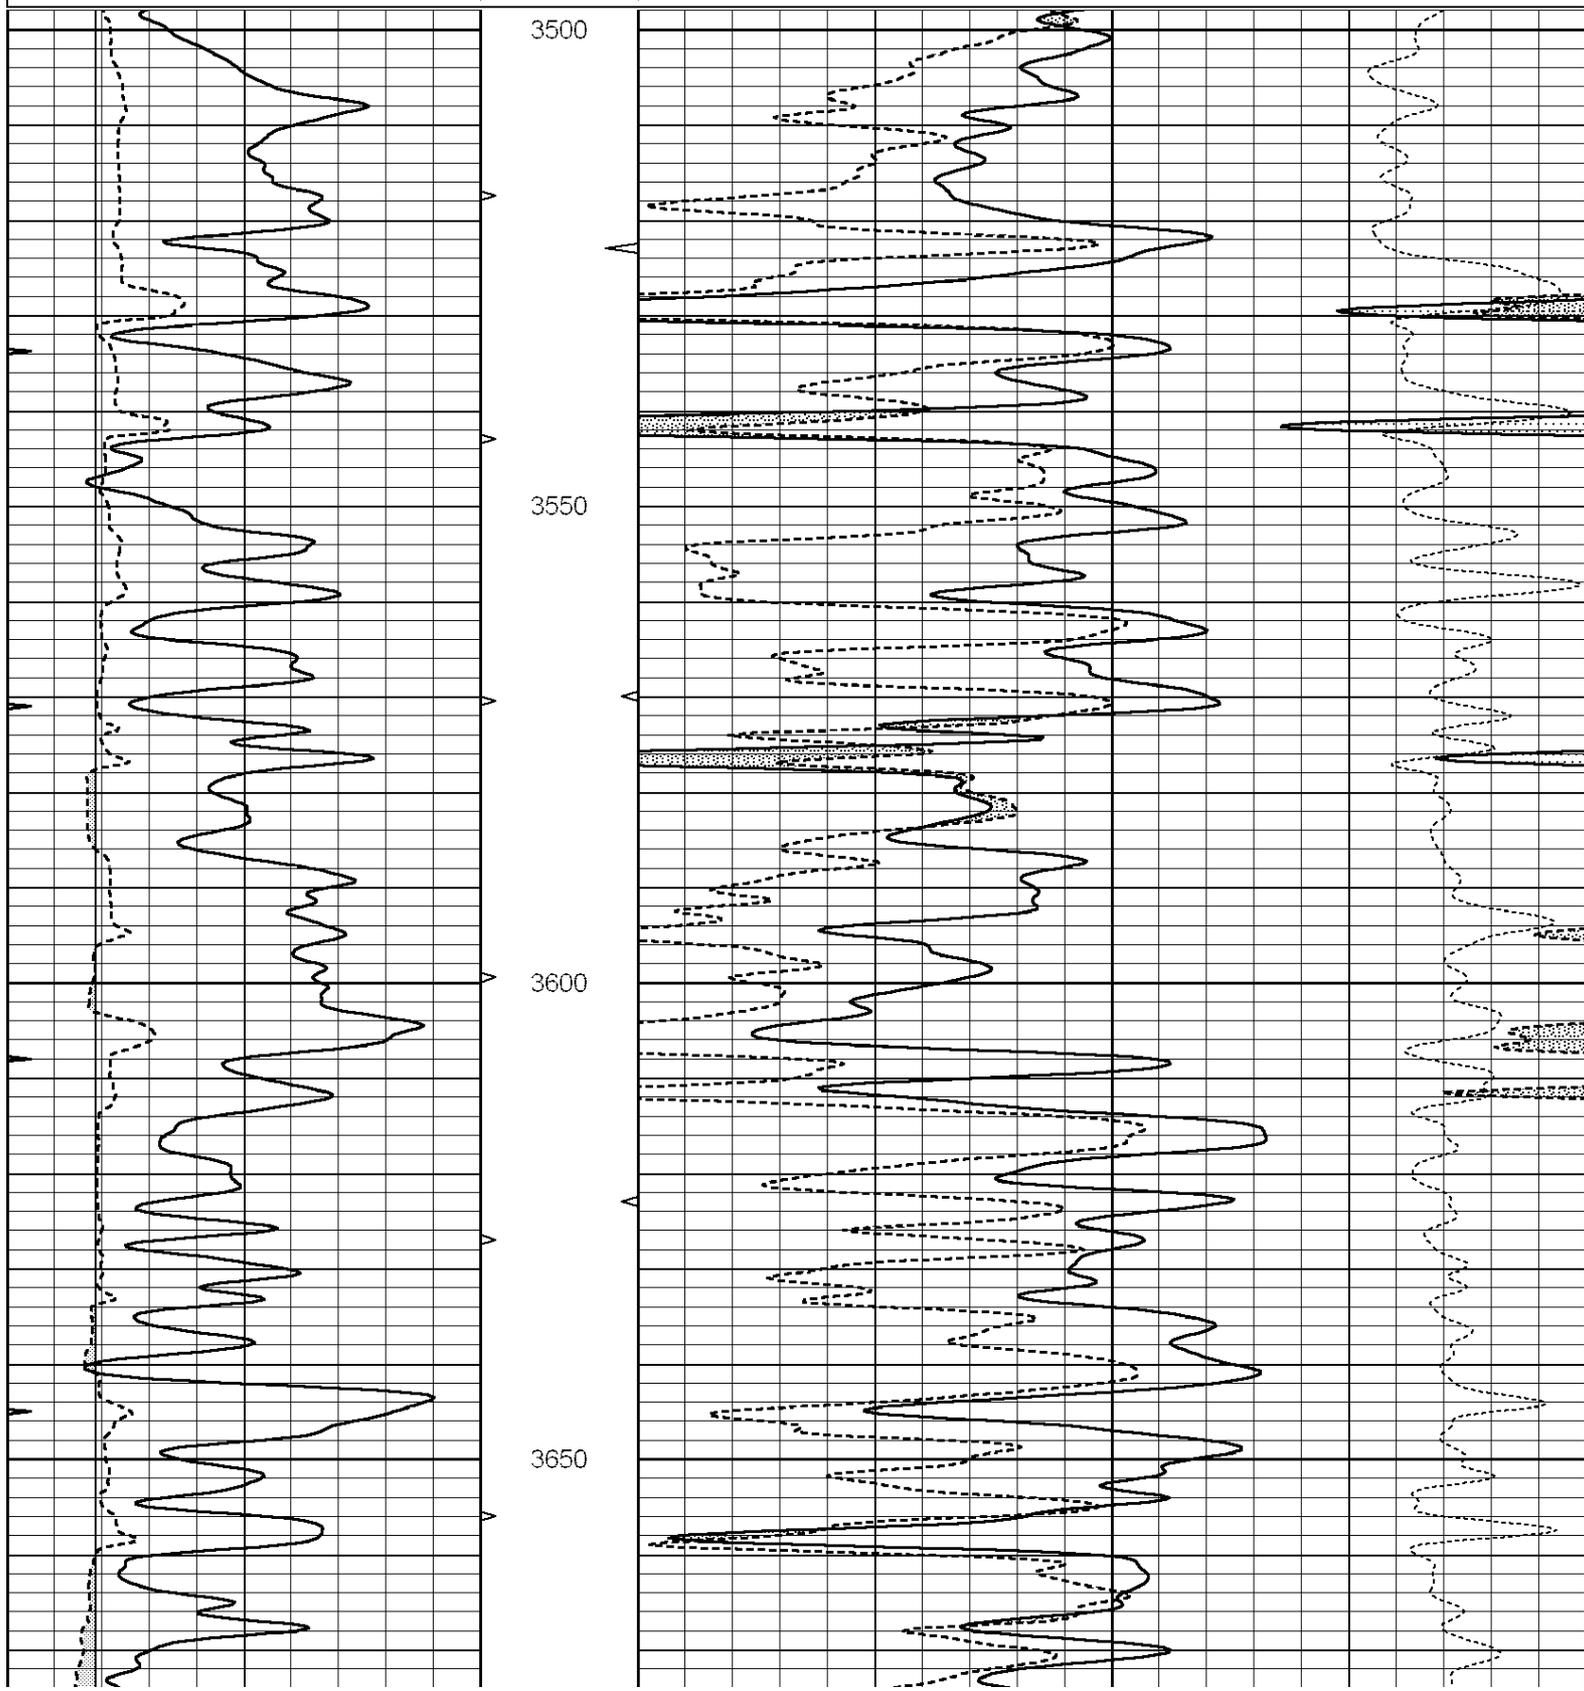


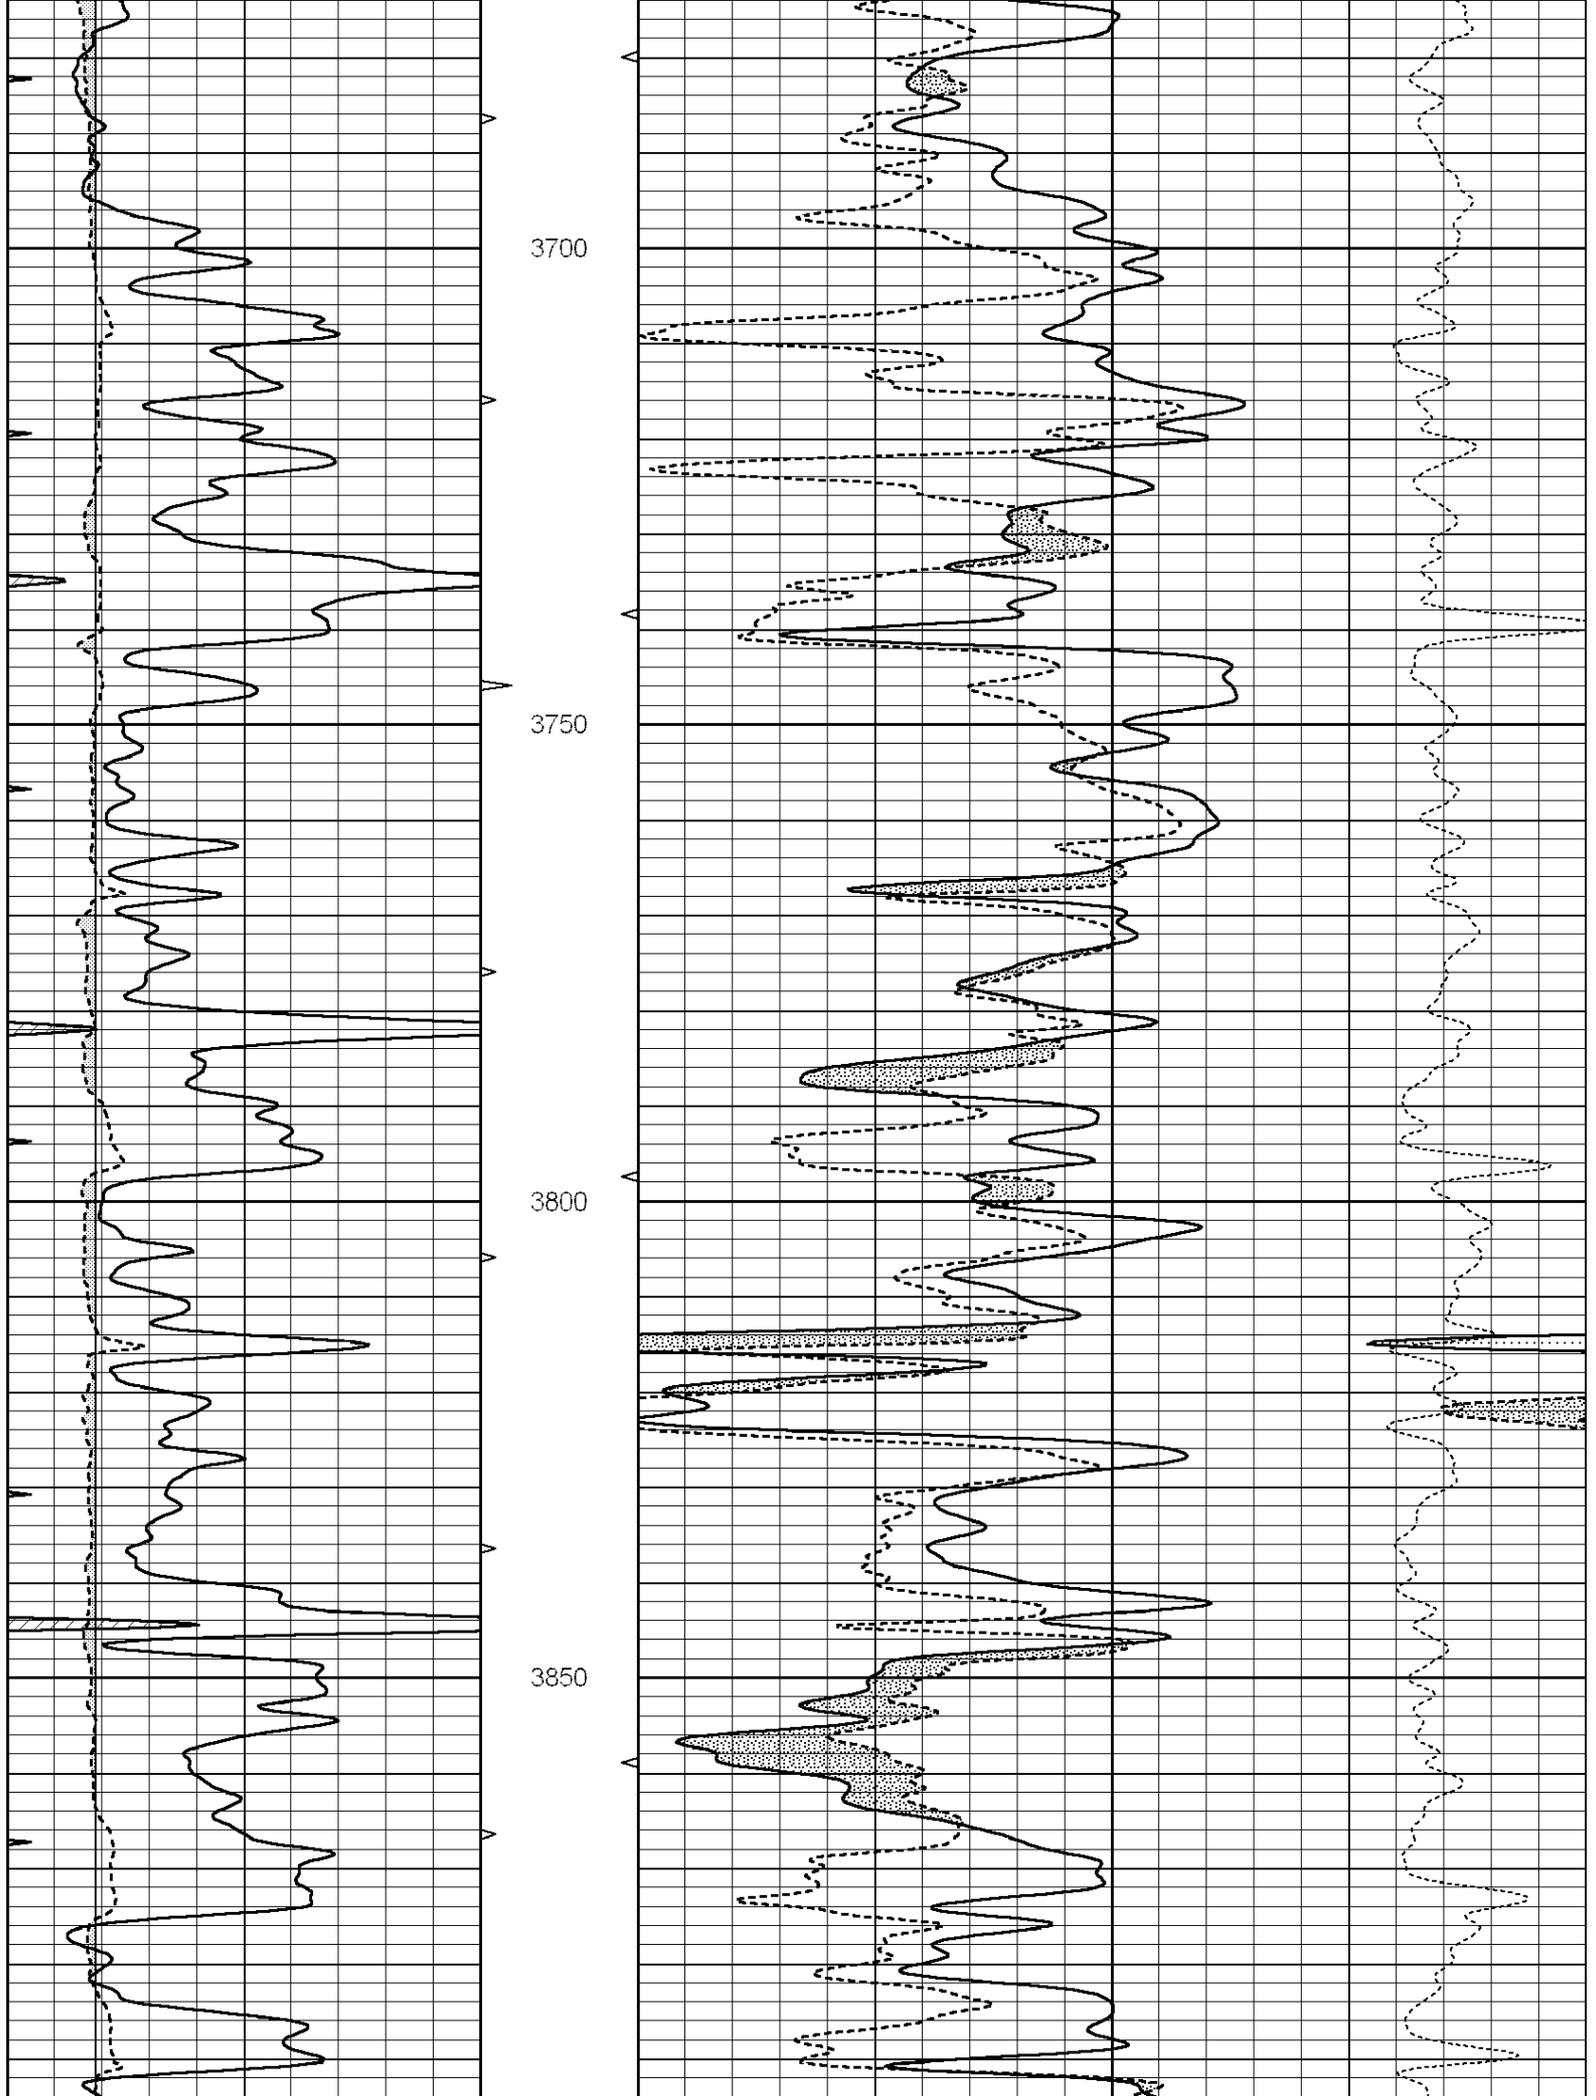

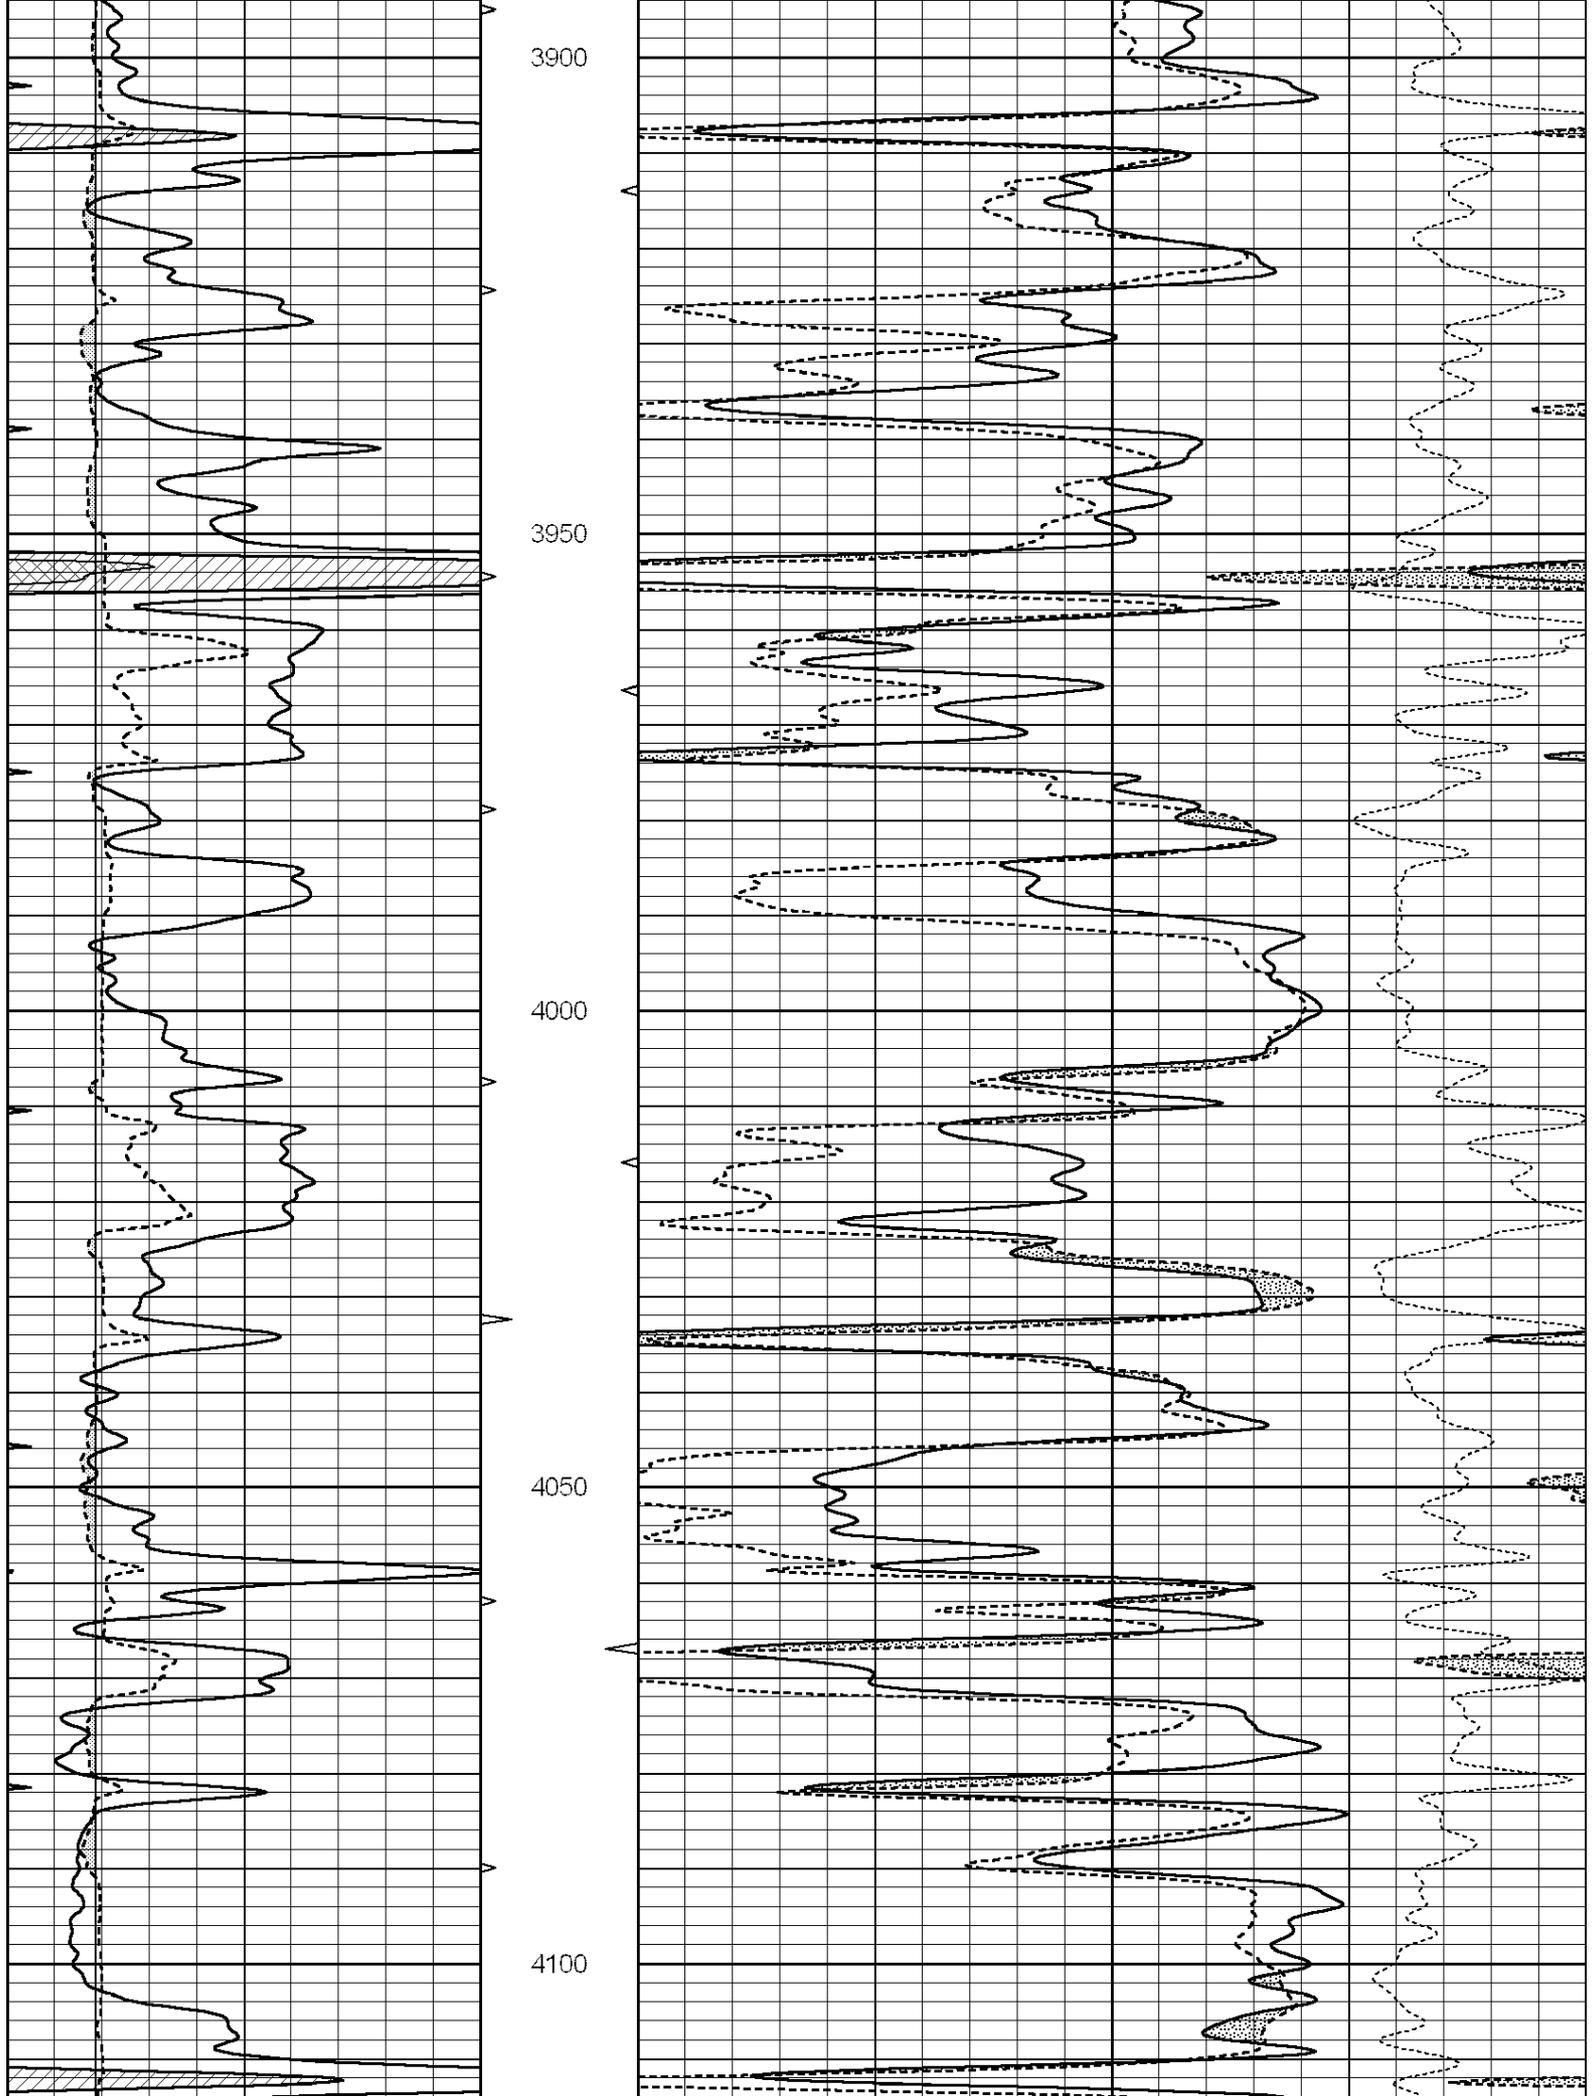

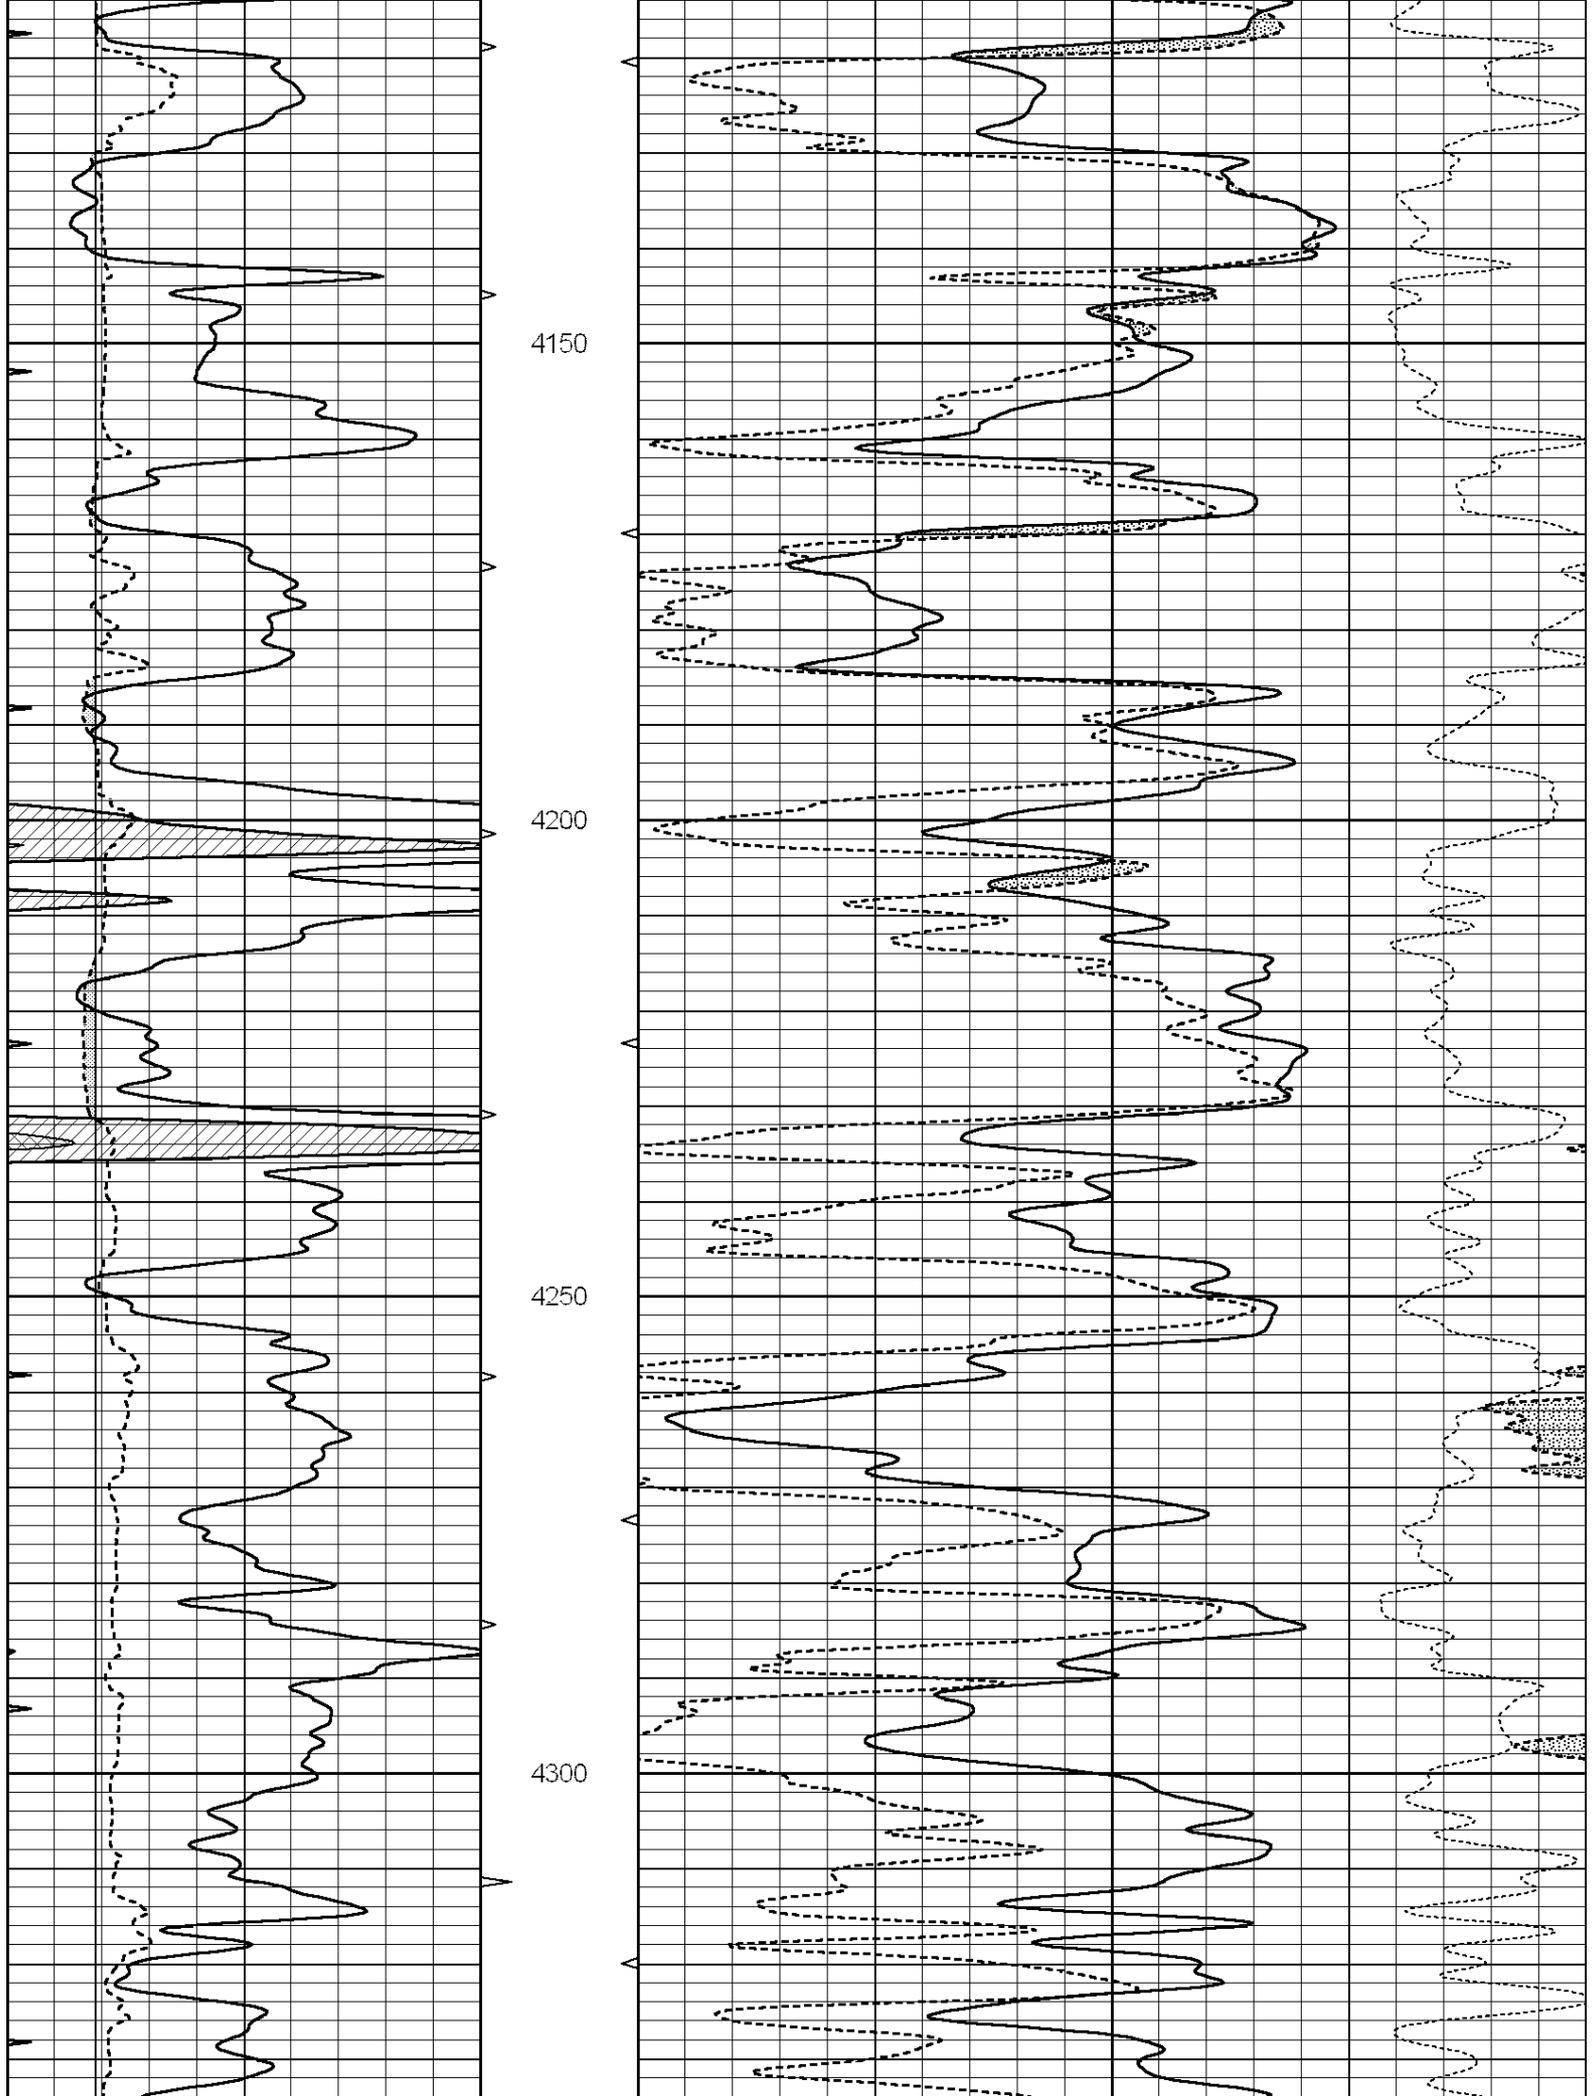

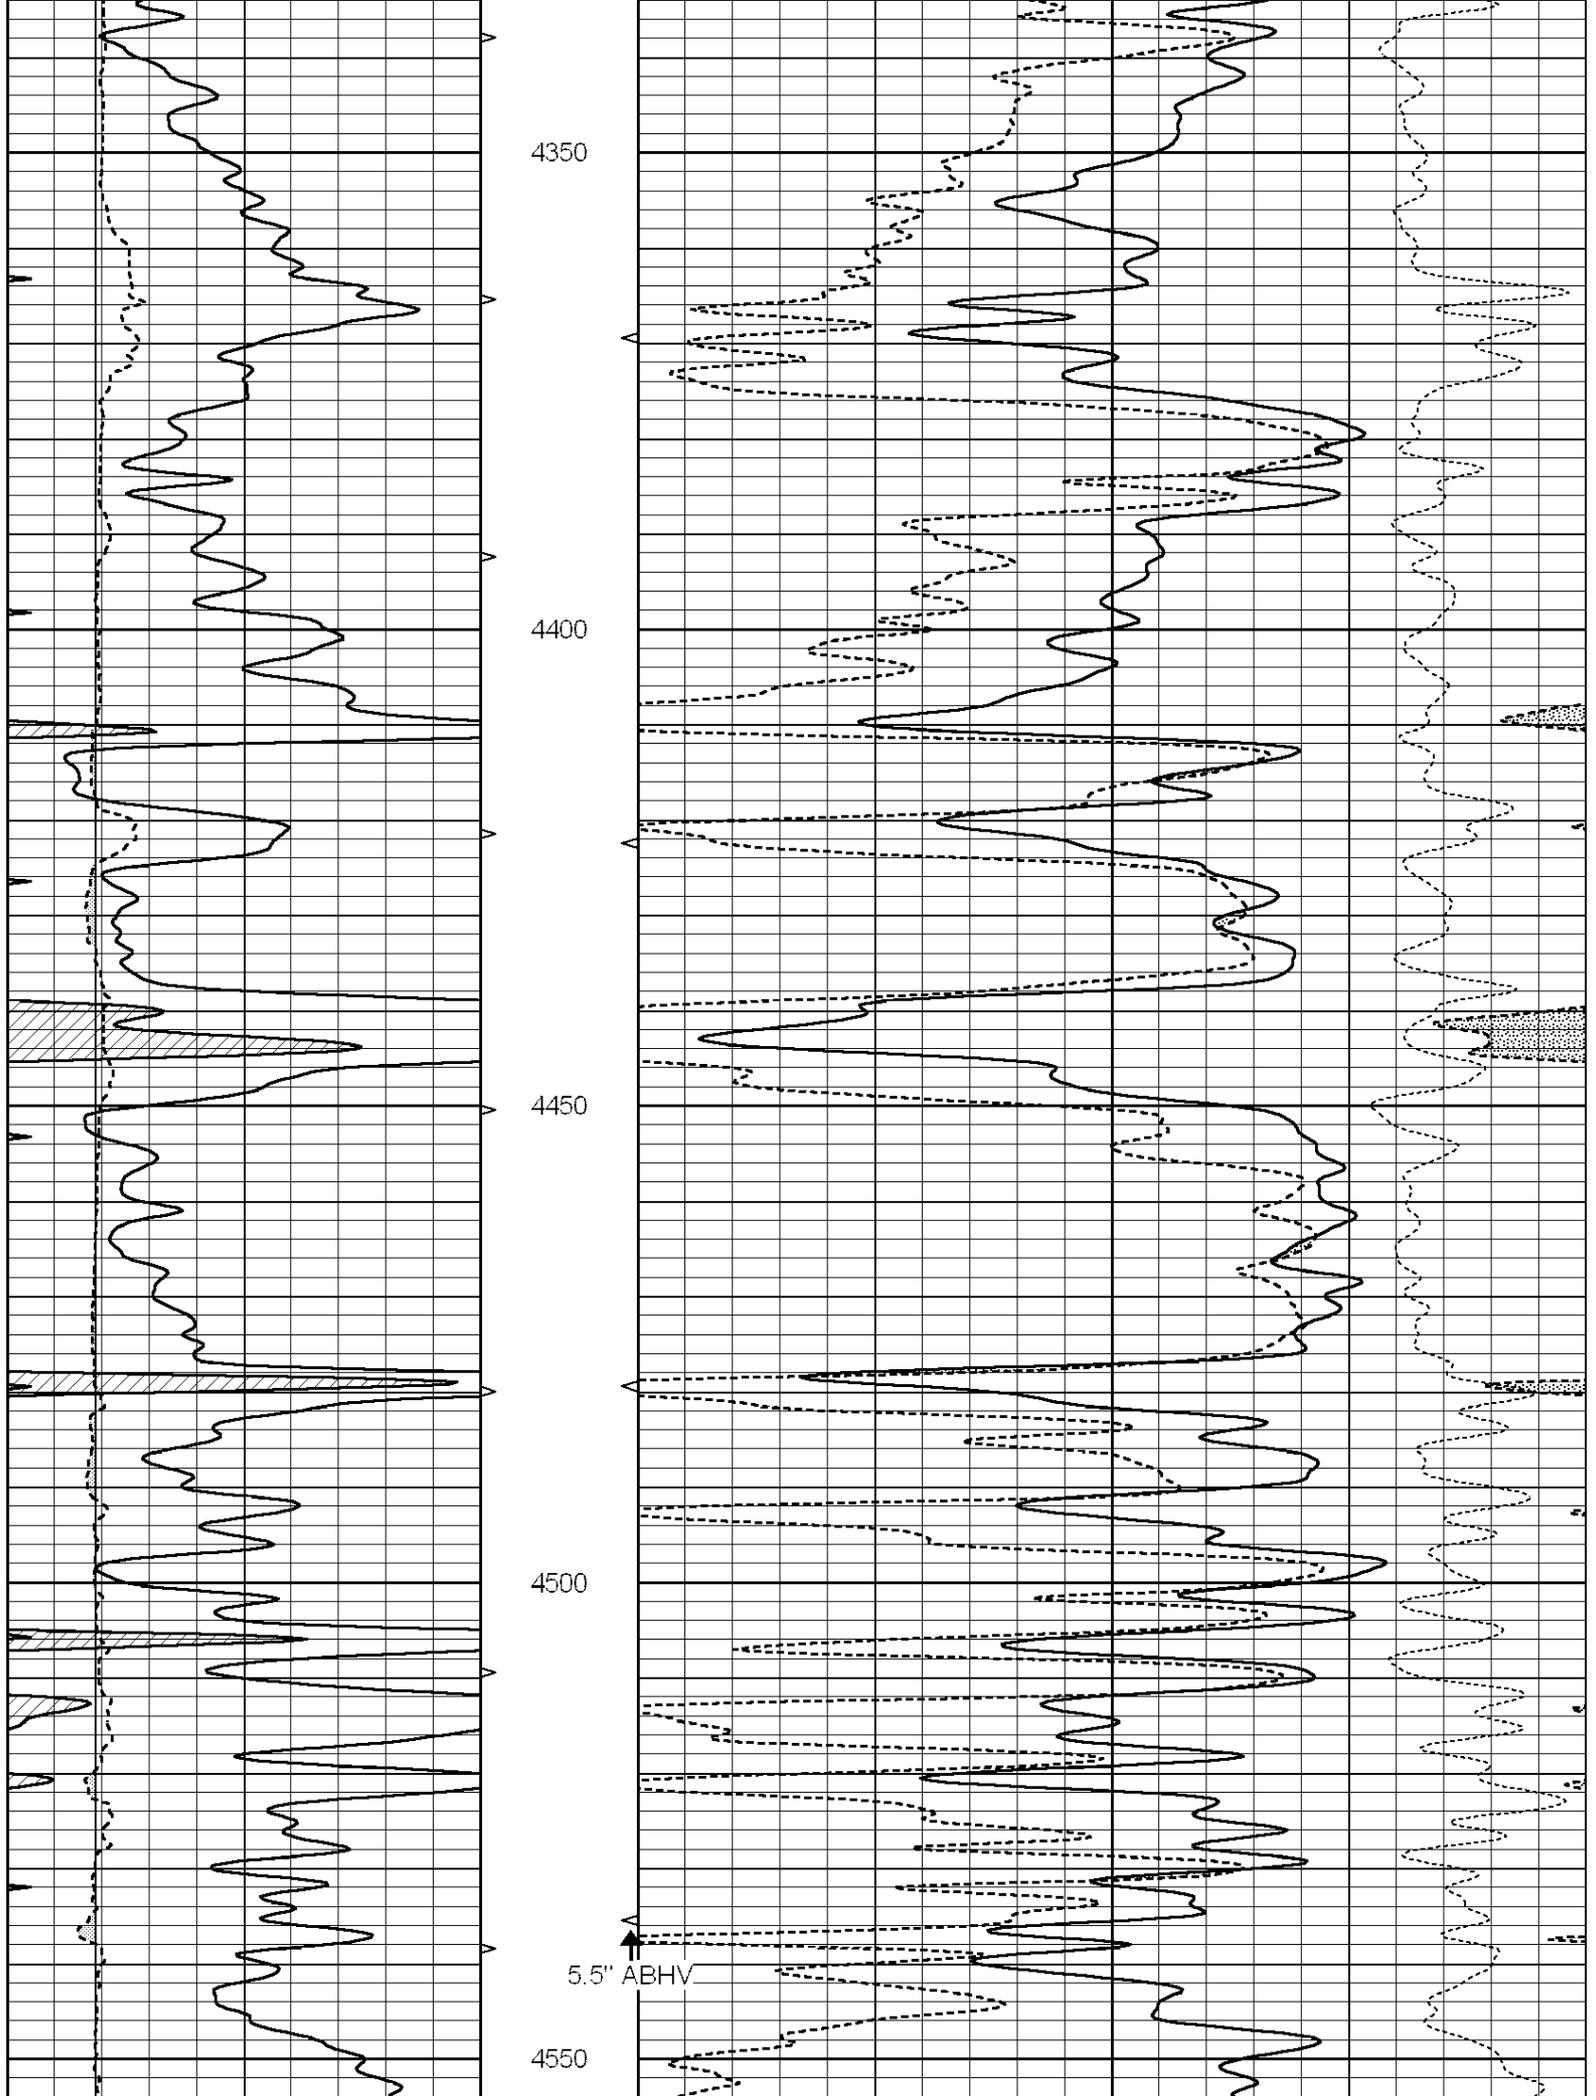


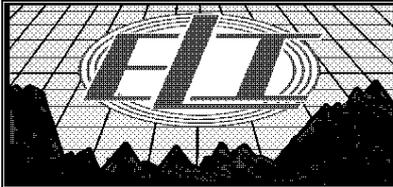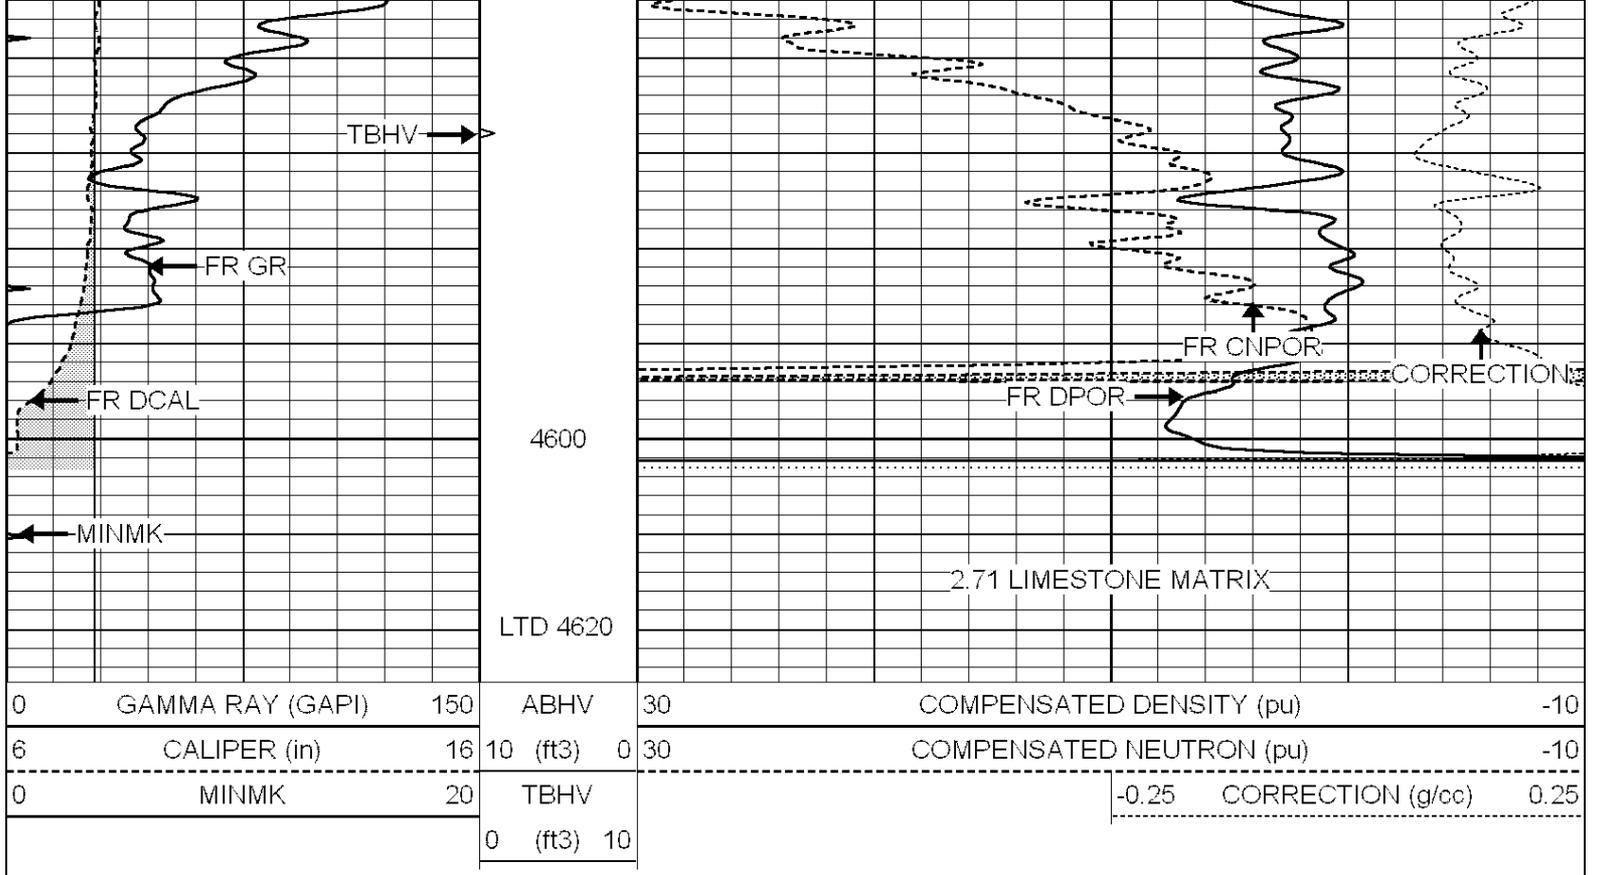


# REPEAT SECTION

Database File: 1417ddn.db  
 Dataset Pathname: pass2.3  
 Presentation Format: den\_neu  
 Dataset Creation: Sat Apr 29 03:05:27 2017 by Calc SOC 120430  
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10	
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10	
0	MINMK	20	TBHV		-0.25	CORRECTION (g/cc)	0.25
			0 (ft3)	10			

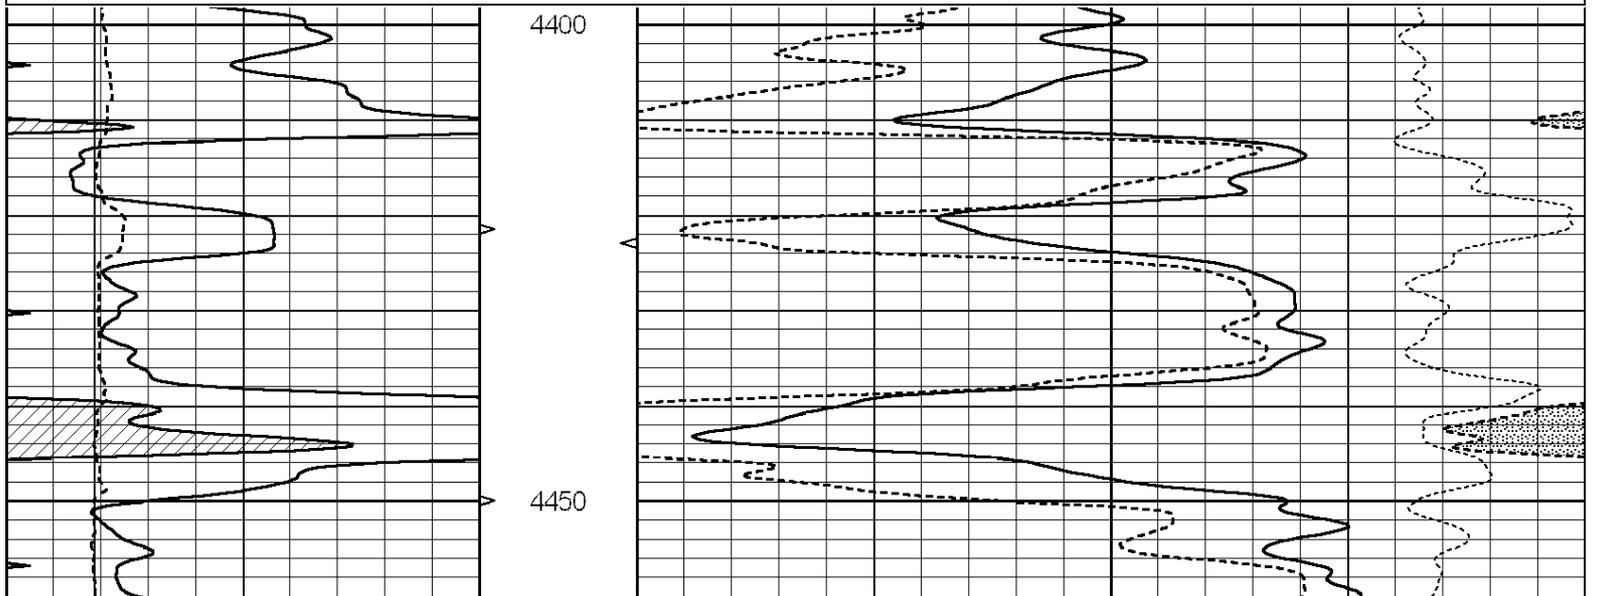

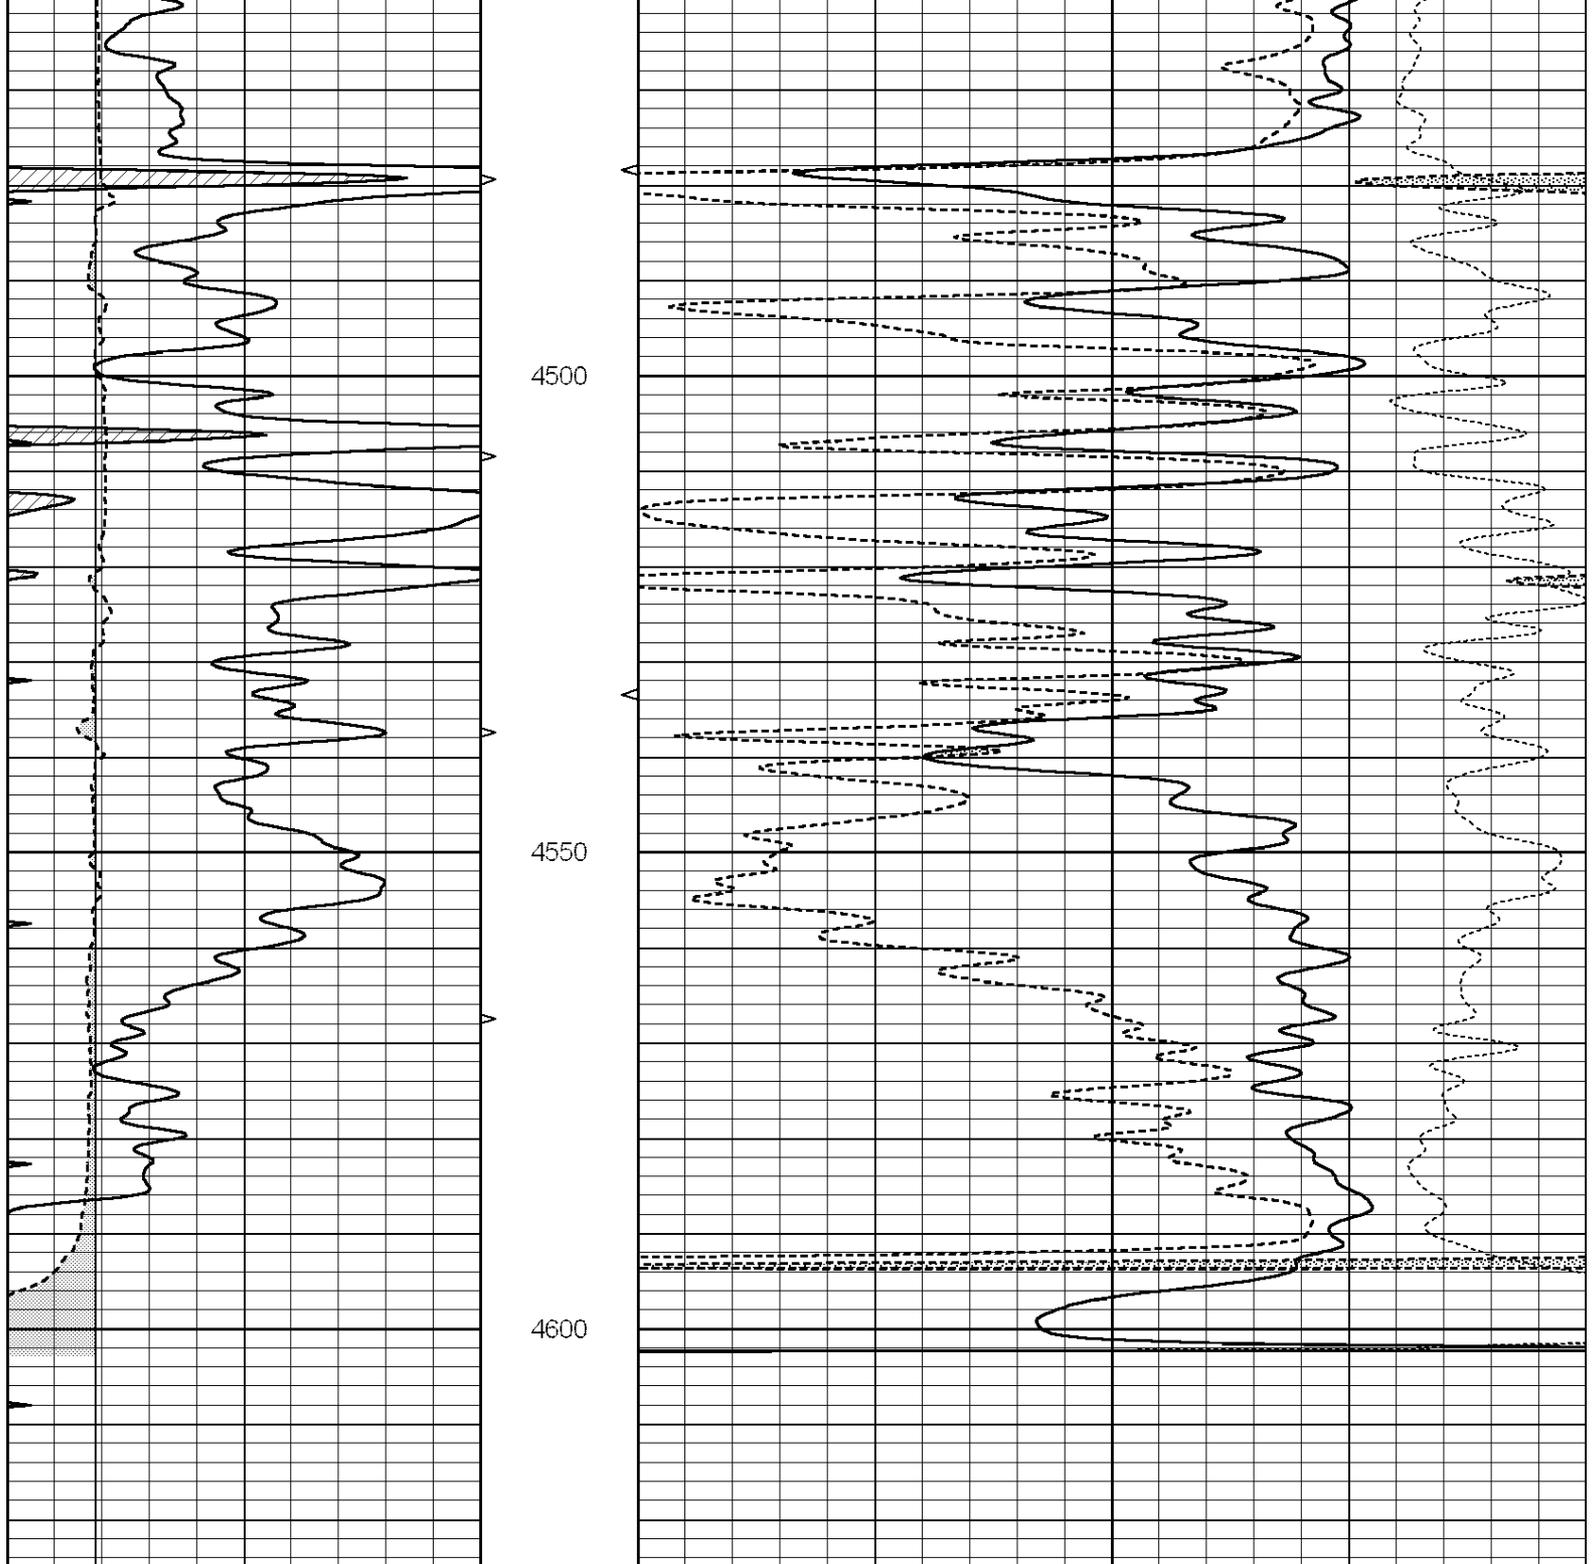

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		

Calibration Report

Database File: 1417ddn.db  
 Dataset Pathname: pass3.5  
 Dataset Creation: Sat Apr 29 03:45:05 2017 by Calc SOC 120430

Dual Induction Calibration Report

Serial-Model: PROBE7-DILG  
 Surface Cal Performed: Tue Apr 18 12:30:40 2017

Surface Calibration								
Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	-6.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-54.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration								
	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report  
Serial: 004N Model: PRB

Master Calibration					Performed Fri May 30 11:01:00 2014			
	Background	Magnesium	Aluminum	Sandstone				
Window 1	1378.8	10804.6	3492.0	12453.4				cps
Window 2	1262.4	9313.5	3076.7	10594.7				cps
Window 3	1077.6	5668.7	2076.0	6314.8				cps
Window 4	306.4	313.0	306.4	315.6				cps
Long Space	0.0	8051.0	1814.3	9332.3				cps
Short Space	1.9	1706.1	1146.0	1707.6				cps
Rho		1.7100	2.5900	1.3800				g/cc
Pe		0.0000	2.5700	1.5500				
Rib Angle	: 45.0	Rib Slope	: 1.002	Density/Spine Ratio			: 0.571	
Spine Angle	: 75.0	Spine Slope	: 3.745	Spine Intercept			: -18.9	

Before Survey Verification					Performed Wed Dec 31 18:00:00 1969			
	Background	Magnesium	Aluminum	Sandstone				
Window 1	0.0	0.0	0.0	0.0				cps
Window 2	0.0	0.0	0.0	0.0				cps
Window 3	0.0	0.0	0.0	0.0				cps
Window 4	0.0	0.0	0.0	0.0				cps
Long Space	0.0	0.0	0.0	0.0				cps
Short Space	0.0	0.0	0.0	0.0				cps
Measured Rho		0.0000	0.0000	0.0000				g/cc
Measured Correction		0.0000	0.0000	0.0000				g/cc

Measured Correction	0.0000	0.0000	0.0000	g/cc
Measured Pe		0.0000	0.0000	

After Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 070808  
 Tool Model: Probe

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: 070558  
 Tool Model: OPEN\_GR  
 Performed: Mon Aug 22 01:00:15 2016

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps  
 Calibrator Reading: 1.0 cps

Sensitivity: 0.2800 GAPI/cps