



**DUAL RECEIVER
CEMENT BOND LOG**

Company: C & G DRILLING, INC.
Well: BUSENTITZ #2
Field: PLUM GROVE
County: BUTLER
Country: U.S.A.

State: KANSAS
County: U.S.A.
Location: SW - SE - NW - NW
API #: 15-015-24123-0-000

Other Services: GRN/CCL, PERFF
Elevation: 1400
K.G. 1409, D.F. 1407, G.L. 1400
SEC 24 TWP 24S RGE 4E
GROUND LEVEL
KELLY BUSHING & A.G.L.
KELLY BUSHING

Company: C & G DRILLING, INC.
Well: BUSENTITZ #2
Field: PLUM GROVE
County: BUTLER
State: KANSAS
Permanent Datum: GROUND LEVEL
Log Measured From: KELLY BUSHING & A.G.L.
Drilling Measured From: KELLY BUSHING

Date: 8/13/18
Run Number: 2730
Depth (ft): 2794
Bottom Logged Interval: 1400
Top Log Interval: 7-78"

Open Hole Size: WATER
Type Fluid: WATER
Viscosity: N/A
Temperature: N/A
Estimate Comment: top

Time Well Ready: 1:00 P.M.
Time Logger on Bottom: 1:15 P.M.
Equipment Number: HAYS 2730SS
Recon By: JEFF HEBBERS
Witnessed By: TIM GULLICK

Run Number: 2
Borehole Record: 200 to 2794
Size: 8.53
Production String: 5.5
Casing Record: 14#
Production String: 5.5


Production String: 5.5

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

THANK YOU FOR USING E.L.I. WIRELINE SERVICES HAYS, KANSAS (785) 628-6395
DIRECTIONS
POTWIN, KS., 4E. ON HWY 196 TO "SHUMWAY RD.", 2 1/2N., E. INTO AT GATE

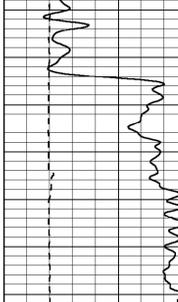

MAIN SECTION

Database File: 3463bgrn.db
Dataset Pathname: pass2_3
Presentation Format: db102
Dataset Creation: Tue Aug 13 01:53:32 2019
Charted by: Depth in Feet scaled 1:240

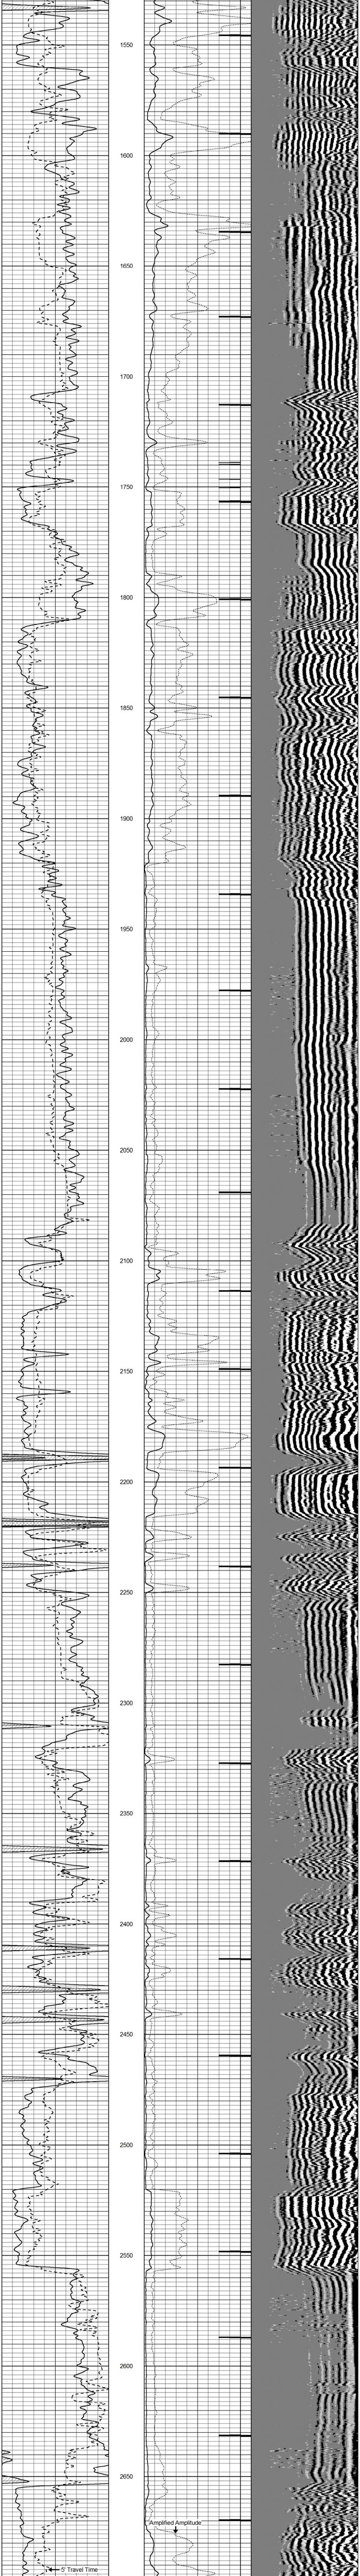

0 Gamma Ray (GAPI) 150
200 5' Travel Time (usec) 1000

0 3' Amplitude (mV) 100 200
9 CCL -1
0 Amplified Amplitude (mV) 20

5FT VDL 1000