

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-22391-00-00
Spot: NWNENE Sec/Twnshp/Rge: 35-22S-12W
4950 feet from S Section Line, 990 feet from E Section Line
Lease Name: MCCUNE B Well #: 1
County: STAFFORD Total Vertical Depth: 3879 feet

Operator License No.: 32610
Op Name: G T PETROLEUM, INC.
Address: RR 2, BOX 32
STAFFORD, KS 67578

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	3879	2050	WITH 225 SX CMT
SURF	8.625	250		WITH 175 SX CMT

A/26 07

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 01/26/2006 10:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SANDED TO 3527' & 4 SX CMT. PLUG AT 630' WITH 10 SX GEL & 50 SX CMT. PLUG AT 280' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY Witness Type: NONE
Date/Time Plugging Completed: 01/26/2006 12:00 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

ANHYDRITE = 600'. SANDED TO 3527' & 4 SX CMT WITH BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 630' WITH 10 SX GEL - 50 SX CMT. 2ND PLUG AT 280' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3608	3612		


**RECEIVED
FEB 06 2006**

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND.

Plugged through: CSG

KCC WICHITA

District: 01

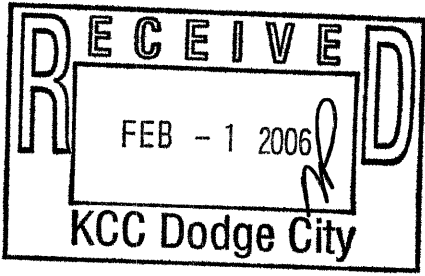

Signed Richard W. Lacey
(TECHNICIAN)

INVOICED
DATE 2-7-06
INV. NO. 2006061071

Form CP-23 *[Signature]*