

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-071-20798-00-00
Spot: SWNWNE Sec/Twnshp/Rge: 14-17S-40W
990 feet from N Section Line, 2250 feet from E Section Line
Lease Name: DOTY Well #: 1
County: GREELEY Total Vertical Depth: 3005 feet

Operator License No.: 32920
Op Name: W. R. WILLIAMS, INC.
Address: PO BOX 15163
AMARILLO, TX 79105

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	3004	0	WITH 650 SX CMT
SURF	8.625	304		WITH 175 SX CMT

#97.66

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 04/06/2006 8:30 AM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: DAVE OLSEN Company: ALLIED CEMENT COMPANY Phone: (620) 793-5861

Proposed Plugging Method: FILLED 4-1/2 CASING WITH CEMENT TO SURFACE. FILL 8-5/8 /4-1/2 ANNULUS WITH CEMENT TO SURFACE.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 04/06/2006 10:30 AM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMP 300# HULLS & 40 SX CMT. PUMP 120 SX CMT TO SURFACE. PRESSURED TO 400# & HELD. HOOK UP TO 4 1/2" X 8 5/8" ANNULUS AND PUMP 20 SX CMT. PRESSURED TO 400# & HELD.

Perfs:

Top	Bot	Thru	Comments
2979	2983		
2972	2974		
2954	2966		


INVOICE
DATE 4-25-06
WT. NO. 2006061532

RECEIVED
APR 24 2006
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

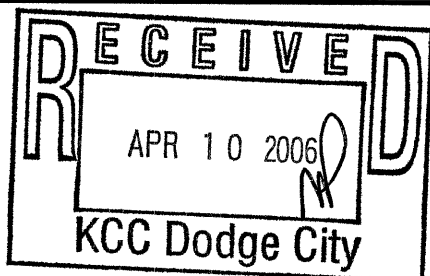

Signed

[Signature]

(TECHNICIAN)

[Signature]

Plot