

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-075-20774-00-00
Spot: NE Sec/Twnshp/Rge: 10-23S-40W
1250 feet from N Section Line, 1390 feet from E Section Line
Lease Name: BUCK A Well #: 1
County: HAMILTON Total Vertical Depth: 2640 feet

Operator License No.: 4894
Op Name: HORSESHOE OPERATING, INC.
Address: 110 W. LOUISIANA, SUITE 200
MIDLAND, TX 79701

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	2649	0	WITH 625 SX CMT
SURF	8.625	224		WITH 175 SX CMT

85.80

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 04/06/2006 12:30 PM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: DAVE OLSON Company: HORSESHOE OPERATING Phone: (432) 683-1448

Proposed Plugging Method: PUMP 30 SX CMT & 200# HULLS. PUMP 145 SX CMT TO SURFACE. CHECK BACKSIDE.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 04/06/2006 2:30 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMP 200# HULLS & 30 SX CMT. PUMP 145 SX CMT DOWN 4 1/2" CASING TO SURFACE. PRESSURED TO 500# & HELD. PUMP 35 SX CMT DOWN 4 1/2" X 8 5/5" ANNULUS. PRESSURED TO 500# & HELD.

Perfs:


Top	Bot	Thru	Comments
2603	2612		

INVOICED
DATE 4-24-06
INV. NO. 2006061530
RECEIVED
APR 24 2006
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

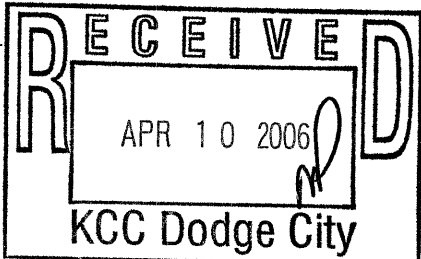

Signed

Ken Jehlik

(TECHNICIAN)

Form 04/05

POT