

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-019-21951-00-00
Spot: SWNENE Sec/Twnshp/Rge: 34-34S-11E
4000 feet from S Section Line, 900 feet from E Section Line
Lease Name: DENMAN Well #: 3
County: CHAUTAUQUA Total Vertical Depth: 1300 feet

Operator License No.: 5723

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	1300	0	

Op Name: DENMAN, JOHN M. OIL CO., INC.

Address: PO BOX 36 202 S. CHATAUQUA
SEDAN, KS 67361

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 03/08/2006 8:00 AM

Plug Co. License No.: 32884

Plug Co. Name: ELMORE'S, INC.

Proposal Rcvd. from: JOHN ELMORE

Company: ELMORES, INC.

Phone: (620) 249-2519

Proposed
Plugging
Method: TO PUMP CEMENT & GEL FOR BOTTOM & TOP PLUGS.

Plugging Proposal Received By: RON ROWE

WitnessType: PARTIAL

Date/Time Plugging Completed: 03/08/2006 5:00 PM

KCC Agent: RON ROWE

Actual Plugging Report:

RAN 1" HYDRIL INSIDE 6" CASING TO 1300' & PUMPED 20 SACKS CEMENT FOR BOTTOM PLUG AND GEL SPACER.. PULLED 1" OUT & PERFORATED 6" CASING @ 350'. RAN 1" TO 350' & PUMPED/CIRCULATED CEMENT TO SURFACE, INSIDE & OUTSIDE 6". PULLED 1" & TOPPED-OFF WELL. USED TOTAL OF 140 SACKS CEMENT & 4 SACKS GEL.

Perfs:

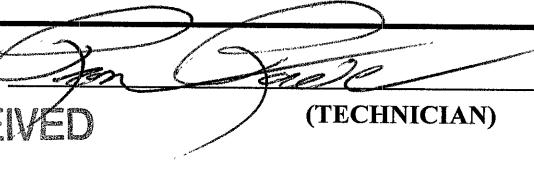
RECEIVED
KCC DISTRICT #3
APR 19 2006 RR
CHANUTE, KS

INVOICED
4-26-06
DATE 4-26-06
REC. NO. 2006061545

Remarks: PLUGGED OLD OIL WELL.

Plugged through: CSG

District: 03

Signed 

(TECHNICIAN)

RECEIVED

APR 26 2006

KCC WICHITA