



DUAL INDUCTION LOG

Company	MAI OIL OPERATIONS, INC.	Company	MAI OIL OPERATIONS, INC.
Well	MORGENSTERN-HERRES UNIT #1	Well	MORGENSTERN-HERRES UNIT #1
Field	McCAULEY	Field	McCAULEY
County	BARTON	County	BARTON
State	KANSAS	State	KANSAS
Location:	AP1 # : 15-009-26186-00-00	Other Services	CDL/CNL MEL
Permanent Datum	438' FSL & 107' FWL	Elevation	
Log Measured From	GROUND LEVEL	Elevation	1867'
Drilling Measured From	KELLY BUSHING 8' A.G.L. KELLY BUSHING	Elevation	K.B. 1875' D.F. 1873' G.L. 1867'
Date	09/24/17		
Run Number	ONE		
Depth Driller	3435		
Depth Logger	3435		
Bottom Logged Interval	3433		
Top Log Interval	00		
Casing Driller	8 5/8" @ 453		
Casing Logger	453		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 8000 PPM	
Density / Viscosity	9.2/53		
pH / Fluid Loss	10.5/10.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.1@78		
Rmt @ Meas. Temp	.83@78		
Rmc @ Meas. Temp	1.32@78		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.77@111		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	111F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	JIM MUSGROVE		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS
1 EAST OF HOISINGTON,
1/4 NORTH, EAST INTO.

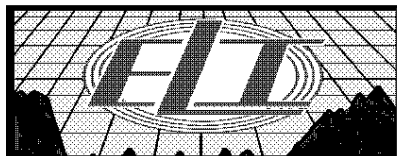

MAIN PASS




Database File: 1824ddn.db
Dataset Pathname: pass3.1
Presentation Format: _dil2
Dataset Creation: Sun Sep 24 17:34:20 2017 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:600



0	Gamma Ray (GAPI)	150
-100	SP (mV)	100



0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50



1000	CILD (mmho/m)	0
------	---------------	---


50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

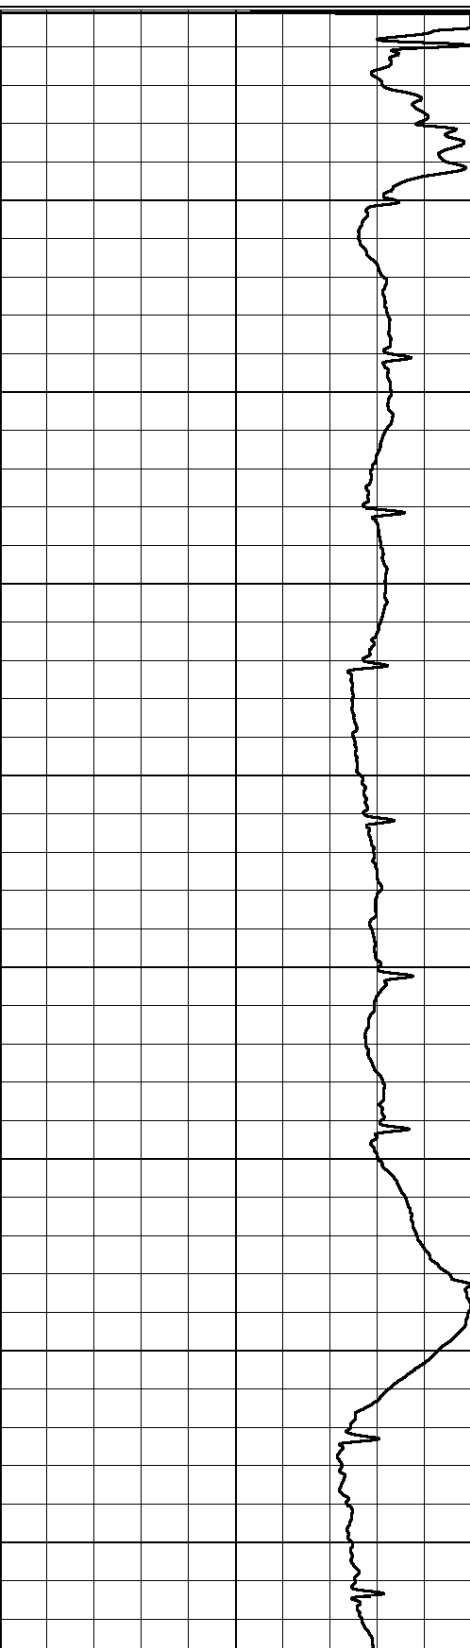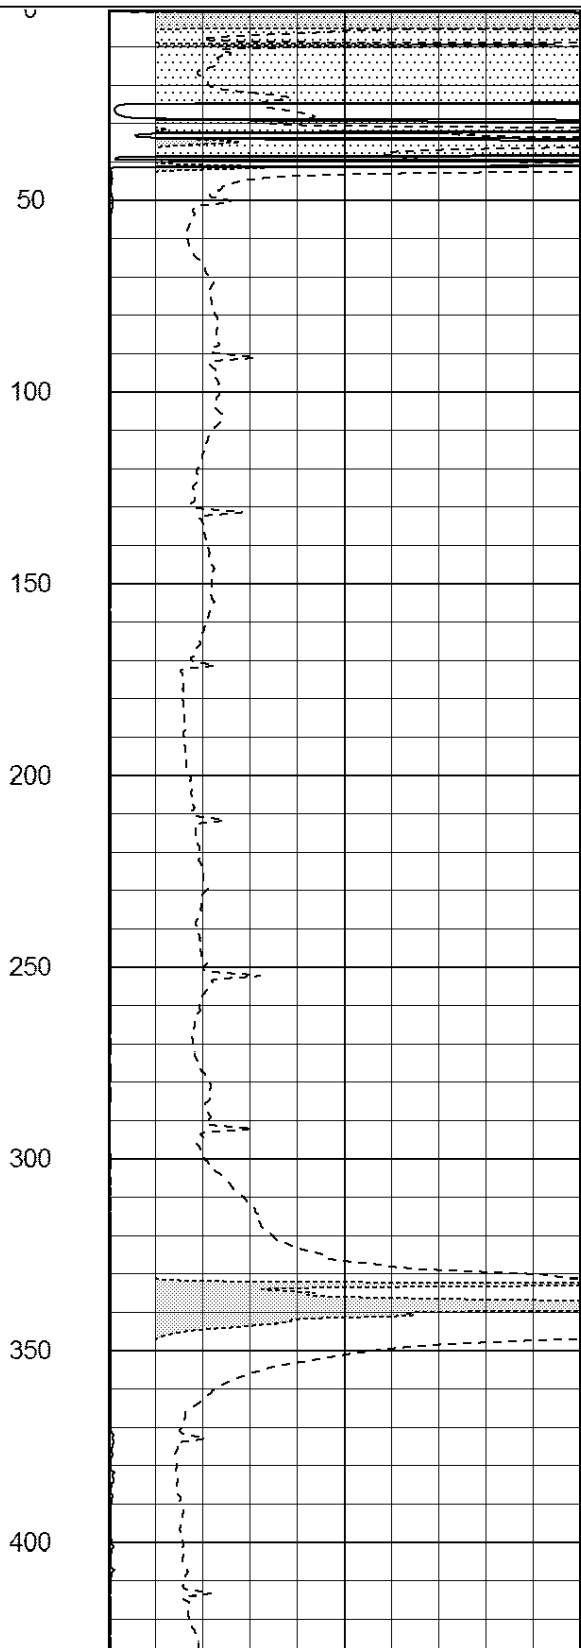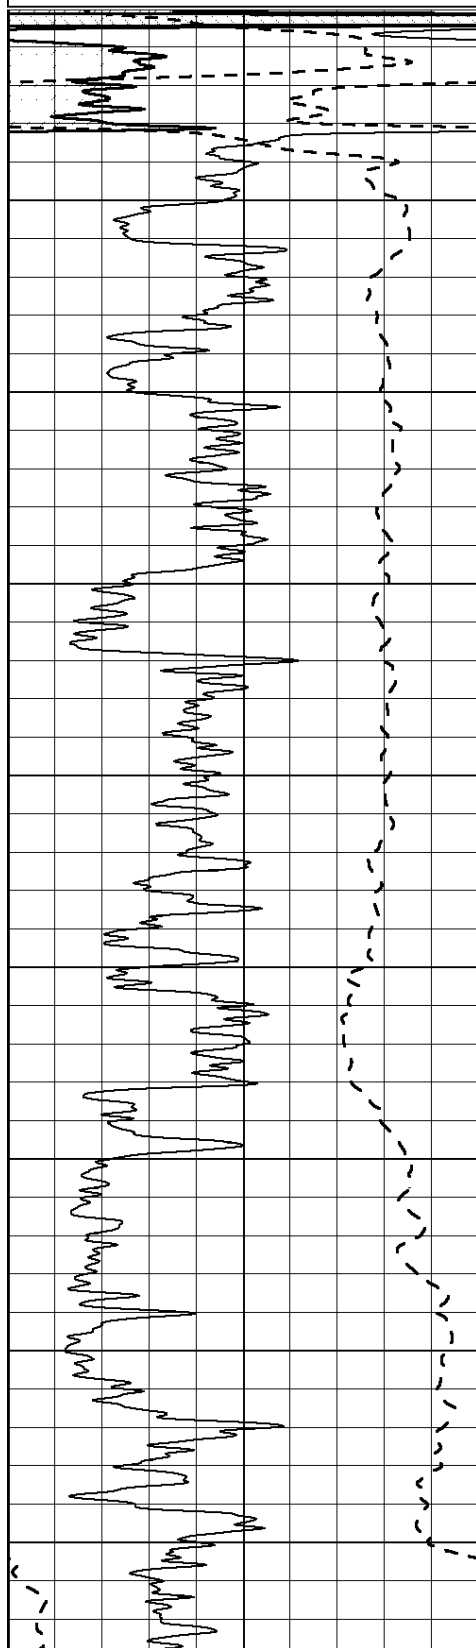

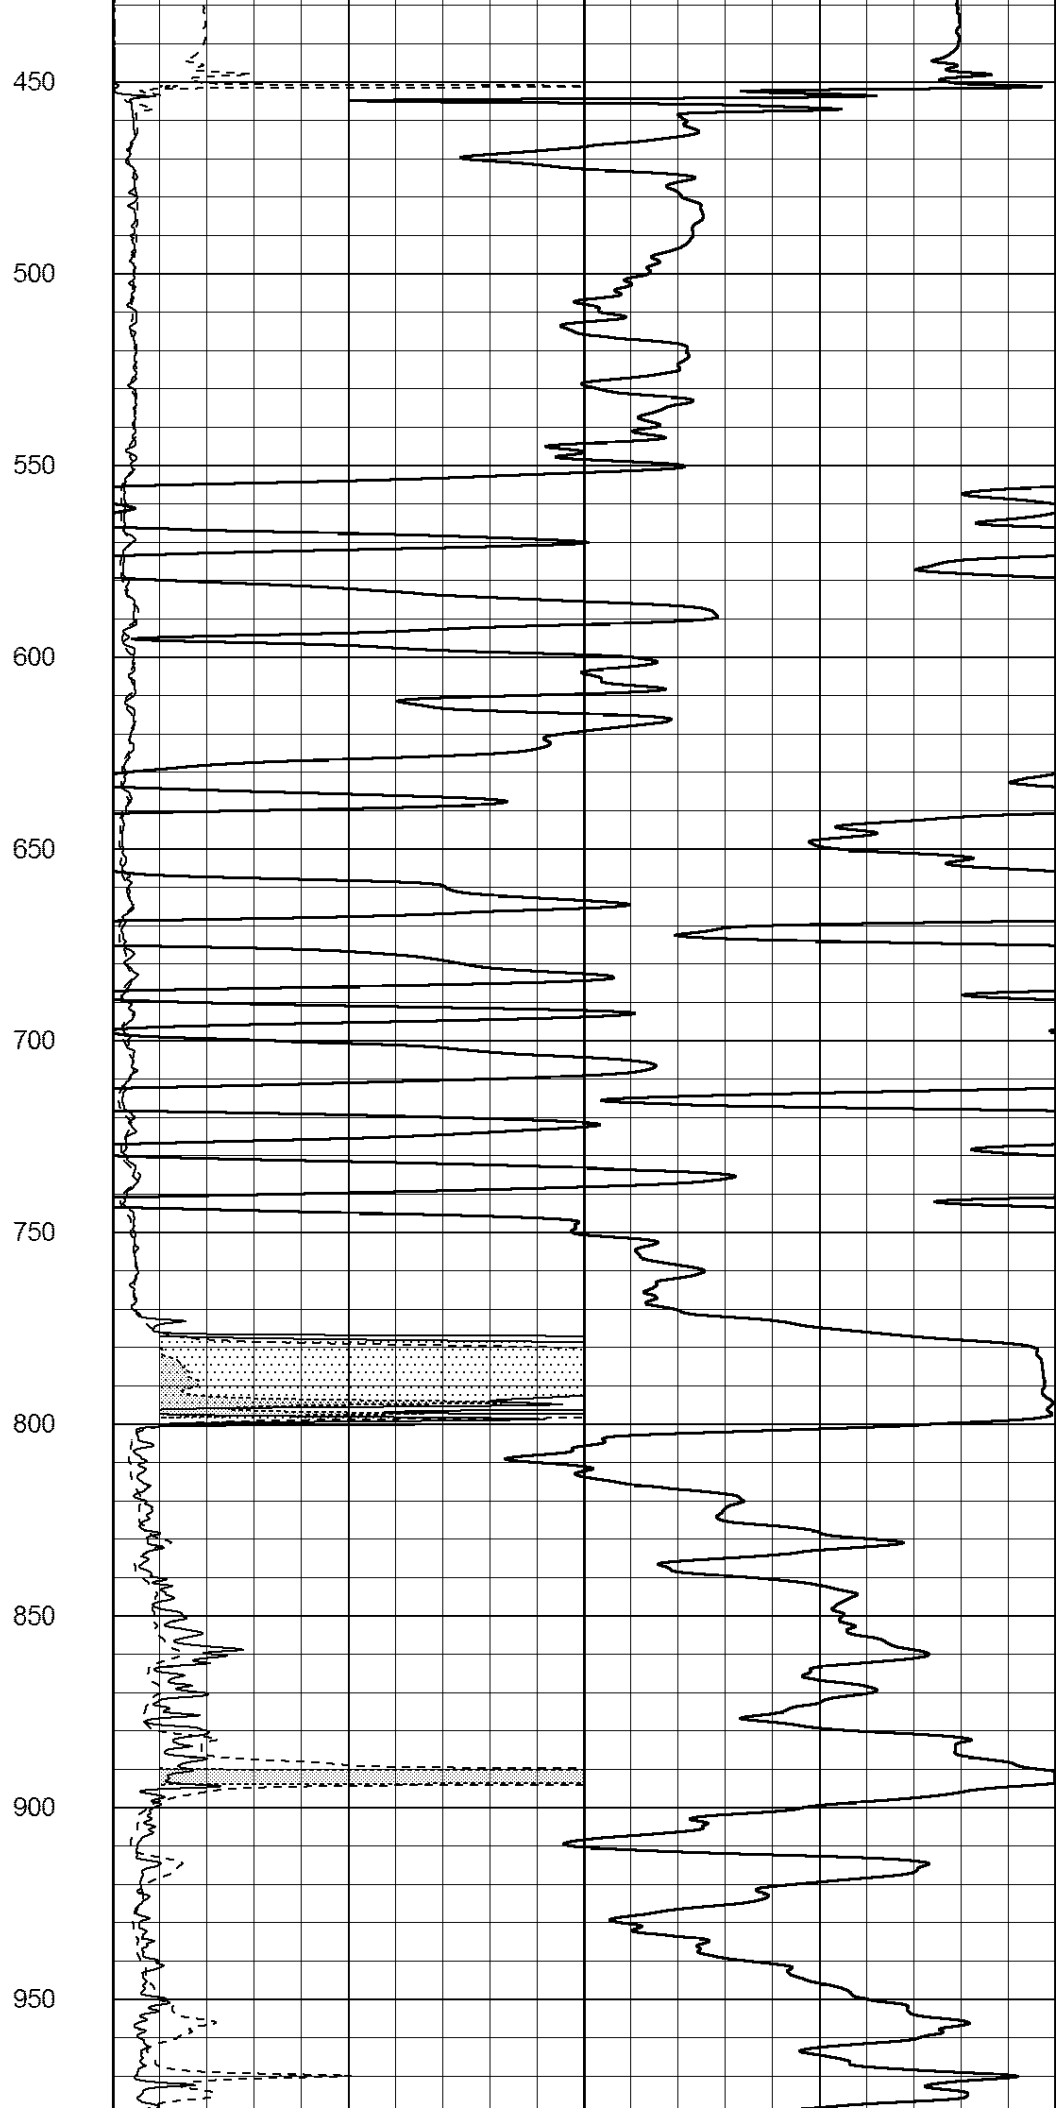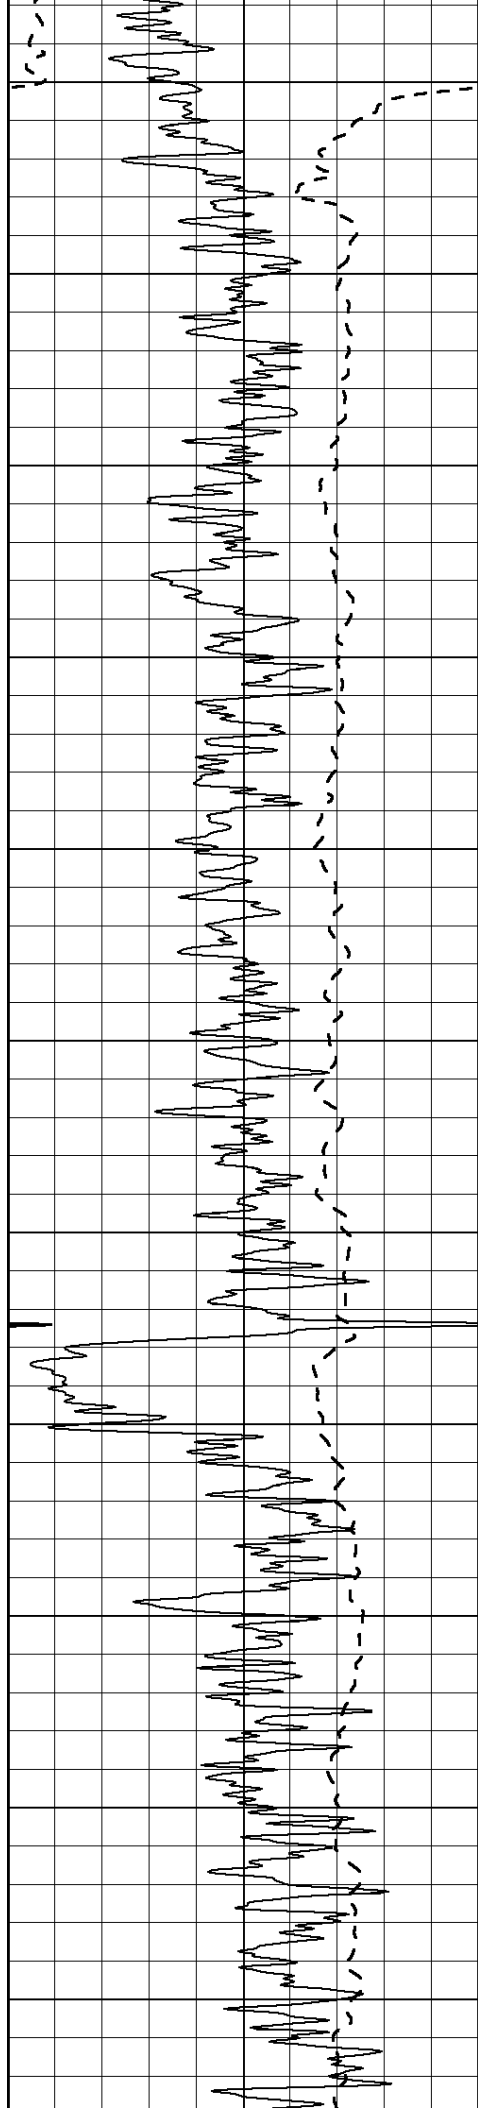

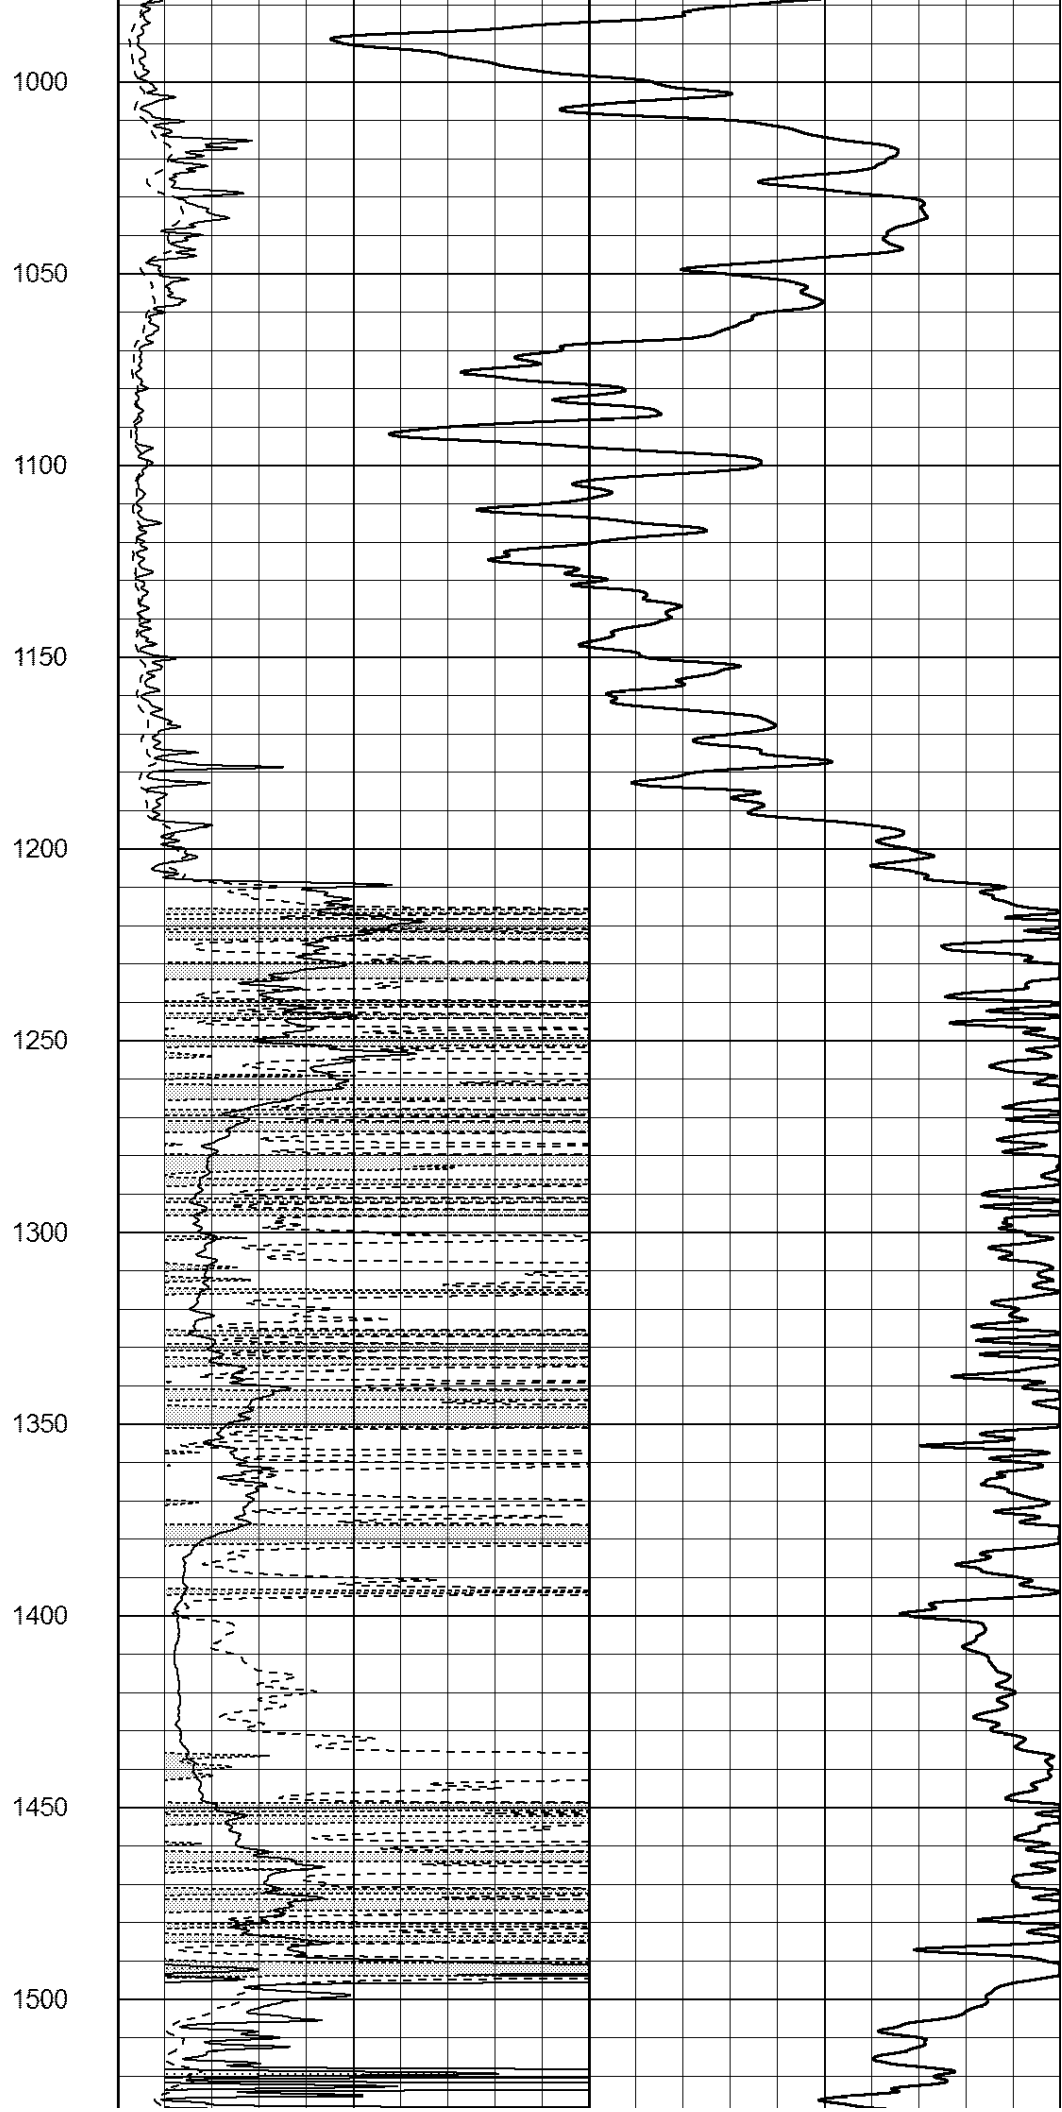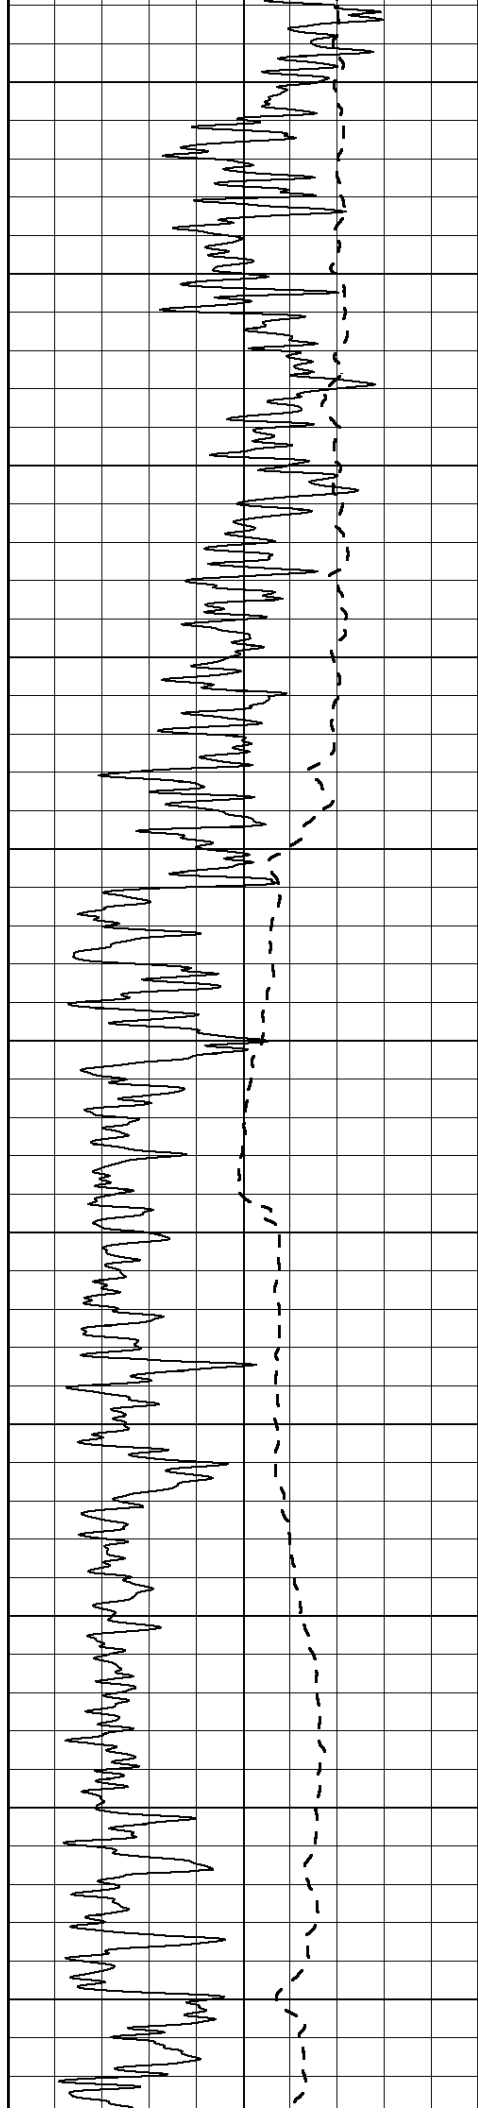

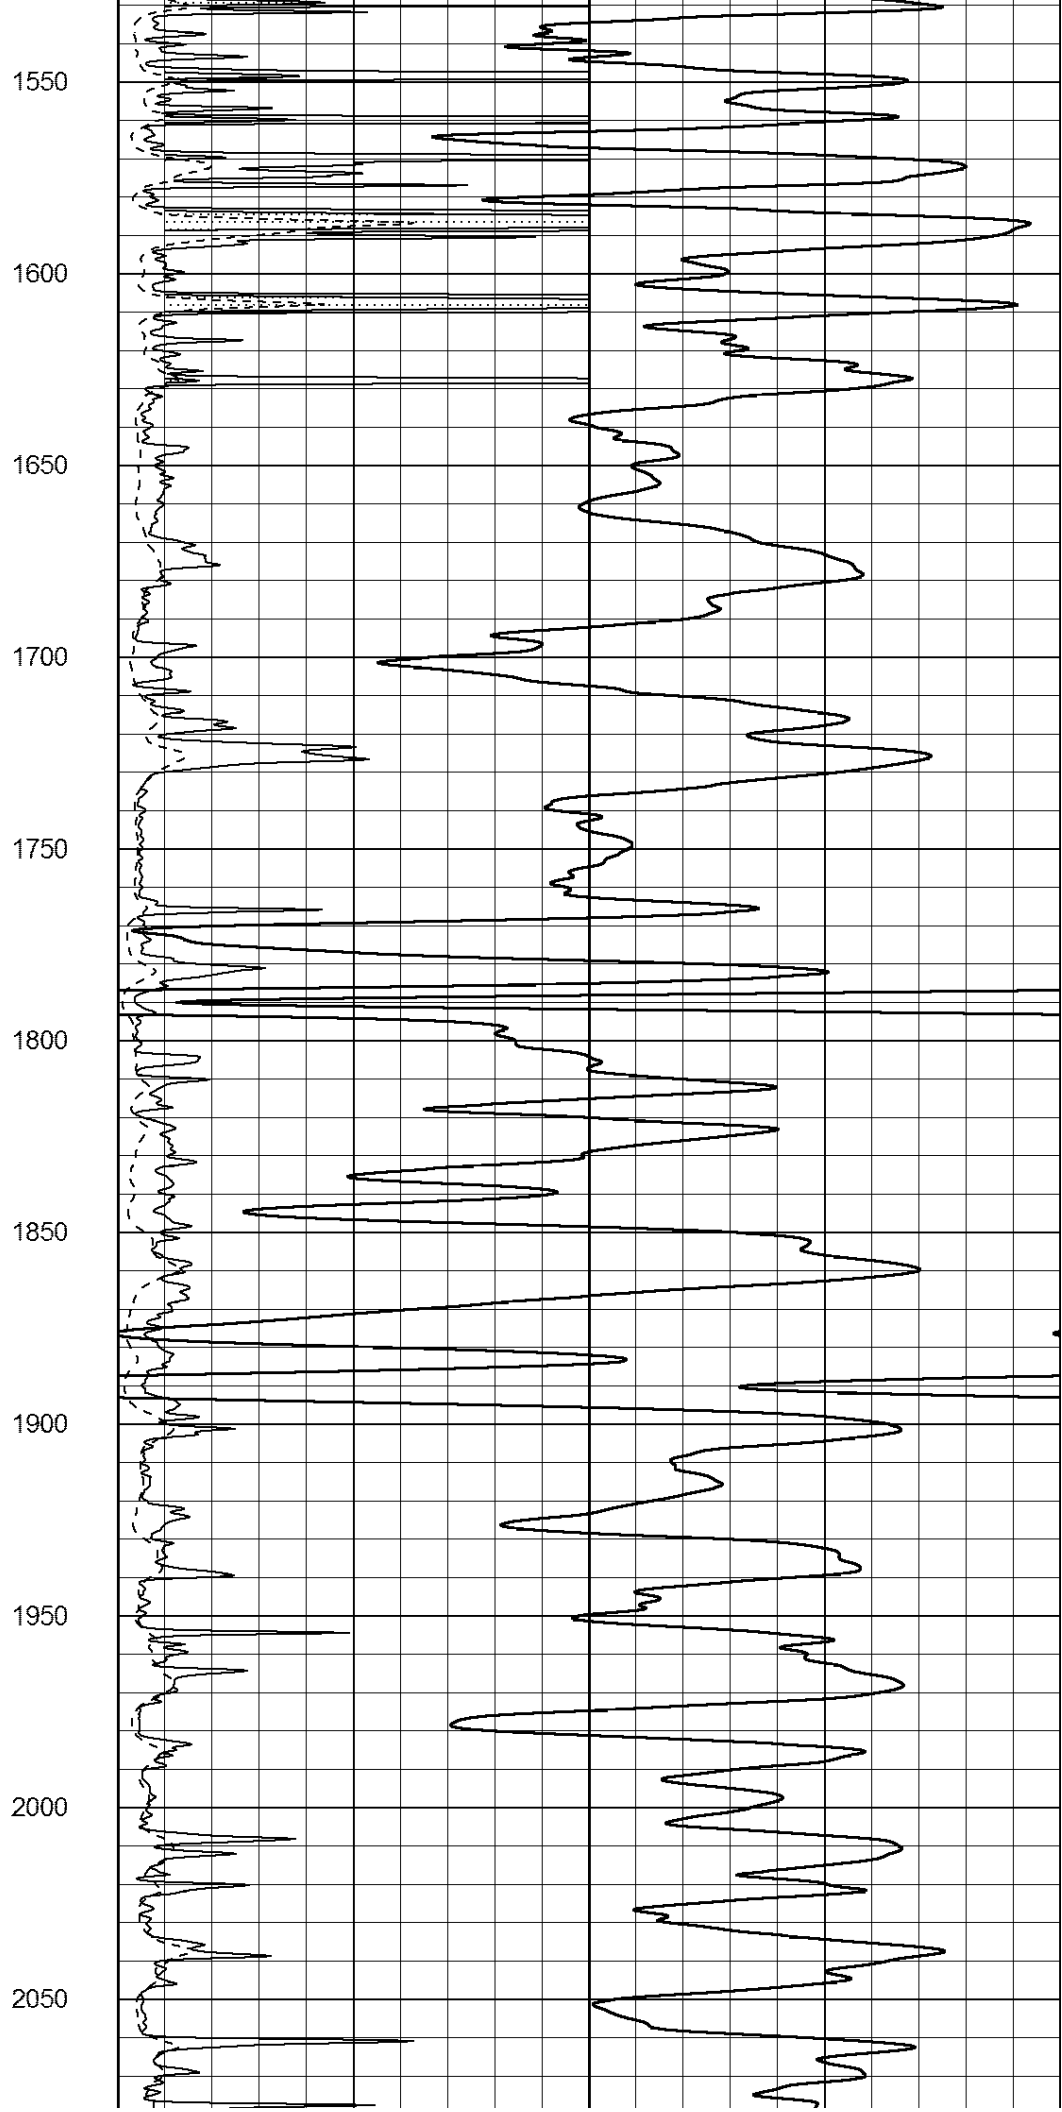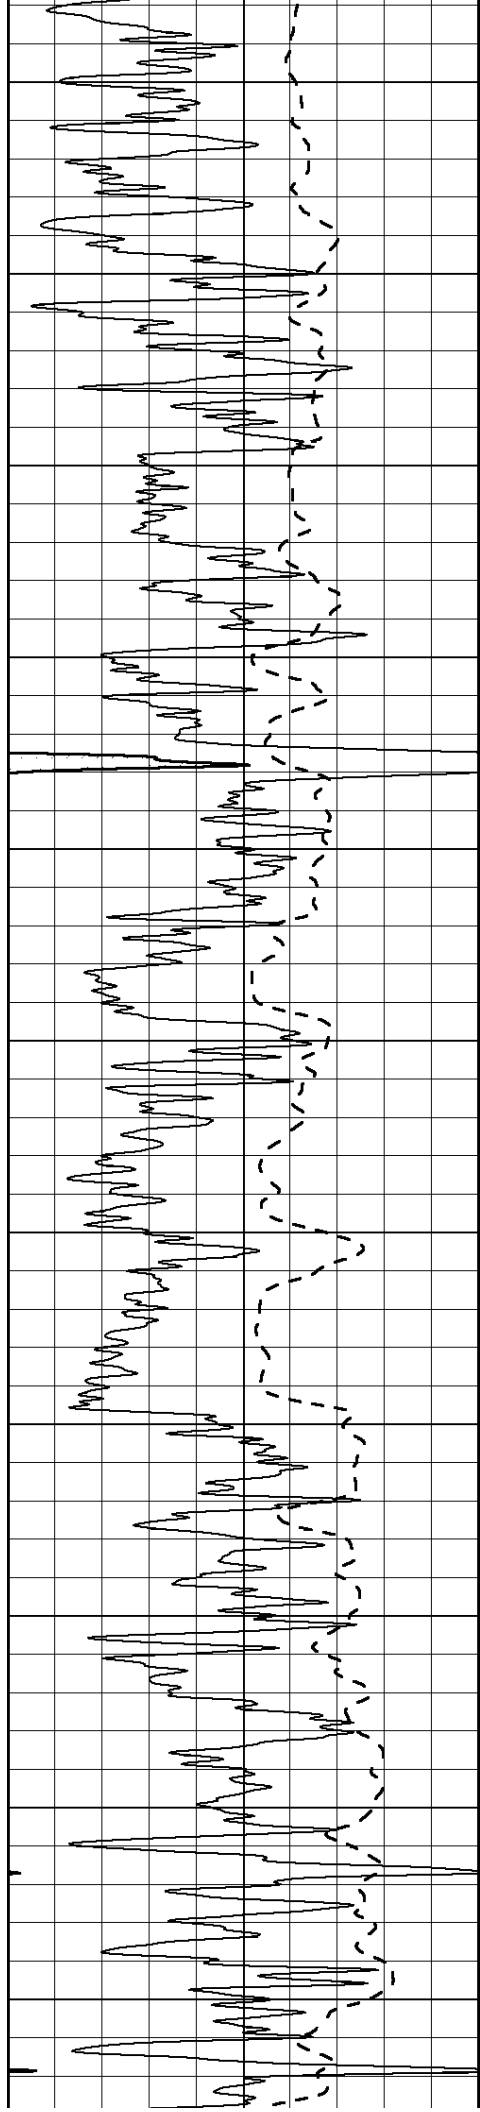

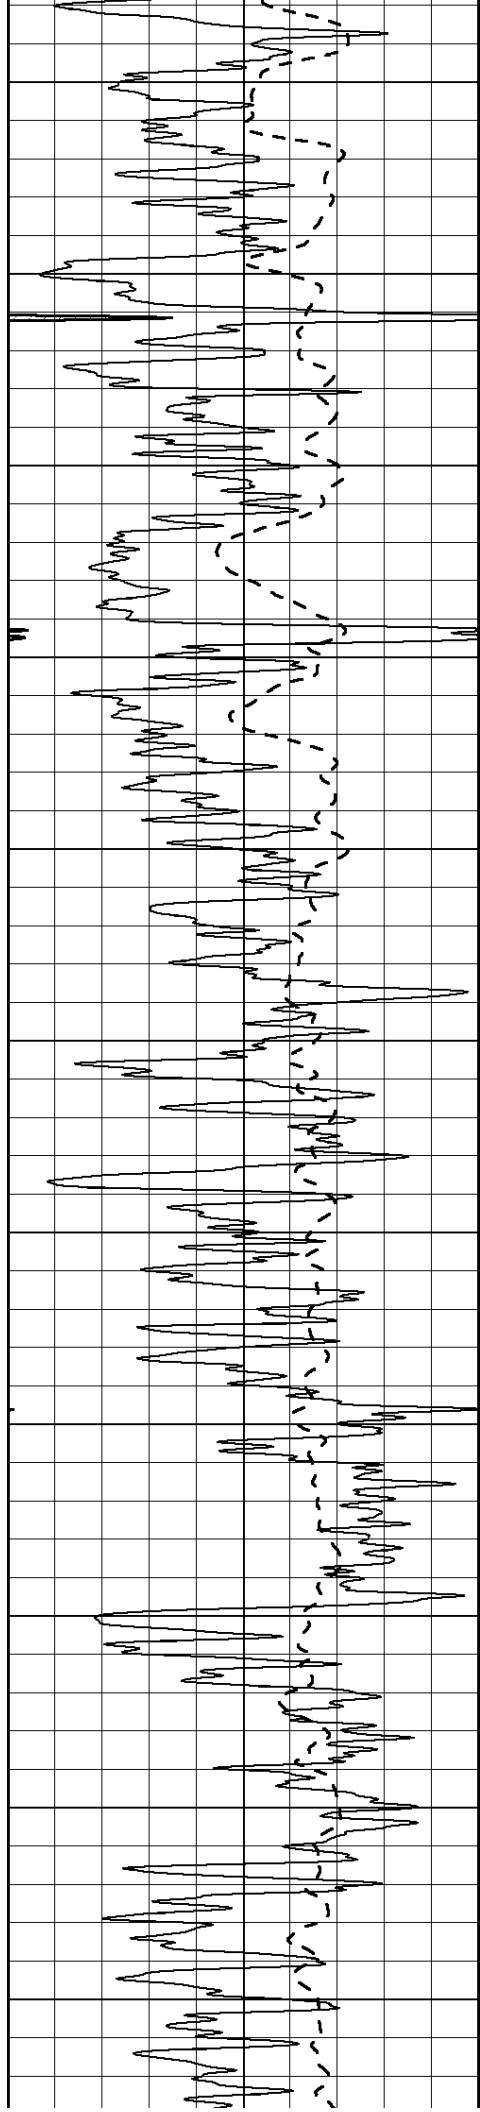

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

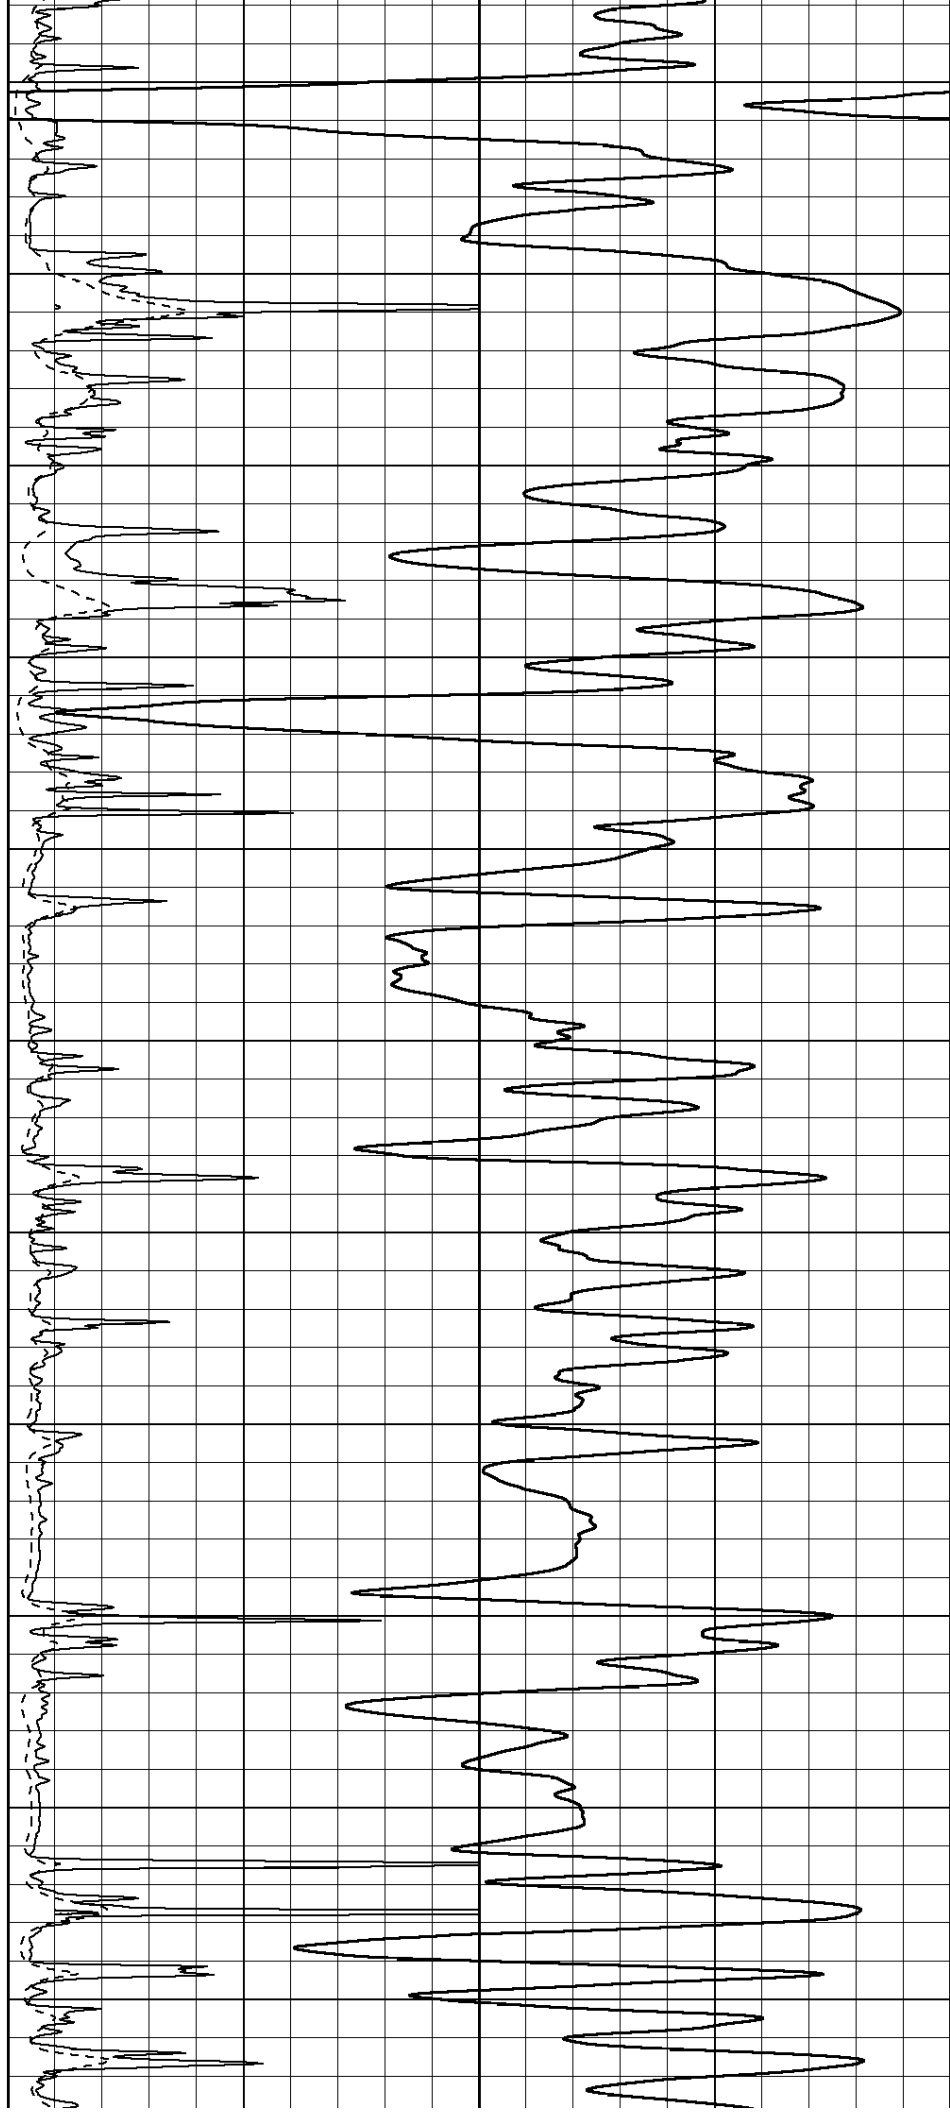

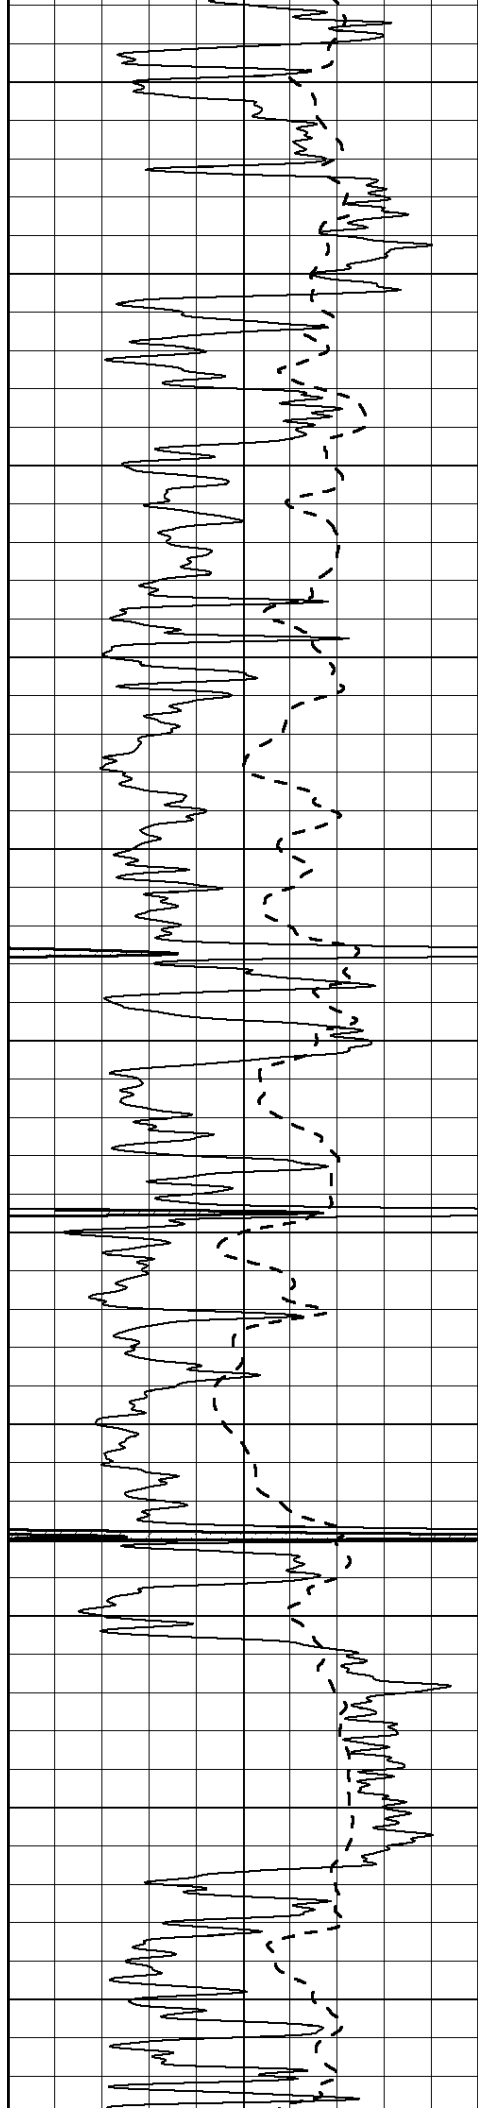

2650

2700

2750

2800

2850

2900



2950



3000


3050

3100

3150

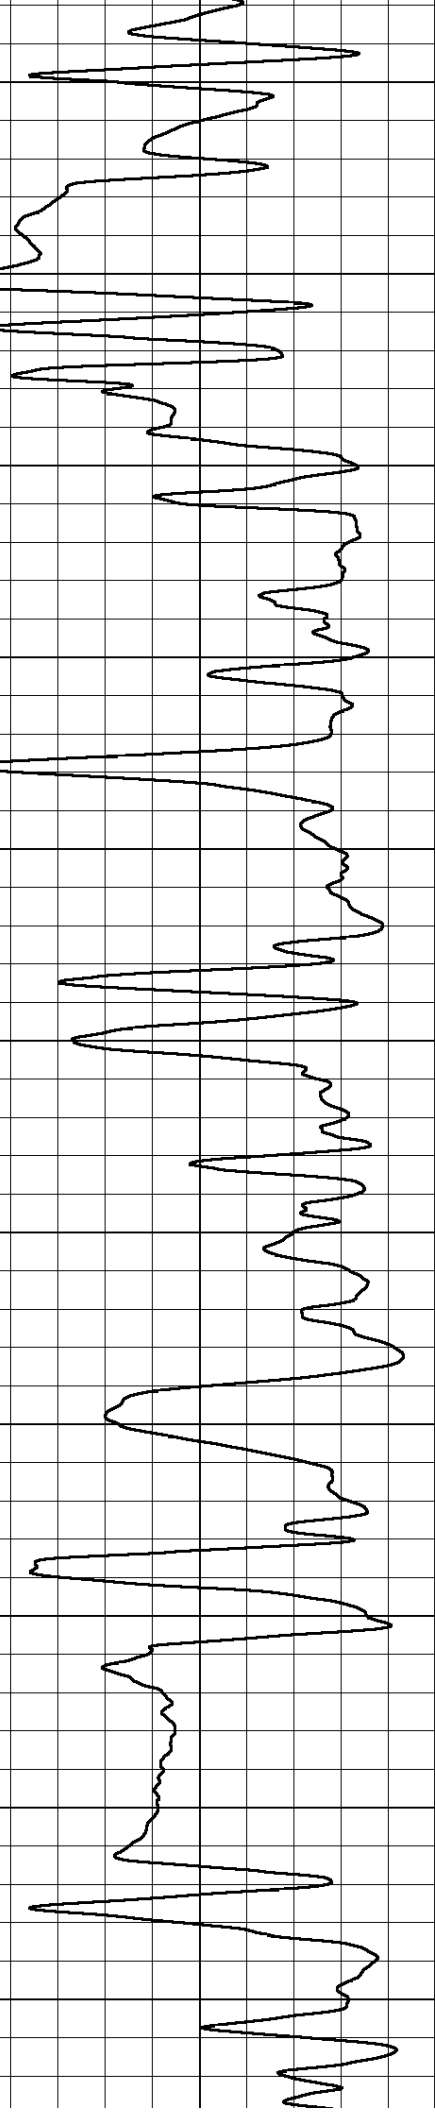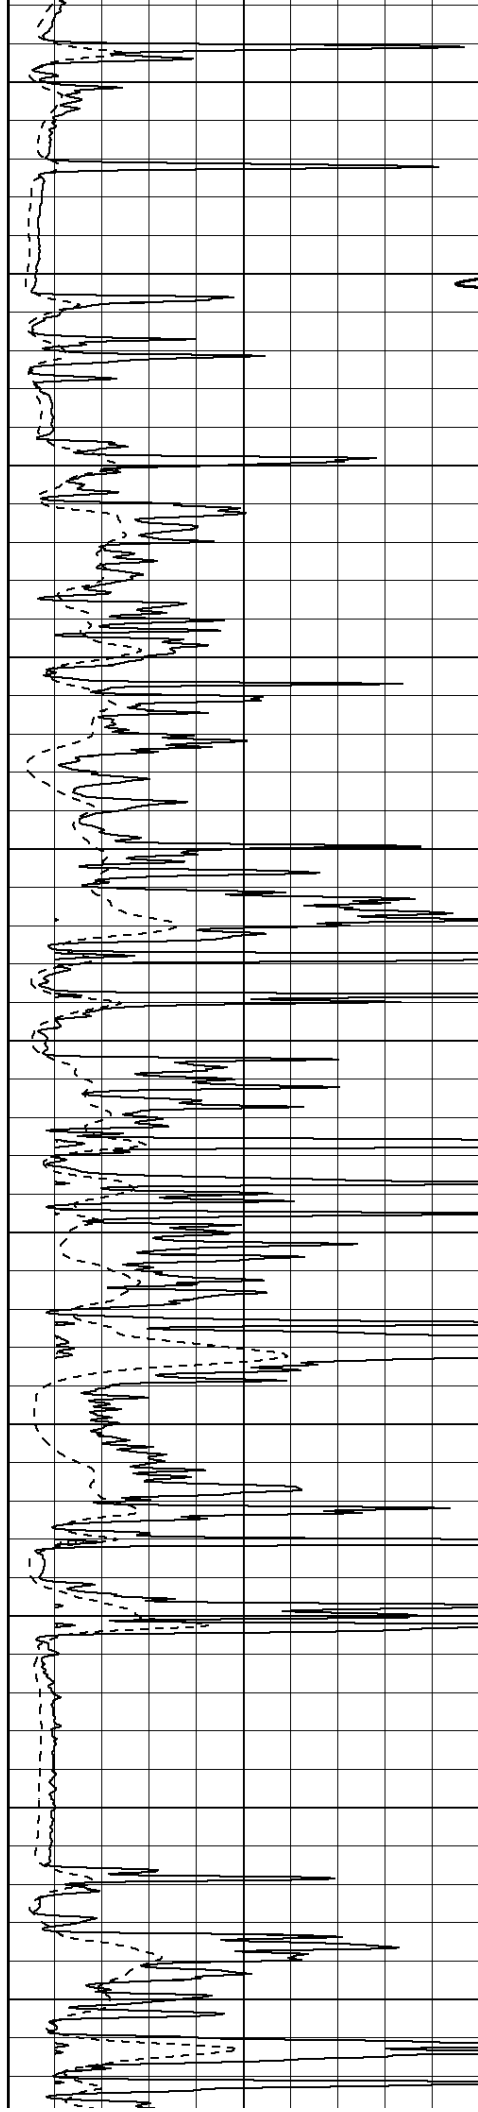


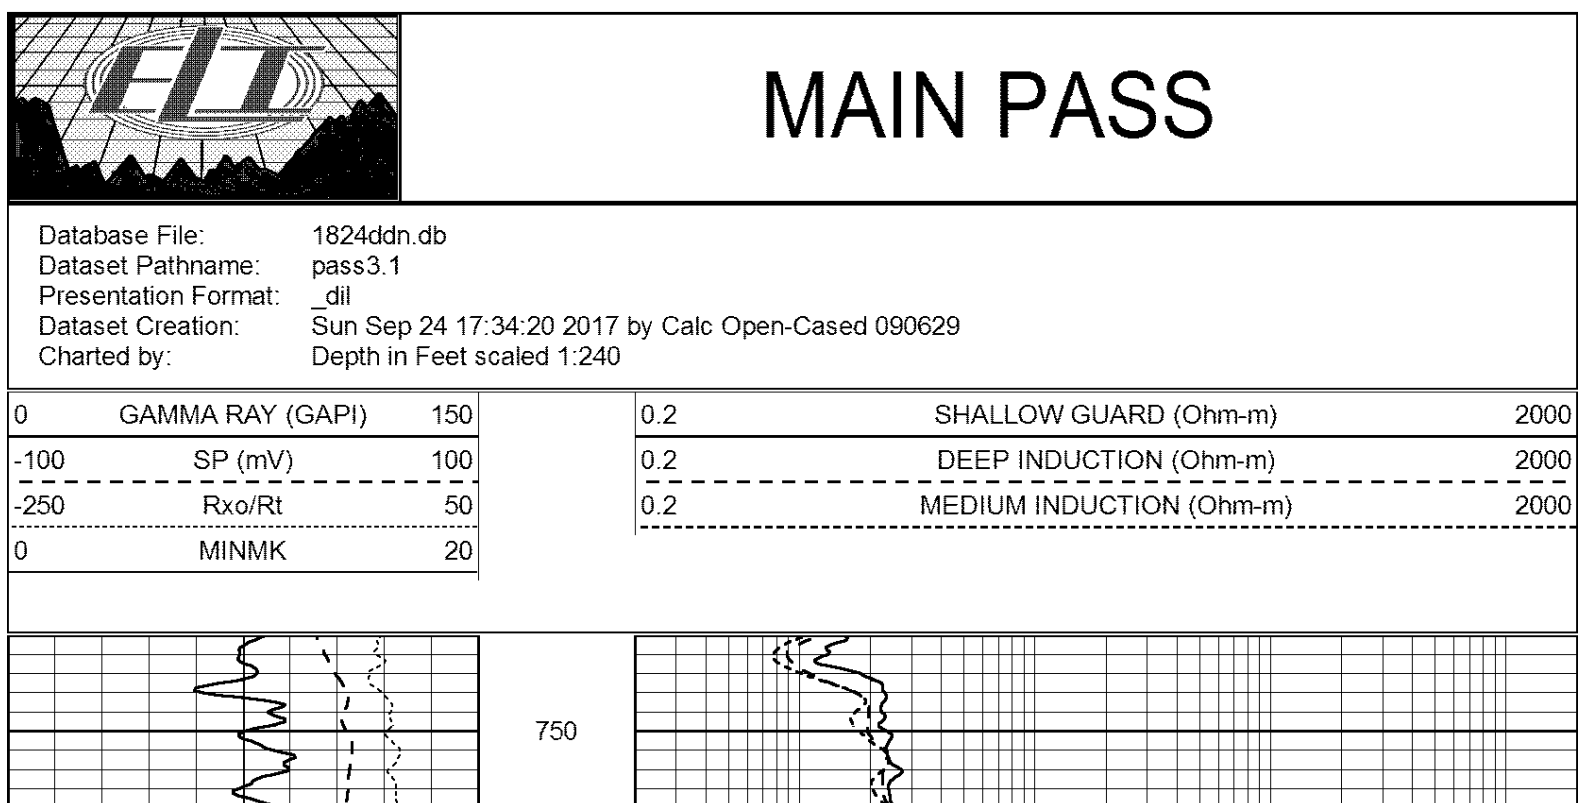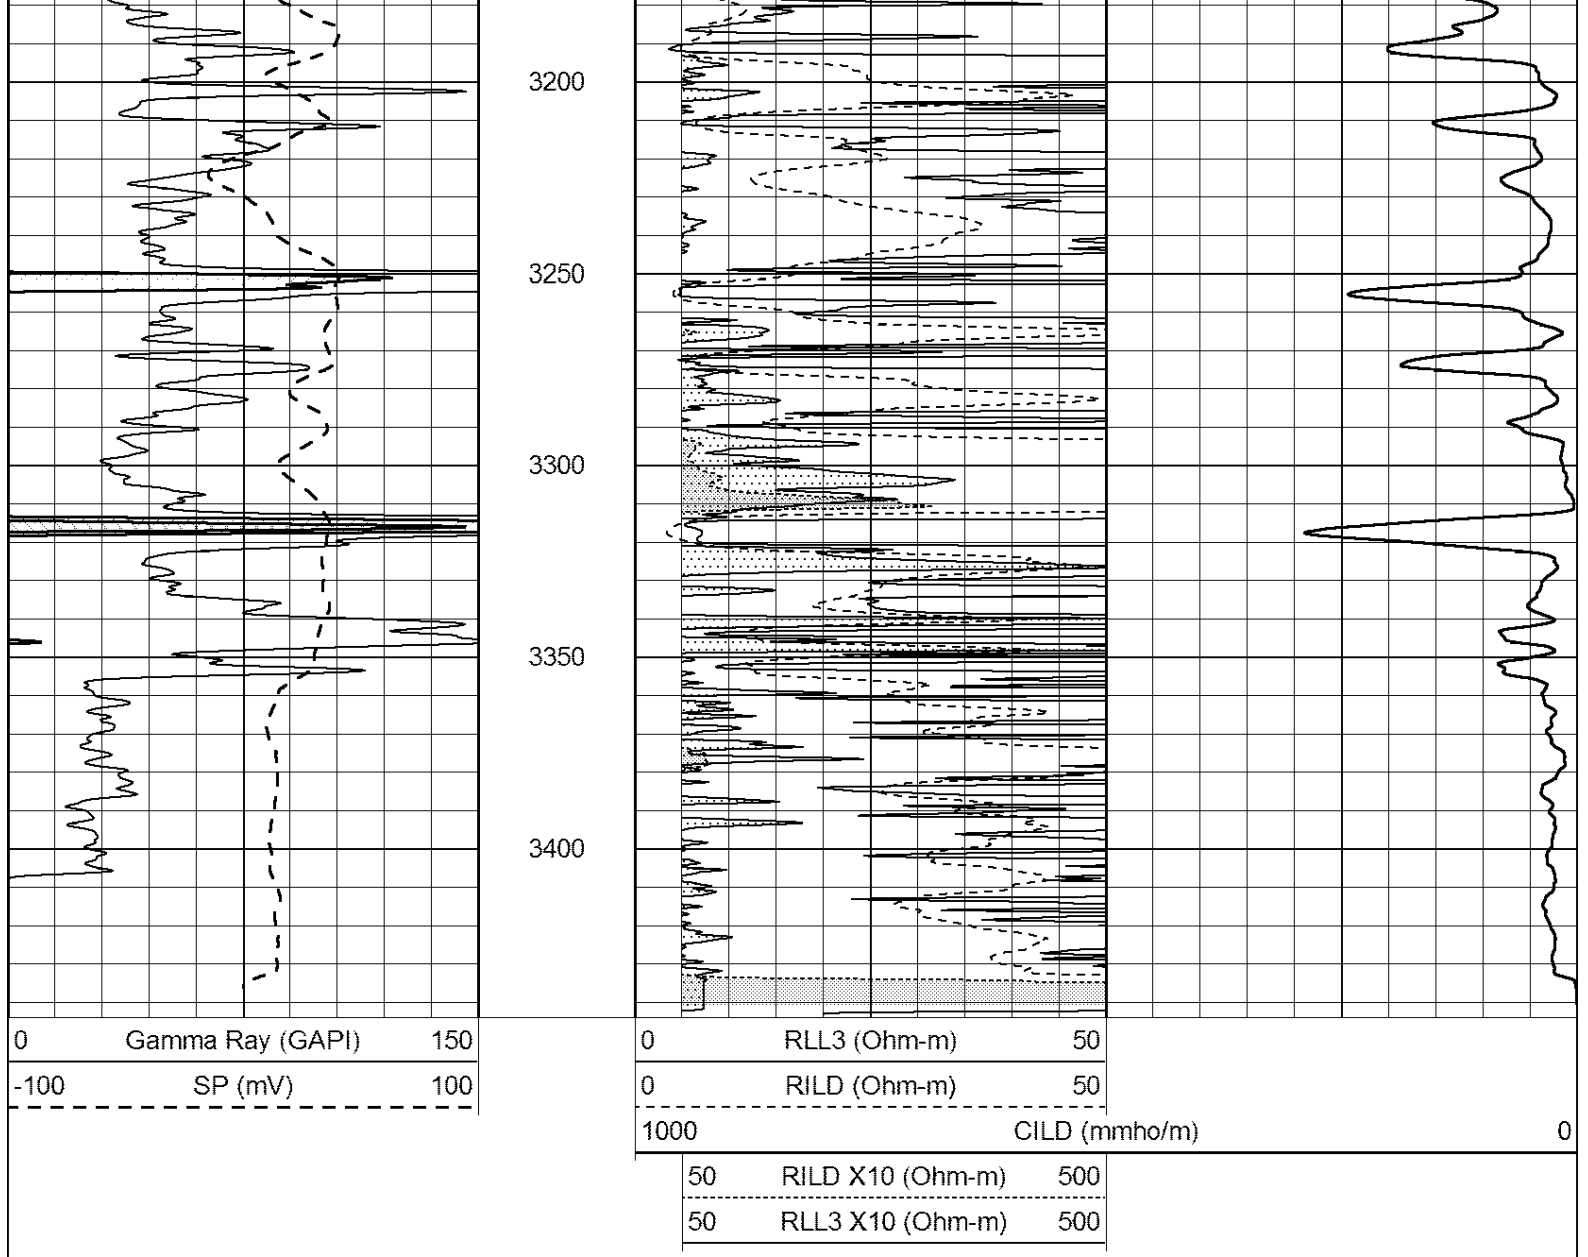

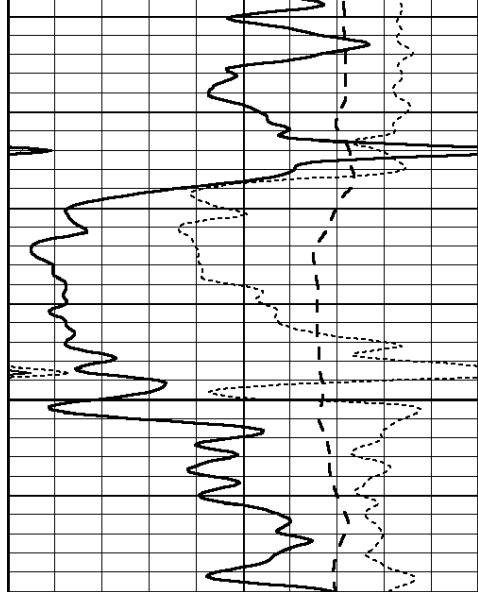


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

800

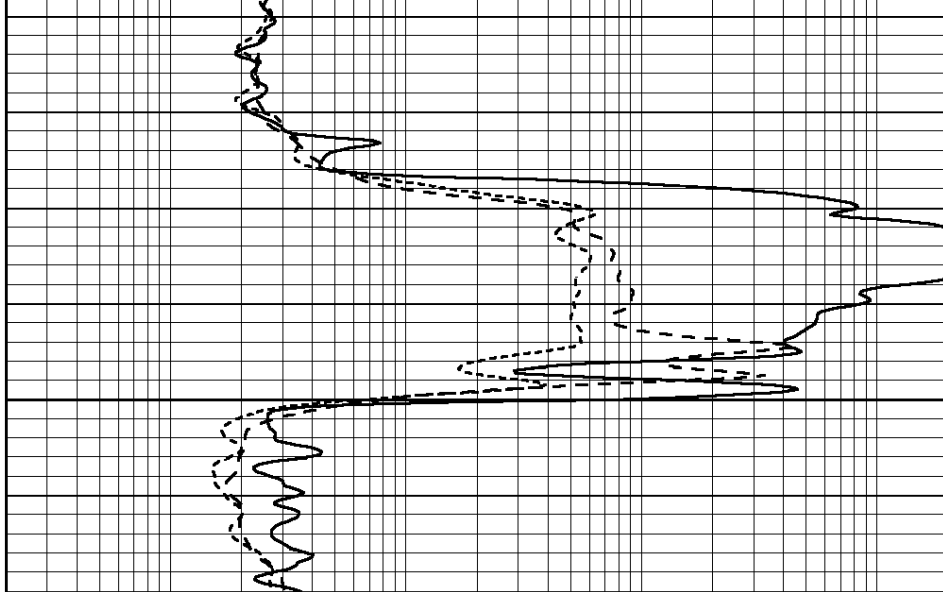

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

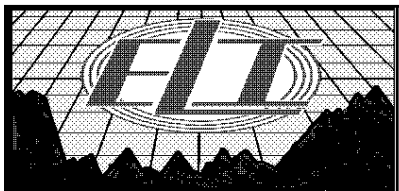


MAIN PASS

Database File: 1824ddn.db
 Dataset Pathname: pass3.1
 Presentation Format: _dil
 Dataset Creation: Sun Sep 24 17:34:20 2017 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

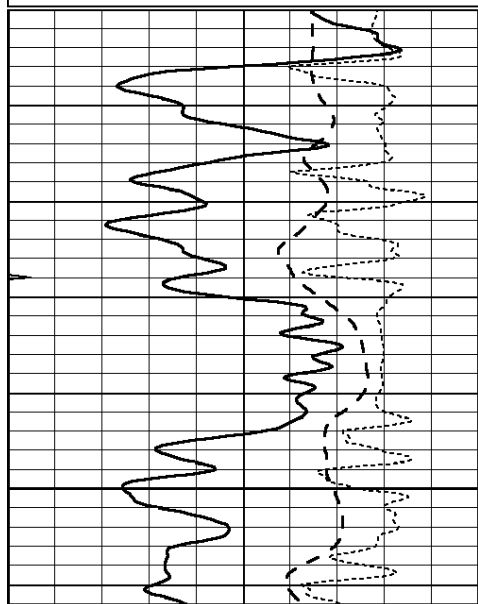

2700

2750

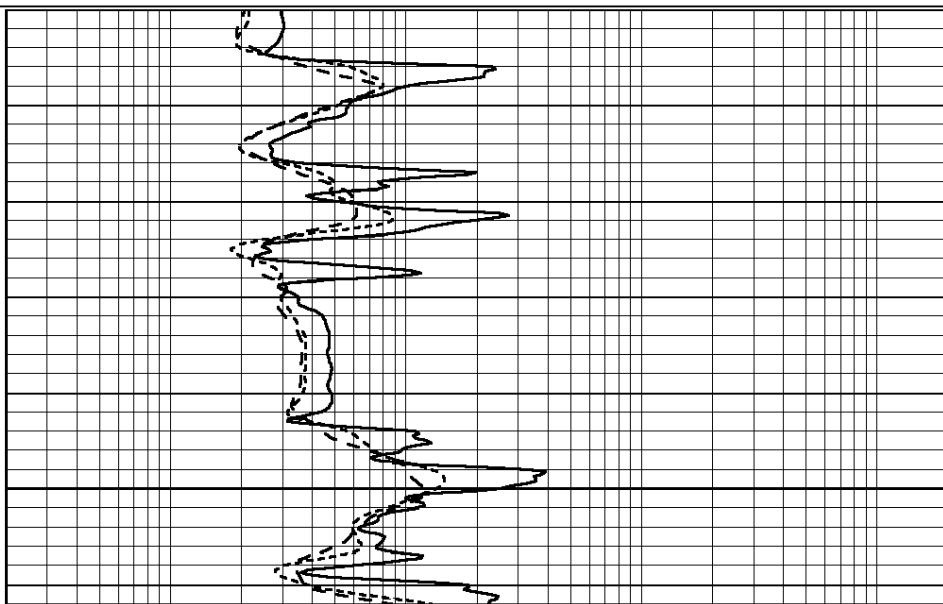

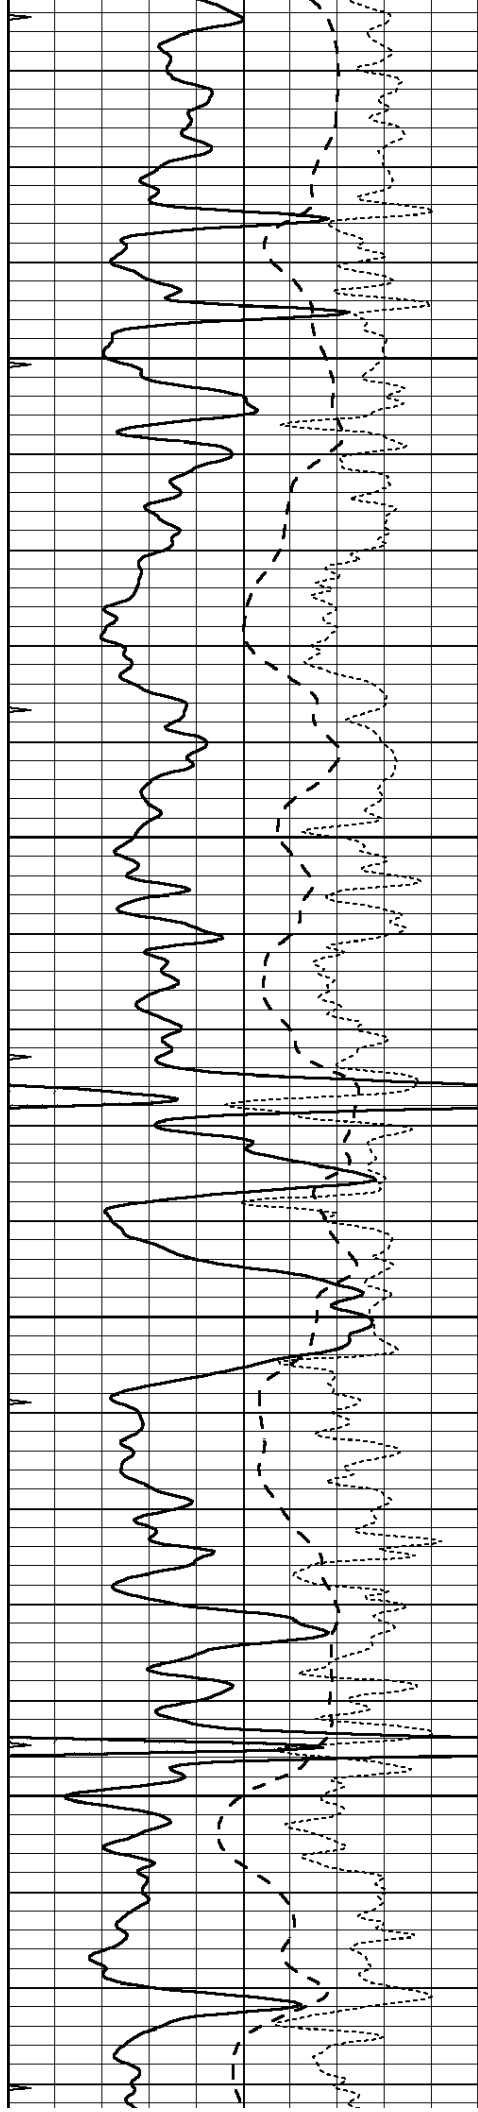



2800

2850

2900

2950

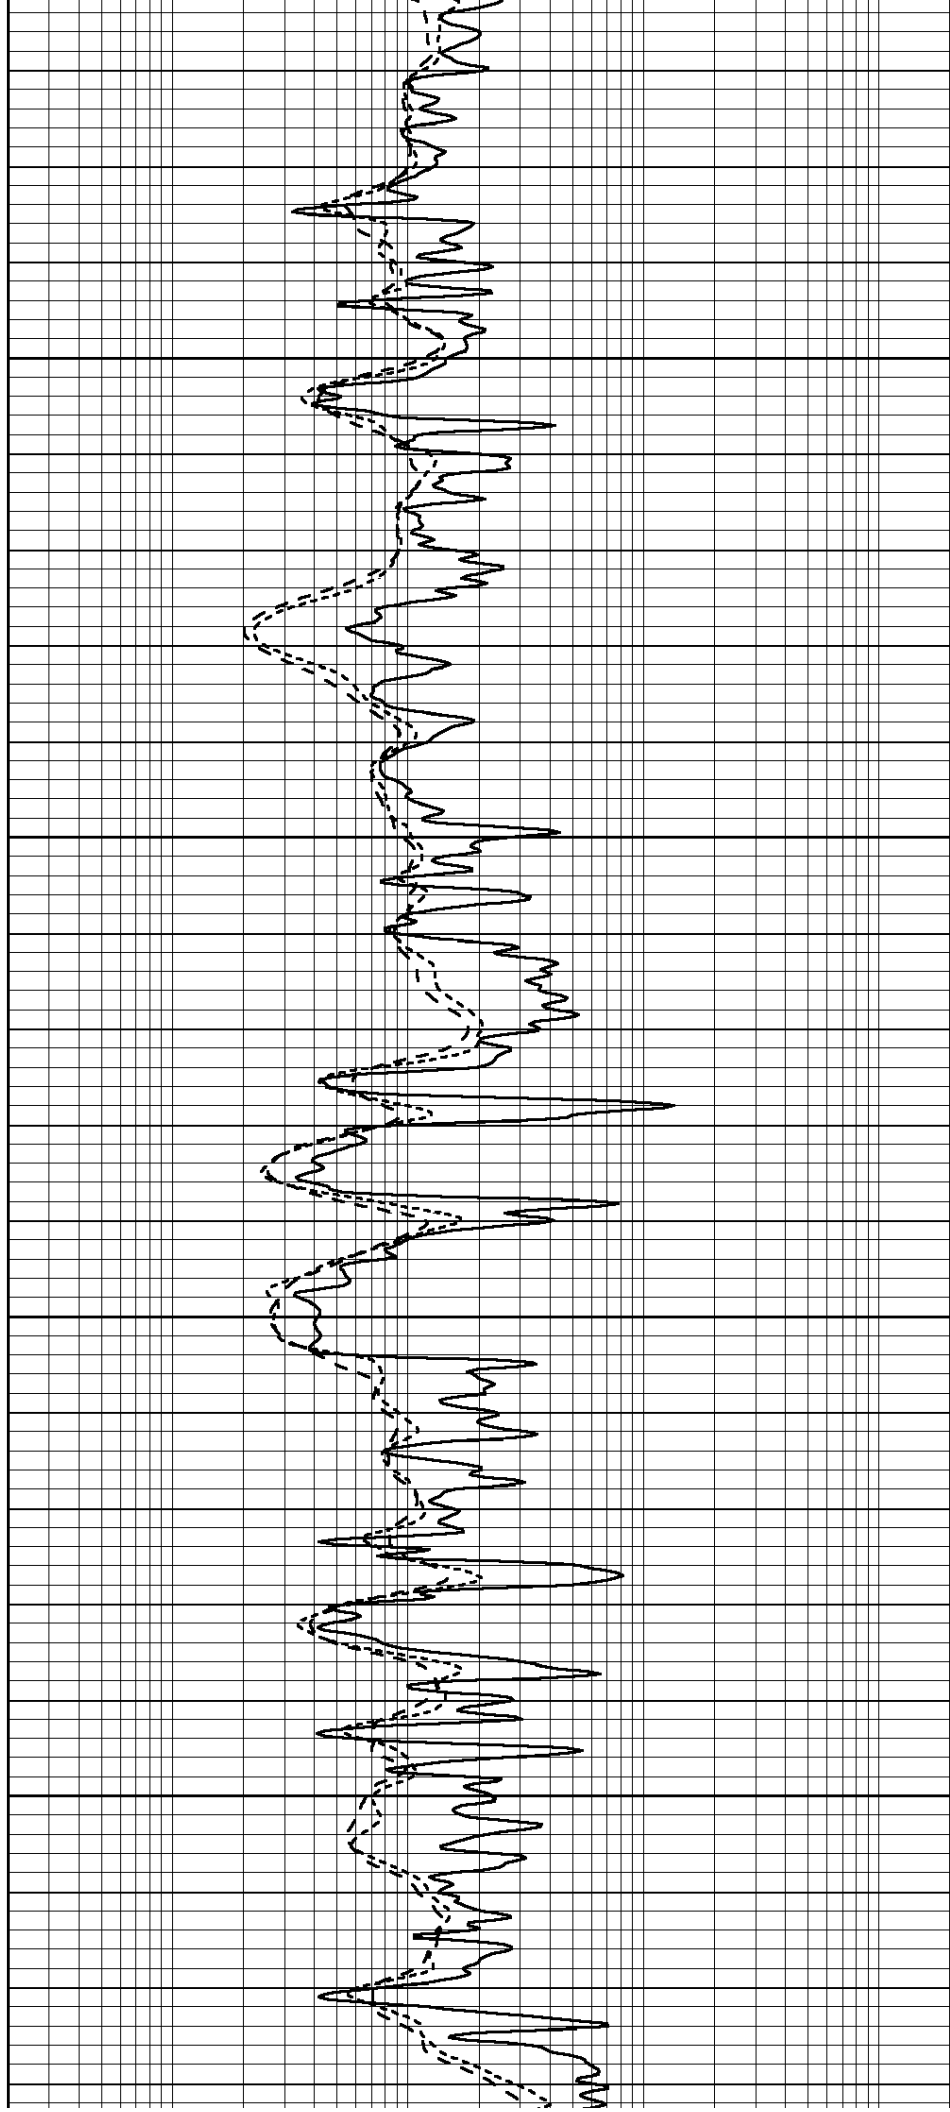

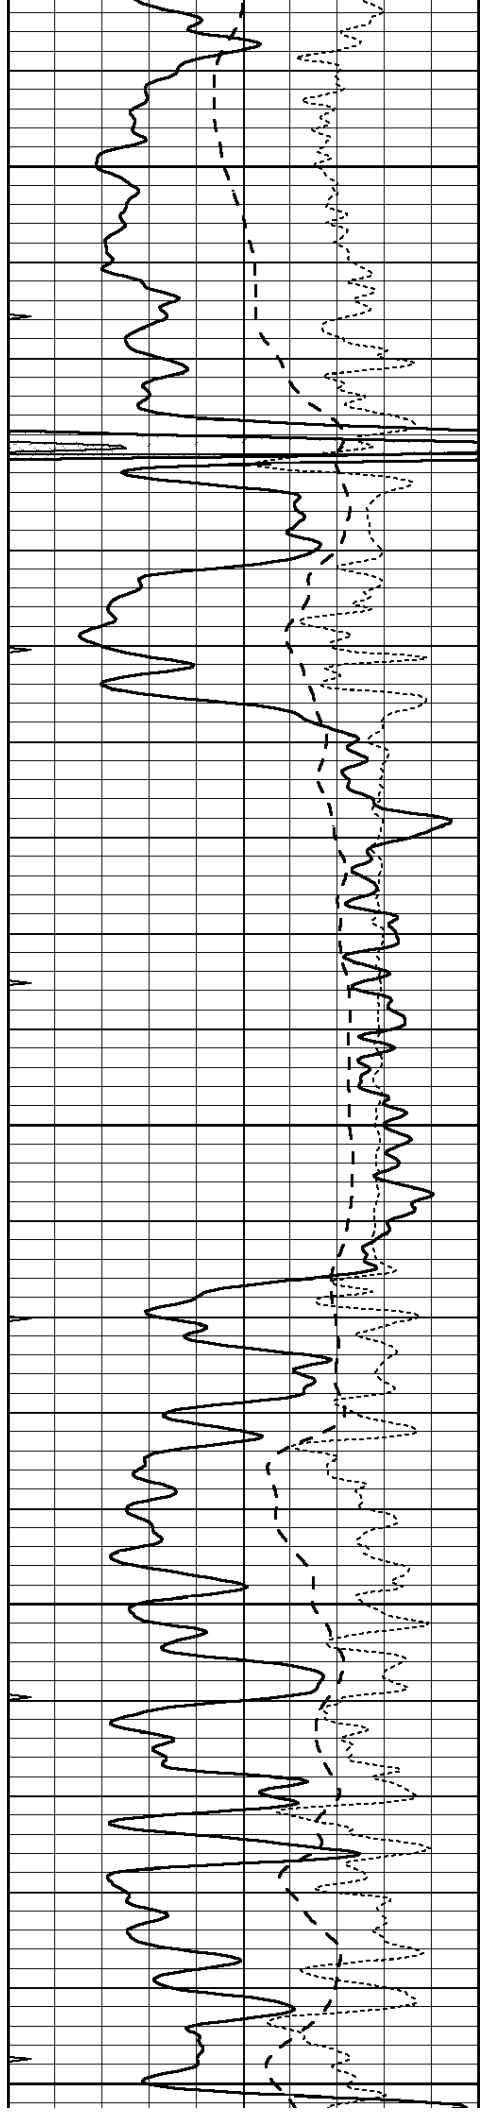


3000


3050

3100

3150

3200

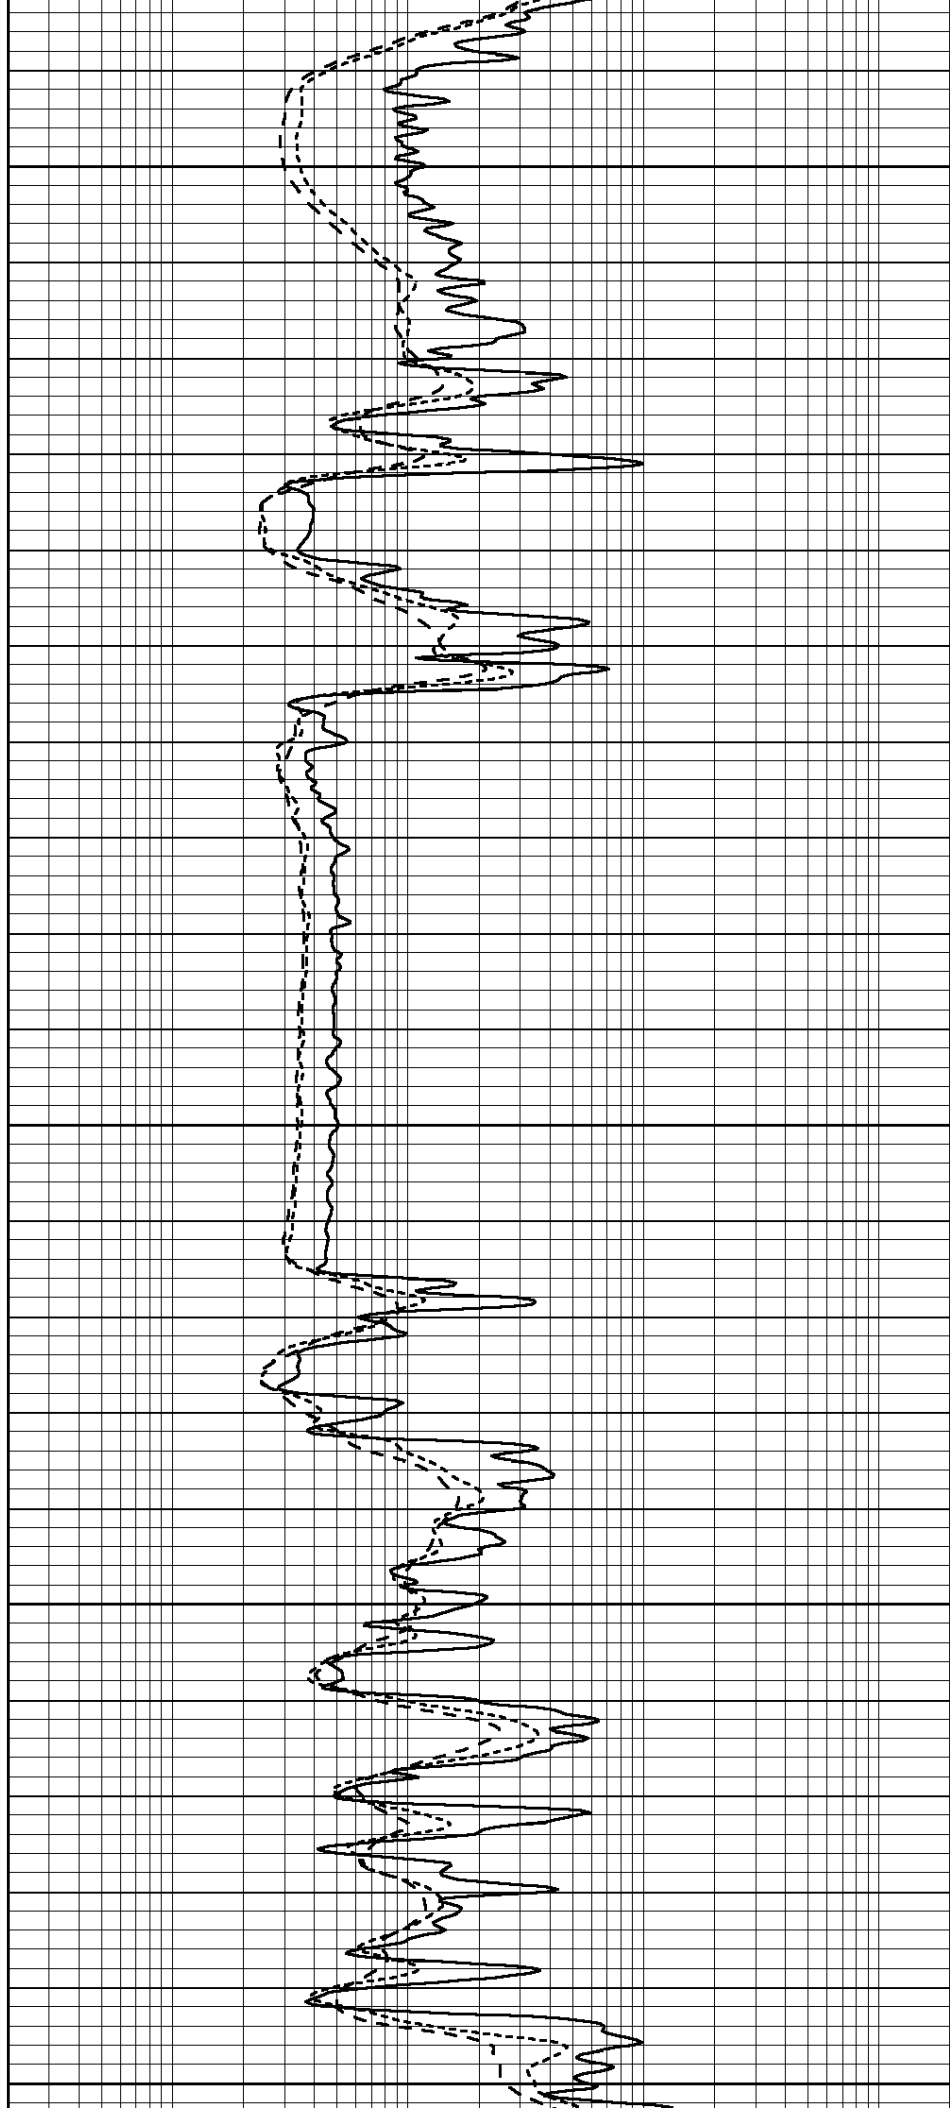

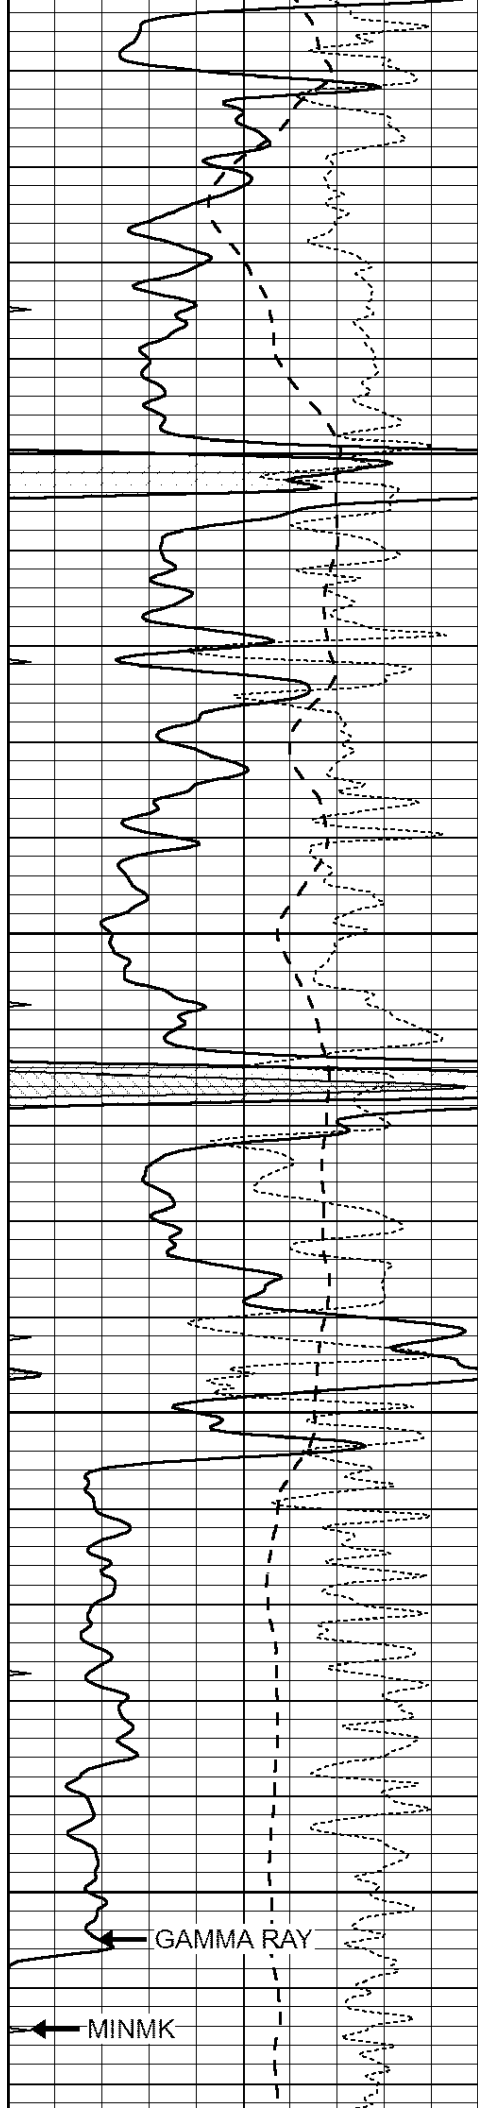





3250

3300

3350




3400

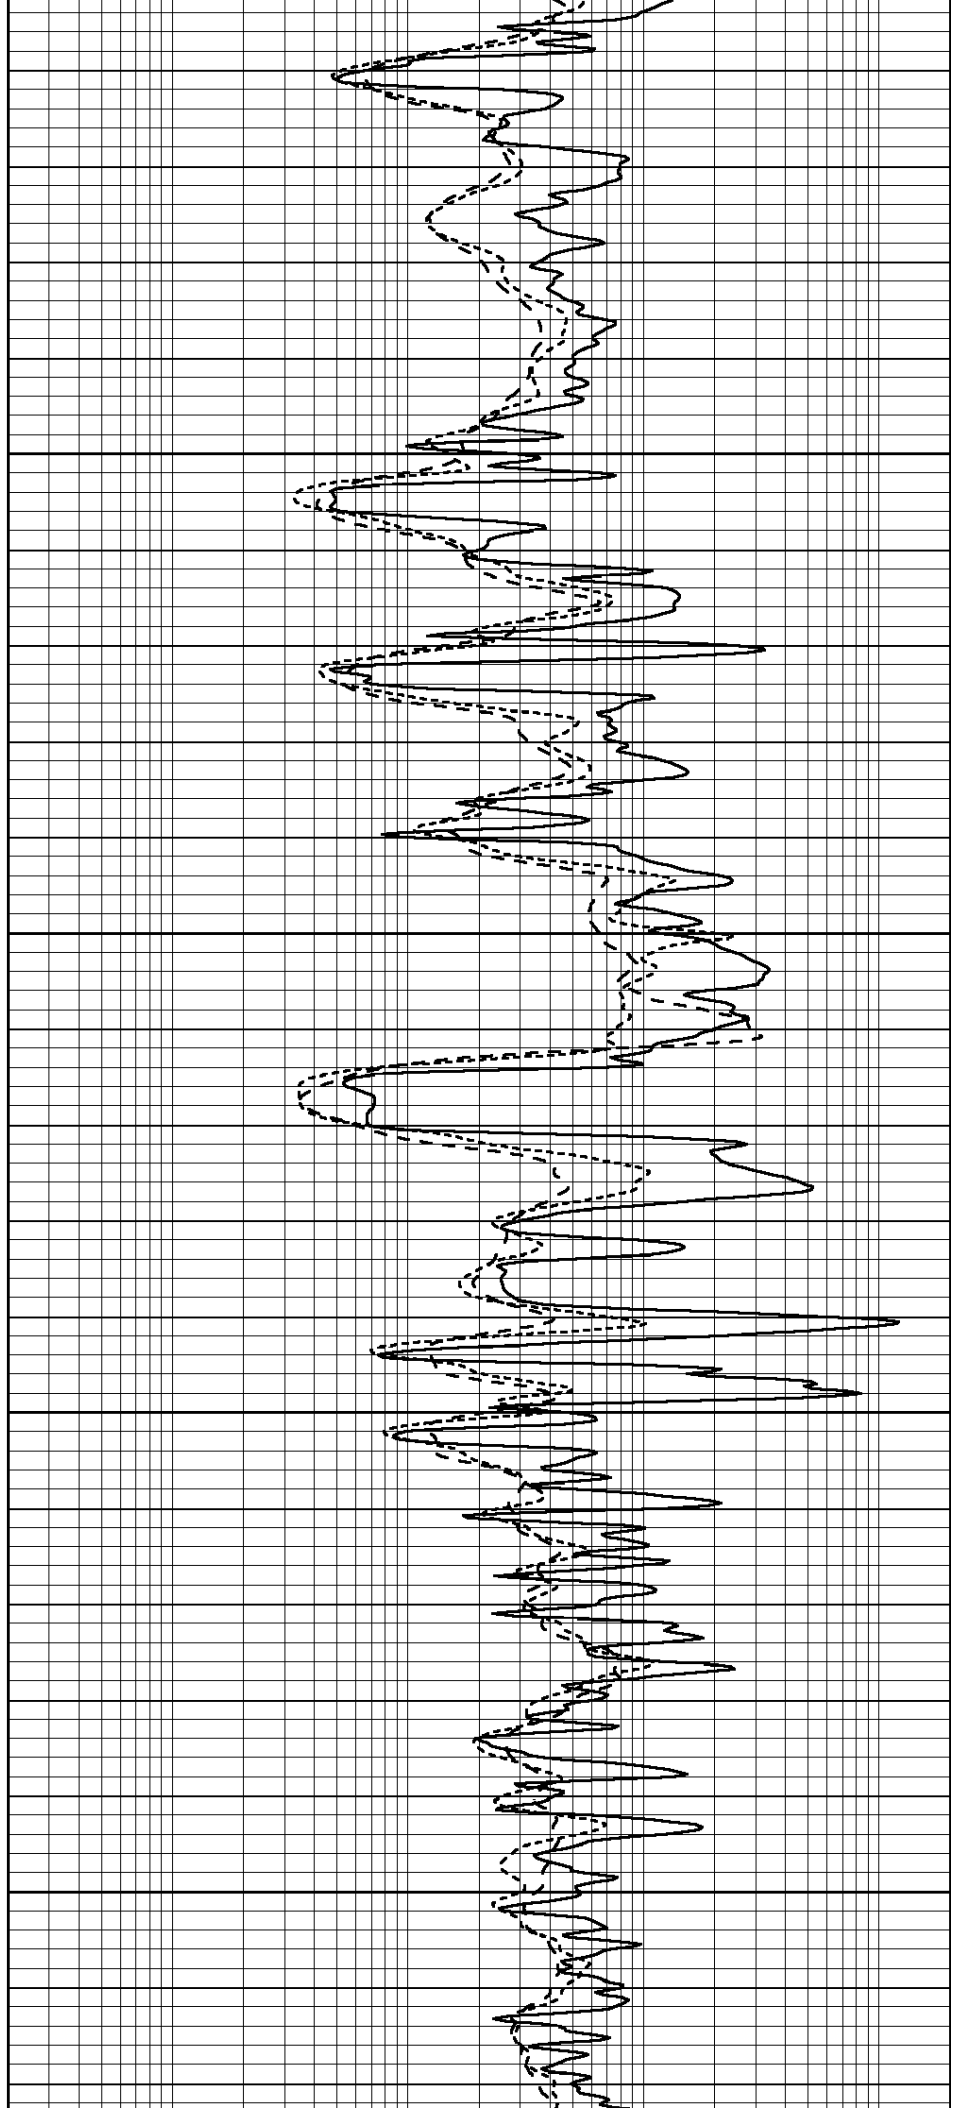

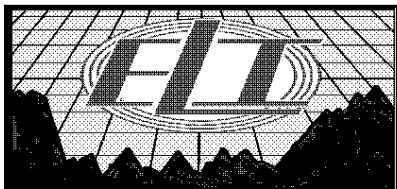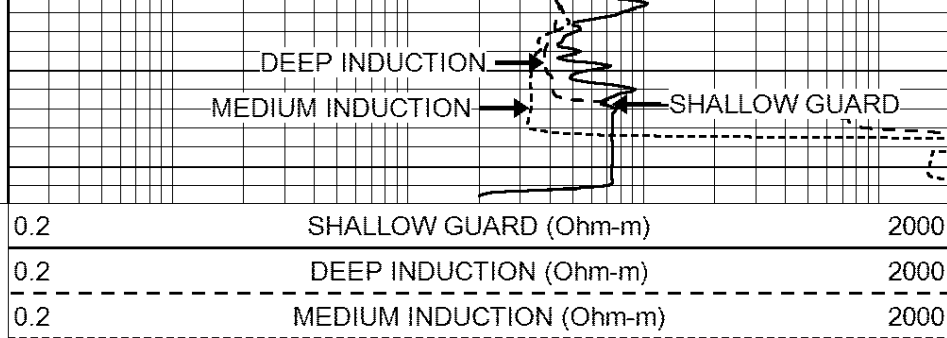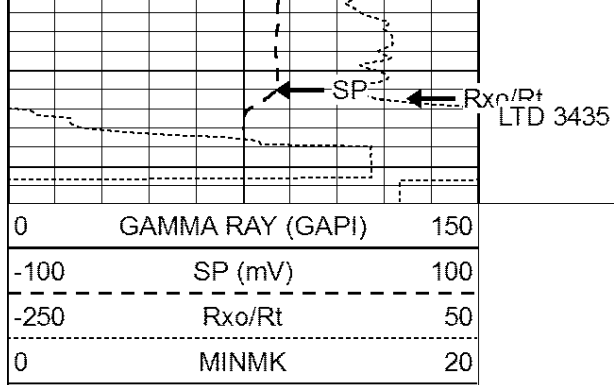


REPEAT SECTION

Database File: 1824ddn.db
 Dataset Pathname: pass2.1
 Presentation Format: _dil
 Dataset Creation: Sun Sep 24 16:22:03 2017 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

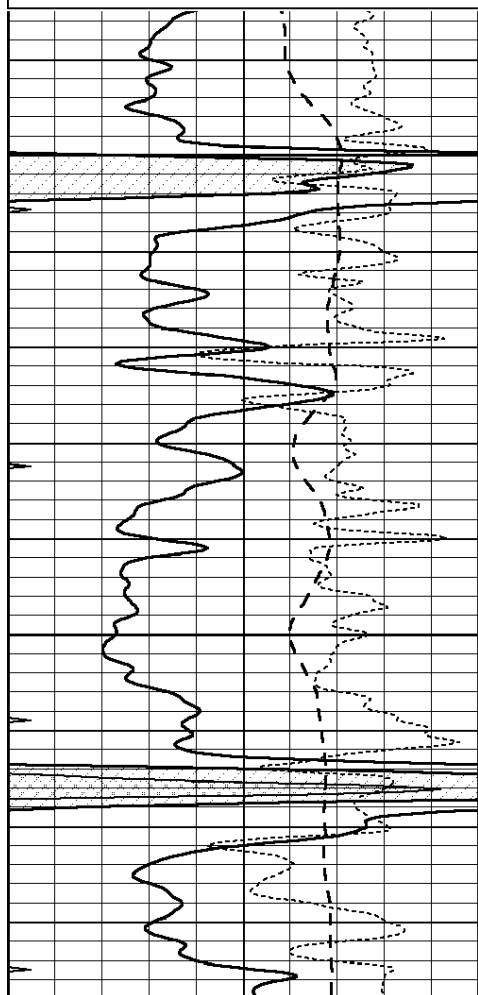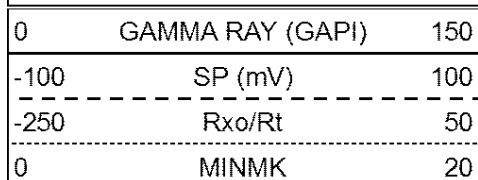

3250

3300

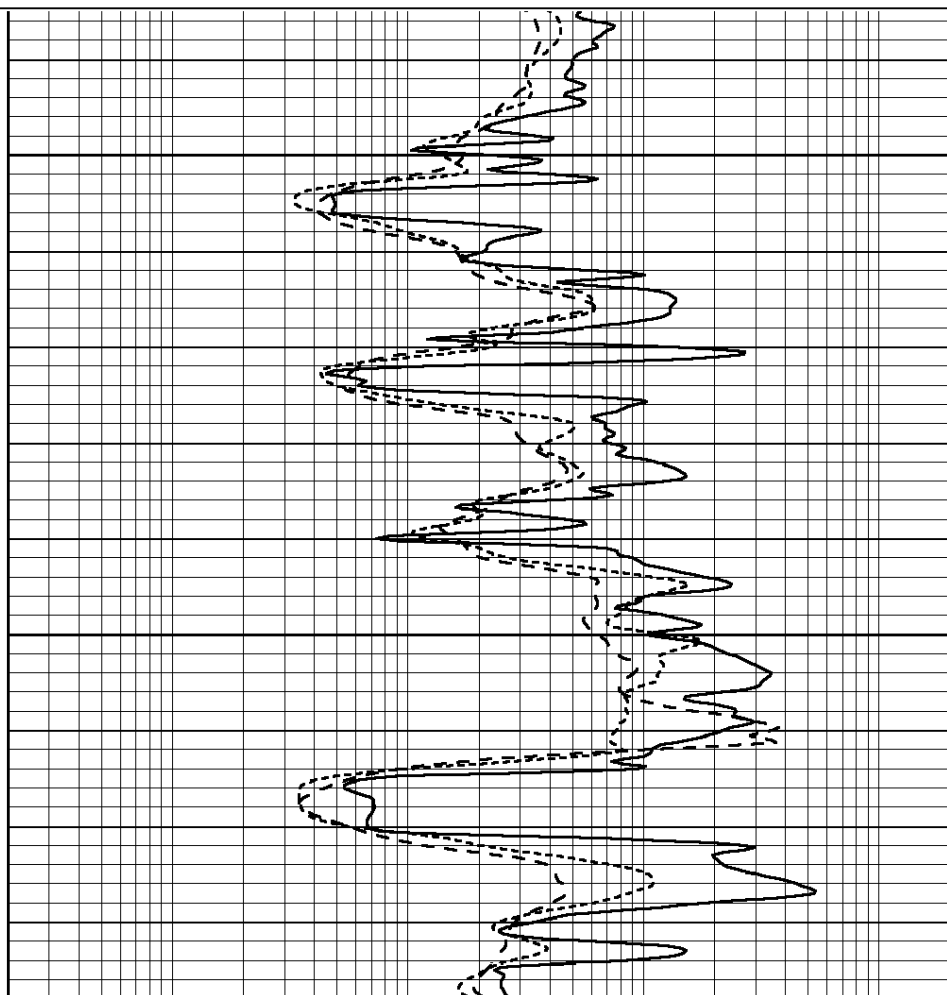



0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification								
Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report								
Serial: 002			Model: PRB					

Master Calibration				Performed Mon Aug 21 11:56:41 2017				
	Background	Magnesium		Aluminum		Sandstone		
Window 1	833.6	7394.2		2287.3		8111.8		cps
Window 2	768.9	6322.3		1995.6		6800.0		cps
Window 3	621.5	3261.9		1186.4		3380.9		cps
Window 4	184.2	185.7		184.9		184.8		cps
Long Space	0.0	5553.4		1226.6		6031.1		cps
Short Space	1.2	1307.5		903.9		1387.7		cps
Rho		1.7100		2.5900		1.3800		g/cc
Pe		0.0000		2.5700		1.5500		
Rib Angle	: 46.3	Rib Slope	: 1.045	Density/Spine Ratio			: 0.566	
Spine Angle	: 76.3	Spine Slope	: 4.090	Spine Intercept			: -20.7	

Before Survey Verification				Performed Wed Dec 31 18:00:00 1969				
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc
Measured Correction		0.0000		0.0000		0.0000		g/cc
Measured Pe				0.0000		0.0000		

After Survey Verification				Performed Wed Dec 31 18:00:00 1969				
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc
Measured Correction		0.0000		0.0000		0.0000		g/cc
Measured Pe				0.0000		0.0000		

Compensated Neutron Calibration Report

Serial Number: 6I
Tool Model: G

CALIBRATION

Detector	Readings	Target	Normalization
Short Space	1.00 cps	1.00 cps	1.0000
Long Space	1.00 cps	1.00 cps	1.0000

PRE-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	
3)	Short Space	cps		
	Long Space	cps	pu	

POST-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	pu
3)	Short Space	cps		
	Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: GR6
Tool Model: OPEN
Performed: Mon Aug 21 11:59:01 2017

Calibrator Value: 150.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 276.0 cps

Sensitivity: 0.5500 GAPI/cps