

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-093-21780-00-00  
Spot: SWNESWSE Sec/Twnshp/Rge: 35-26S-36W  
793 feet from S Section Line, 1712 feet from E Section Line  
Lease Name: SHAPLAND Well #: 35.1  
County: KEARNY Total Vertical Depth: 5700 feet

Operator License No.: 5278  
Op Name: EOG RESOURCES, INC.  
Address: 3817 NW EXPRESSWAY, SUITE 500  
OKLAHOMA CITY, OK 73112

| String | Size  | Depth (ft) | Pulled (ft) | Comment |
|--------|-------|------------|-------------|---------|
| SURF   | 8.625 | 1660       |             |         |

\$ 185.25

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 04/14/2006 2:00 AM  
Plug Co. License No.: 30684 Plug Co. Name: ABERCROMBIE RTD, INC  
Proposal Rcvd. from: DALE Company: EOG RESOURCES Phone: (405) 246-3100

Proposed Plugging Method: 1ST PLUG AT 3200' WITH 100 SX CMT. 2ND PLUG AT 1675' WITH 50 SX CMT. 3RD PLUG AT 1000' WITH 50 SX CMT. 4TH PLUG AT 450' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: JIM HOLLAND WitnessType: NONE  
Date/Time Plugging Completed: 04/14/2006 4:20 AM KCC Agent: JIM HOLLAND

Actual Plugging Report:

1ST PLUG AT 3200' WITH 100 SX CMT. 2ND PLUG AT 1675' WITH 50 SX CMT. 3RD PLUG AT 1000' WITH 50 SX CMT. 4TH PLUG AT 450' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.


Perfs:

Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY HALLIBURTON.

Plugged through: DP

INVOICED  
DATE 4-27-06  
WV. NO. 2006061541  
RECEIVED  
APR 27 2006  
KCC WICHITA

District: 01

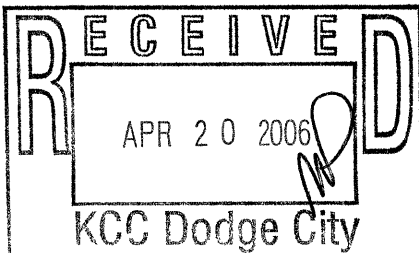

Signed

Jim Holland PART II  
(TECHNICIAN)

PBT