

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-165-20076-00-00  
Spot: NESWNW Sec/Twnshp/Rge: 32-16S-19W  
3535 feet from S Section Line, 4340 feet from E Section Line  
Lease Name: SCHMIDT A Well #: 3  
County: RUSH Total Vertical Depth: 3818 feet

Operator License No.: 5363  
Op Name: BEREXCO, INC.  
Address: PO BOX 20380  
WICHITA, KS 67208

| String | Size  | Depth (ft) | Pulled (ft) | Comment         |
|--------|-------|------------|-------------|-----------------|
| DVT    |       | 1271       |             | WITH 375 SX CMT |
| PROD   | 4.5   | 3786       | 0           | WITH 75 SX CMT  |
| SURF   | 8.625 | 198        |             |                 |

\$1124.09

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 04/20/2006 12:00 PM  
Plug Co. License No.: 5363 Plug Co. Name: BEREXCO, INC.  
Proposal Rcvd. from: MARK LEIKER Company: BEREXCO, INC. Phone: (316) 265-3311

Proposed Plugging Method: RUN TUBING TO 3616' WITH 40 SX CMT WITH 300# HULLS. PULL TUBING TO 1280' & CIRCULATE CMT AND PRESSURE TEST ANNULUS WITH CMT

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 04/20/2006 3:00 PM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

HOLES @ 3508'. HOLES @ 895-925'. RUN TUBING TO 3616' WITH 40 SX CMT WITH 300# HULLS. PUMP 110 SX CMT AT 1280'. TUBING ON VACUUM. PULLED TUBING TO 640' & PUMPED 30 SX CMT. PRESSURED ANNULUS WITH 1 SX CMT. TOPPED OFF CASING WITH 5 SX CMT. CIRCULATED APPROXIMATELY 30 SX CMT TO PIT.

Perfs:

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.


Plugged through: TBG

RECEIVED  
APR 27 2006  
KCC WICHITA

INVOICED

DATE 4-27-06  
NO. 2006061558

District: 01

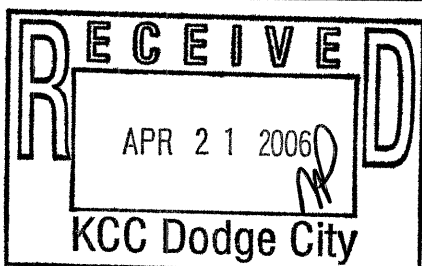

Signed Eric MacLaren  
(TECHNICIAN)

Form 502-203

PLG