

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-165-21611-00-00
Spot: NENESW Sec/Twnshp/Rge: 3-16S-16W
2310 feet from S Section Line, 2970 feet from E Section Line
Lease Name: MCRACKEN Well #: 1
County: RUSH Total Vertical Depth: 3526 feet

Operator License No.: 33612
Op Name: GEIST, RON DBA WILDCAT WELL SER
Address: PO BOX 961
HAYS, KS 67601

| String | Size | Depth (ft) | Pulled (ft) | Comment |
|--------|-------|------------|-------------|-----------------|
| PROD | 5.5 | 3509 | 1081 | WITH 150 SX CMT |
| SURF | 8.625 | 1045 | | |

\$ 114.60

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 04/19/2006 9:00 AM
Plug Co. License No.: 33612 Plug Co. Name: GEIST, RON DBA WILDCAT WELL SERVICE
Proposal Rcvd. from: RON GEIST Company: GEIST, RON DBA WILDCAT WELL Phone: (785) 728-2040

Proposed Plugging Method: SAND BACK TO 3450' & 5 SX CMT. PLUG AT 1050' WITH 10 SX GEL - 50 SX CMT. PLUG AT 400' WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 04/19/2006 11:10 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

ANHYDRITE =1020'. SANDED BACK TO 3450' & 5 SX CMT. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 1050' WITH 10 SX GEL - 50 SX CMT. 2ND PLUG AT 400' WITH 40 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:

| Top | Bot | Thru | Comments |
|------|------|------|----------|
| 3509 | 3518 | OH | |

INVOICED
DATE 5-1-06
INV. NO. 200606156


RECEIVED
APR 27 2006

KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

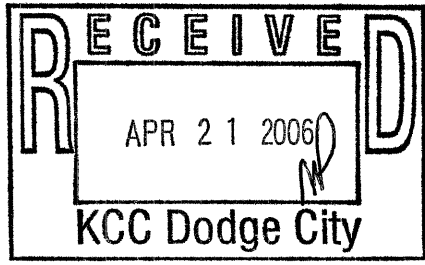

Signed Richard W. Lacey
(TECHNICIAN)

Form 3

PLG