



COMPENSATED DENSITY/NEUTRON LOG

Company	ROCKHOUND PETROLEUM,LLC.		
Well	DUNN #2		
Field	BRENN		
County	STAFFORD	State	KANSAS
Location:	API # : 15-185-24054-0000		Other Services DIL/MEL
1305' FNL & 1878' FEL			
SEC 24 TWP 23S RGE 14W			
Permanent Datum	GROUND LEVEL	Elevation	1933
Log Measured From	KELLY BUSHING 7' A.G.L.	K.B. 1940	
Drilling Measured From	KELLY BUSHING	D.F. 1938	
		G.L. 1933	
Date	6/20/19		
Run Number	ONE		
Depth Driller	4080		
Depth Logger	4078		
Bottom Logged Interval	4058		
Top Log Interval	2900		
Casing Driller	8 5/8" @ 628		
Casing Logger	628		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.0/60		
pH / Fluid Loss	10.0/12.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	2 @ 82F		
Rmt @ Meas. Temp	.15 @ 82F		
Rmc @ Meas. Temp	.24 @ 82F		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.14 @ 117F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	117F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	KEATON JONES		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
WEST OF ST. JOHN 3 MILES, NORTH 3
1/2 WEST, SOUTH INTO.






MAIN PASS


Database File: 3691ddn.db
Dataset Pathname: pass3.1
Presentation Format: den_neu
Dataset Creation: Thu Jun 20 13:28:59 2019 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		


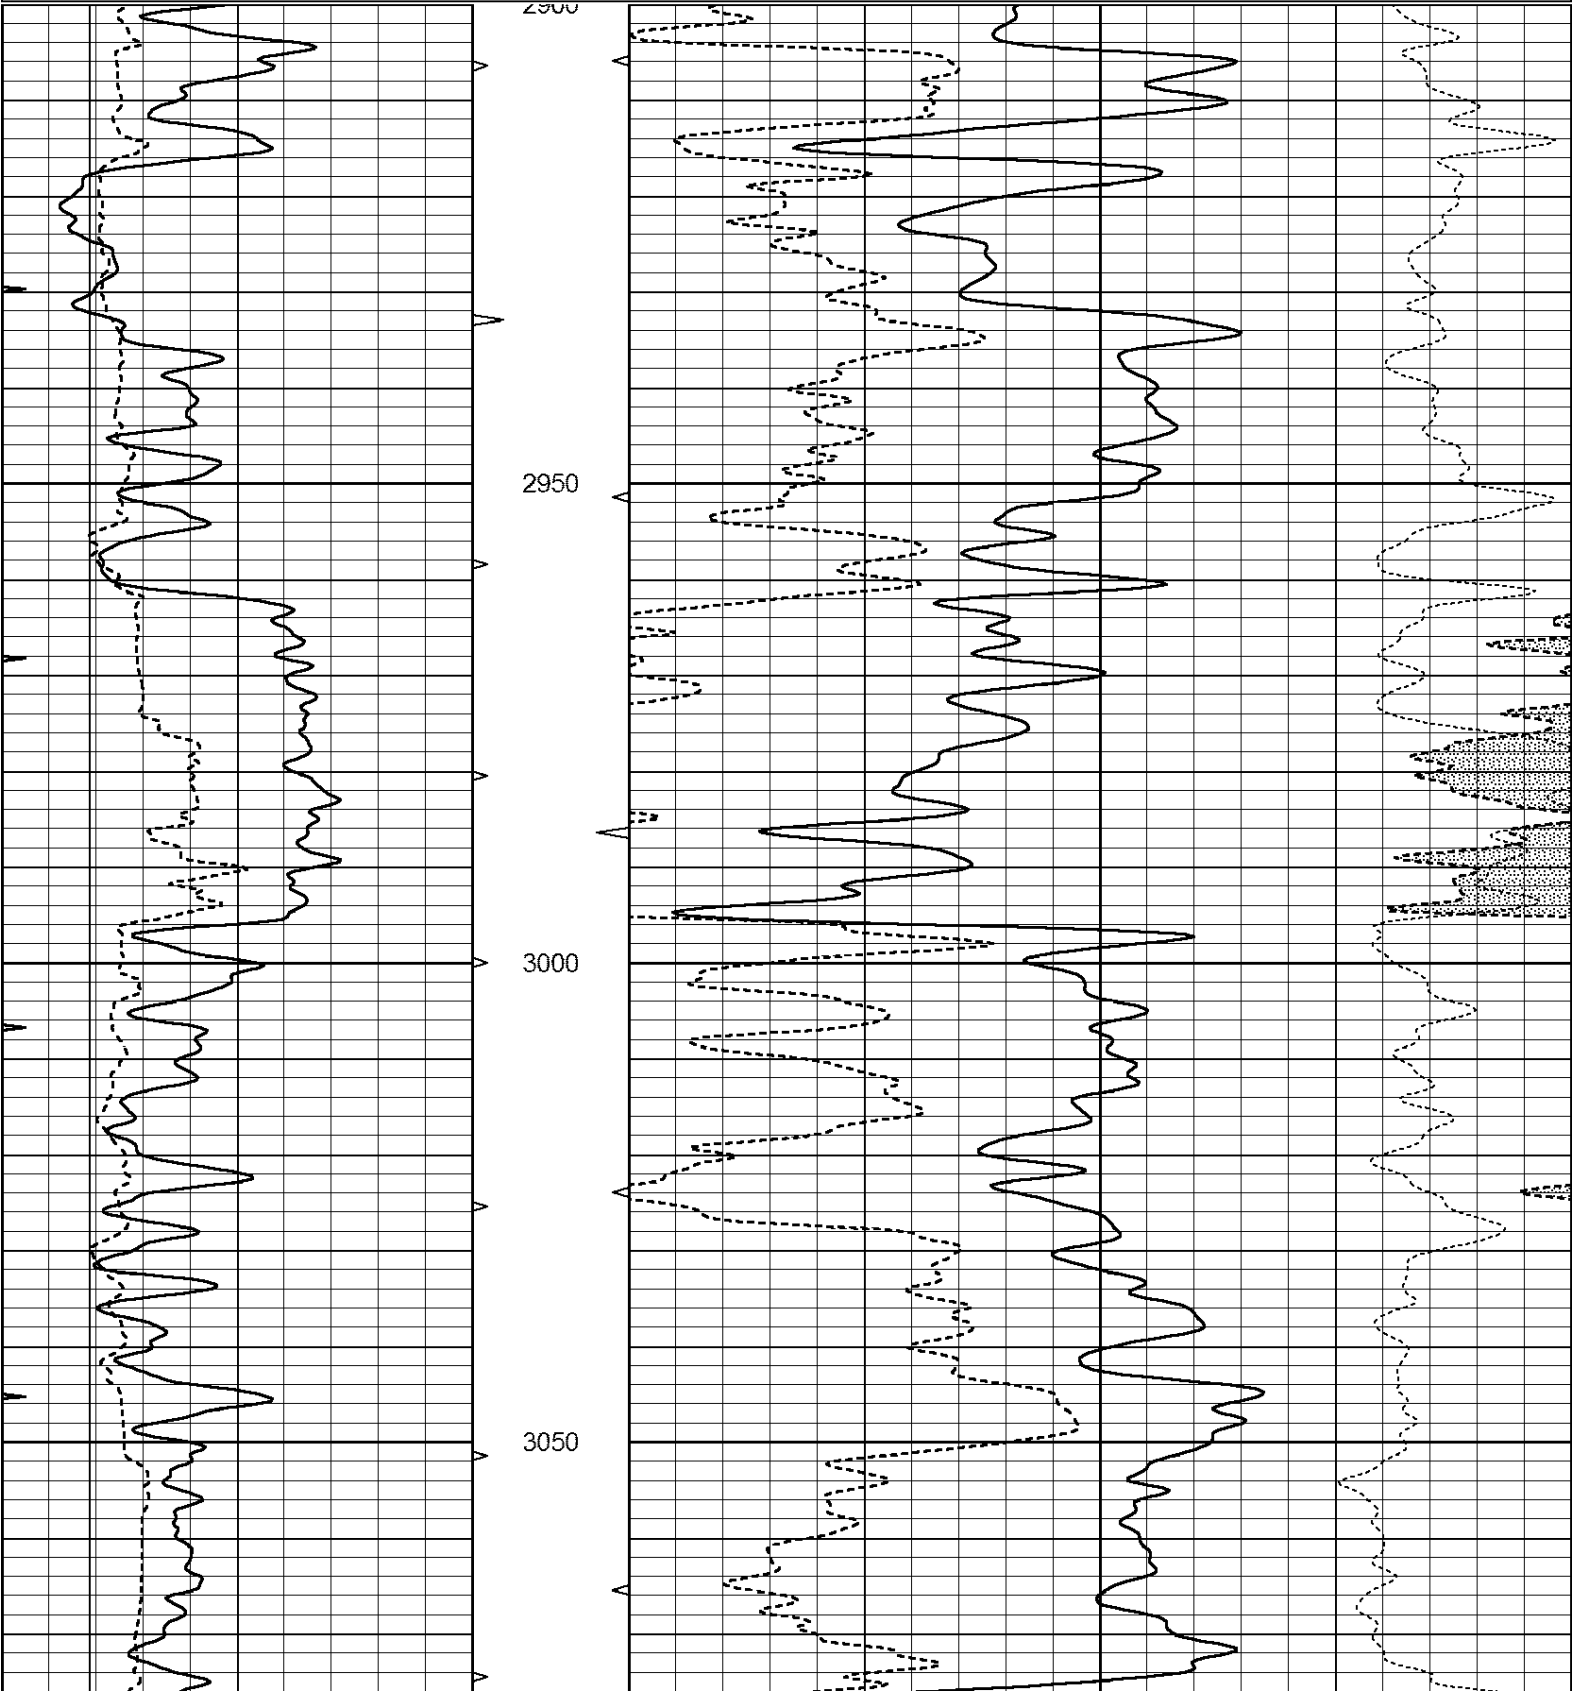


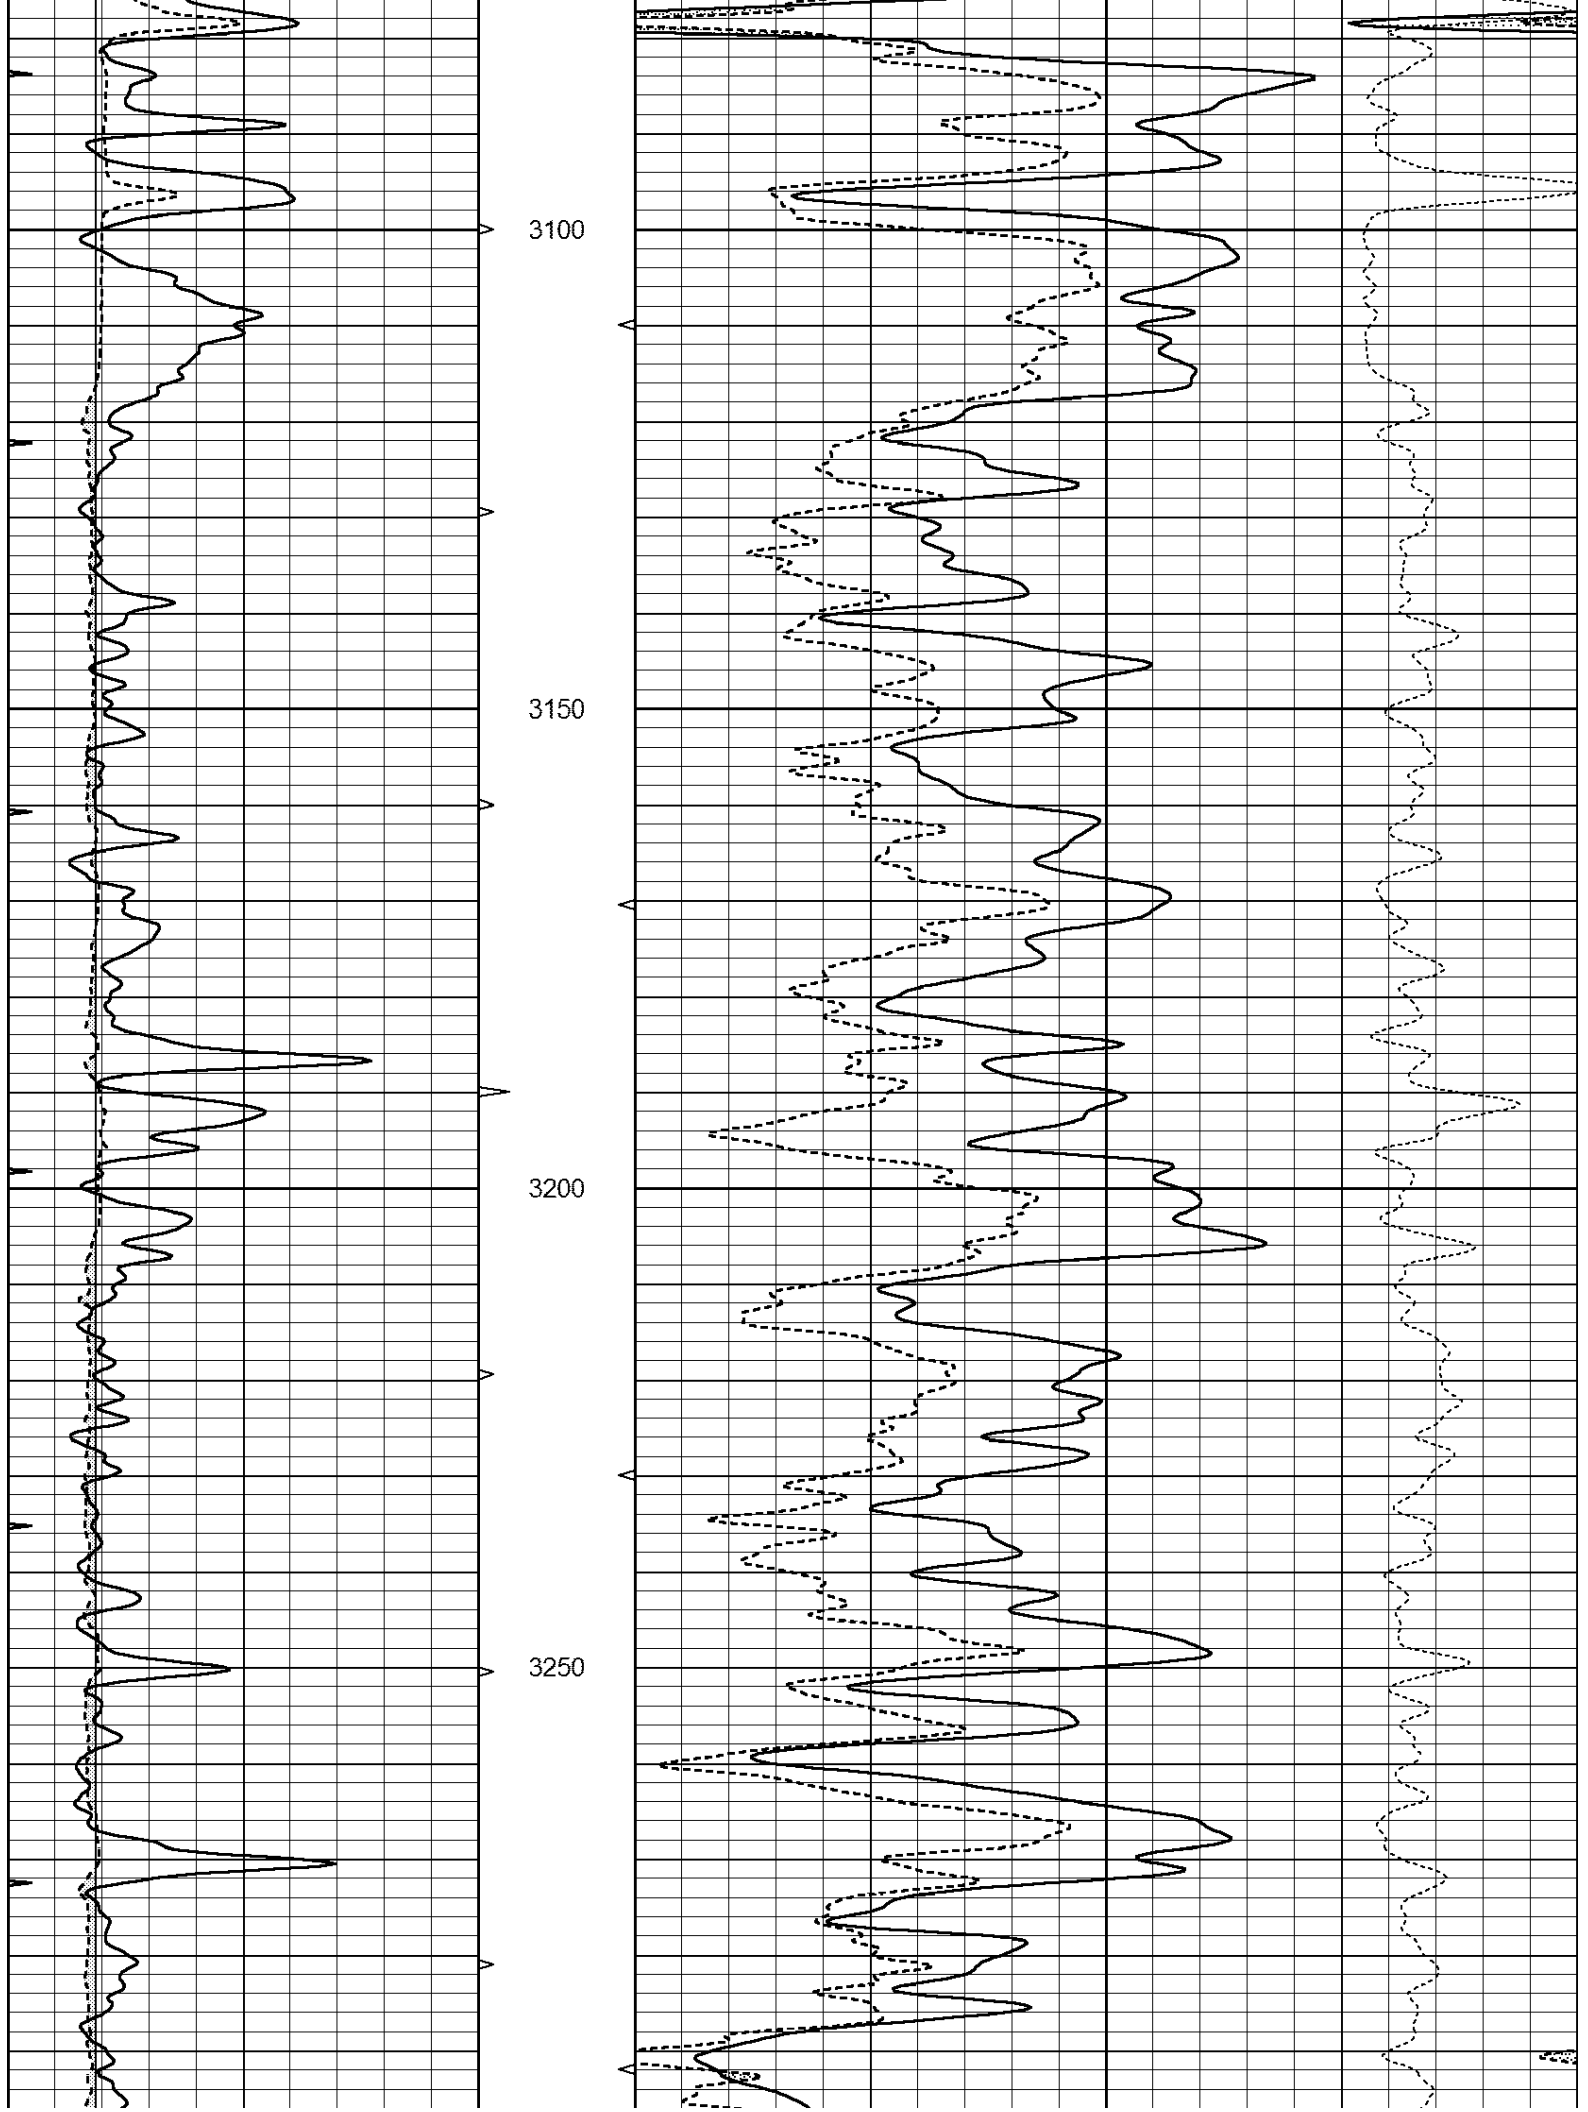

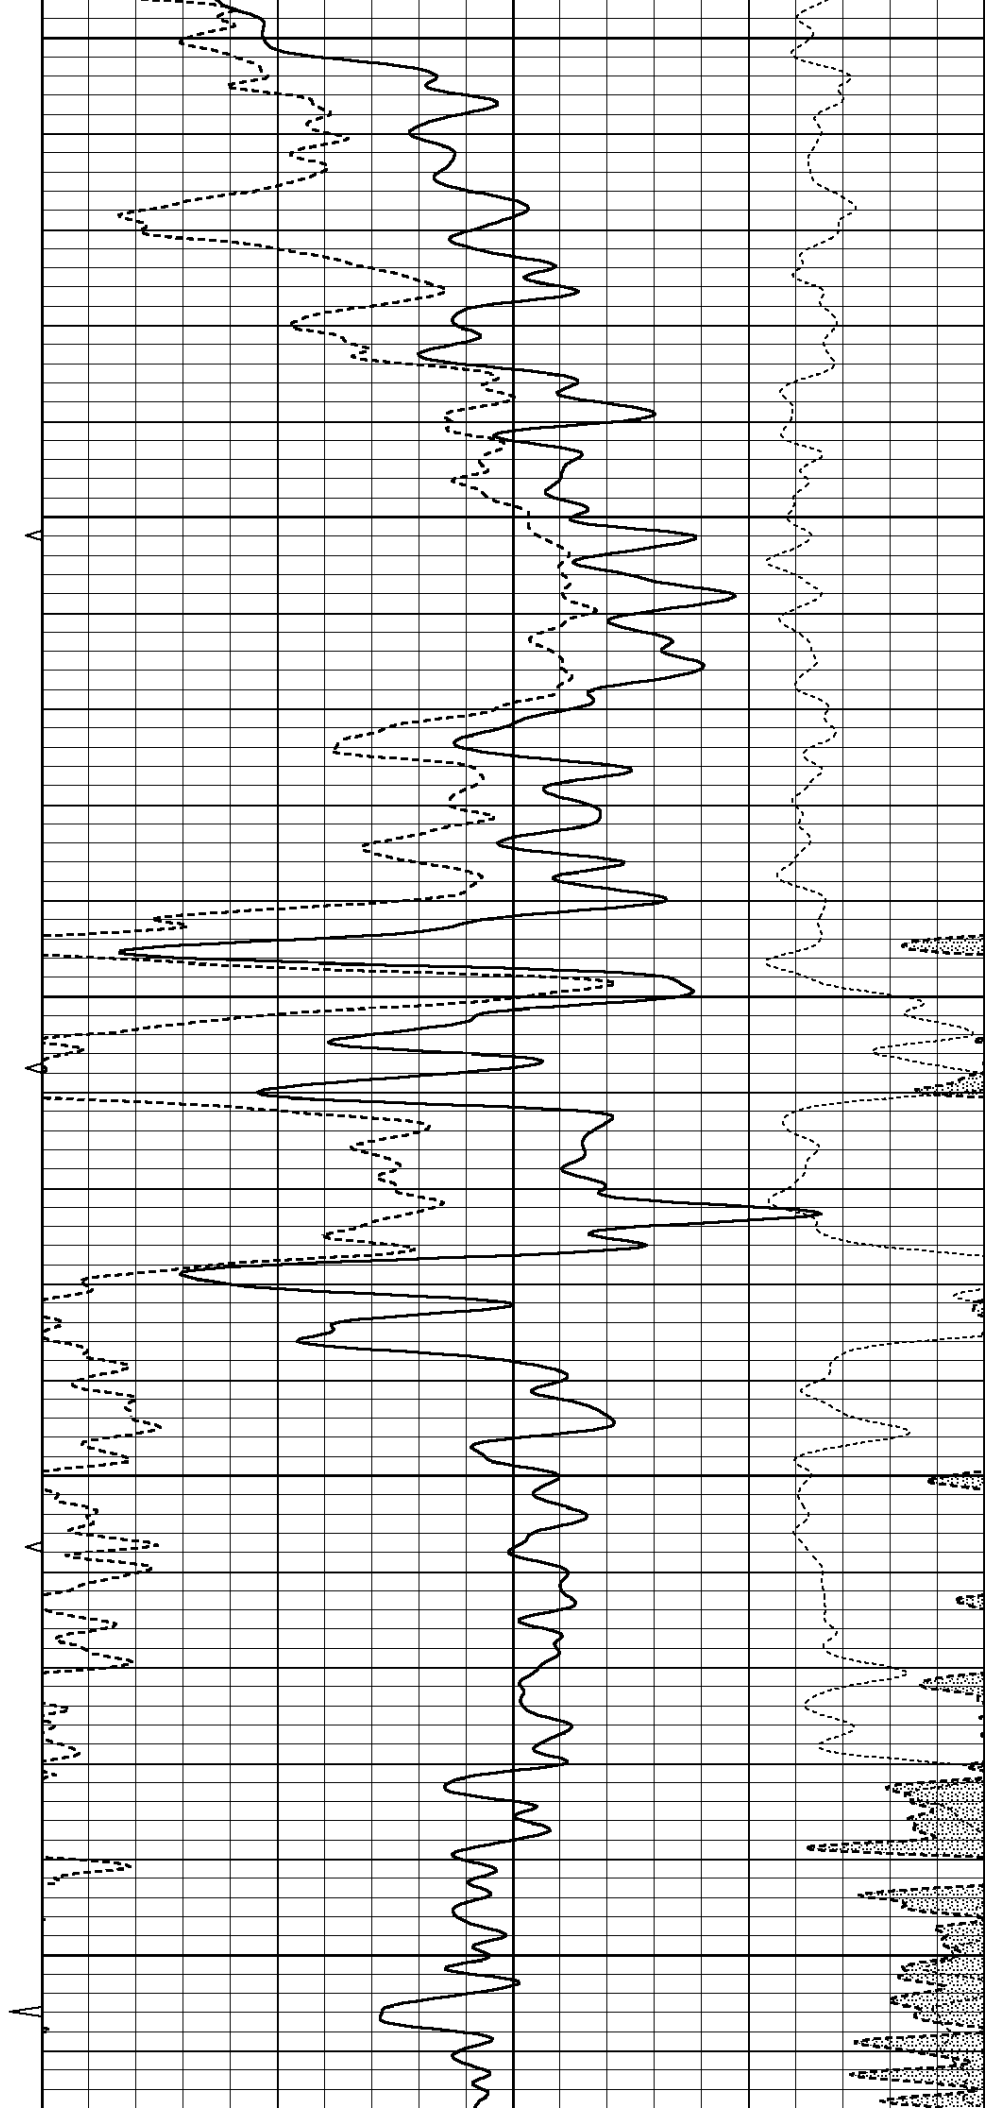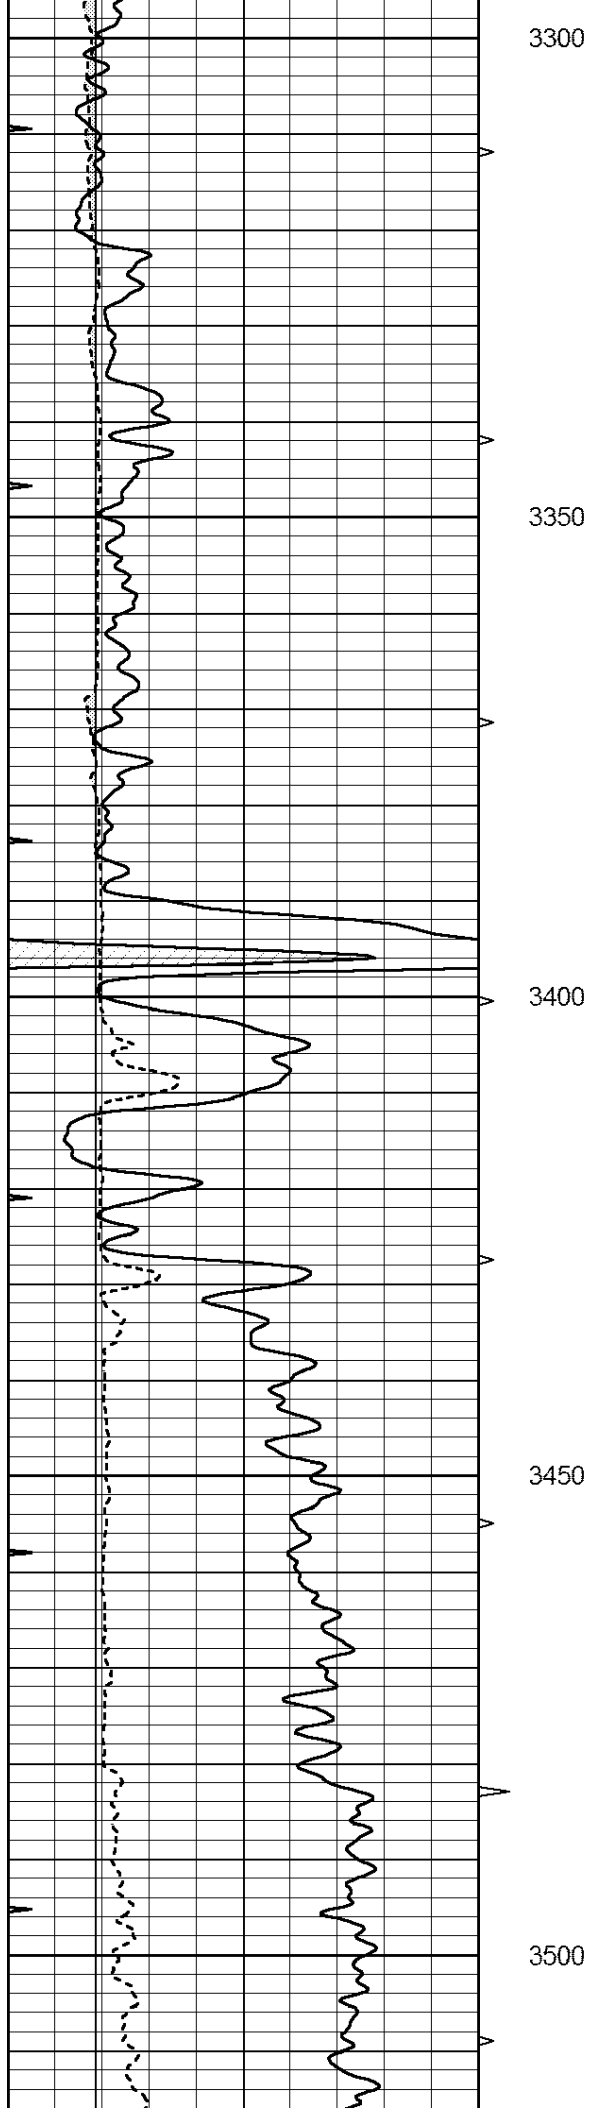

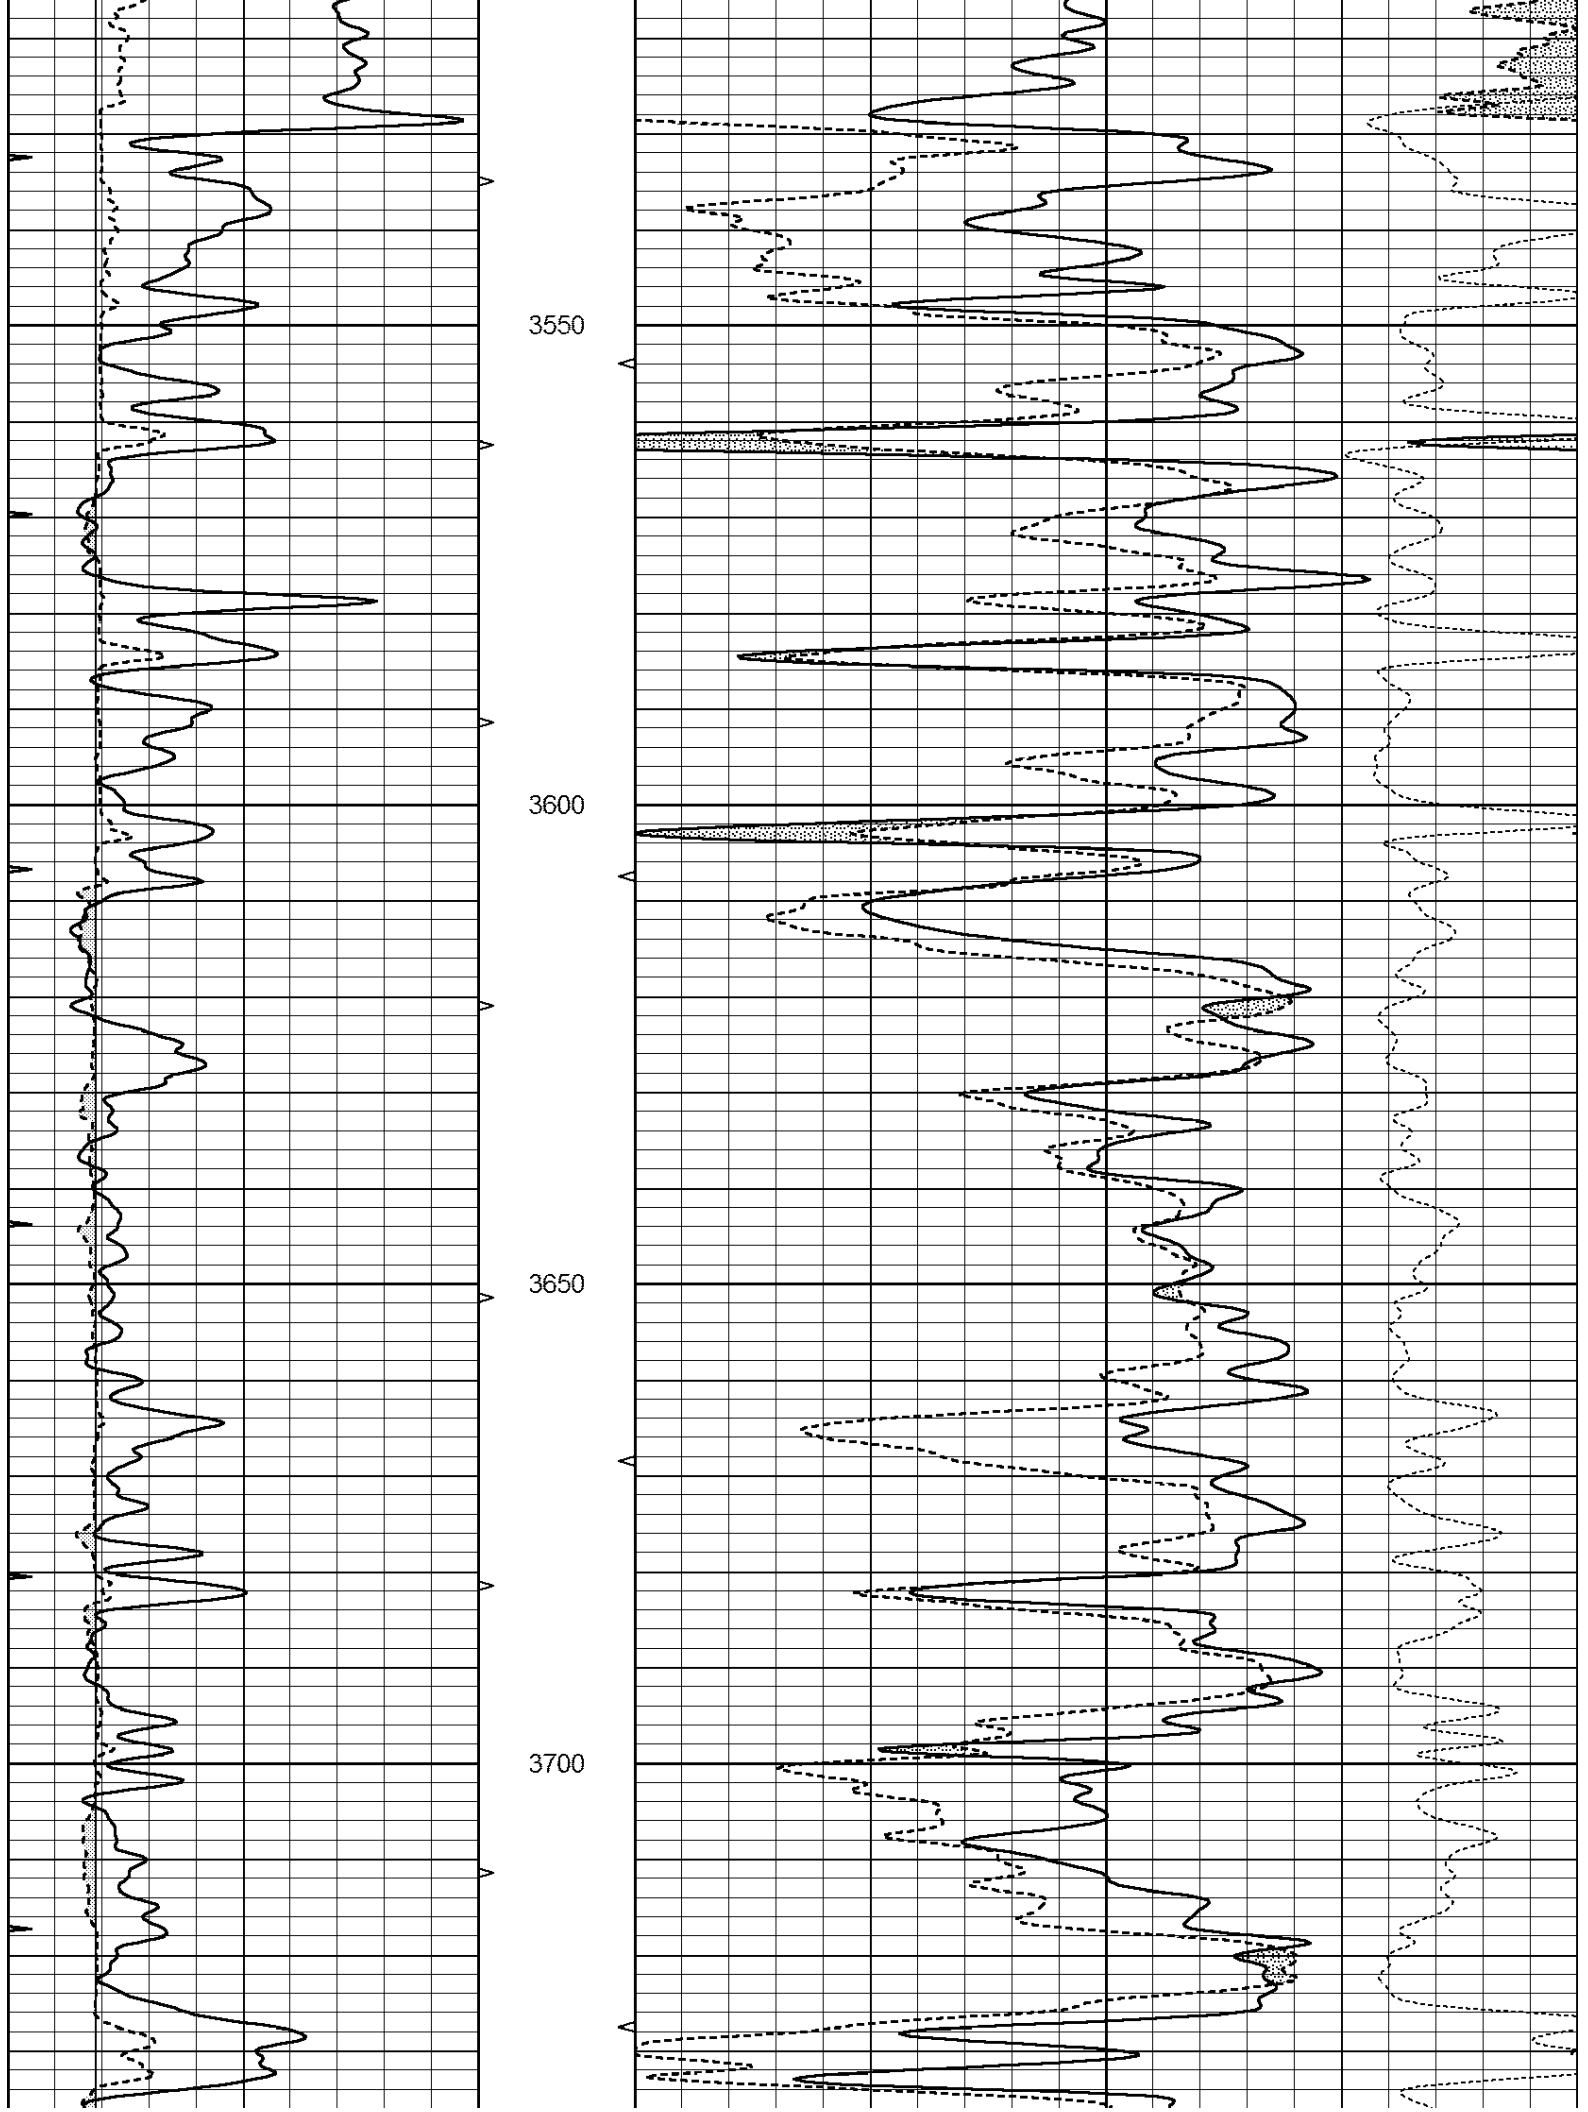



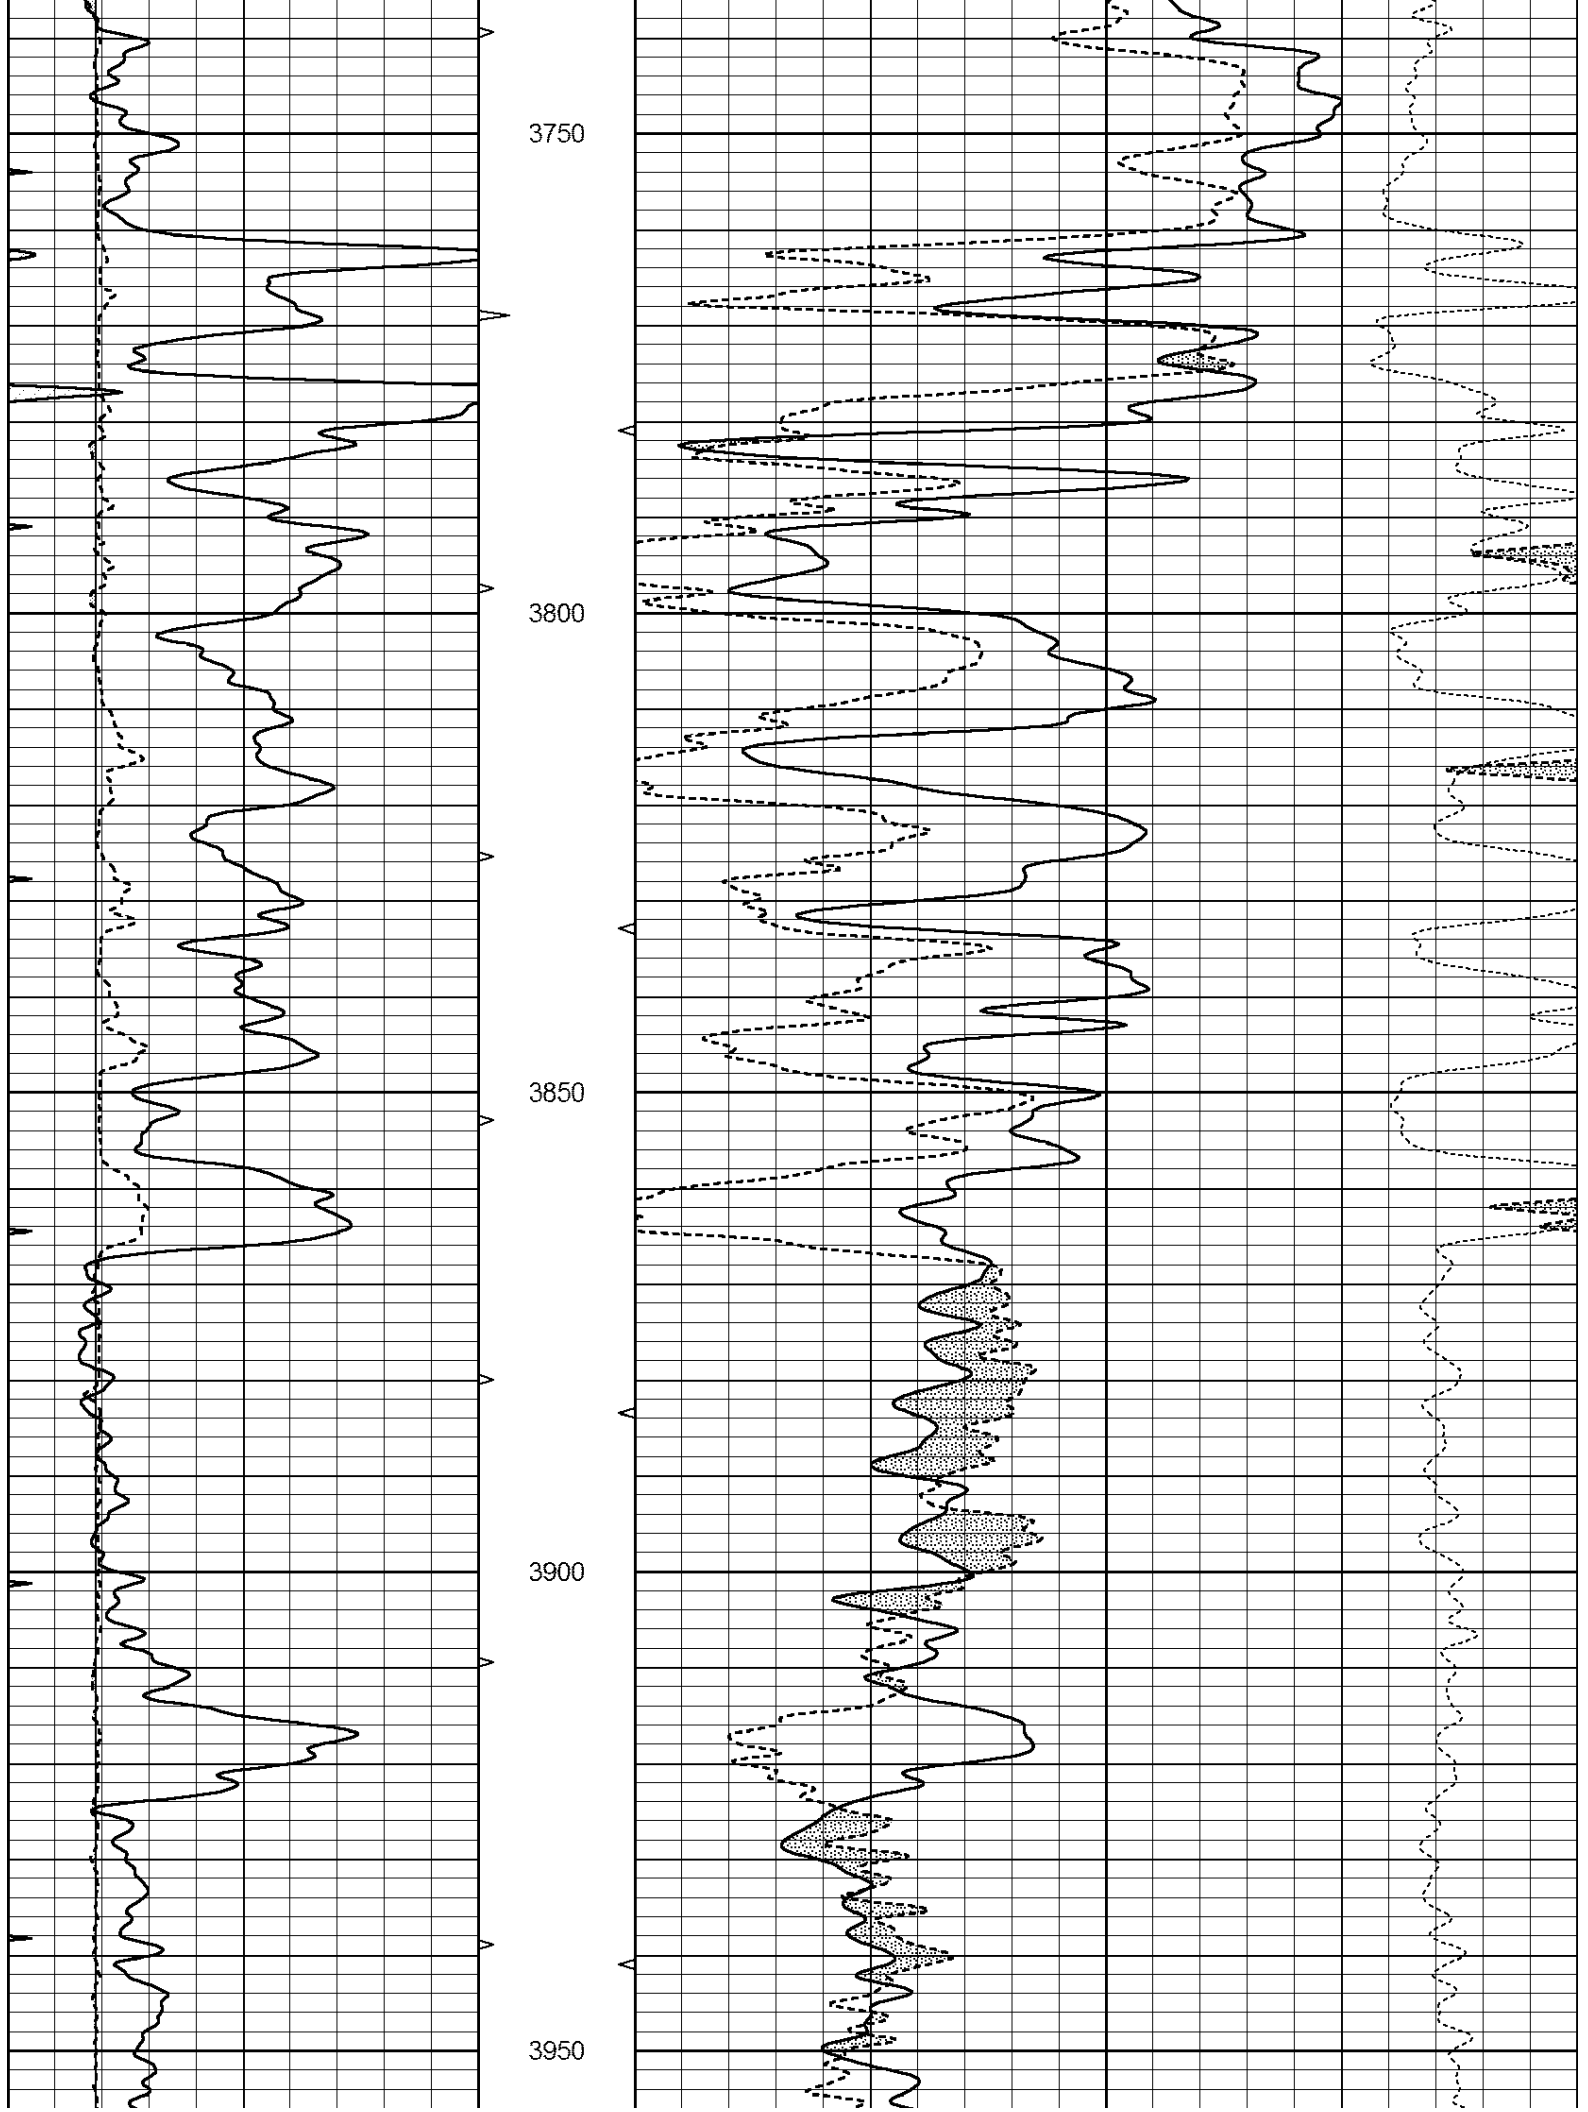


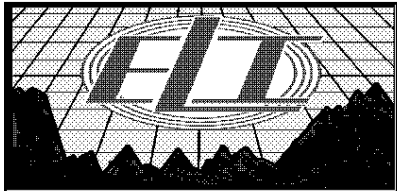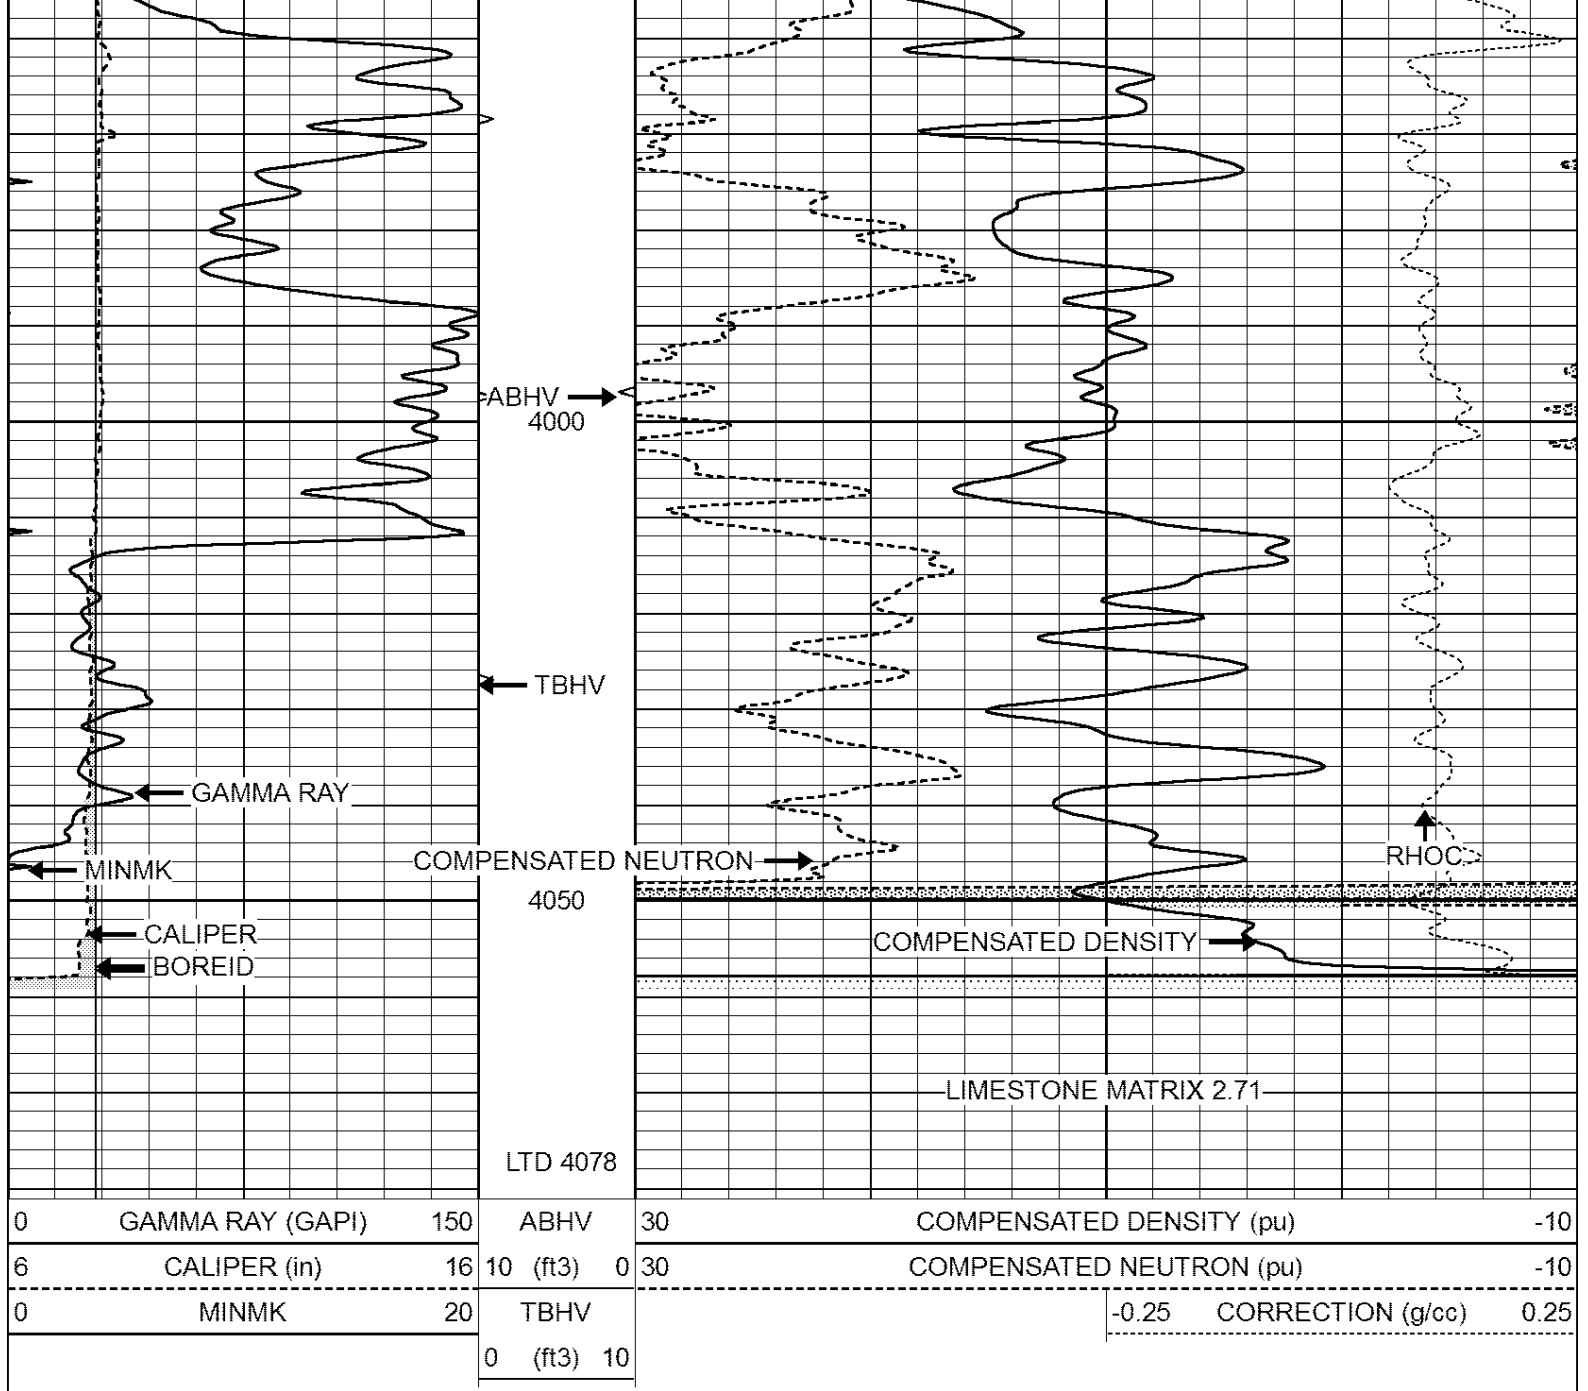


REPEAT SECTION

Database File: 3691ddn.db
 Dataset Pathname: pass2.1
 Presentation Format: den_neu
 Dataset Creation: Thu Jun 20 13:05:16 2019
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		



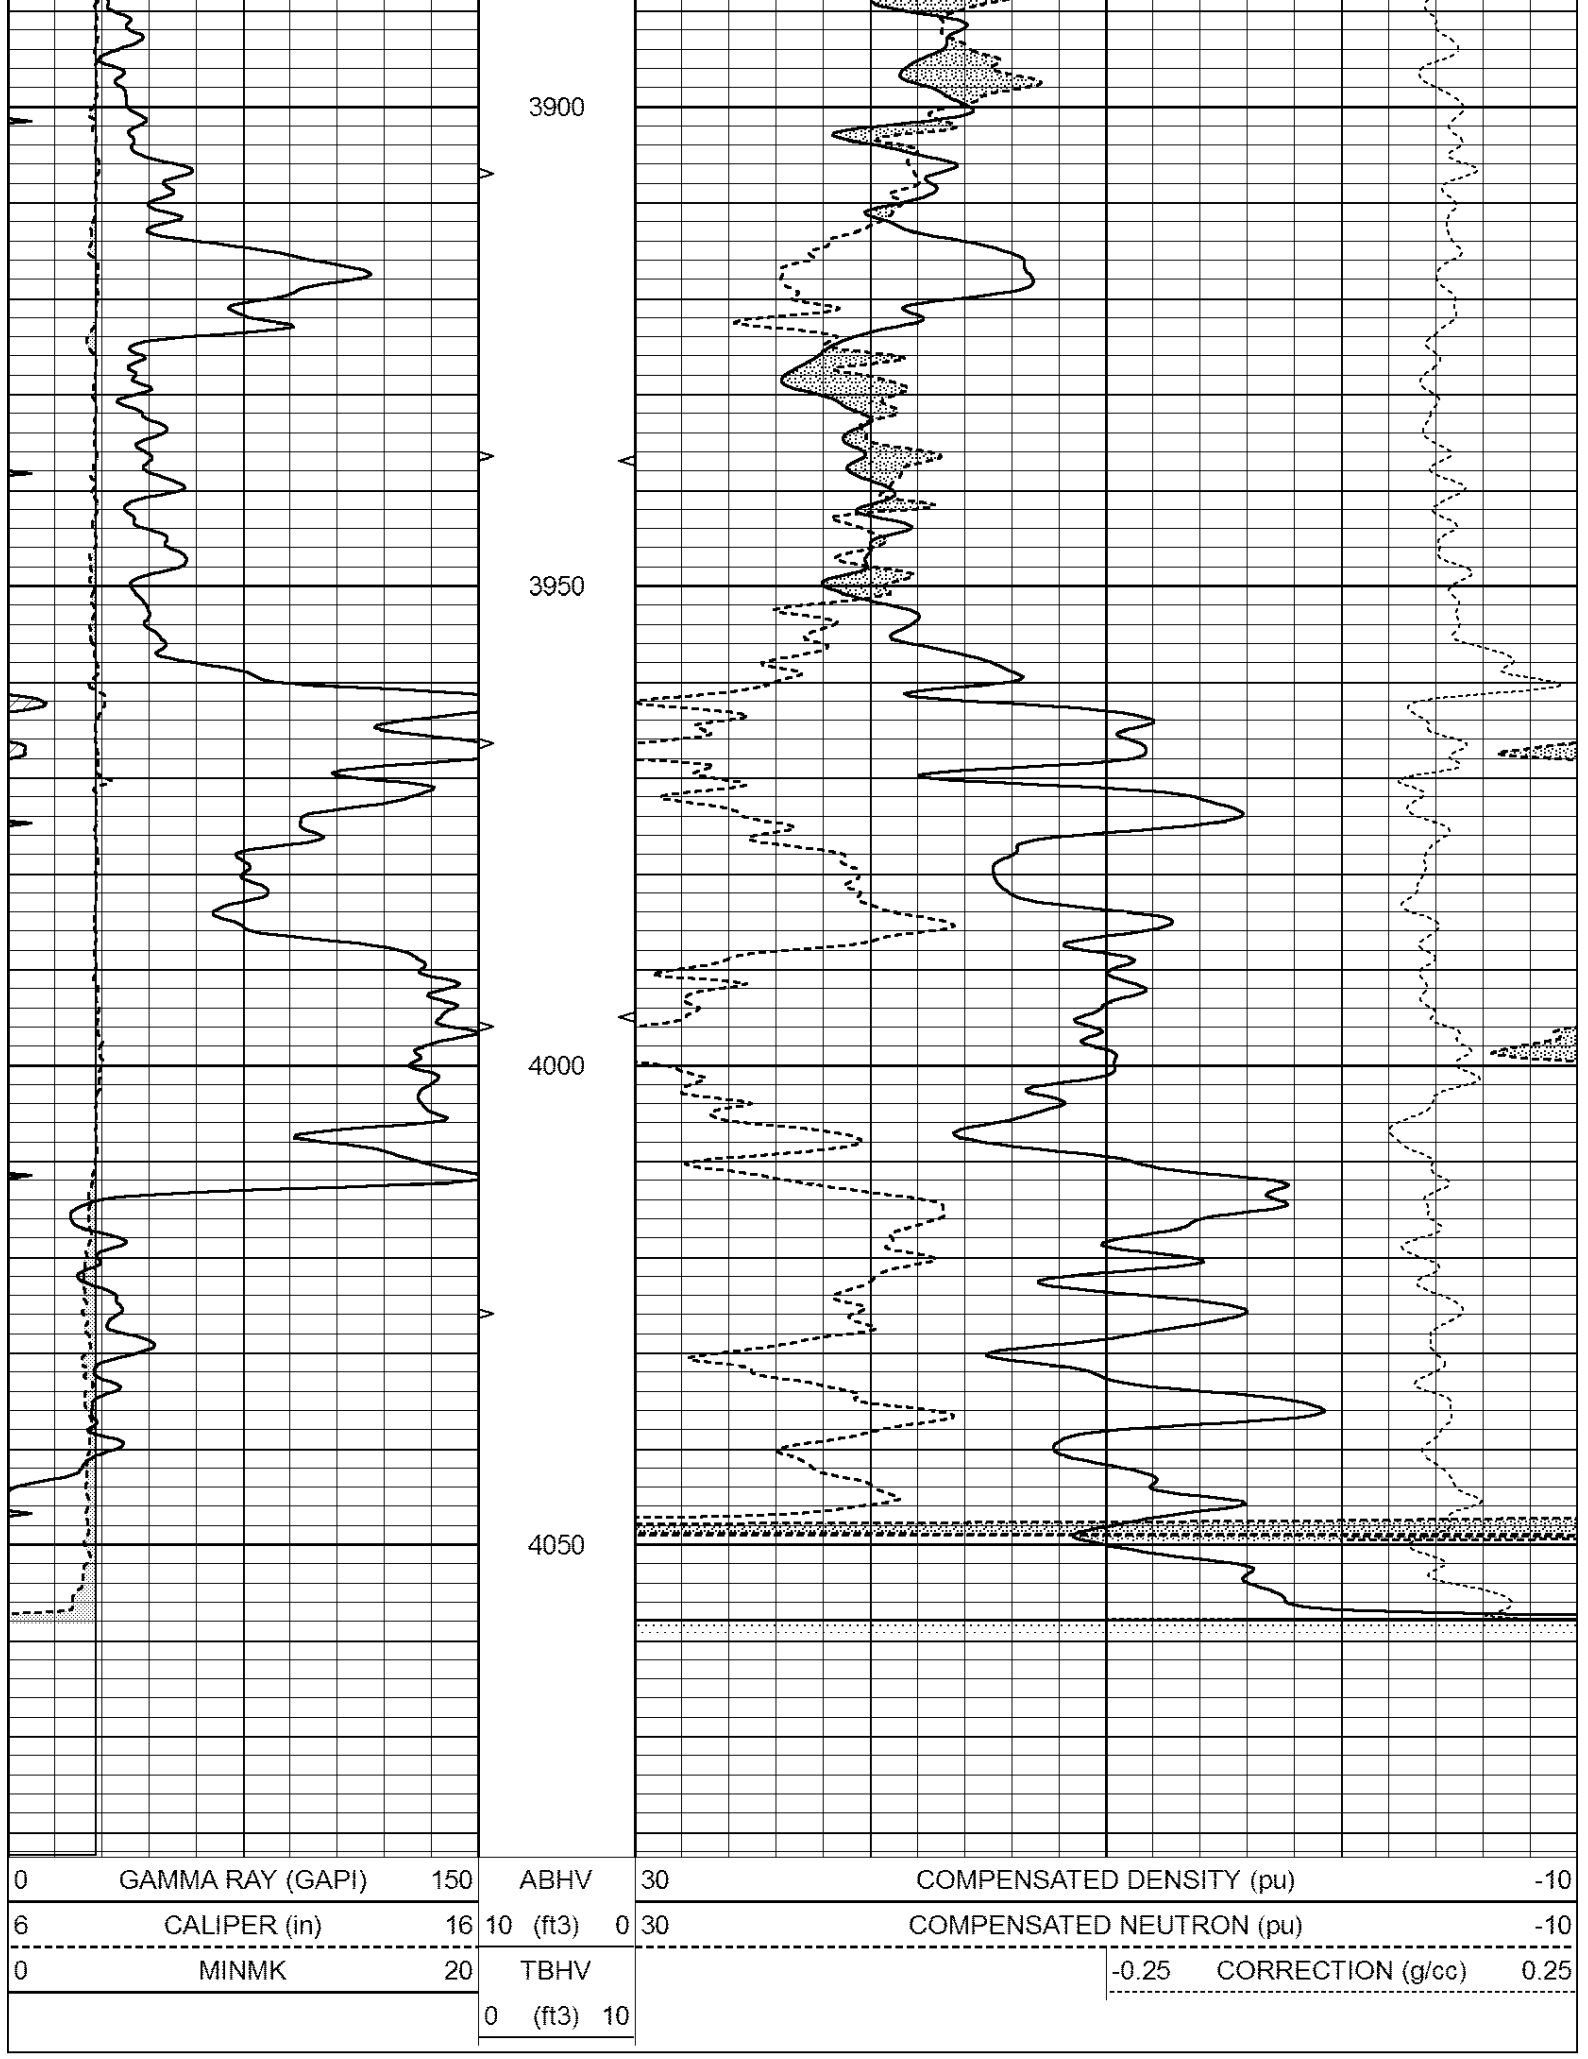

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		

Calibration Report

Database File: 3691ddn.db
Dataset Pathname: pass2.1
Dataset Creation: Thu Jun 20 13:05:16 2019

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG
Surface Cal Performed: Mon Sep 10 14:28:35 2018
Downhole Cal Performed: Mon Sep 10 14:28:38 2018
After Survey Verification Performed: Mon Sep 10 14:28:40 2018

Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-12.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification

Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report

Serial: 001N Model: PRB

Master Calibration

Performed Fri Feb 22 10:21:38 2019

	Background	Magnesium	Aluminum	Sandstone	
Window 1	1650.2	7609.7	2906.5	8386.5	cps
Window 2	1538.2	6635.9	2614.4	7212.4	cps
Window 3	1257.0	3718.7	1765.8	3927.1	cps
Window 4	376.8	375.6	373.4	374.5	cps
Long Space	0.0	5097.7	1076.2	5674.2	cps
Short Space	2.8	1704.3	1106.3	1723.6	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	
Rib Angle	: 44.5	Rib Slope	: 0.982	Density/Spine Ratio	: 0.545
Spine Angle	: 74.5	Spine Slope	: 3.599	Spine Intercept	: -18.2

Before Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification			Performed Wed Dec 31 18:00:00 1969		
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number:	6I
Tool Model:	G

CALIBRATION						
	Detector	Readings		Target		Normalization
	Short Space	1.00	cps	1.00	cps	1.0000
	Long Space	1.00	cps	1.00	cps	1.0000

PRE-SURVEY VERIFICATION						
	Detector	Readings		Measured	Target	
1)	Short Space	cps				
	Long Space	cps		pu	pu	
2)	Short Space	cps				
	Long Space	cps		pu		
3)	Short Space	cps				
	Long Space	cps		pu		

POST-SURVEY VERIFICATION						
	Detector	Readings		Measured	Target	
1)	Short Space	cps				
	Long Space	cps		pu	pu	
2)	Short Space	cps				
	Long Space	cps		pu	pu	
3)	Short Space	cps				
	Long Space	cps		pu	pu	

Gamma Ray Calibration Report

Serial Number:	GR6
----------------	-----

Tool Model:	OPEN
Performed:	Mon Sep 10 14:29:23 2018

Calibrator Value:	150.0	GAPI
-------------------	-------	------

Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps

Sensitivity:	0.5500	GAPI/cps
--------------	--------	----------