

RADIATION GUARD LOG

Company	C. G. OIL COMPANY, LLC.		
Well	MRS #1		
Field	AIR BASE		
County	ELLIS	State	KANSAS
Location:	APL # : 15-051-26963-0000		Other Services CDL/CNL DIL/MEL
Permanent Datum GROUND LEVEL Elevation 1946			
Log Measured From KELLY BUSHING 8' A.G.L.			
Drilling Measured From KELLY BUSHING			
Date	8/14/19		
Run Number	ONE		
Depth Driller	3510		
Depth Logger	3512		
Bottom Logged Interval	3510		
Top Log Interval	2800		
Casing Driller	8 5/8" @ 1063'		
Casing Logger	1063		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4,500 PPM	
Density / Viscosity	8.9/55		
pH / Fluid Loss	11.0/9.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.680 @ 72F		
Rmf @ Meas. Temp	.510 @ 72F		
Rmc @ Meas. Temp	.816 @ 72F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.437 @ 112F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	11:45 P.M.		
Maximum Recorded Temperature	112F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	ROGER FISHER	RON SCHMIDTBERGER	TERRY PLESKER

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
VICTORIA & I-70, 3N. TO "FAIRGROUND RD.", 3 1/2E., S. INTO @TANK BATTERY




MAIN SECTION

Database File: 3953ddn.db
 Dataset Pathname: pass3.2
 Presentation Format: rag
 Dataset Creation: Thu Aug 15 00:14:59 2019 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	NEUTRON	1000
6	BOREID (in)	16	10 (ft3)	0		
-100	SP (mV)	100	TBHV			
6	(in)	16	0 (ft3)	10	(cps)	
6	CALIPER (in)	16			.2	2000
					GUARD	
					(Ohm-m)	

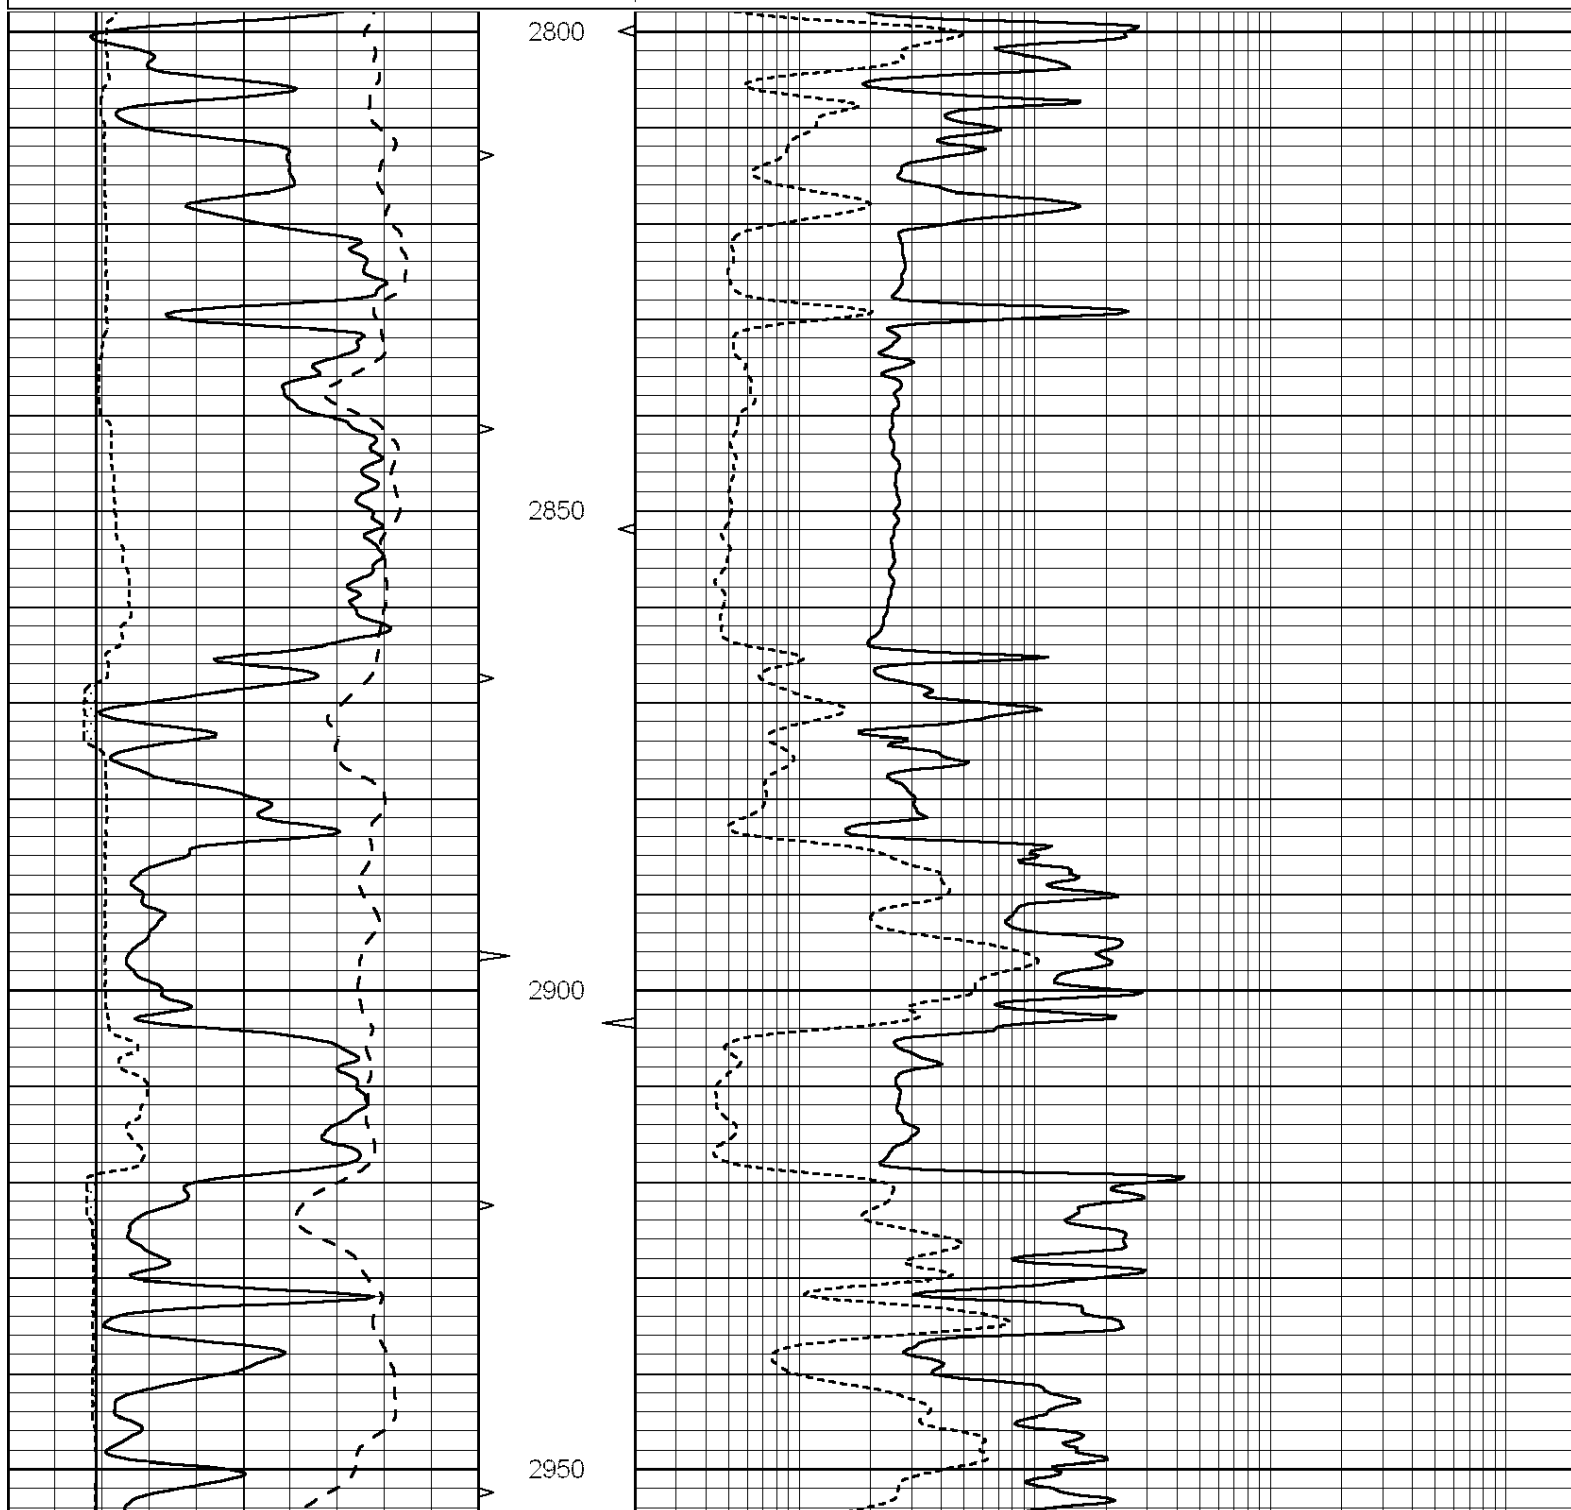

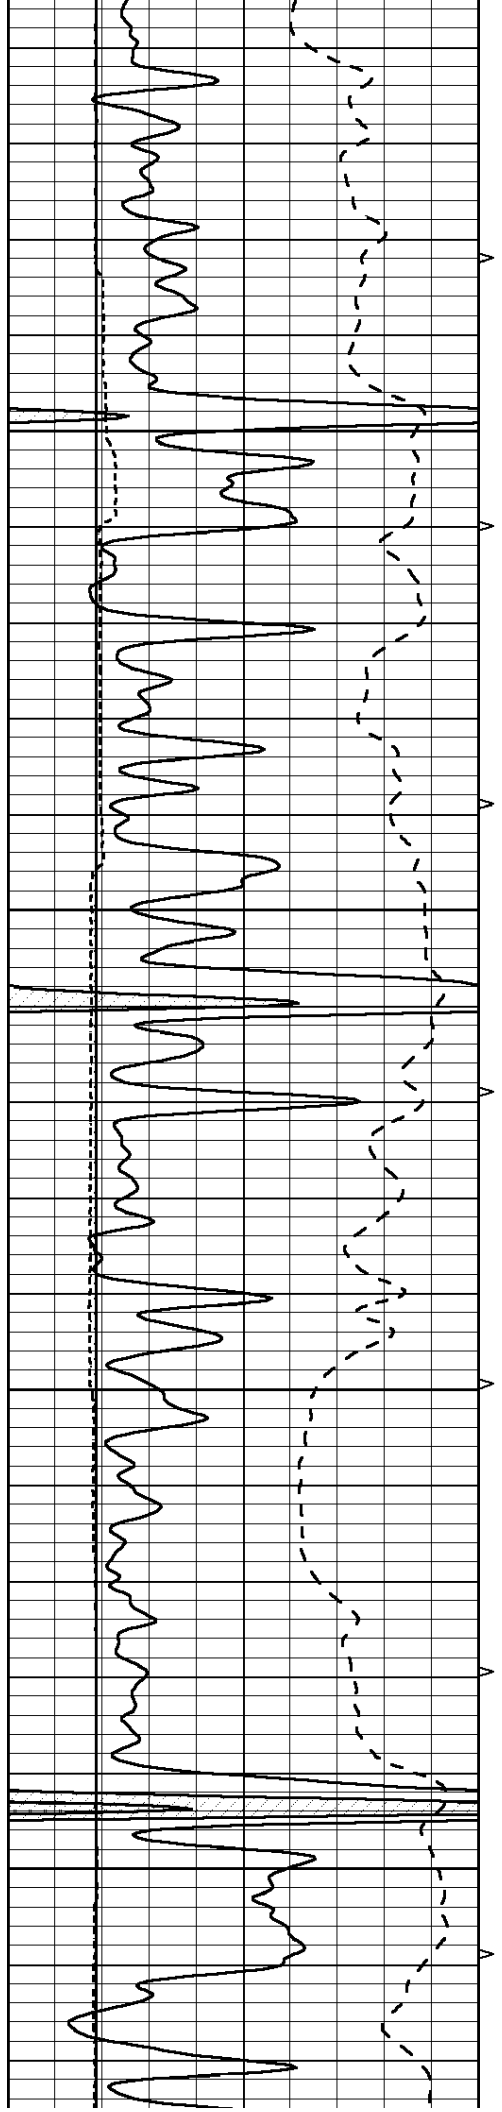



3000

3050

3100

3150

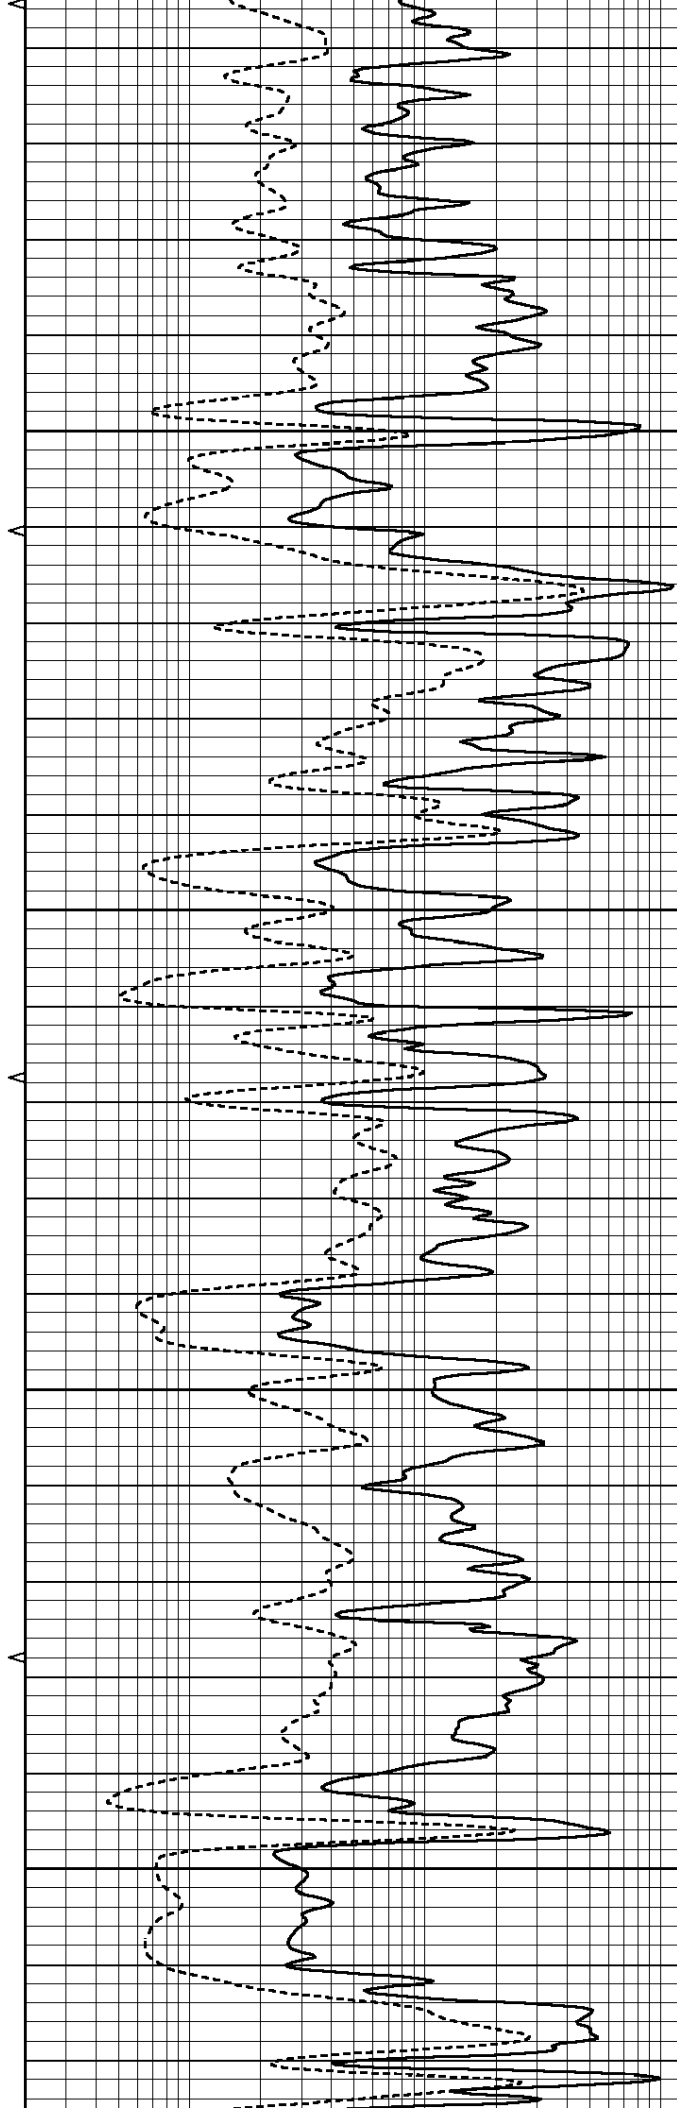


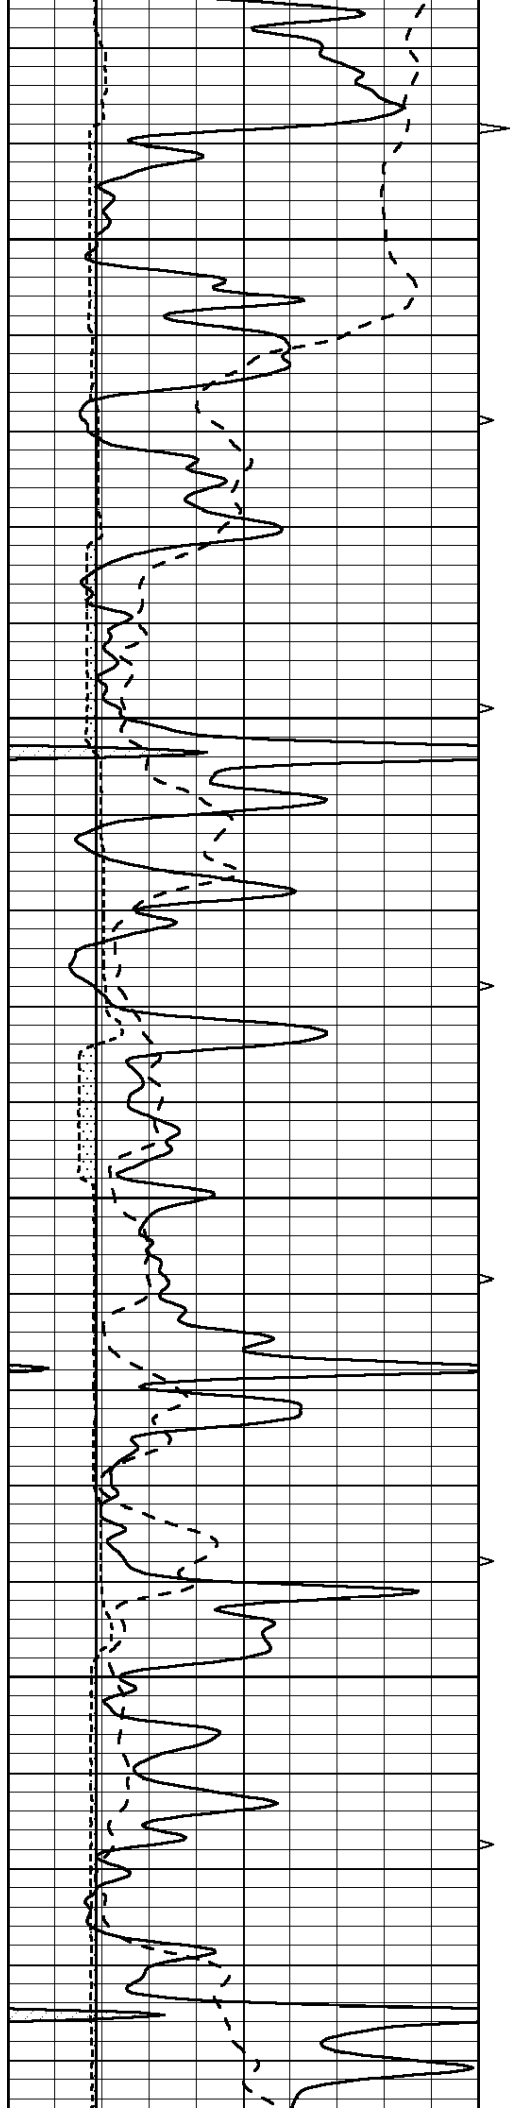


3200

3250

3300

3350

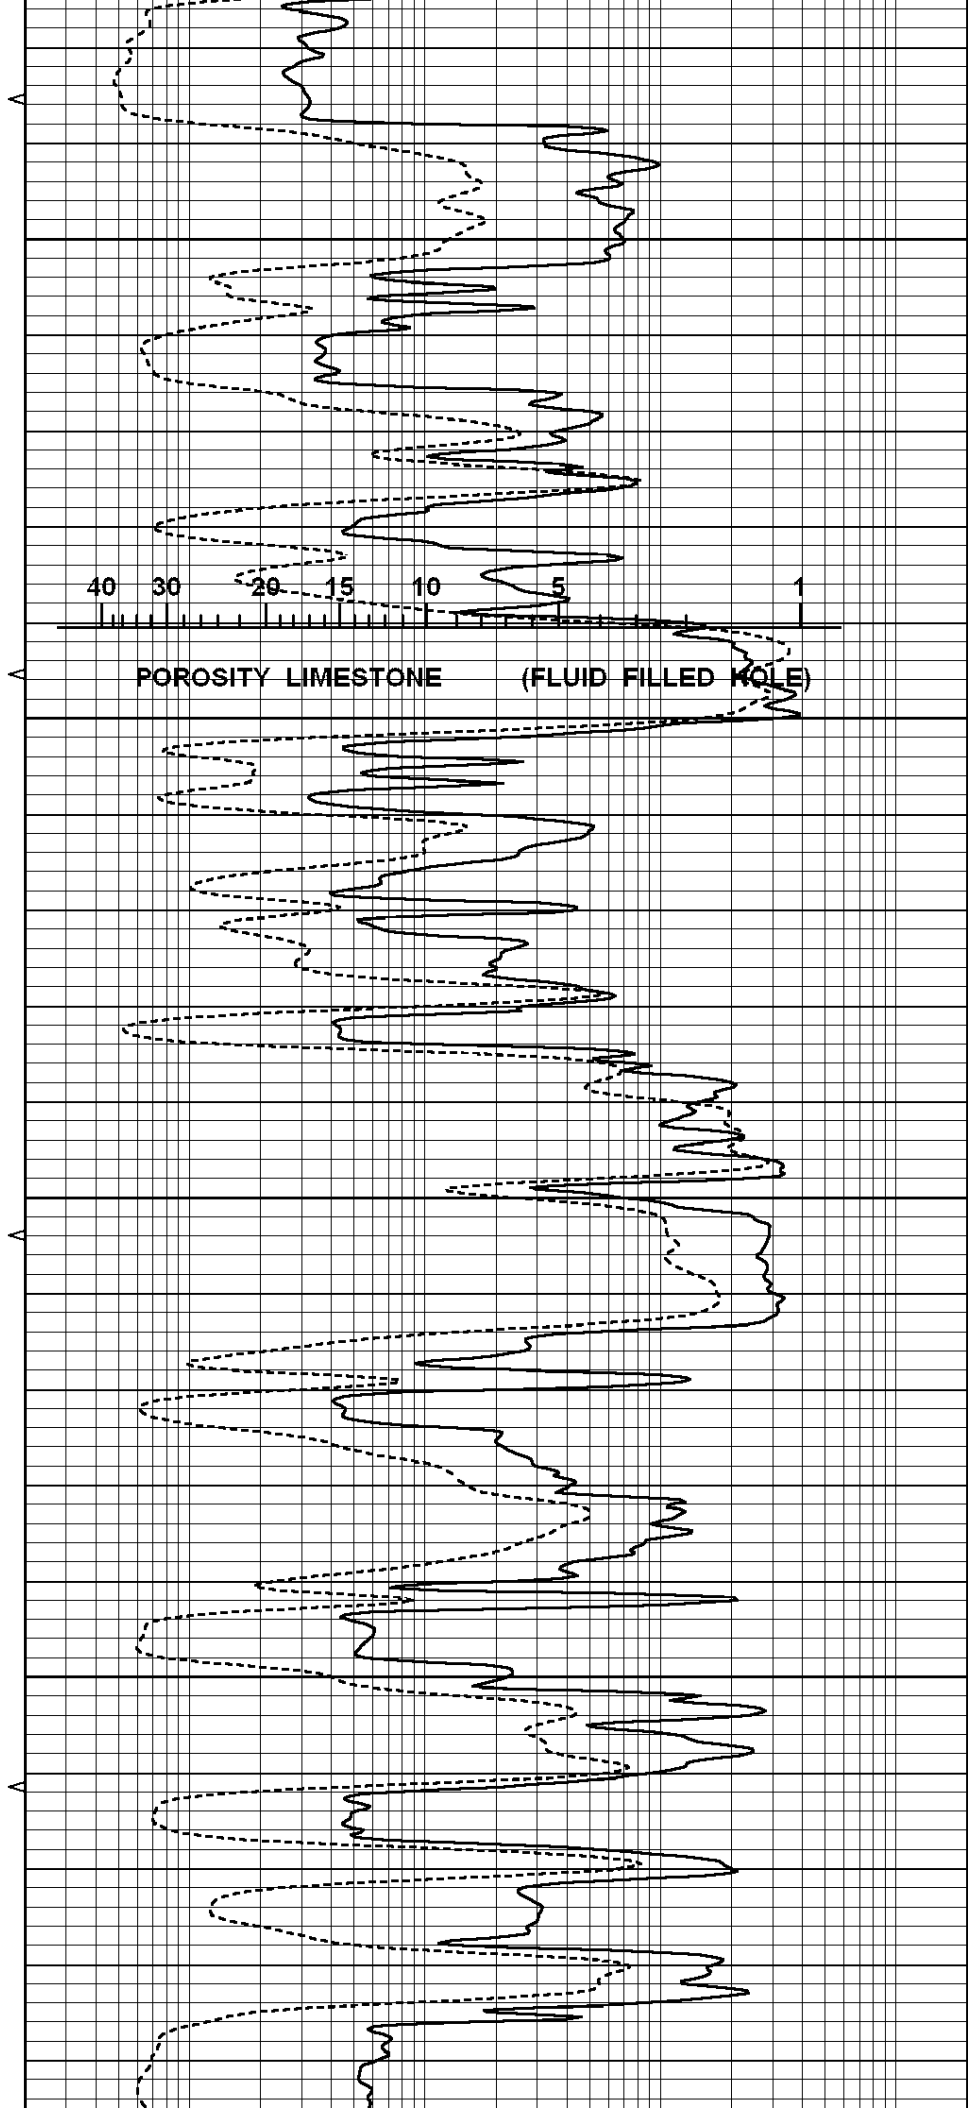

POROSITY LIMESTONE (FLUID FILLED HOLE)

