

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-175-00046-00-01 *KCC 213 50506*
Spot: NWSE Sec/Twnshp/Rge: 3-32S-33W
1980 feet from S Section Line, 1980 feet from E Section Line
Lease/Unit Name: ANGELL A Well Number: 1-3
County: SEWARD Total Vertical Depth: 6493 feet

Operator License No.: 32334
Op Name: CHESAPEAKE OPERATING, INC.
Address: PO BOX 18496 6200 N WESTERN AVE.
OKLAHOMA CITY, OK 73154

Production Casing Size: 4.5 feet: 5951 WITH 220 SX CMT
Surface Casing Size: 8.625 feet: 1779 WITH 1000 SX CMT

#21102

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 01/14/2004 12:30 PM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: DENNIS FRICK Company: CHESAPEAKE OPERATING Phone: (405) 848-8000

Proposed
Plugging
Method:

PUMP 300# HULLS & 25 SX CMT. PERFORATE AT 1800' AND CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: SCOTT ALBERG Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 01/14/2004 1:50 PM KCC Agent: STEVE MIDDLETON

Actual Plugging Report:


PERFS AT 5813-15'. PUMP 25 SX CMT & 300# HULLS ON BOTTOM. PRESSURE CASING TO 600 PSI. PERFORATE CASING AT 1790'. PUMPED 420 SX CMT DOWN 4 1/2". CIRCULATE 3 SX CMT TO PIT.

RECEIVED
JAN 21 2004
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. NO CASING RECOVERED.

Plugged through: CSG

District: 01

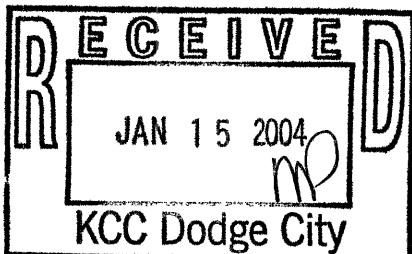

Signed _____

[Handwritten Signature]

(TECHNICIAN)

INVOICED

DATE

1-21-04

INV. NO.

2004061086

Form CP 2/3