

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-129-20066-00-01  
Spot: W2NENE Sec/Twnshp/Rge: 3-33S-41W  
4620 feet from S Section Line, 810 feet from E Section Line  
Lease Name: BERRYMAN RICHFIELD UNIT Well #: 12-1W  
County: MORTON Total Vertical Depth: 5593 feet

Operator License No.: 32659  
Op Name: PHOENIX PETROCORP, INC.  
Address: 15700 CUSTER TRAIL  
FRISCO, TX 75035

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		1710		WITH 2 SX CMT
PKR		4656		
PROD	4.5	5175	0	WITH 180 SX CMT
SURF	8.625	1510		WITH 500 SX CMT

# 181.77

Well Type: EOR UIC Docket No: E18039.3 Date/Time to Plug: 04/10/2006 9:00 AM  
Plug Co. License No.: 32453 Plug Co. Name: ACID SERVICES LLC  
Proposal Rcvd. from: DANNY BRISCOE Company: PHOENIX PETROCORP Phone: (972) 529-2544

Proposed Plugging Method: CIBP @ 1710' WITH 2 SX CMT. CMT 4 1/2" TO SURFACE. PRESSURE CHECK.

Plugging Proposal Received By: JIM HOLLAND WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 04/10/2006 7:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:

SET CIBP @ 1710' WITH 2 SX CMT ON TOP. TEST CASING TO 500#. FILLED 4 1/2" CASING AND 4 1/2" X 8 5/8" ANNULUS FROM 1525' TO SURFACE WITH 590 SX CMT. PRESSURED TO 300# & SHUT IN.

Perfs:


Top	Bot	Thru	Comments
5001	5011		

INVOICED  
DATE 5-9-06  
INV. NO 2006061616

Remarks: USED 60/40 POZMIX 6% GEL BY ACID SERVICES.

Plugged through: CSG

District: 01

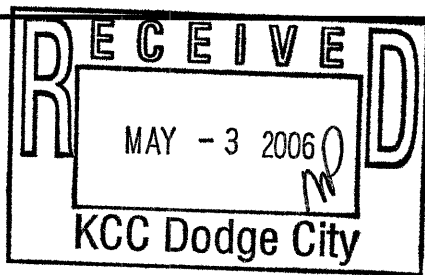

Signed Jim Holland PERT#  
(TECHNICIAN)  
RECEIVED  
MAY 08 2006  
KCC WICHITA

Form CP-27  
PET