

MICRO LOG

Company		VINCENT OIL CORPORATION	
Well		KEOUGH #8-34	
Field		MULLBERRY CREEK	
County		FORD	
State		KANSAS	
Location:		APL # : 15-057-20986-0000 3015' FSL & 865' FEL NE - SW - SE - NE	
Permanent Datum		GROUND LEVEL	
Log Measured From		KELLY BUSHING 12' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 34 TWP 28S RGE 23W		Elevation K.B. 2506 D.F. 2504 G.L. 2494	
Date	10/12/17		
Run Number	TWO		
Depth Driller	5335		
Depth Logger	5338		
Bottom Logged Interval	5322		
Top Log Interval	4000		
Casing Driller	8 5/8"@648'		
Casing Logger	646		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 10,800 PPM	
Density / Viscosity	9.1/78		
pH / Fluid Loss	9.0/11.6		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.400@80F		
Rmf @ Meas. Temp	.300@80F		
Rmc @ Meas. Temp	.480@80F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.250@128F		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom	1:15 A.M.		
Maximum Recorded Temperature	128F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	JIM HALL		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
KINGSDOWN, KS. & HWY 54, 2N. ON "RD. 125" TO "WILBURN RD.", 3 1/4W., N. INTO AT GATE




MAIN SECTION

Database File: 1832pe.db
Dataset Pathname: pass7.3
Presentation Format: micro
Dataset Creation: Thu Oct 12 02:11:19 2017
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

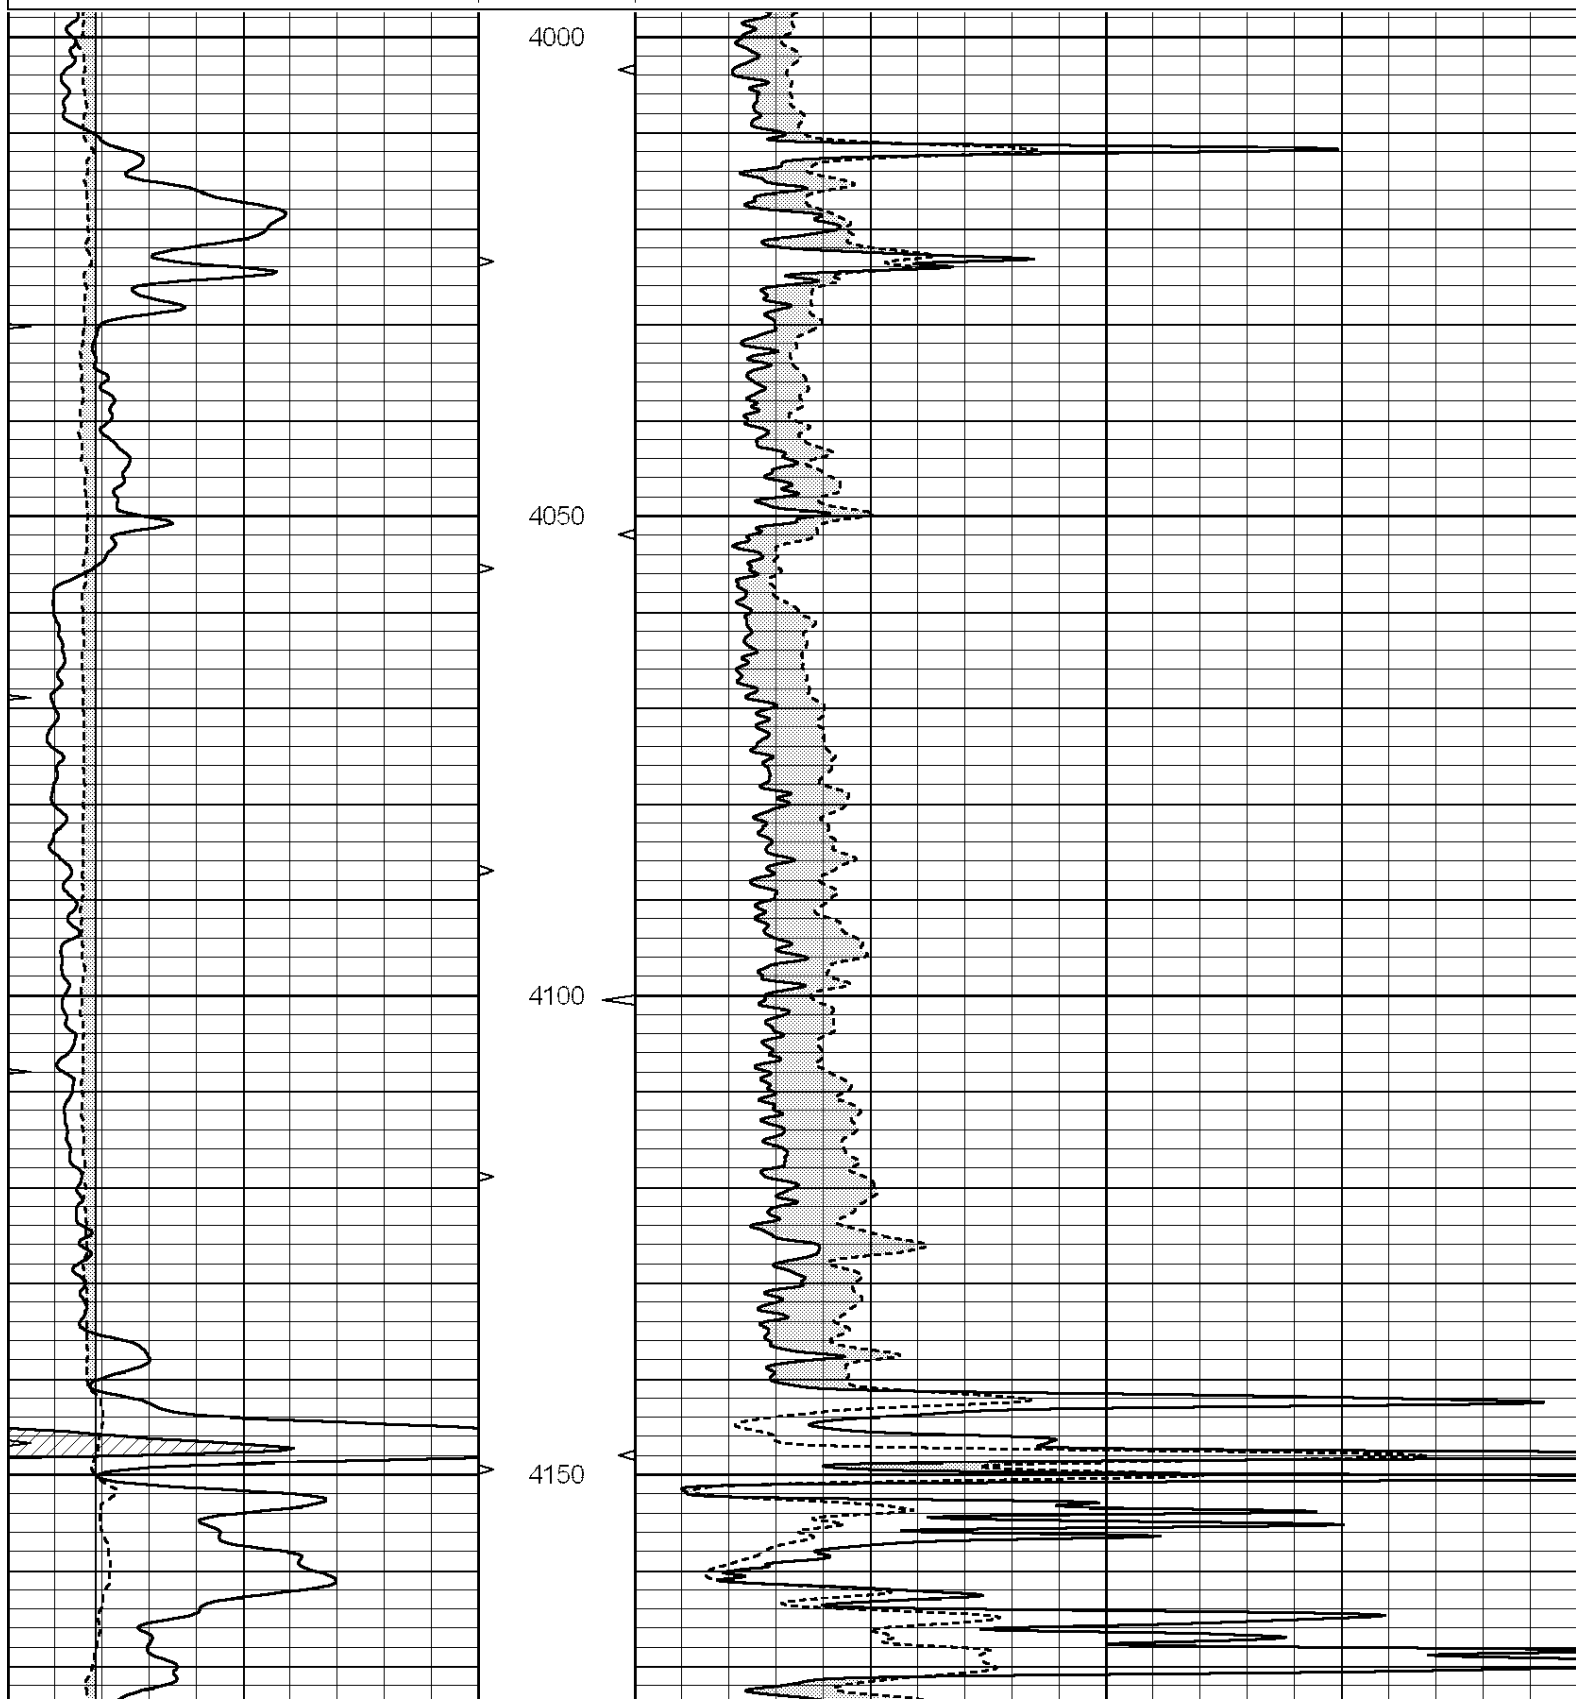

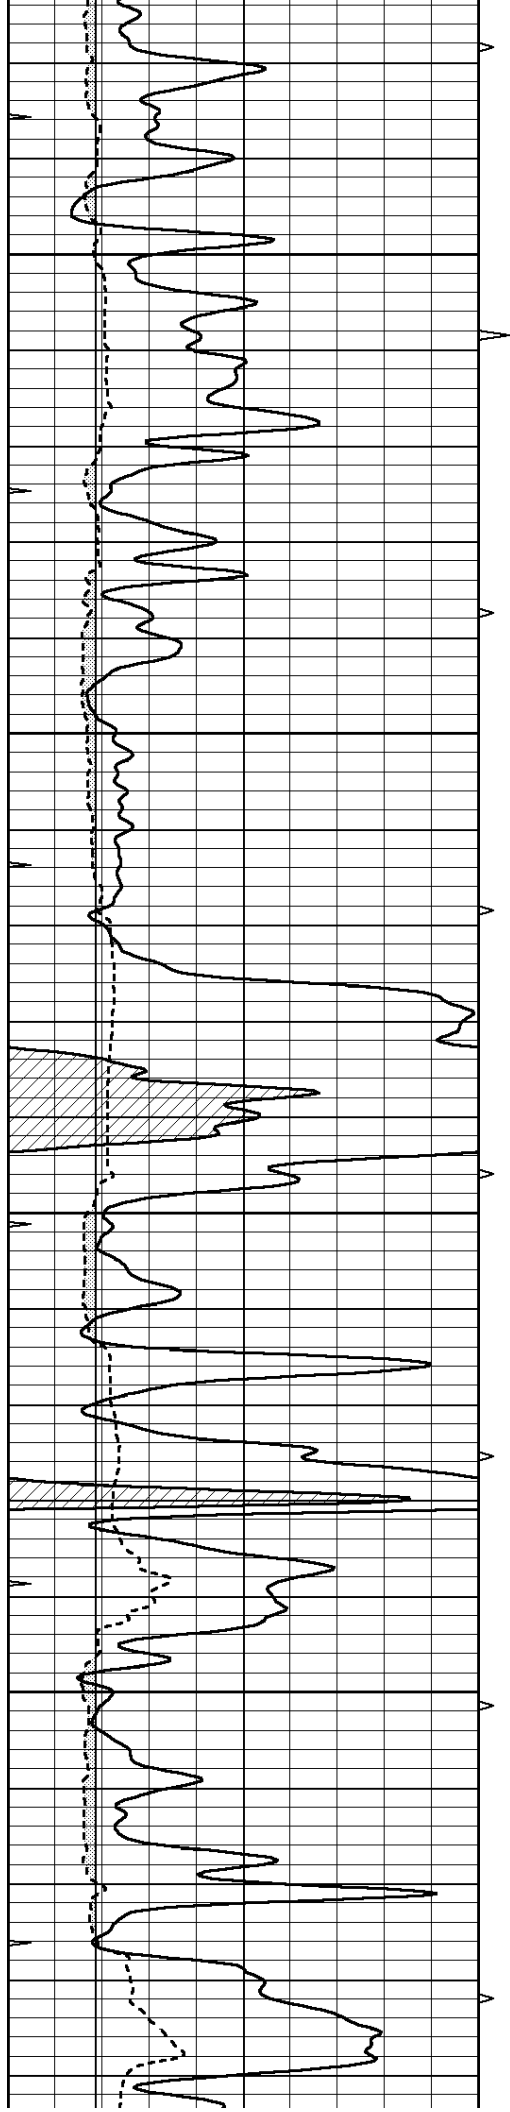



4200


4250

4300

4350

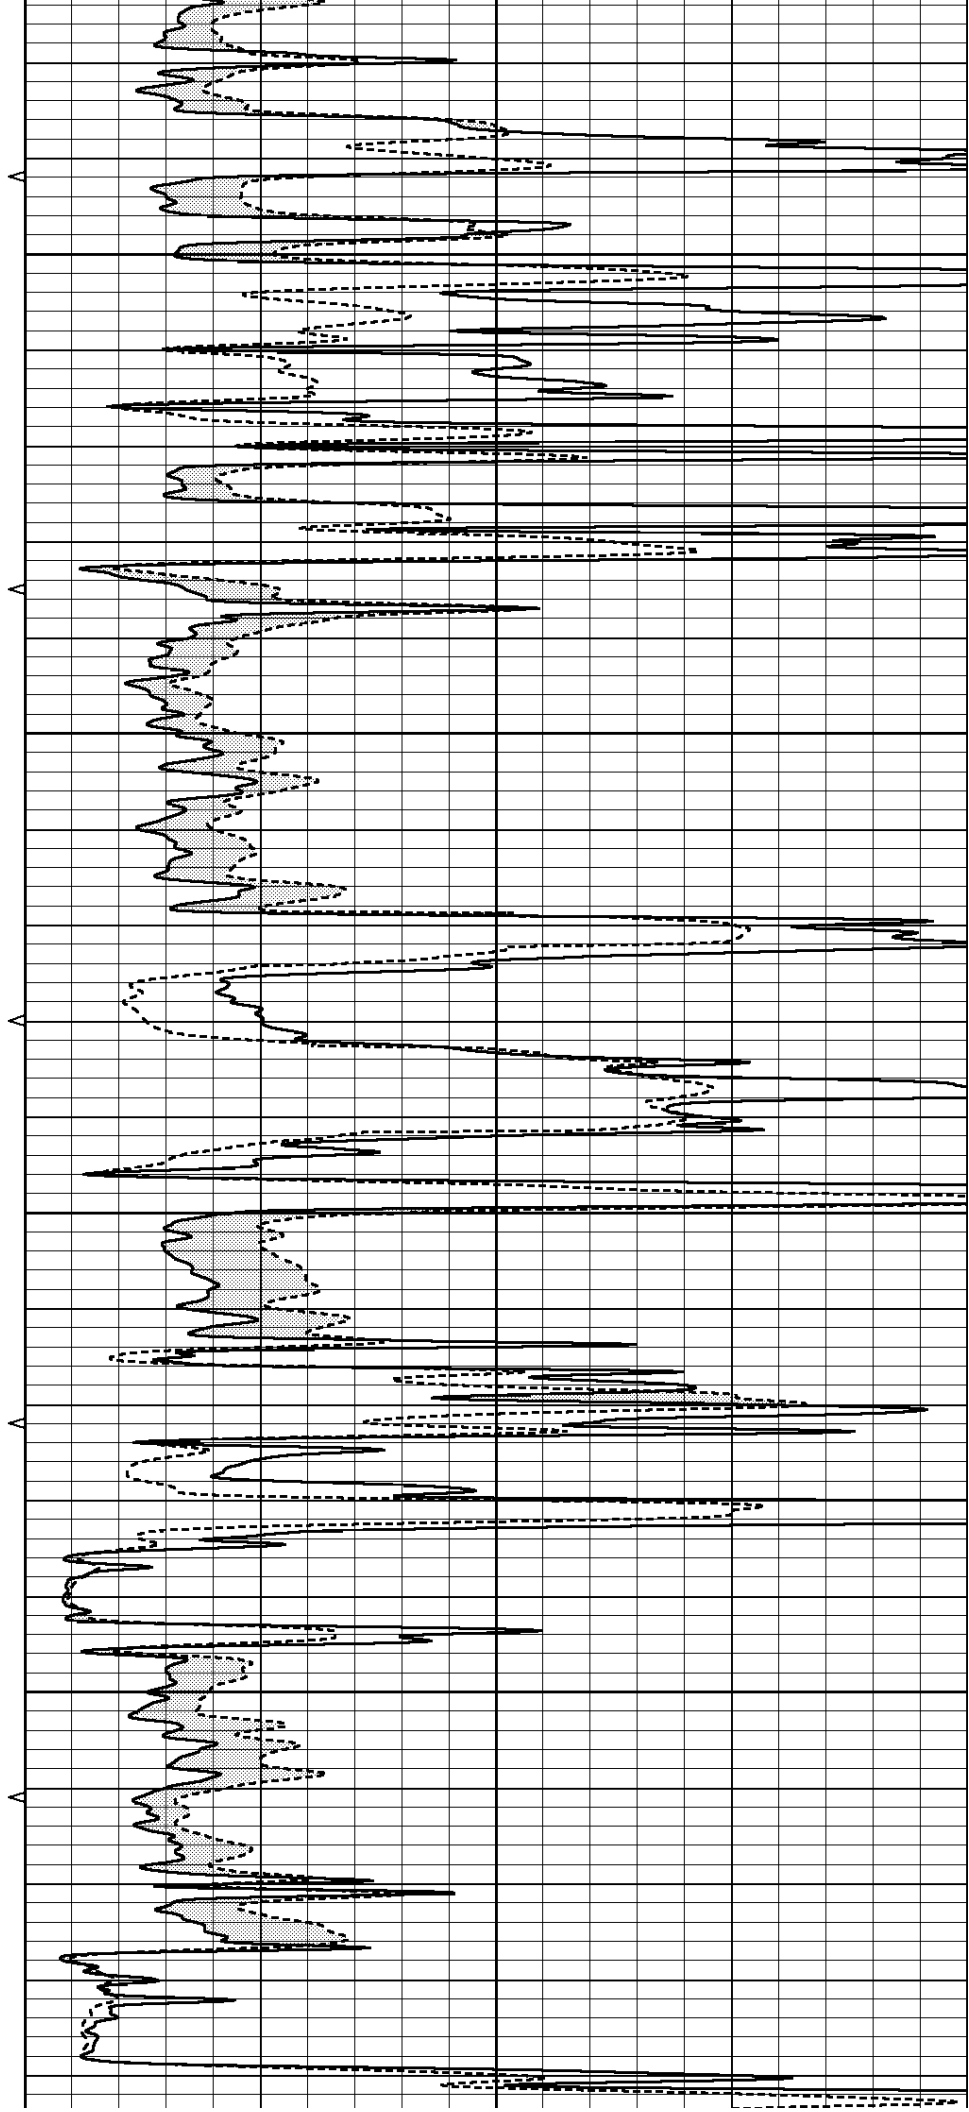

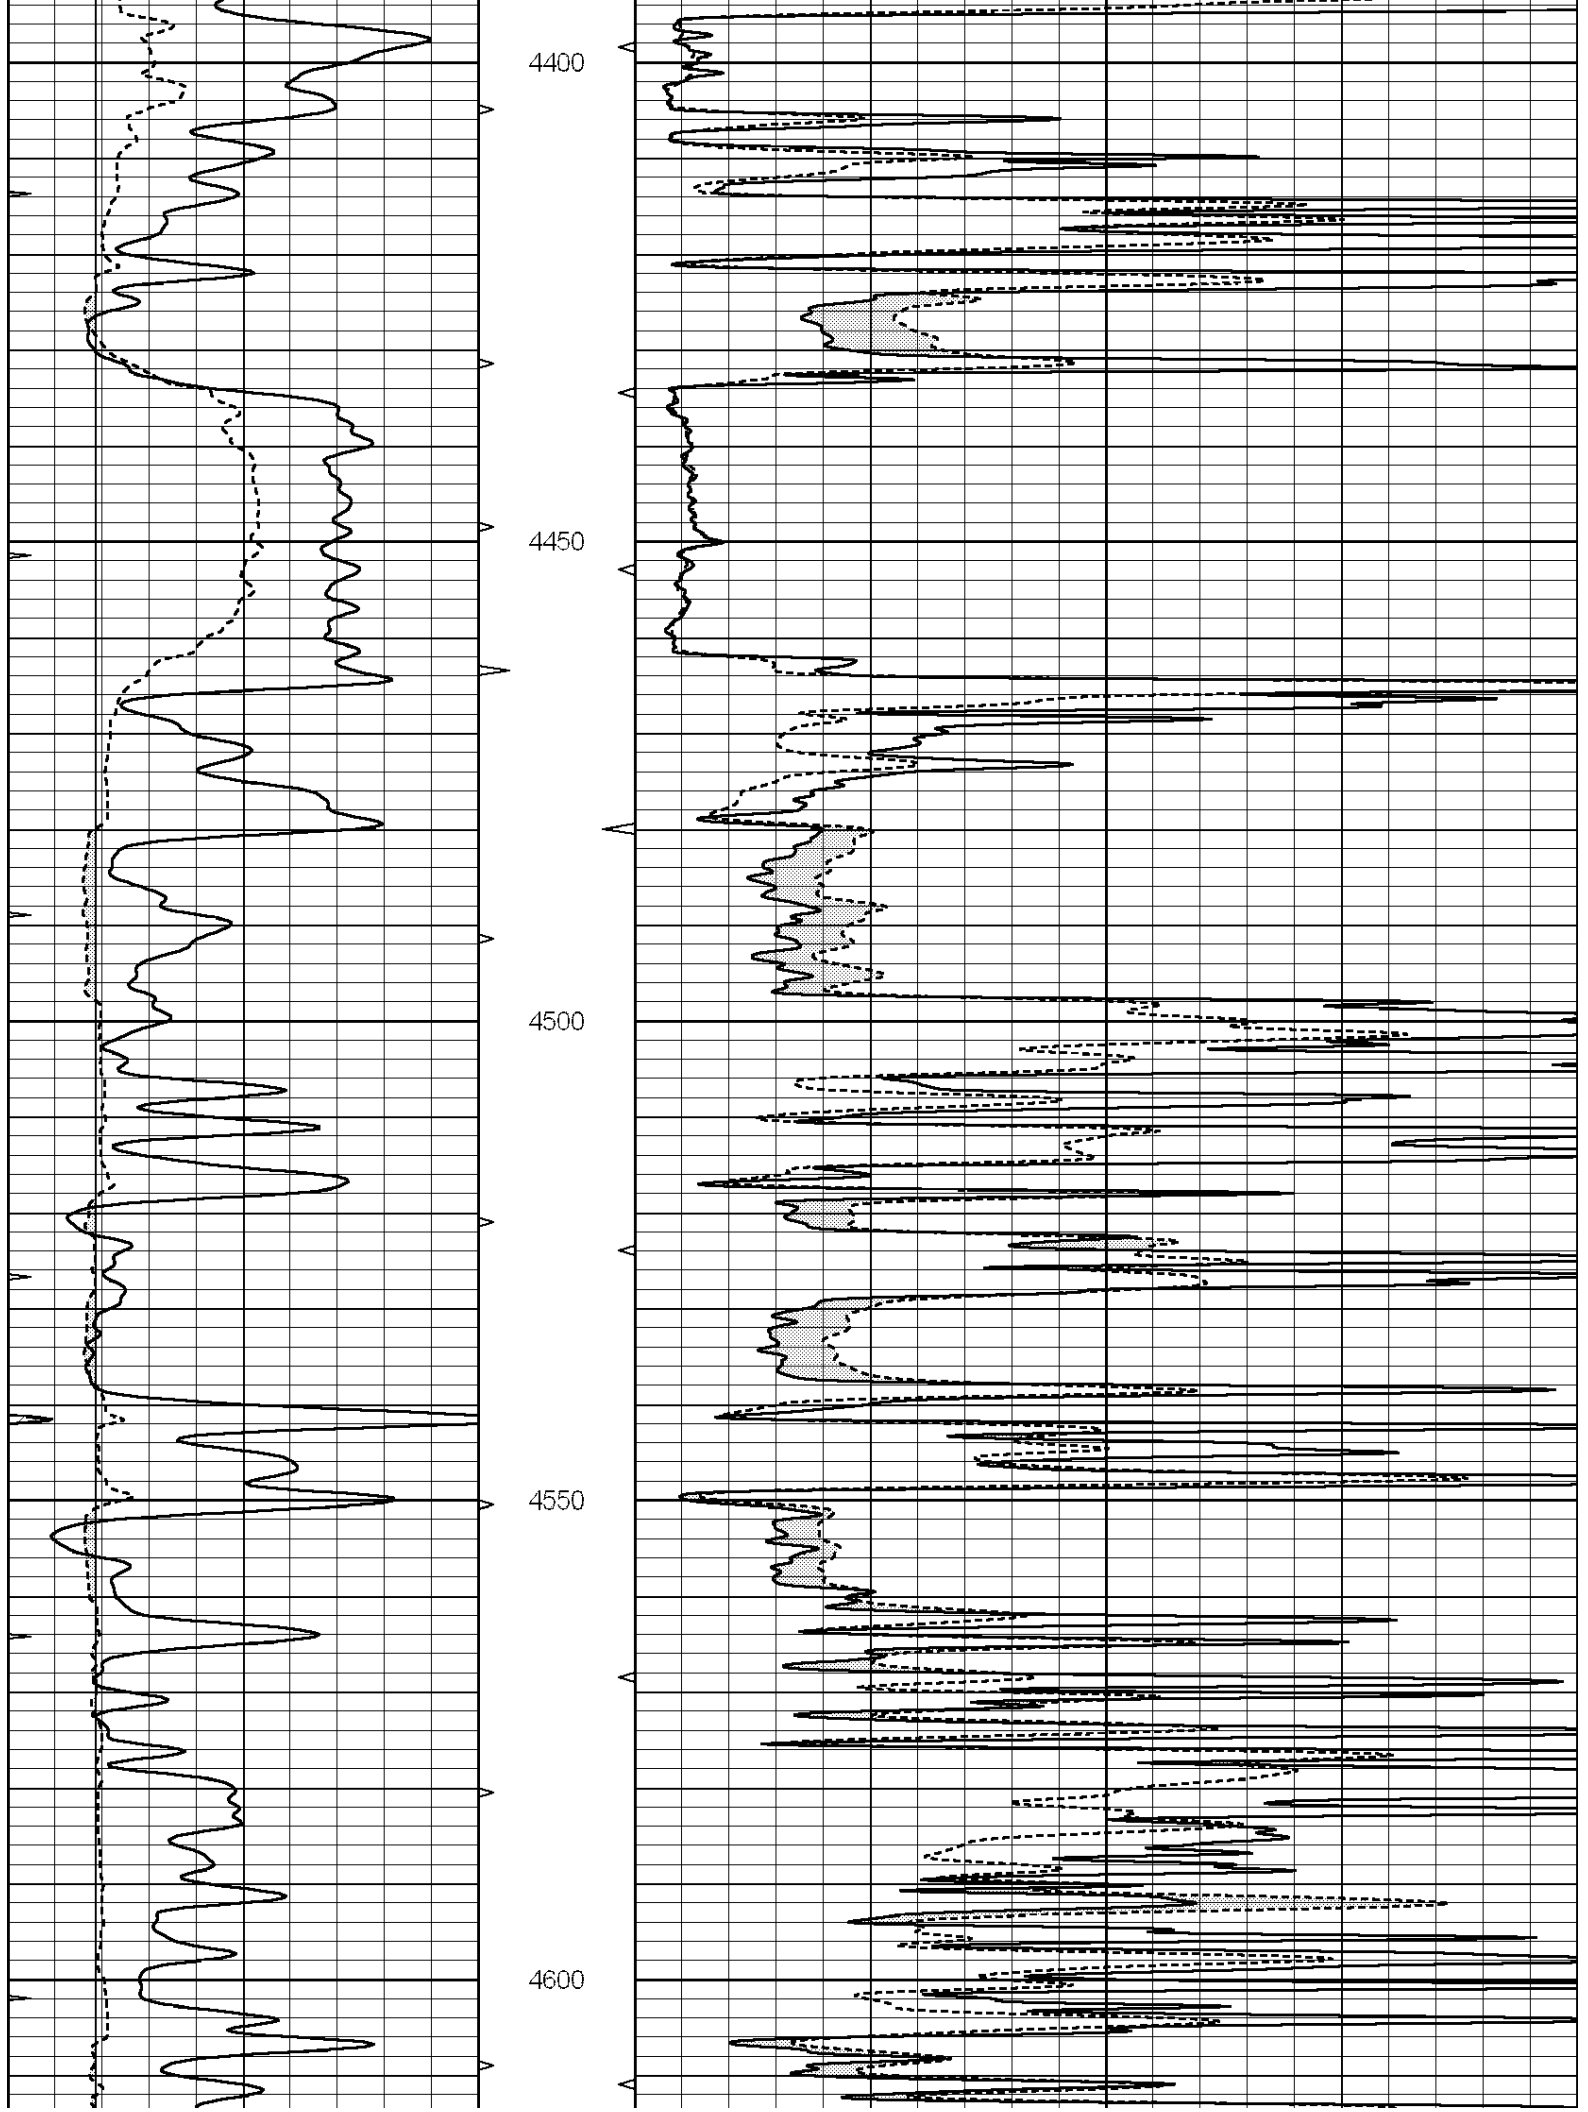

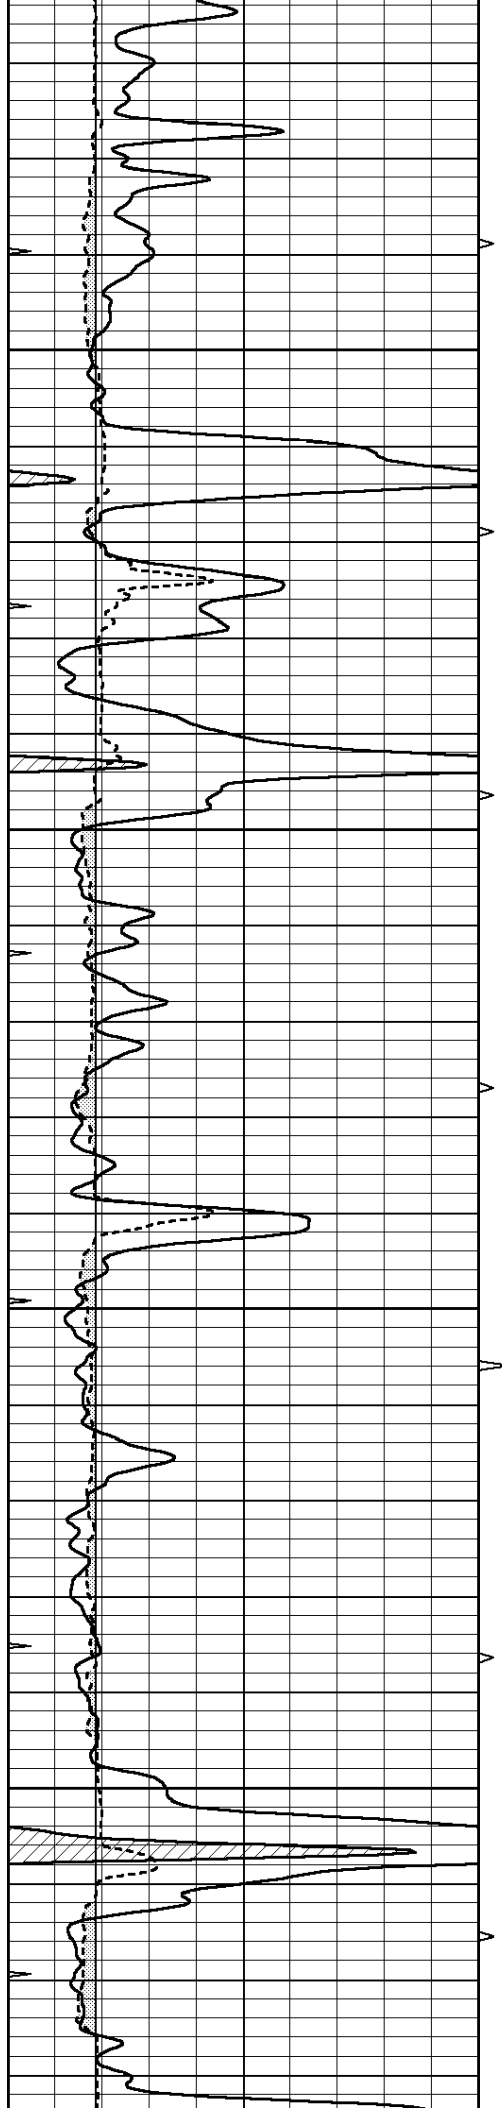



4650

4700

4750

4800

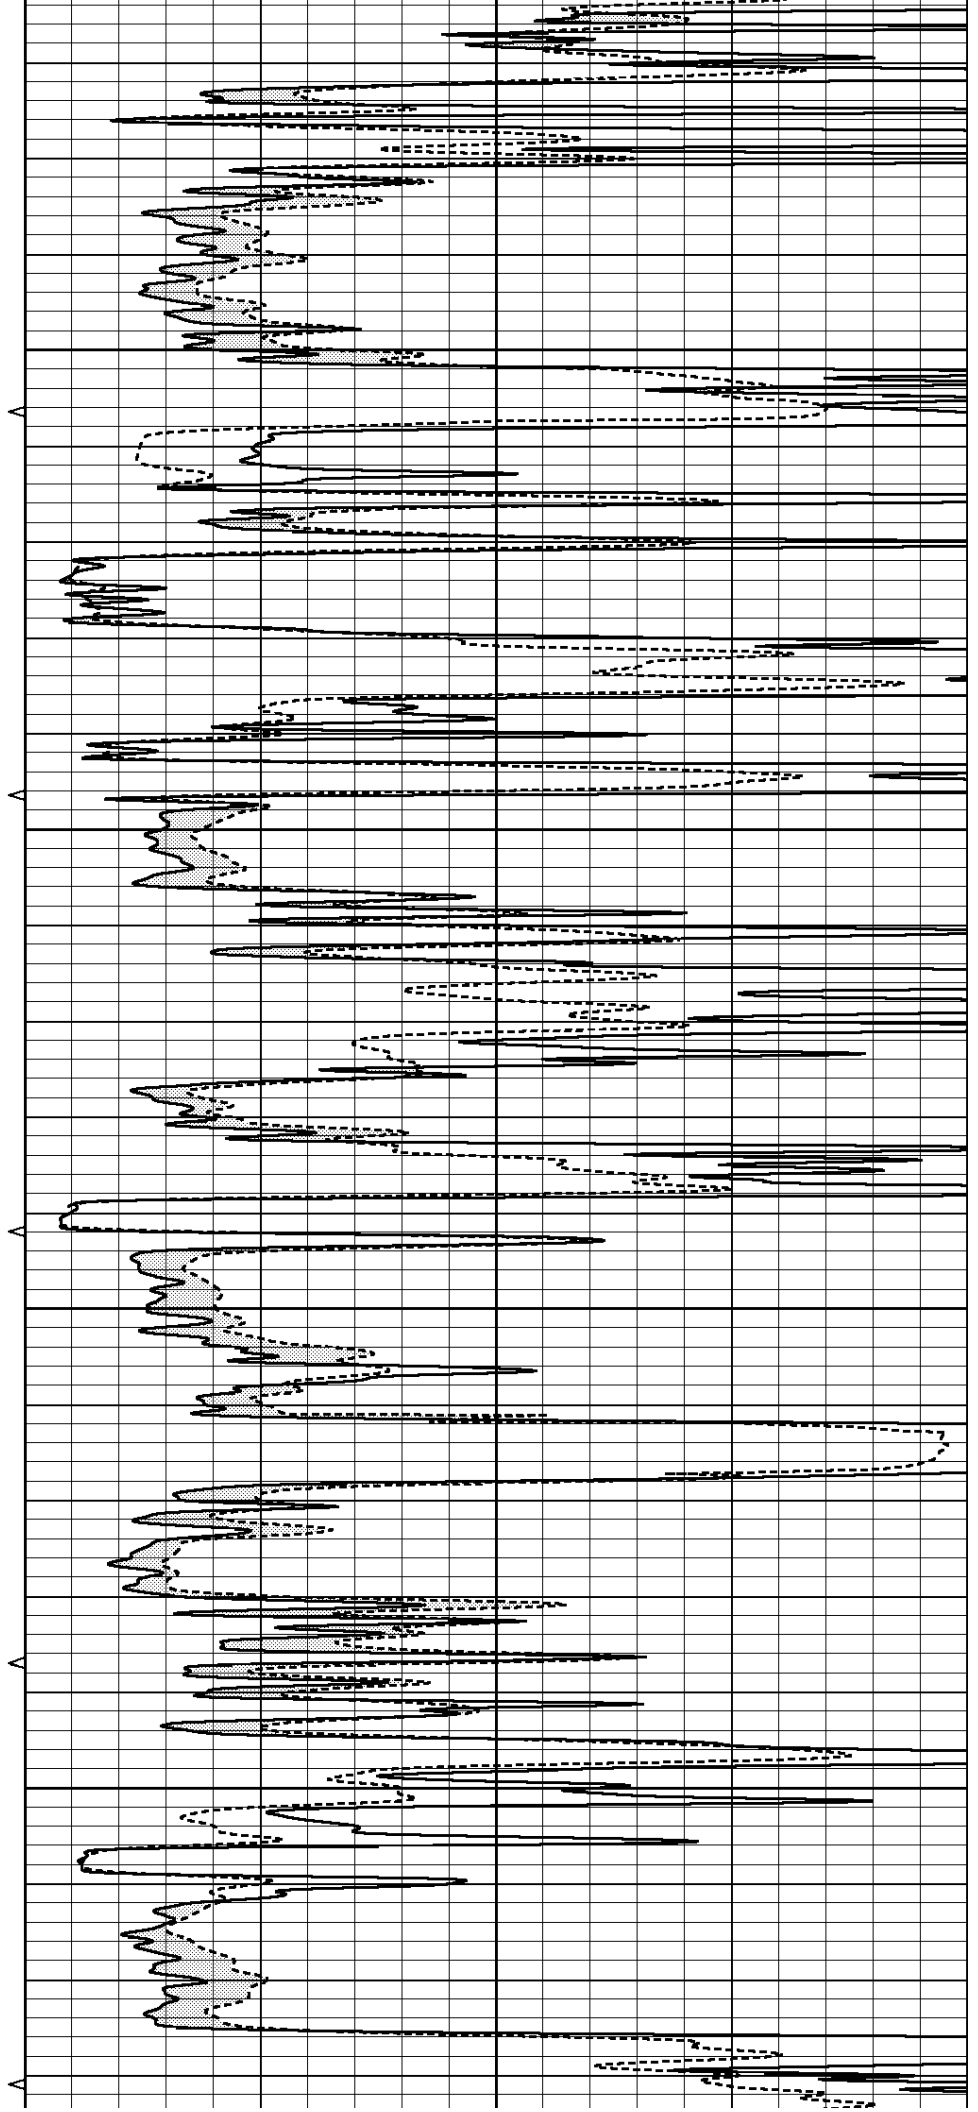

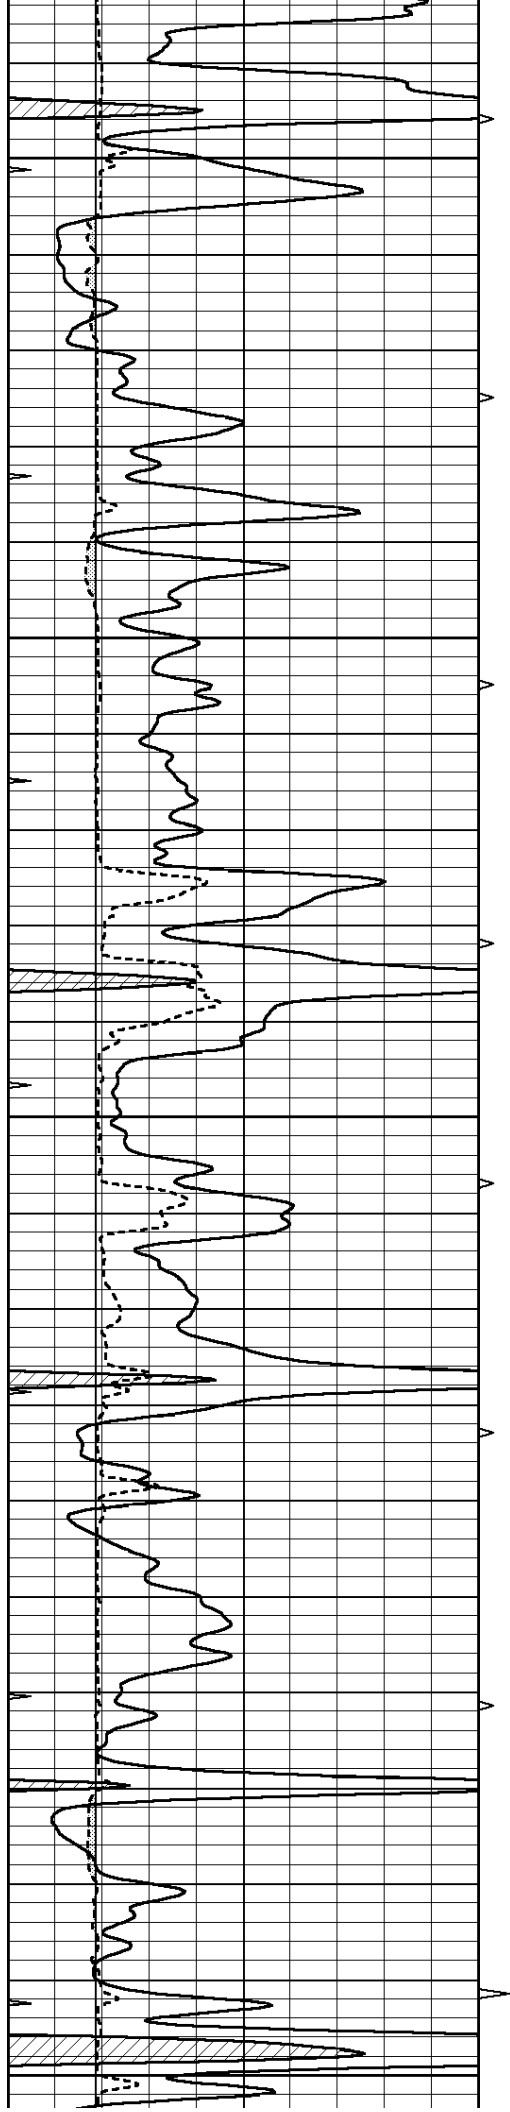


4850


4900

4950

5000

5050

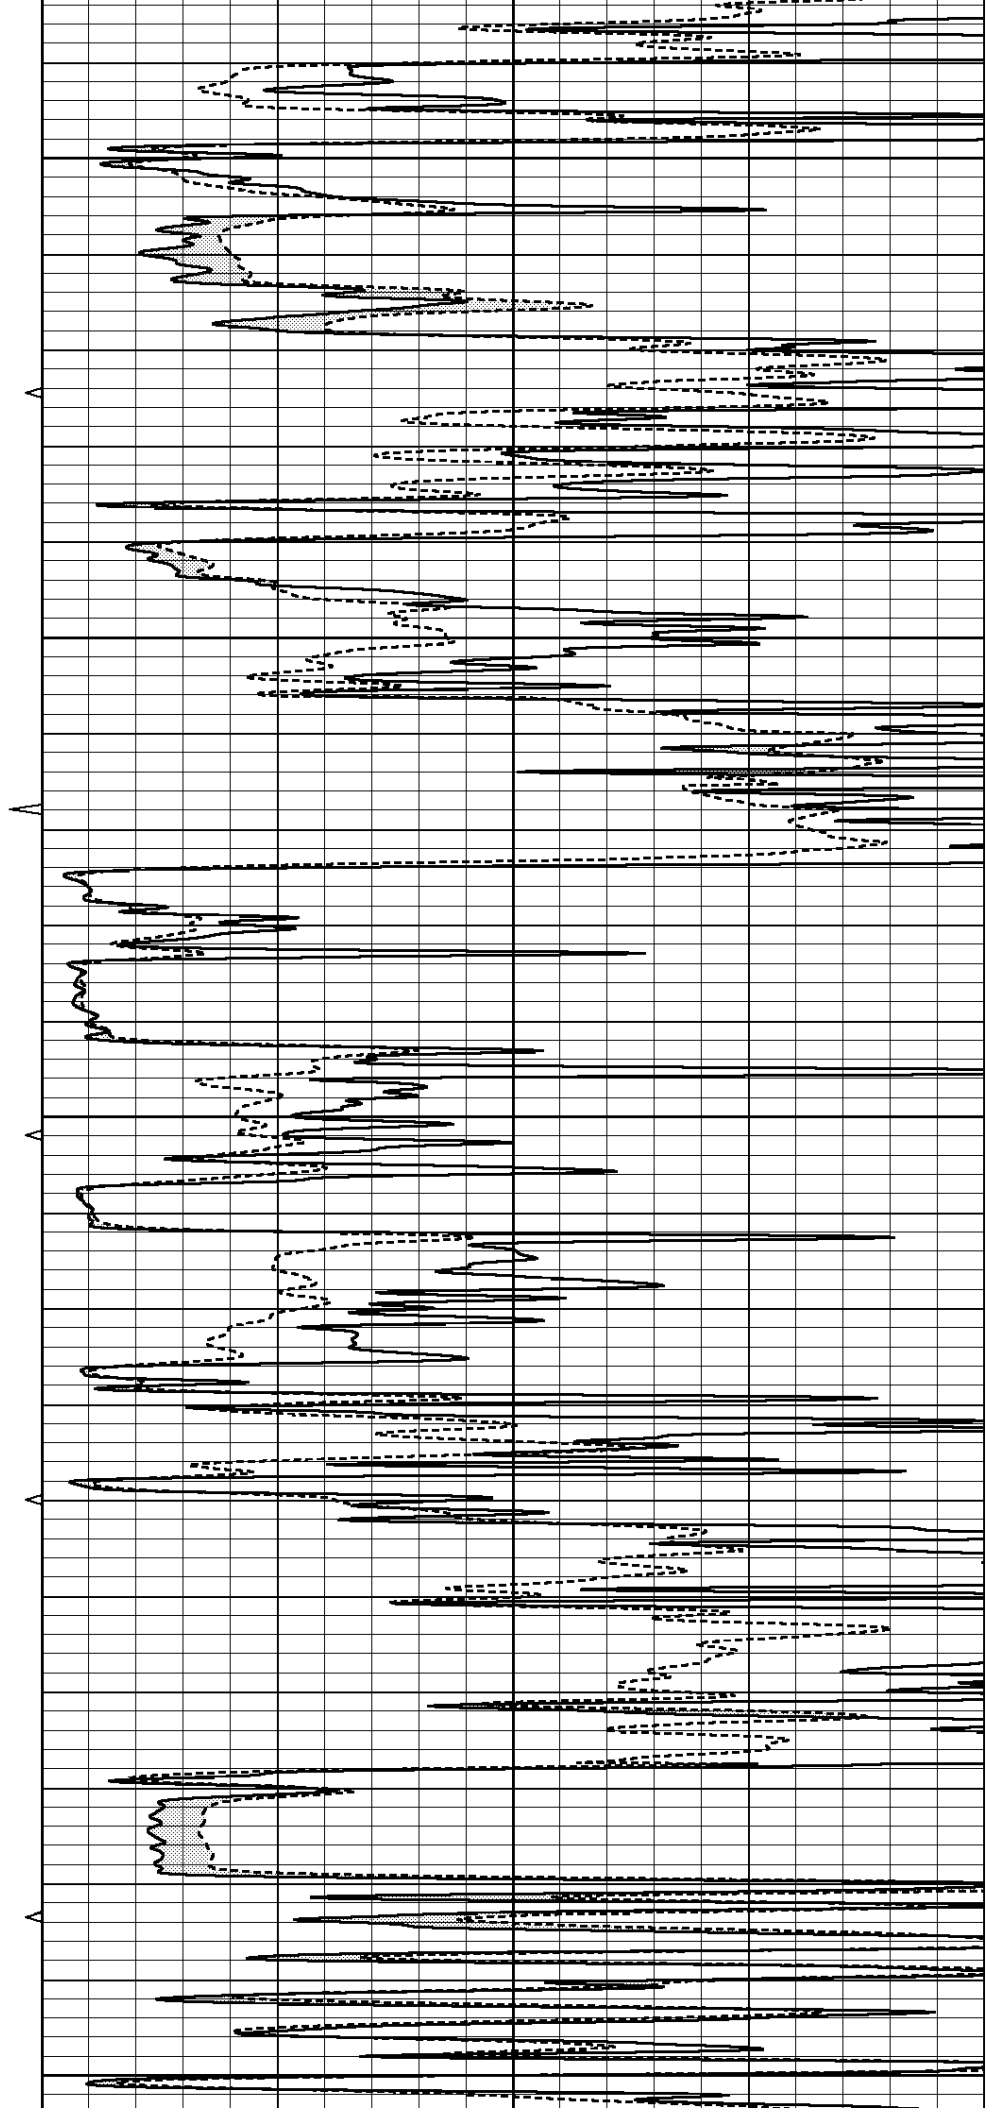

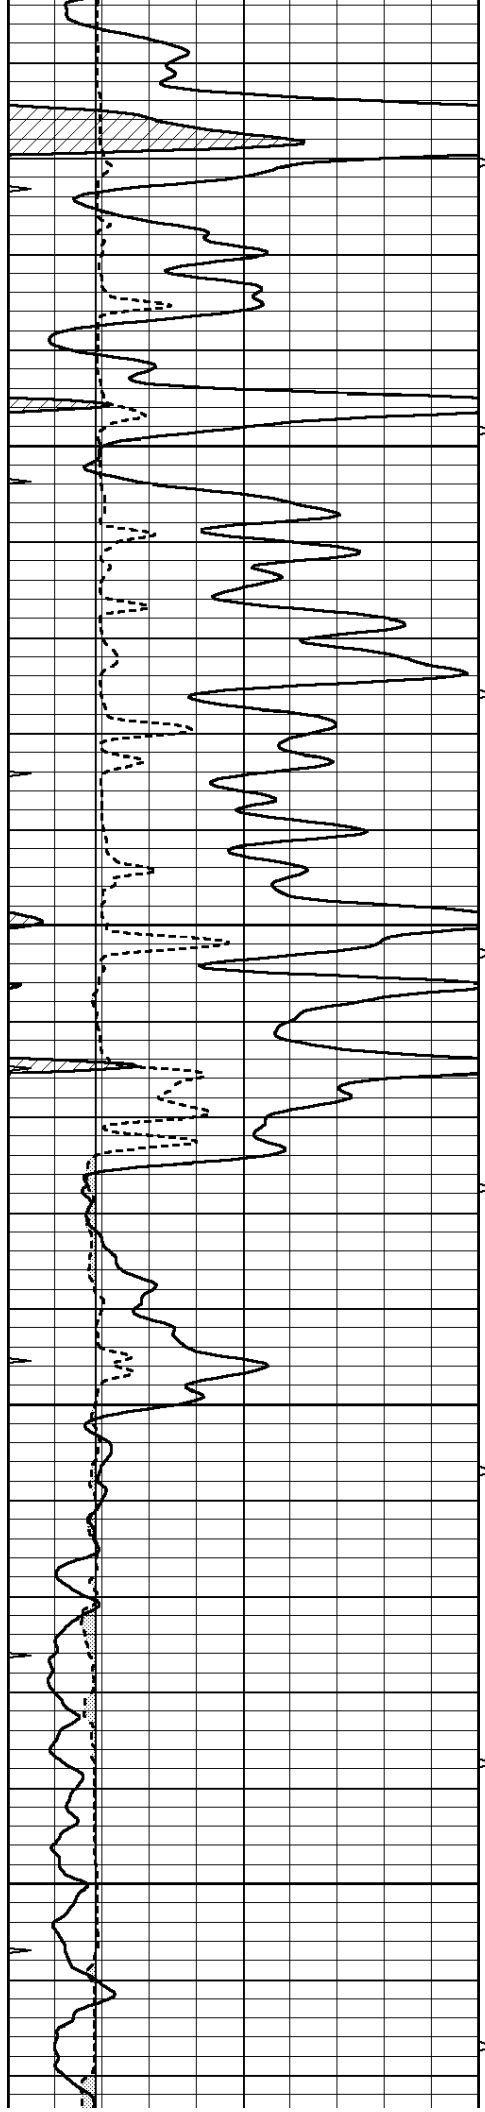




5100

5150

5200

5250

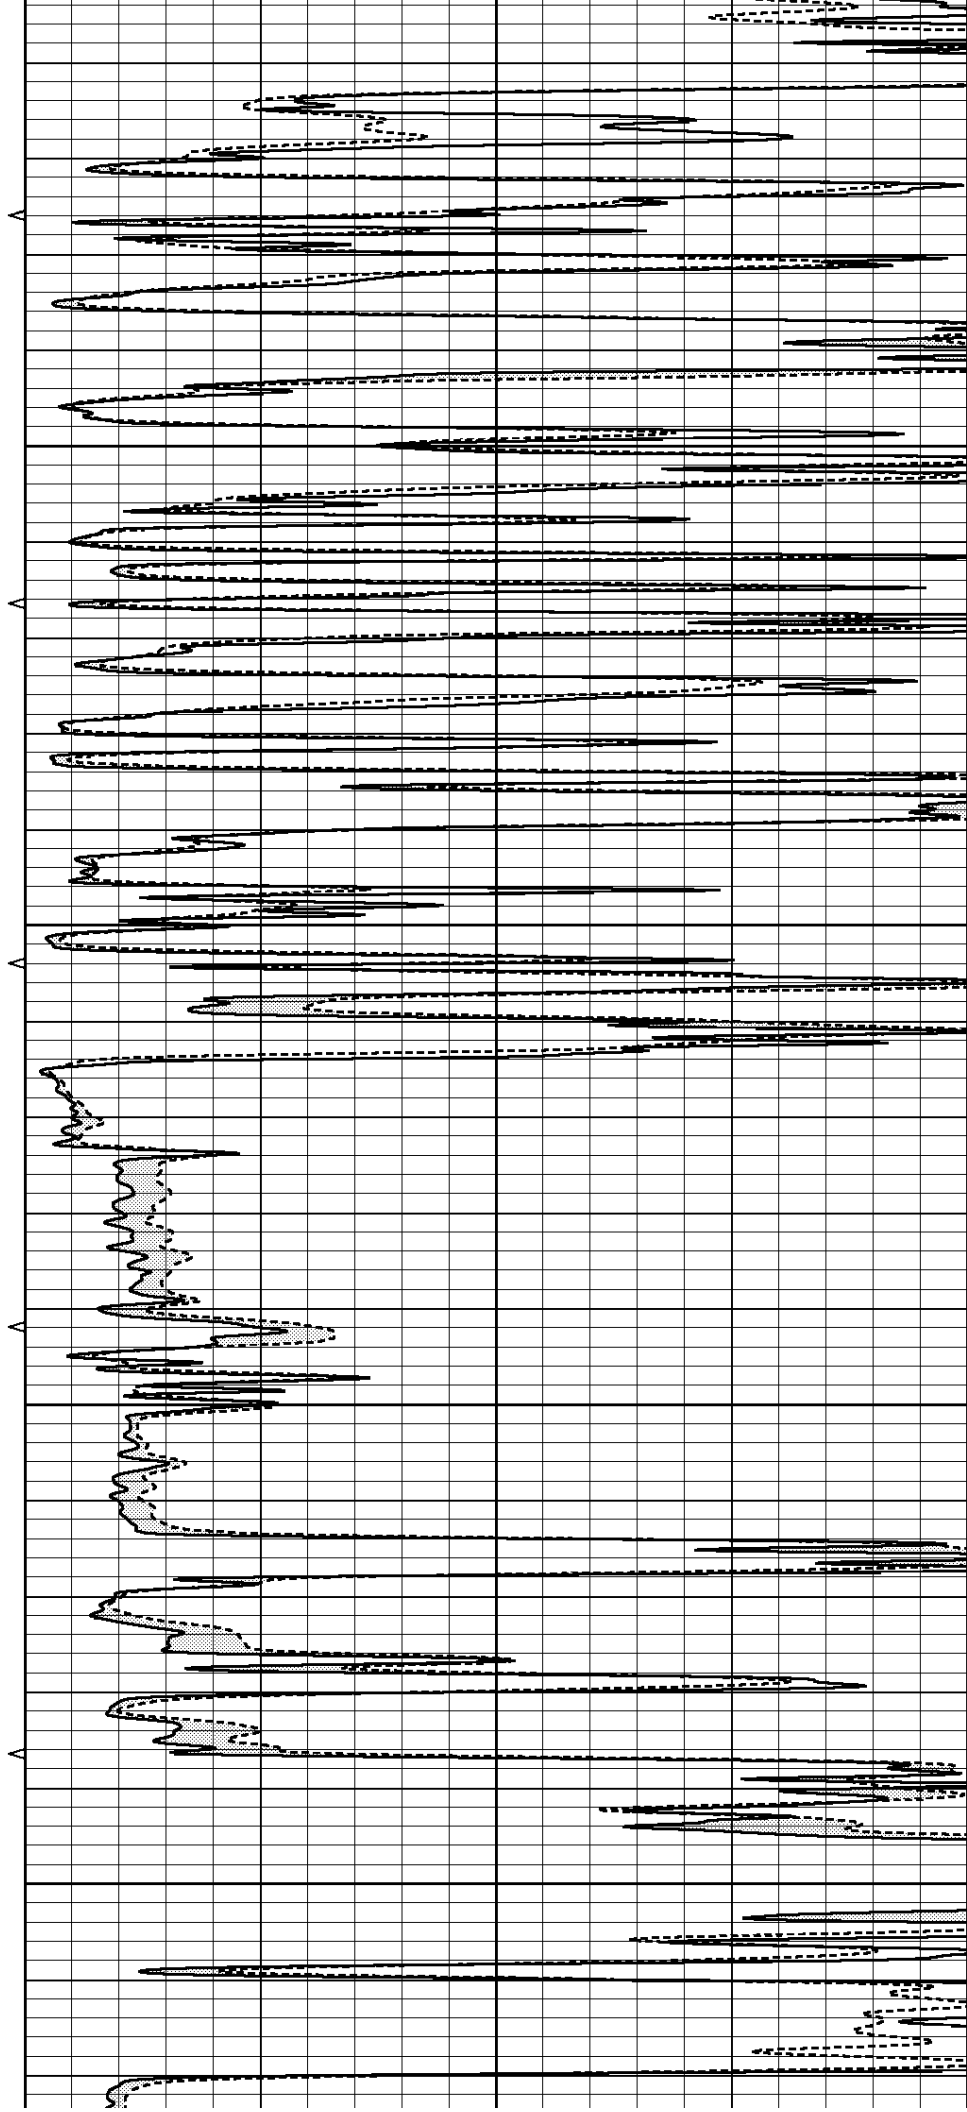


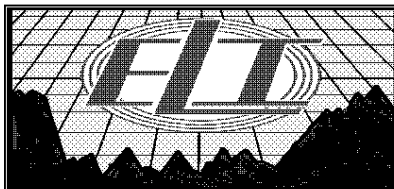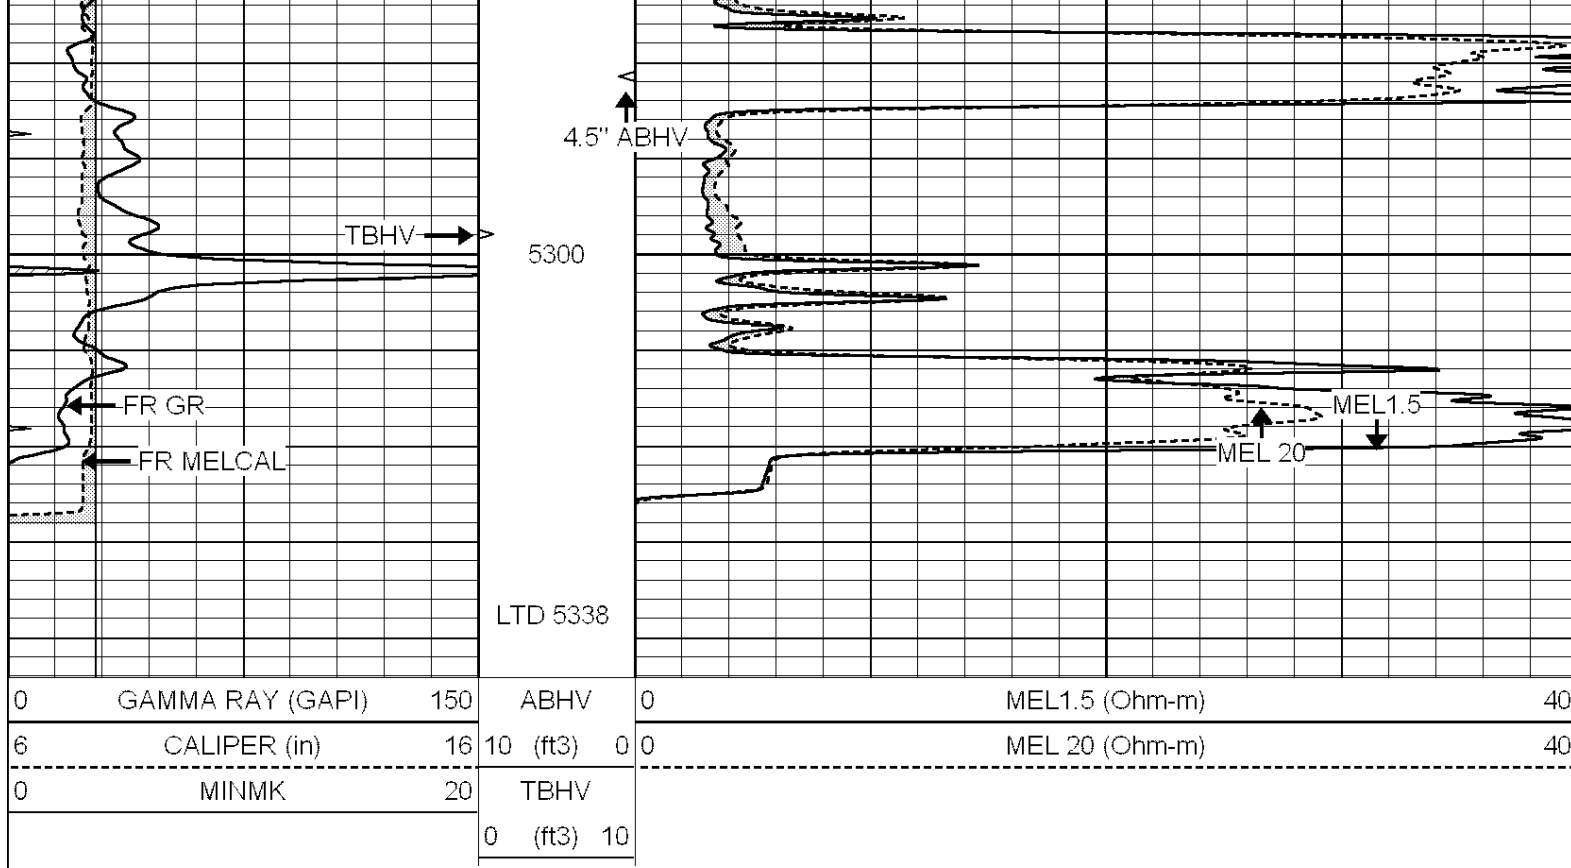


REPEAT SECTION

Database File: 1832pe.db
 Dataset Pathname: pass6.2
 Presentation Format: micro
 Dataset Creation: Thu Oct 12 01:20:02 2017 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

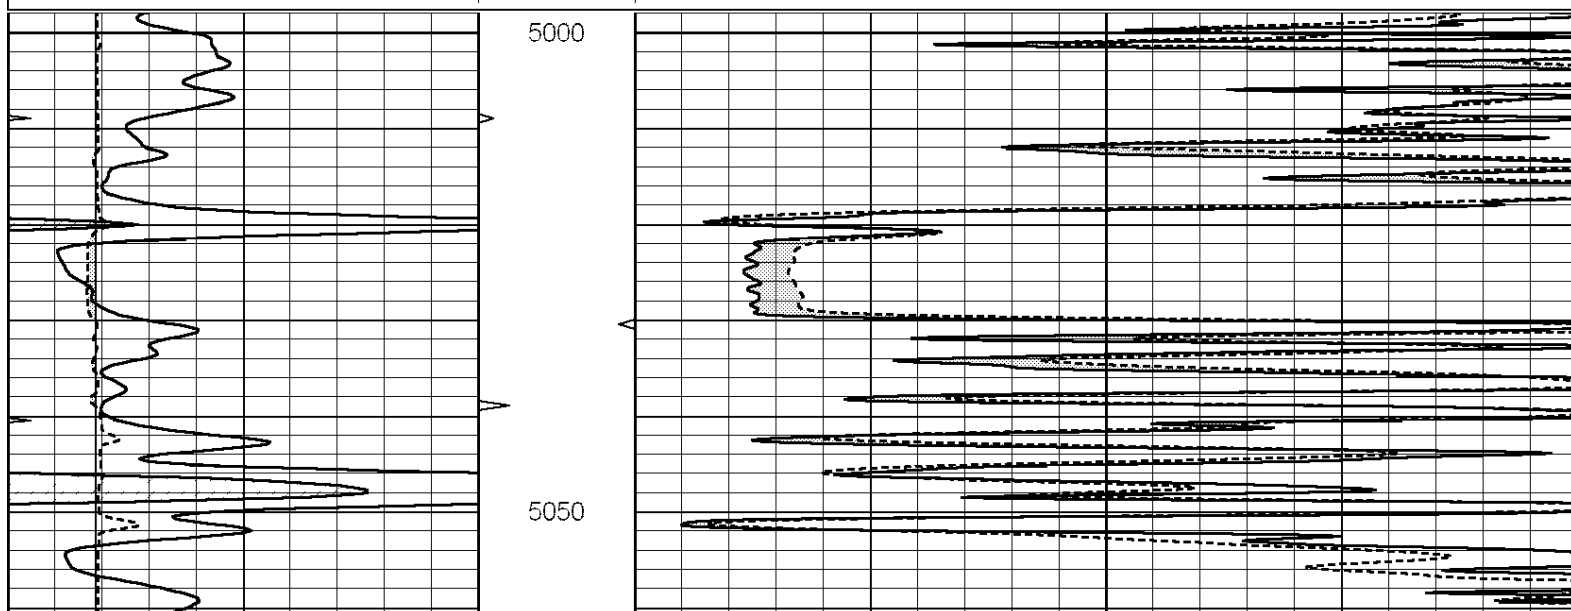

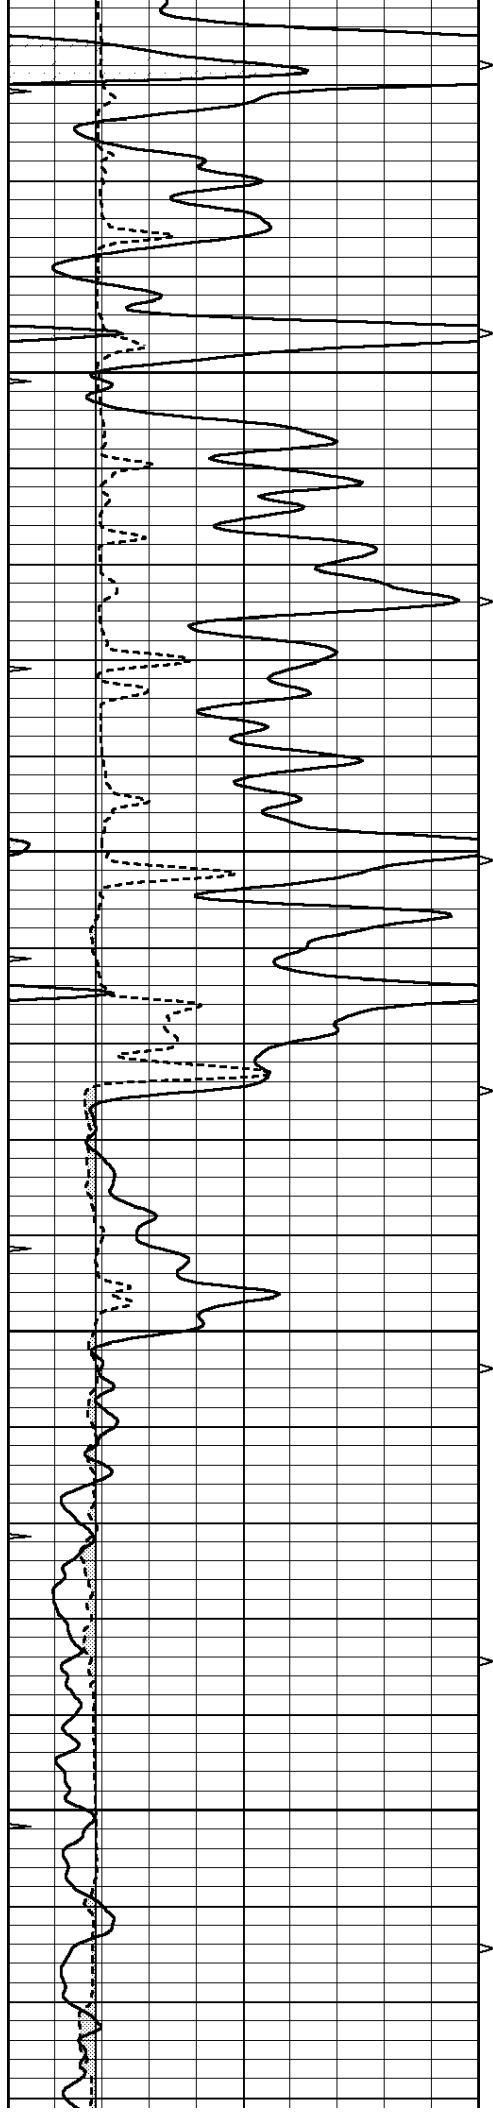



5100

5150

5200

5250

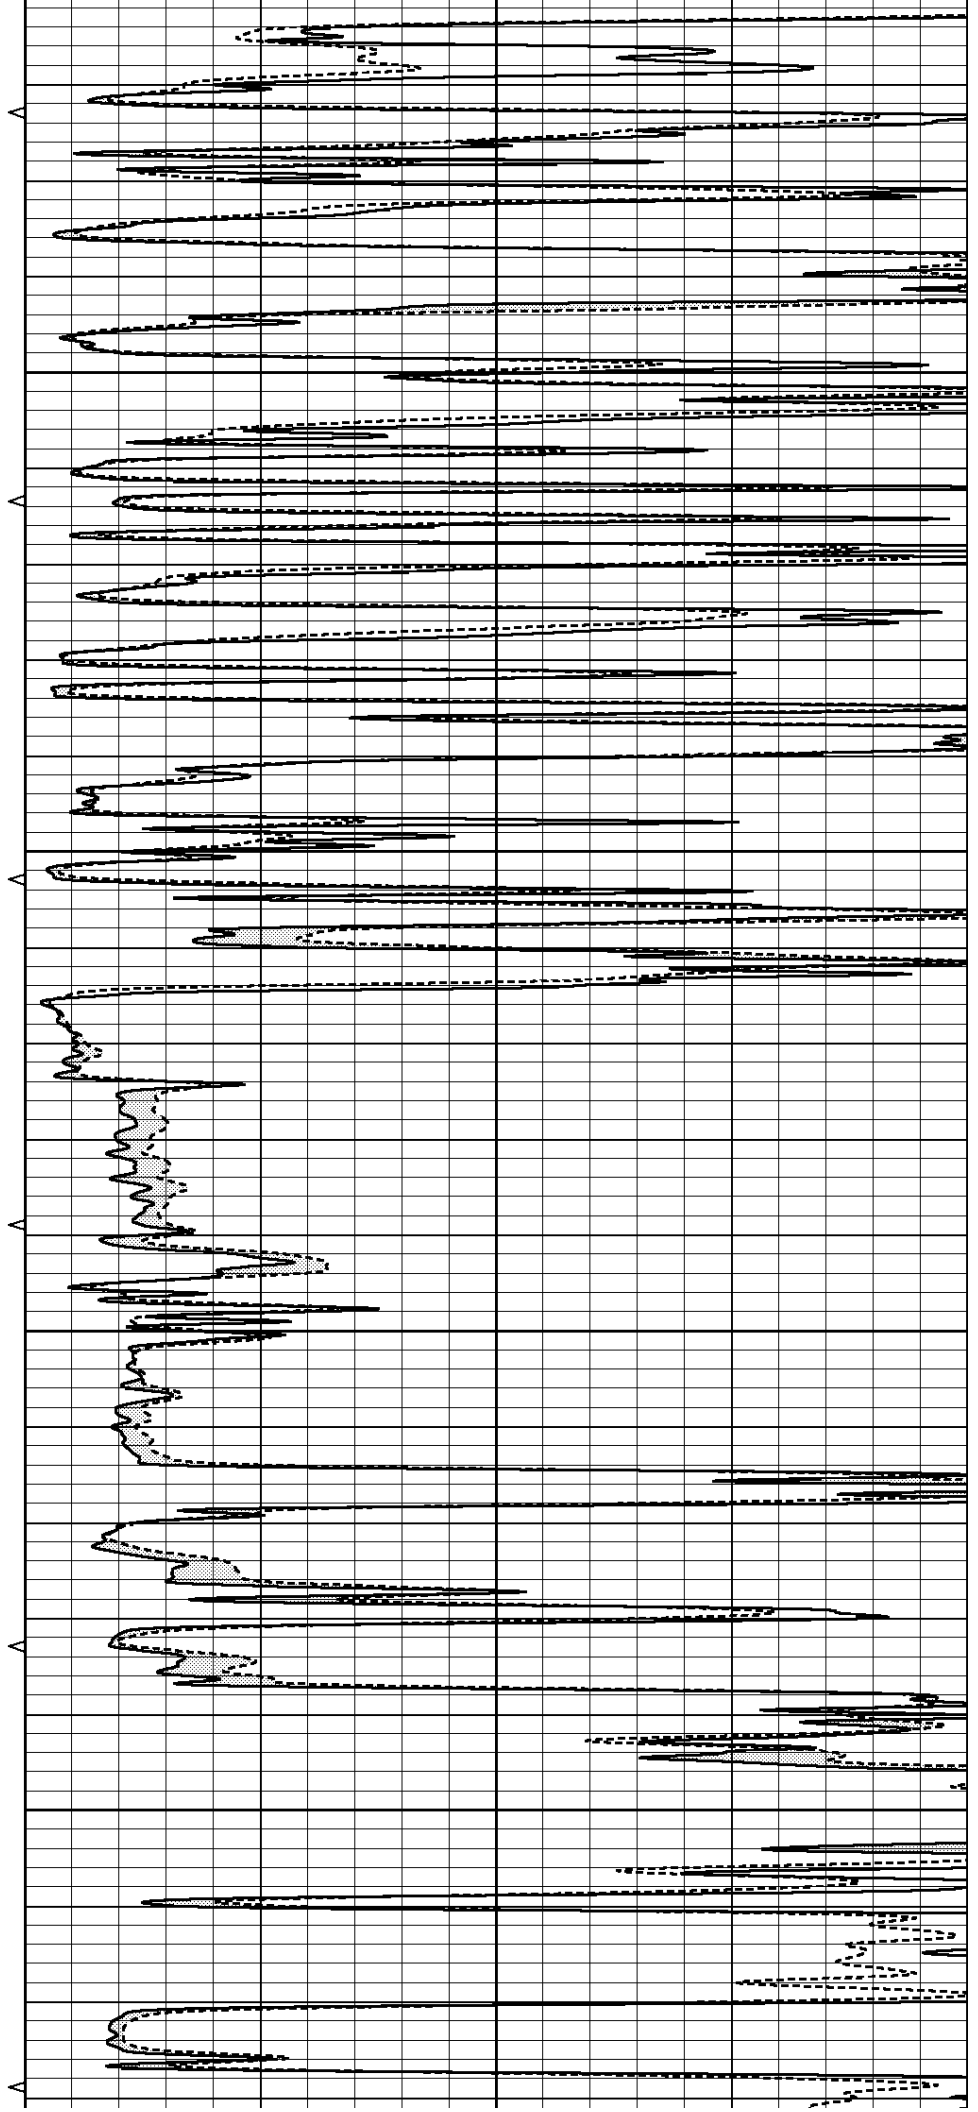

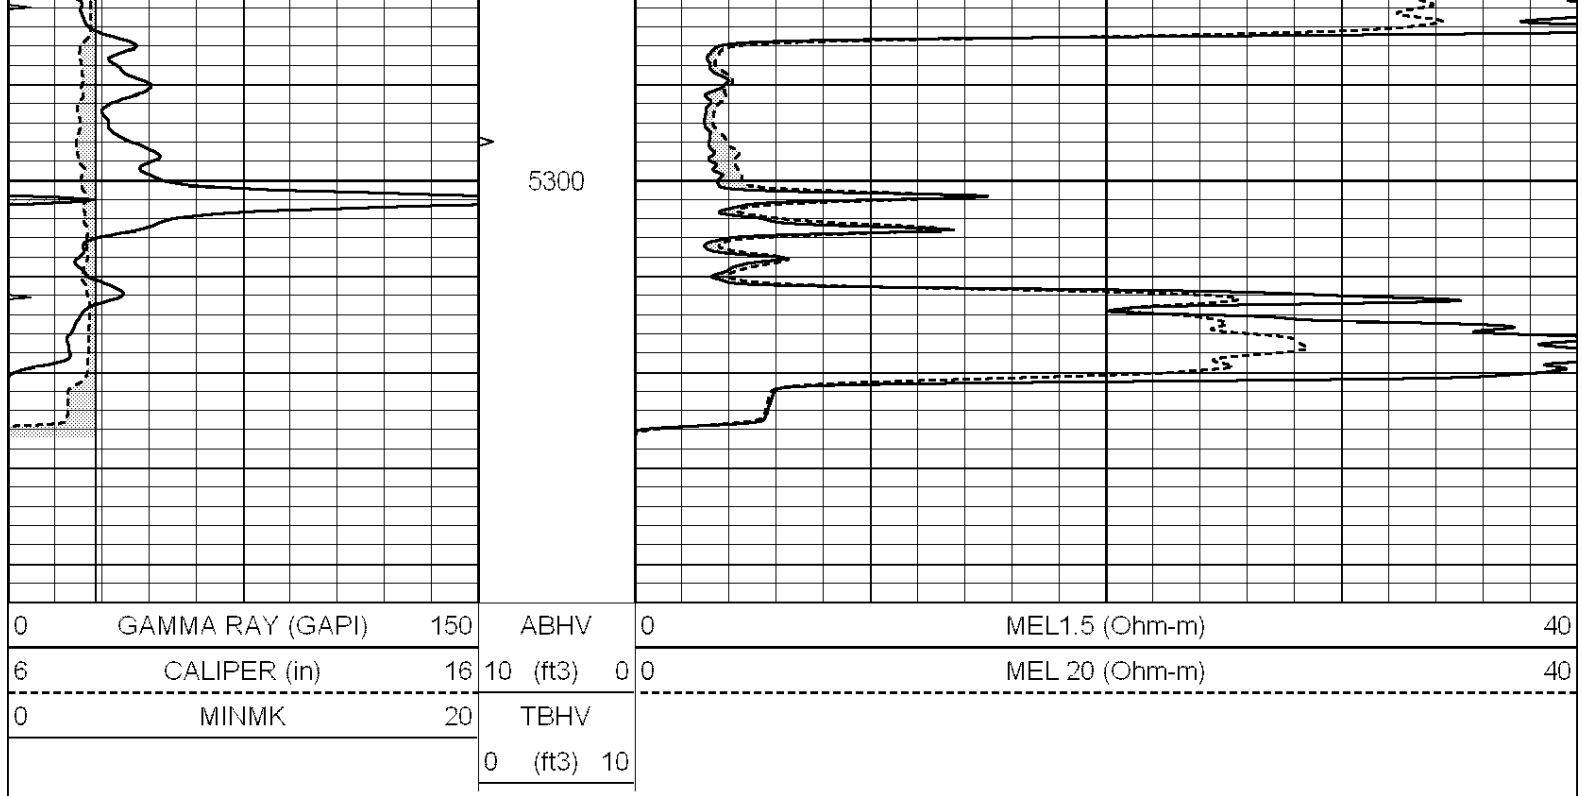

Calibration Report			
Database File:	1832pe.db		
Dataset Pathname:	pass7.3		
Dataset Creation:	Thu Oct 12 02:11:19 2017		
MICRO Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeN		
Performed:	Tue Aug 08 06:25:06 2017		
Caliper Calibration:	Gain=3.961	Offset=2.157	
	Low Cal	High Cal	
References	7.900	18.000	
Readings	1.450	4.000	
1.5" Calibration:	Gain=36.000	Offset=0.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.001	1.240	
2" Calibration:	Gain=52.000	Offset=-0.200	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.001	1.076	

Gamma Ray Calibration Report			
Serial Number:	110959		
Tool Model:	OPEN_GR		
Performed:	Sat Sep 23 21:47:40 2017		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.2300	GAPI/cps	

