



PIONEER

Pioneer Energy Services

DUAL COMP POROSITY LOG

Company **LEBSACK OIL PRODUCTION, INC.**
Well **PFEIFER-AMYX NO. 1**
Field **TANKER**
County **FINNEY**
State **KANSAS**

Company **LEBSACK OIL PRODUCTION, INC.**
Well **PFEIFER-AMYX NO. 1**
Field **TANKER**
County **FINNEY** State **KANSAS**

Location: API #: 15-055-22473-00-00

Other Services

2200' FSL & 440' FWL
SEC 7 TWP 22S RGE 33W

DIL
MEL

Permanent Datum **GROUND LEVEL** Elevation **2904'**
Log Measured From **KELLY BUSHING**
Drilling Measured From **KELLY BUSHING**

Elevation
K.B. 2917'
D.F. N/A
G.L. 2904'

Date **12/10/2017**

Run Number **ONE**

Type Log **CNL/CDL**

Depth Driller **4860'**

Depth Logger **4859'**

Bottom Logged Interval **4830'**

Top Logged Interval **3700'**

Type Fluid In Hole **CHEMICAL**

Salinity, PPM CL **4000**

Density **9.5**

Level **FULL**

Max. Rec. Temp. F **125 DEG/F**

Operating Rig Time **3 HOURS**

Equipment -- Location **108 HAYS**

Recorded By **J. HENRICKSON**

Witnessed By **JOSH AUSTIN**

Borehole Record

Casing Record

Run No.	Bit	From	To	Size	Wgt.	From	To
ONE	12.25"	0	478'	8.625"	23#	0	478'
TWO	7.875"	478'	TD				

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and Pioneer Wireline Services, LLC cannot and does not guarantee the accuracy or correctness of any interpretation, and Pioneer Wireline Services, LLC will not be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees.

Comments

N/A DENOTES NOT AVAILABLE OR NON-APPLICABLE.

GARDEN CITY KANSAS
NORTH TO TENNIS ROAD, 6 WEST, 1/2 SOUTH, EAST INTO

Log Measured From: **KELLY BUSHING** 13 Ft. Above Permanent Datum

THANK YOU FOR USING PIONEER ENERGY SERVICES
www.pioneerenergy.com 785-625-3858

Your Pioneer Energy Services Crew

Engineer: **J. HENRICKSON**
Operator:
Operator:
Operator:

This Log Record Was Witnessed By

Primary Witness: **JOSH AUSTIN**
Secondary Witness:
Secondary Witness:
Secondary Witness:

Top - Bottom

A	BOREID	BOTTEMP	CASEOD	CASETHCK	FLUIDDEN	M	MATRXDEN
1	in 7.875	degF 125	in 5.5	in 0	g/cc 1	2	g/cc 2.71
NPORSEL	PERFS	SNDERR	SNDERRM	SPSHIFT	SRFTEMP	SZCOR	TDEPTH
Limestone	0	mmho/m 0	mmho/m 0	mV -485	degF 42	Off	ft 4859

Sensor	Offset (ft)	Schematic		Description	Length (ft)	O.D. (in)	Weight (lb)
GR	40.58			GR-M&W (89-M&W)	3.00	3.50	50.00
CNLSC	37.48			CNT-M&W (tk10-MW)	5.50	3.50	100.00
CNSSC	36.73						
LSD DCAL SSD	28.43 28.42 27.93			CDL-M&W (168-986)	8.50	4.00	250.00
ML-PSI STKBL ML (PSI-02) Stackable Microlog Tools	7.58				7.58	4.00	65.00
MCAL	19.83						
MI	19.83						
MN	19.83						
RLL3	15.80						
RLL3F	15.79						
CILD	8.00			DIL-M&W (1987)	18.50	3.50	220.00

CILM

4.70

SP

0.20

Dataset: lebsack_pfeifer_amyx_1.db: field/well/stackml/pass3.1
Total length: 43.08 ft
Total weight: 685.00 lb
O.D.: 4.00 in

**PIONEER**


Pioneer Energy Services


MAIN PASS


Database File lebsack_pfeifer_amyx_1.db
Dataset Pathname stackml/pass3.1
Presentation Format cdl
Dataset Creation Sun Dec 10 11:42:42 2017
Charted by Depth in Feet scaled 1:600

0	GAMMA RAY (GAPI)	150
6	CALIPER (in)	16

30	COMPENSATED DENSITY (pu)	-10
2	BULK DENSITY (g/cc)	3
15000	LINE TENSION (lb)	0
-0.25	CORRECTION (g/cc)	0.25

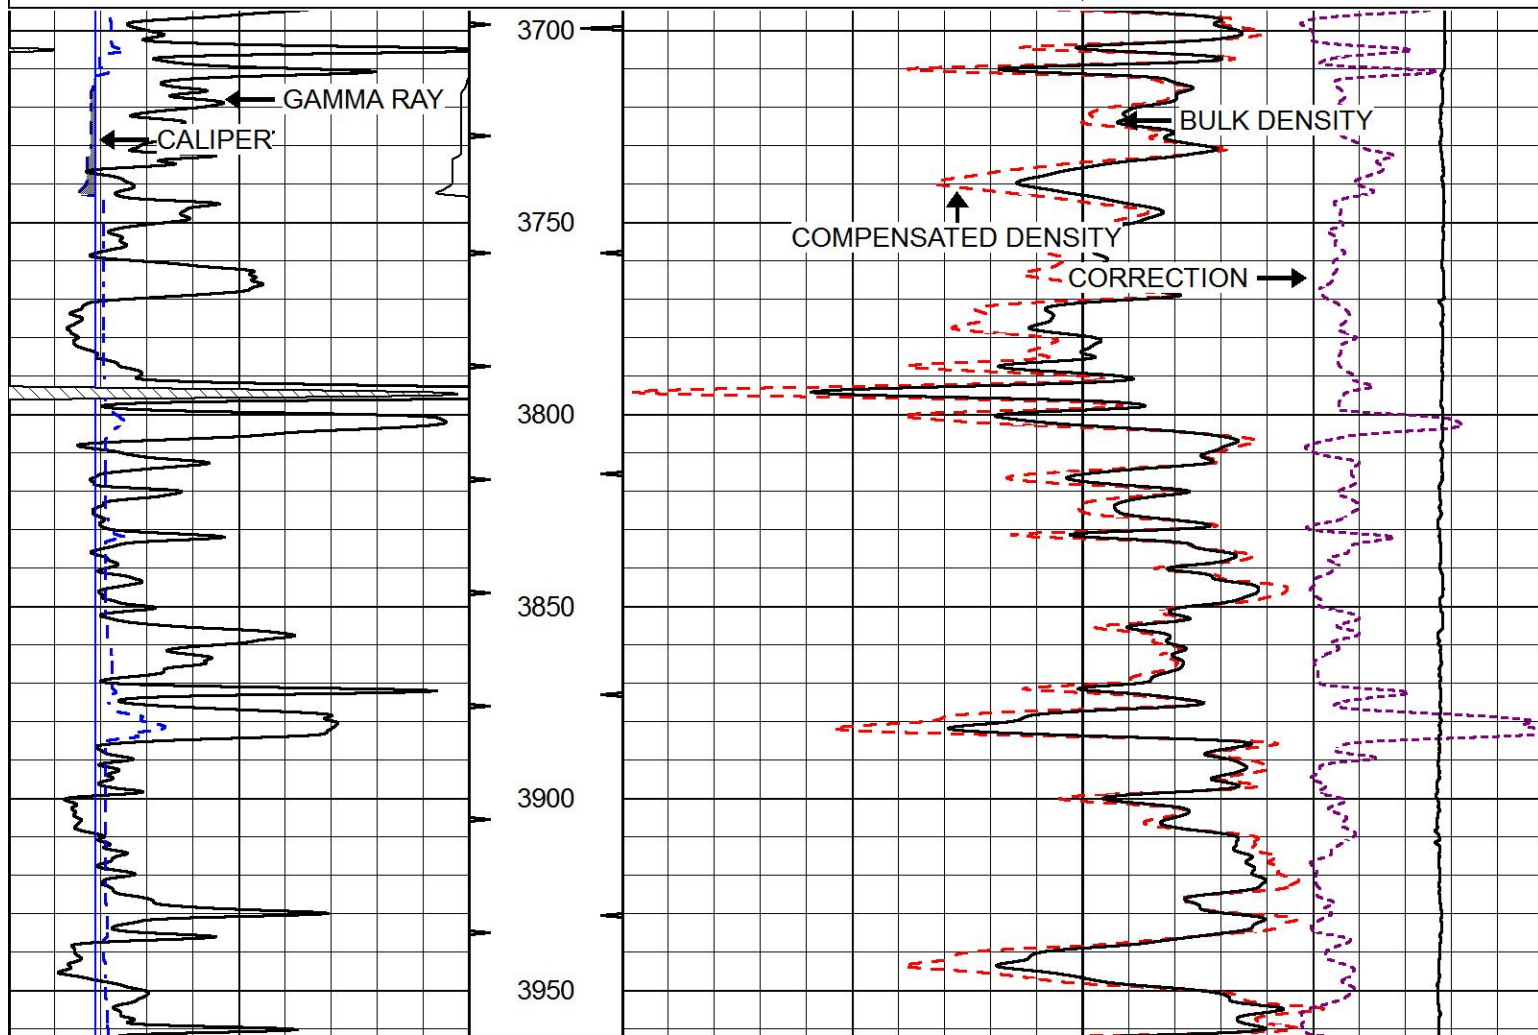

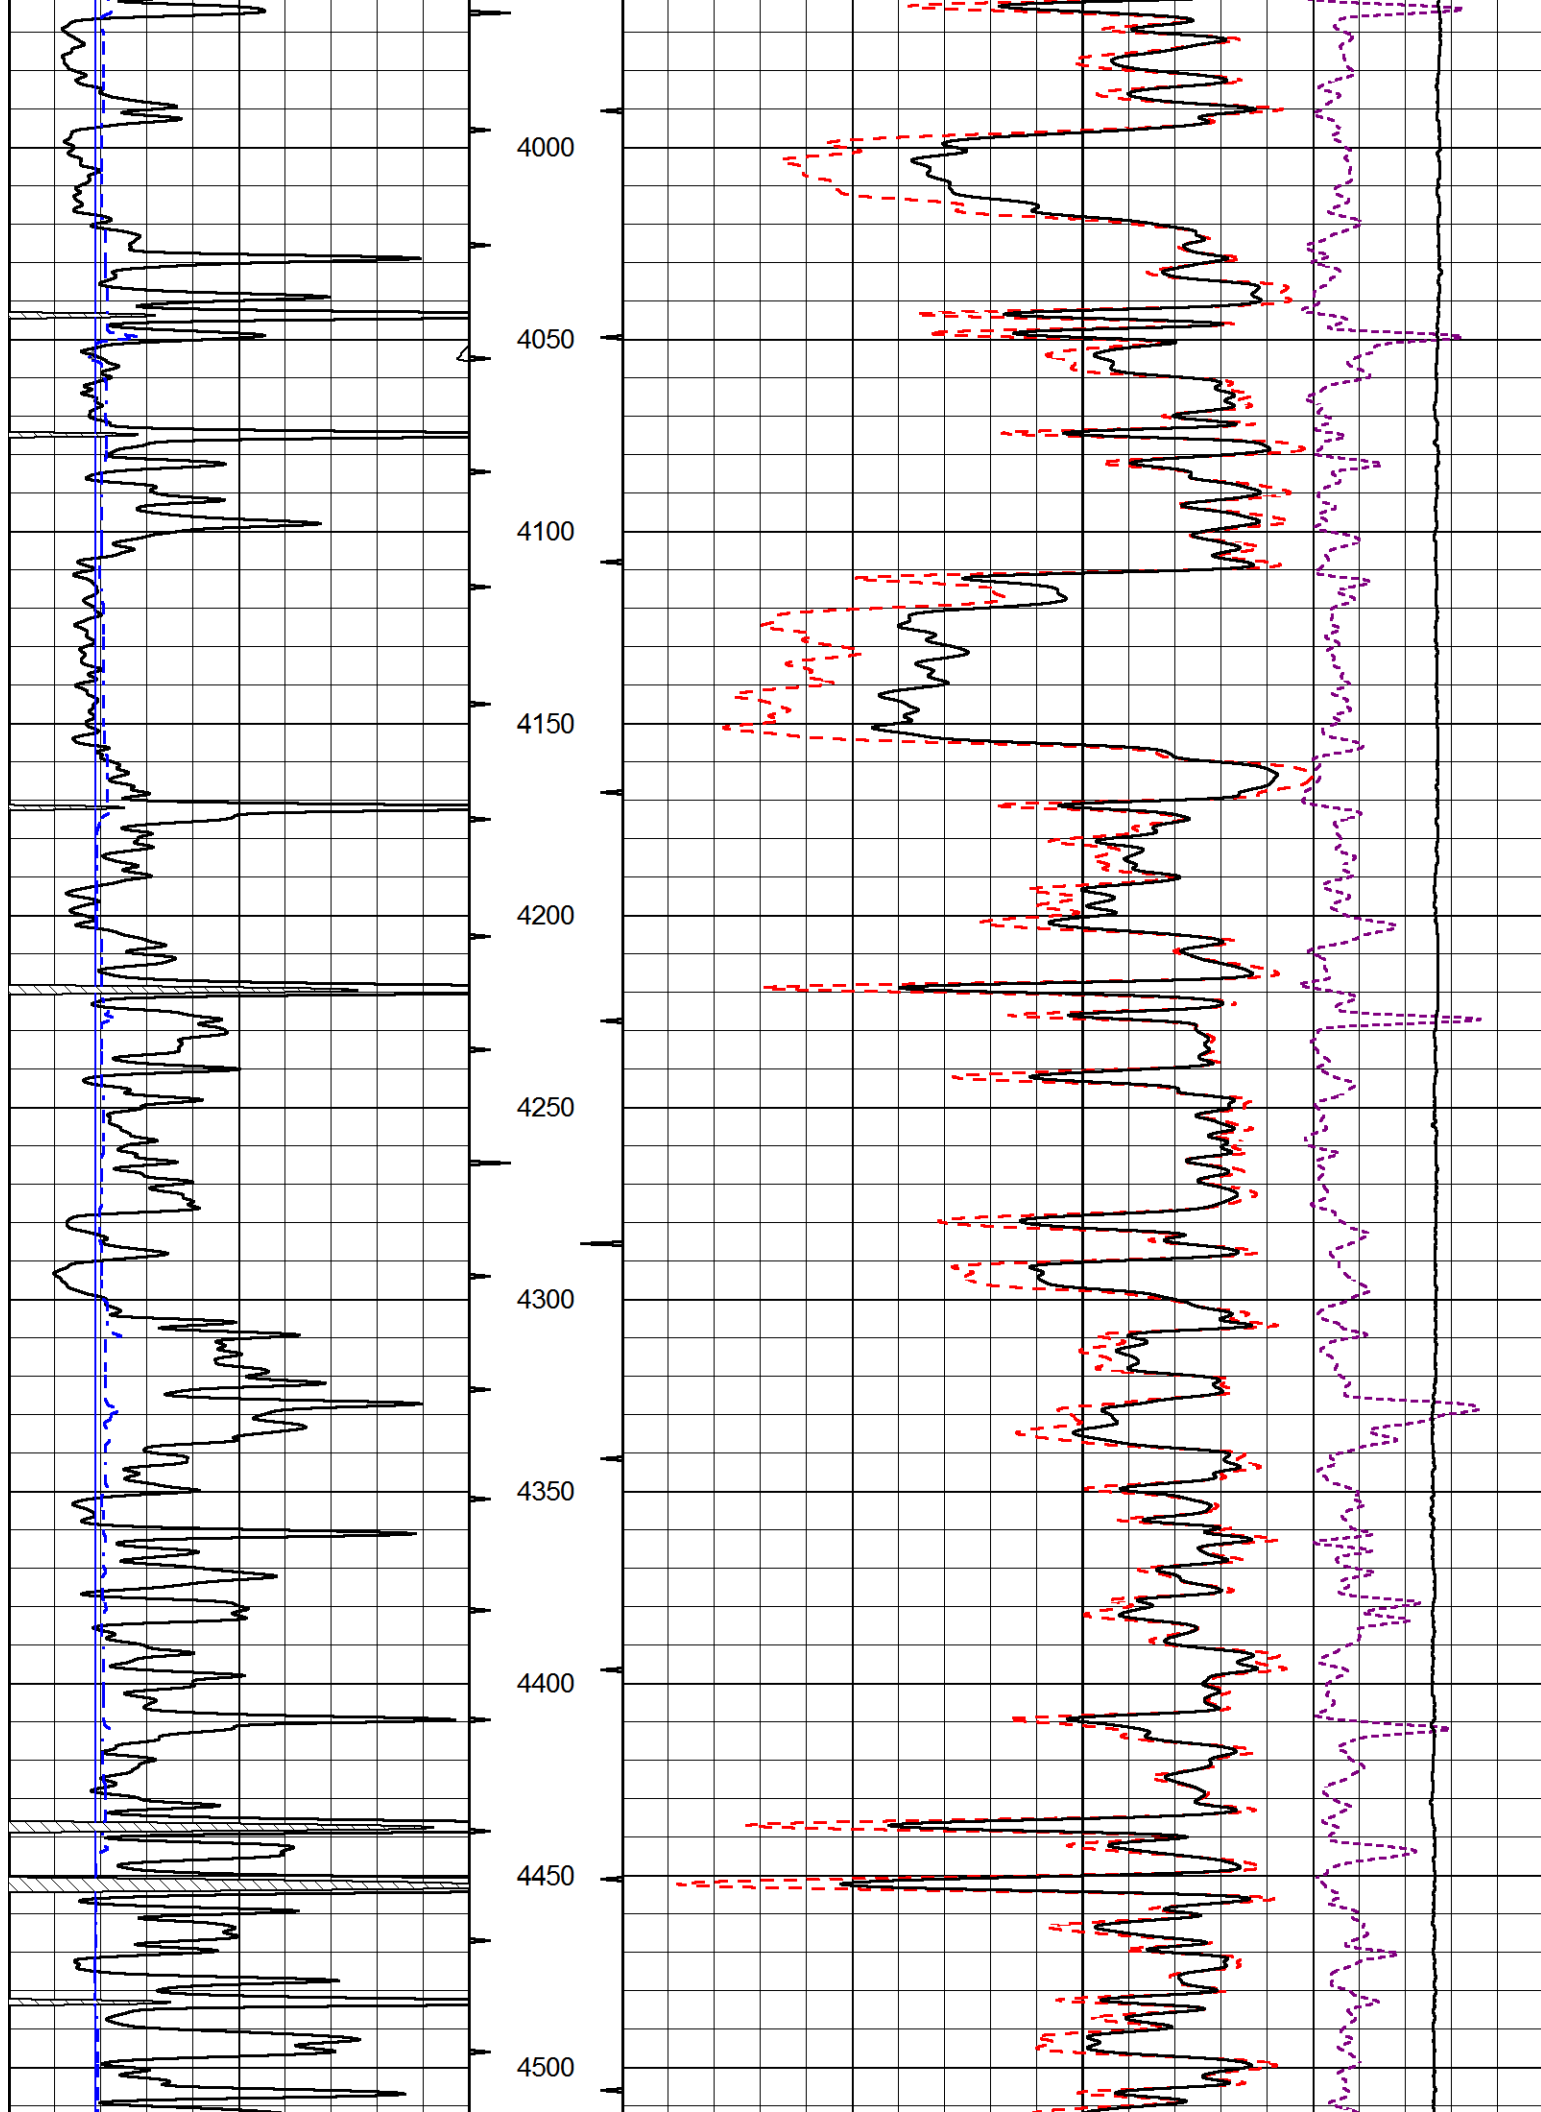

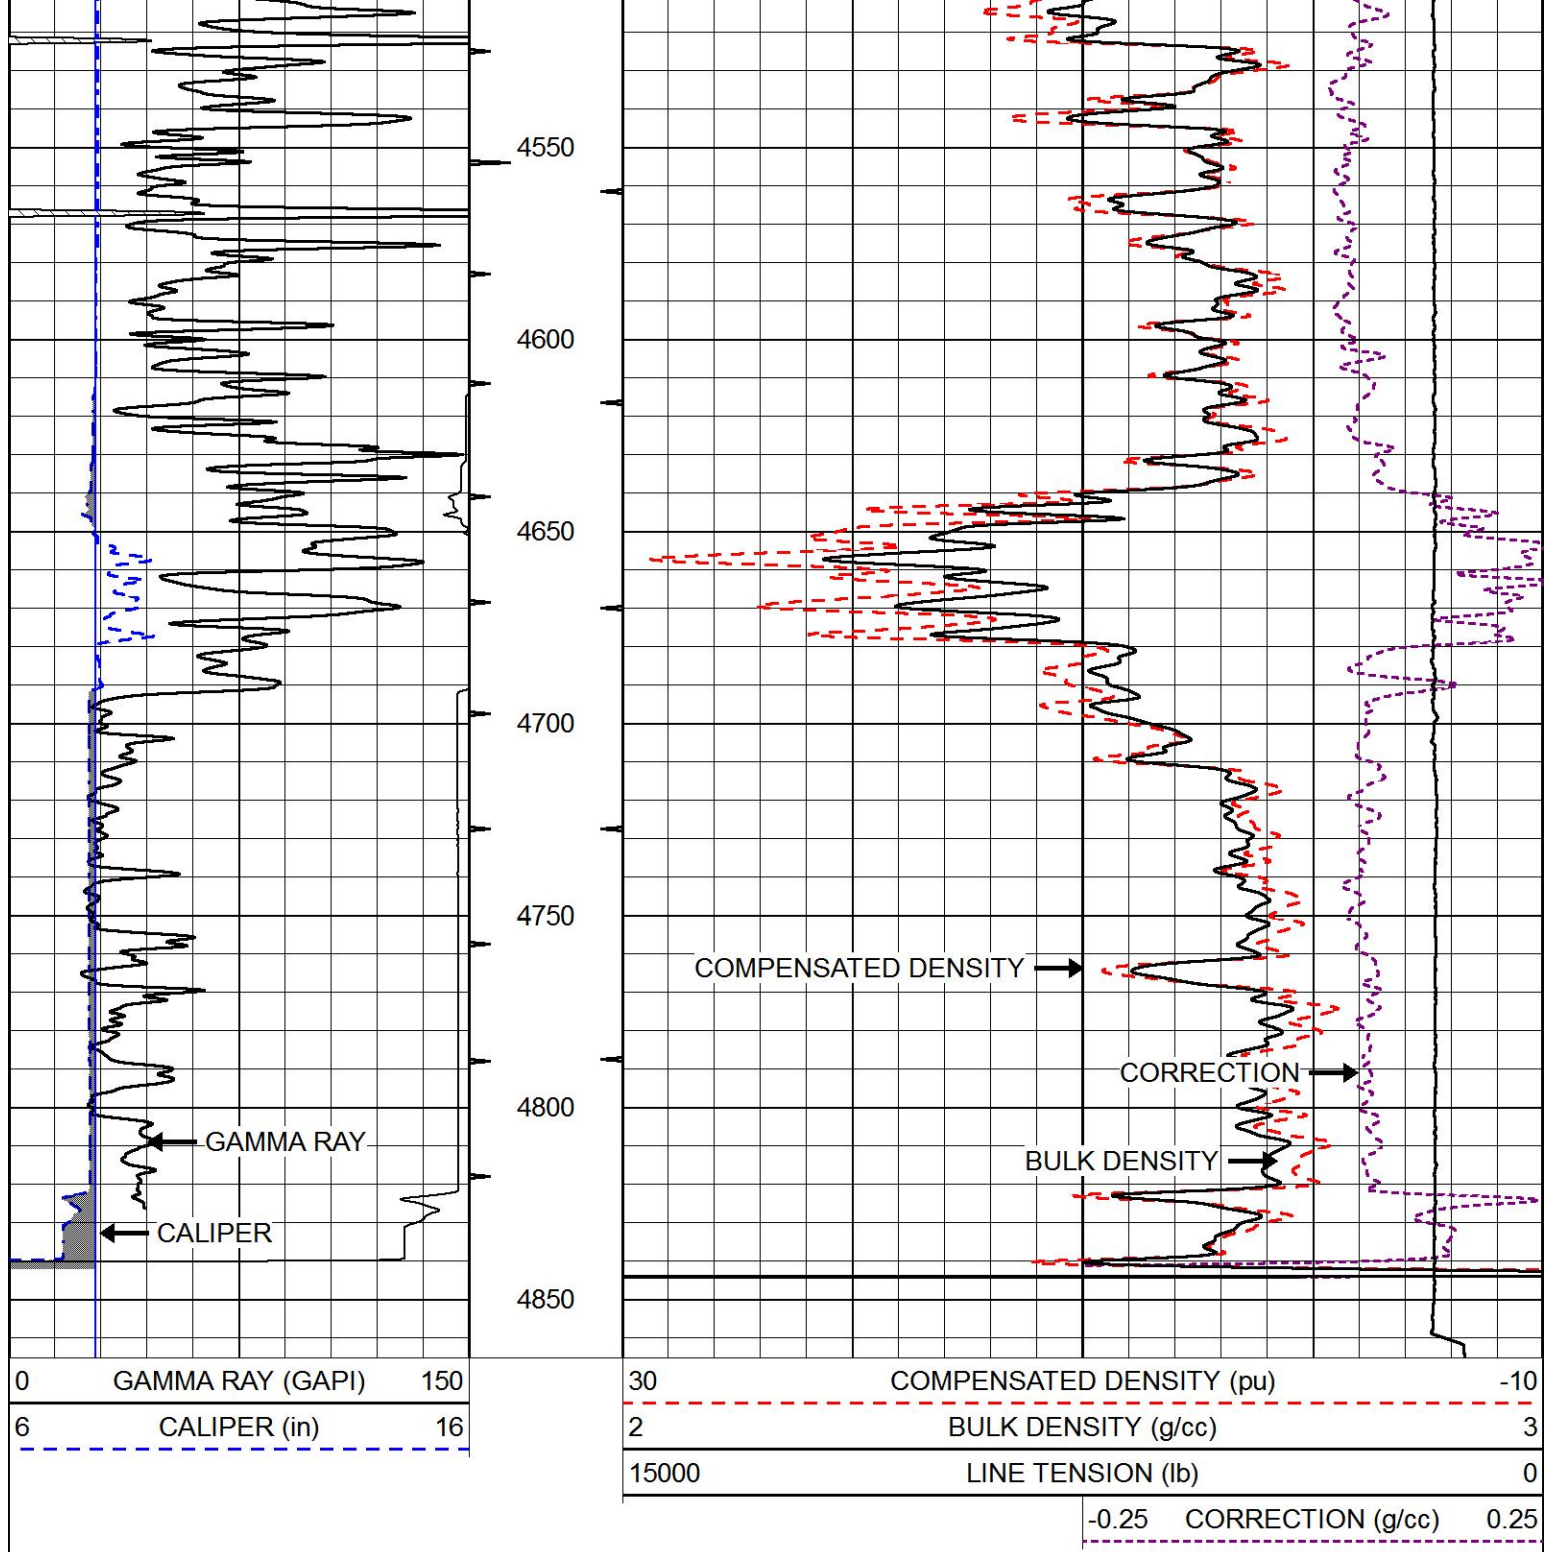




PIONEER
Pioneer Energy Services


MAIN PASS


Database File		lebsack_pfeifer_amyx_1.db	
Dataset Pathname		stackml/pass3.1	
Presentation Format		cndlspec	
Dataset Creation		Sun Dec 10 11:42:42 2017	
Charted by		Depth in Feet scaled 1:240	


0	GAMMA RAY (GAPI)	150
6	dcal (in)	16
6	BIT SIZE (in)	16


30	CNLS (pu)	-10
30	COMPENSATED DENSITY (2.71 ma) (pu)	-10
15000	LINE TENSION (lb)	0

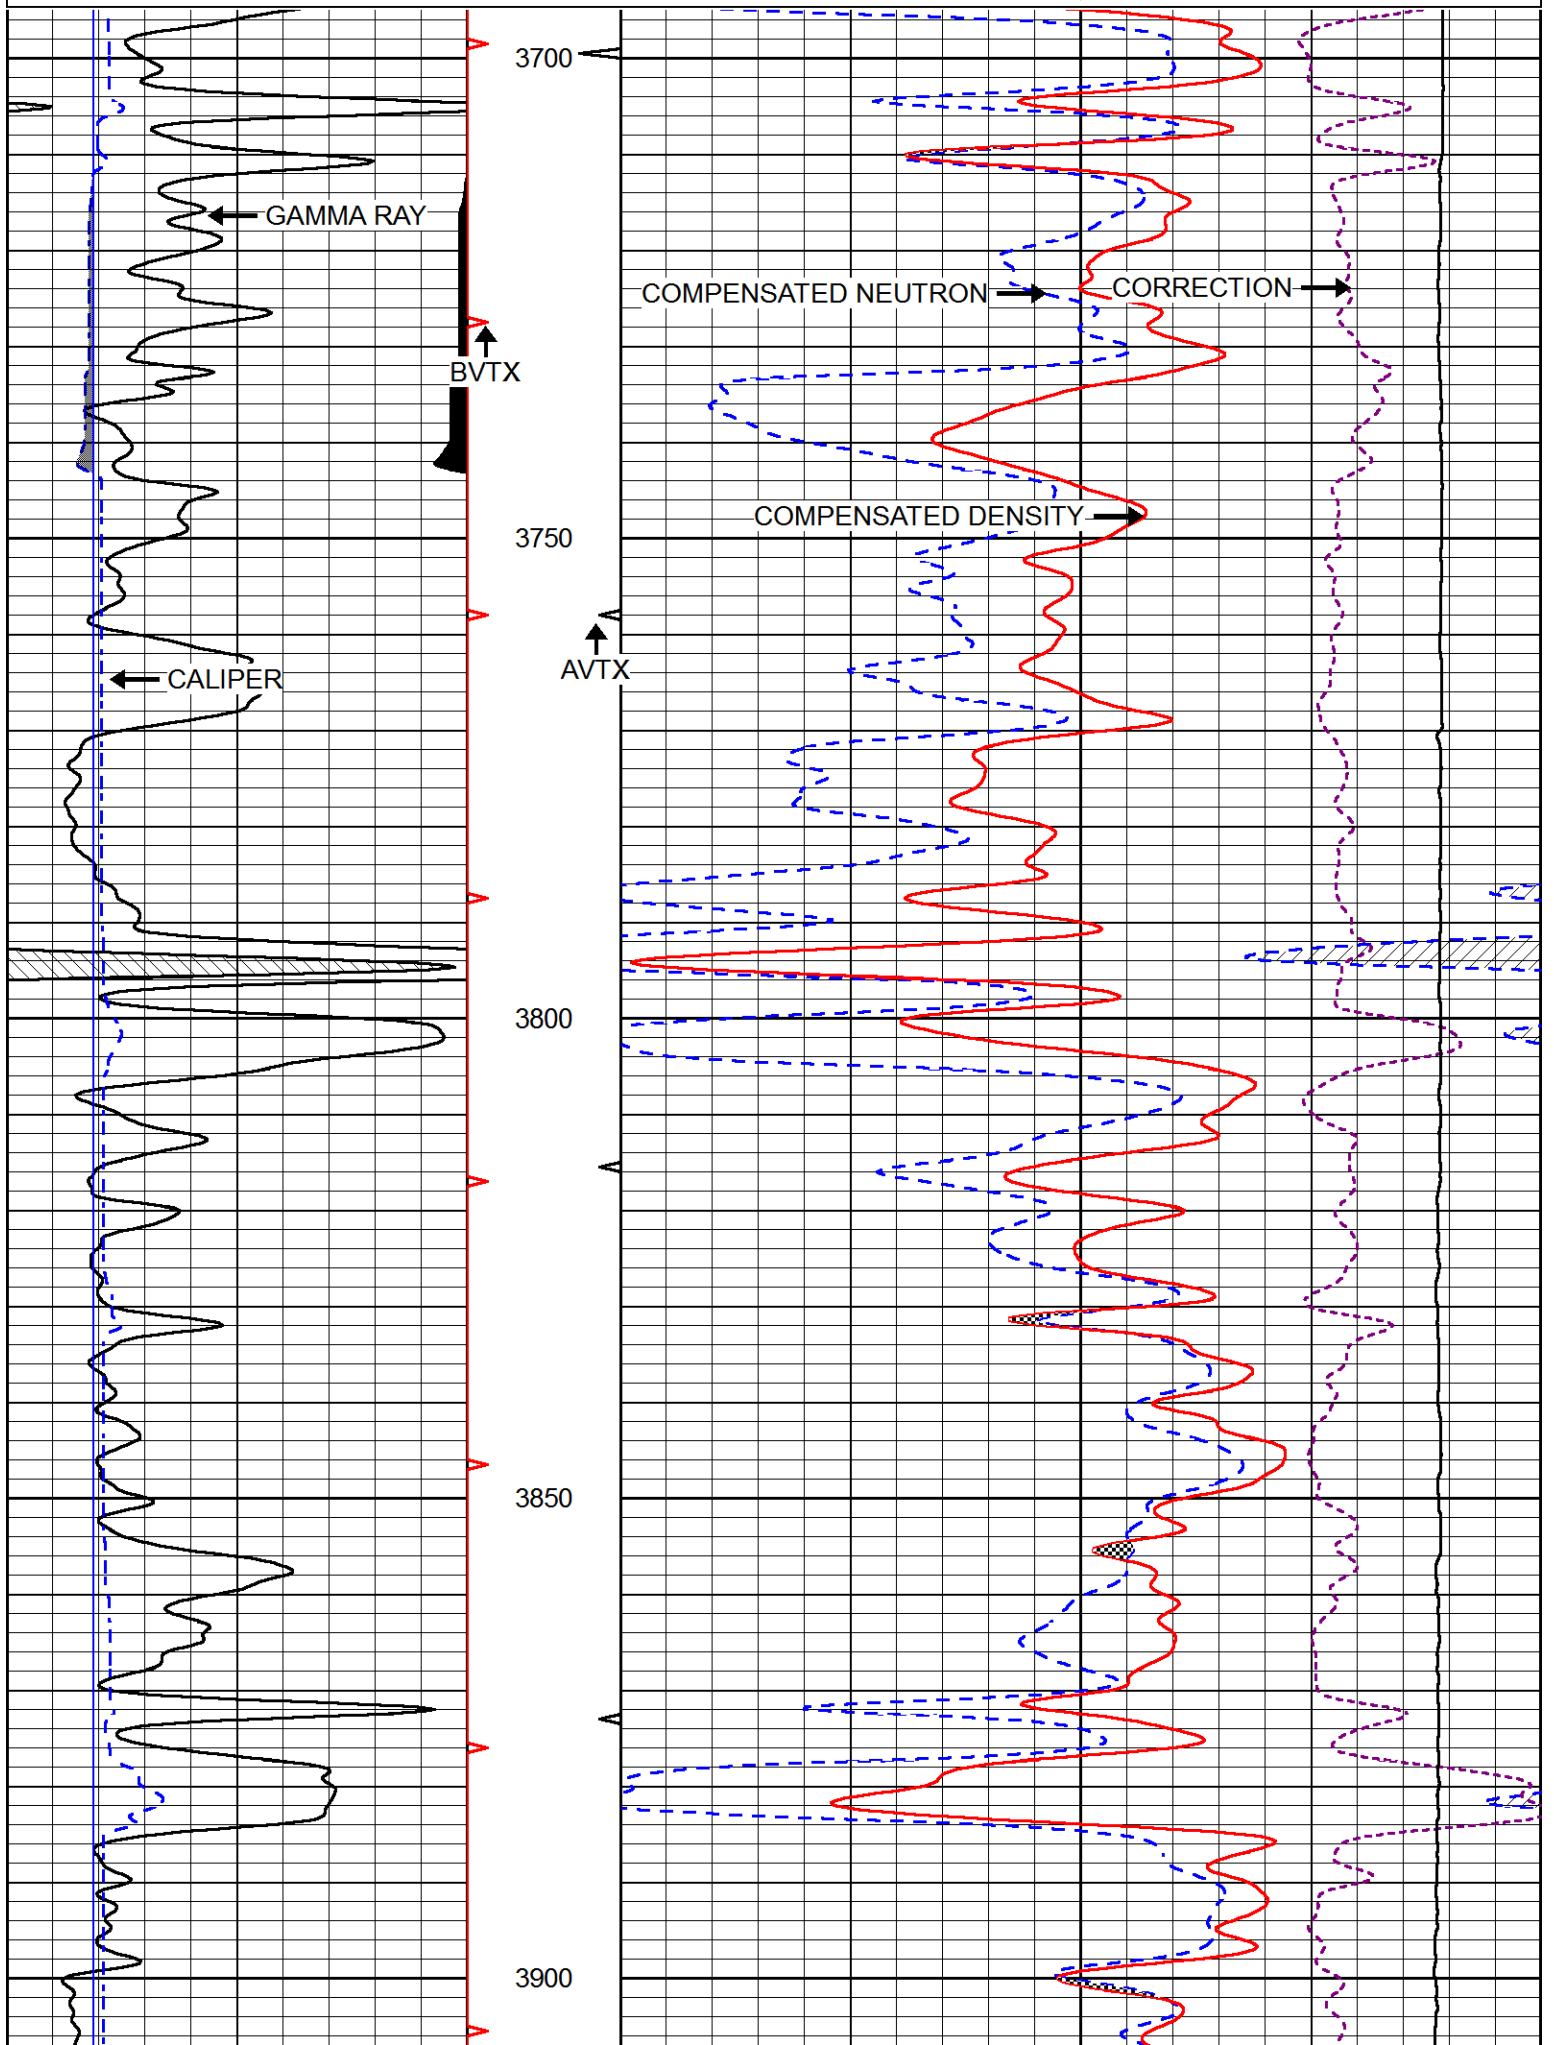


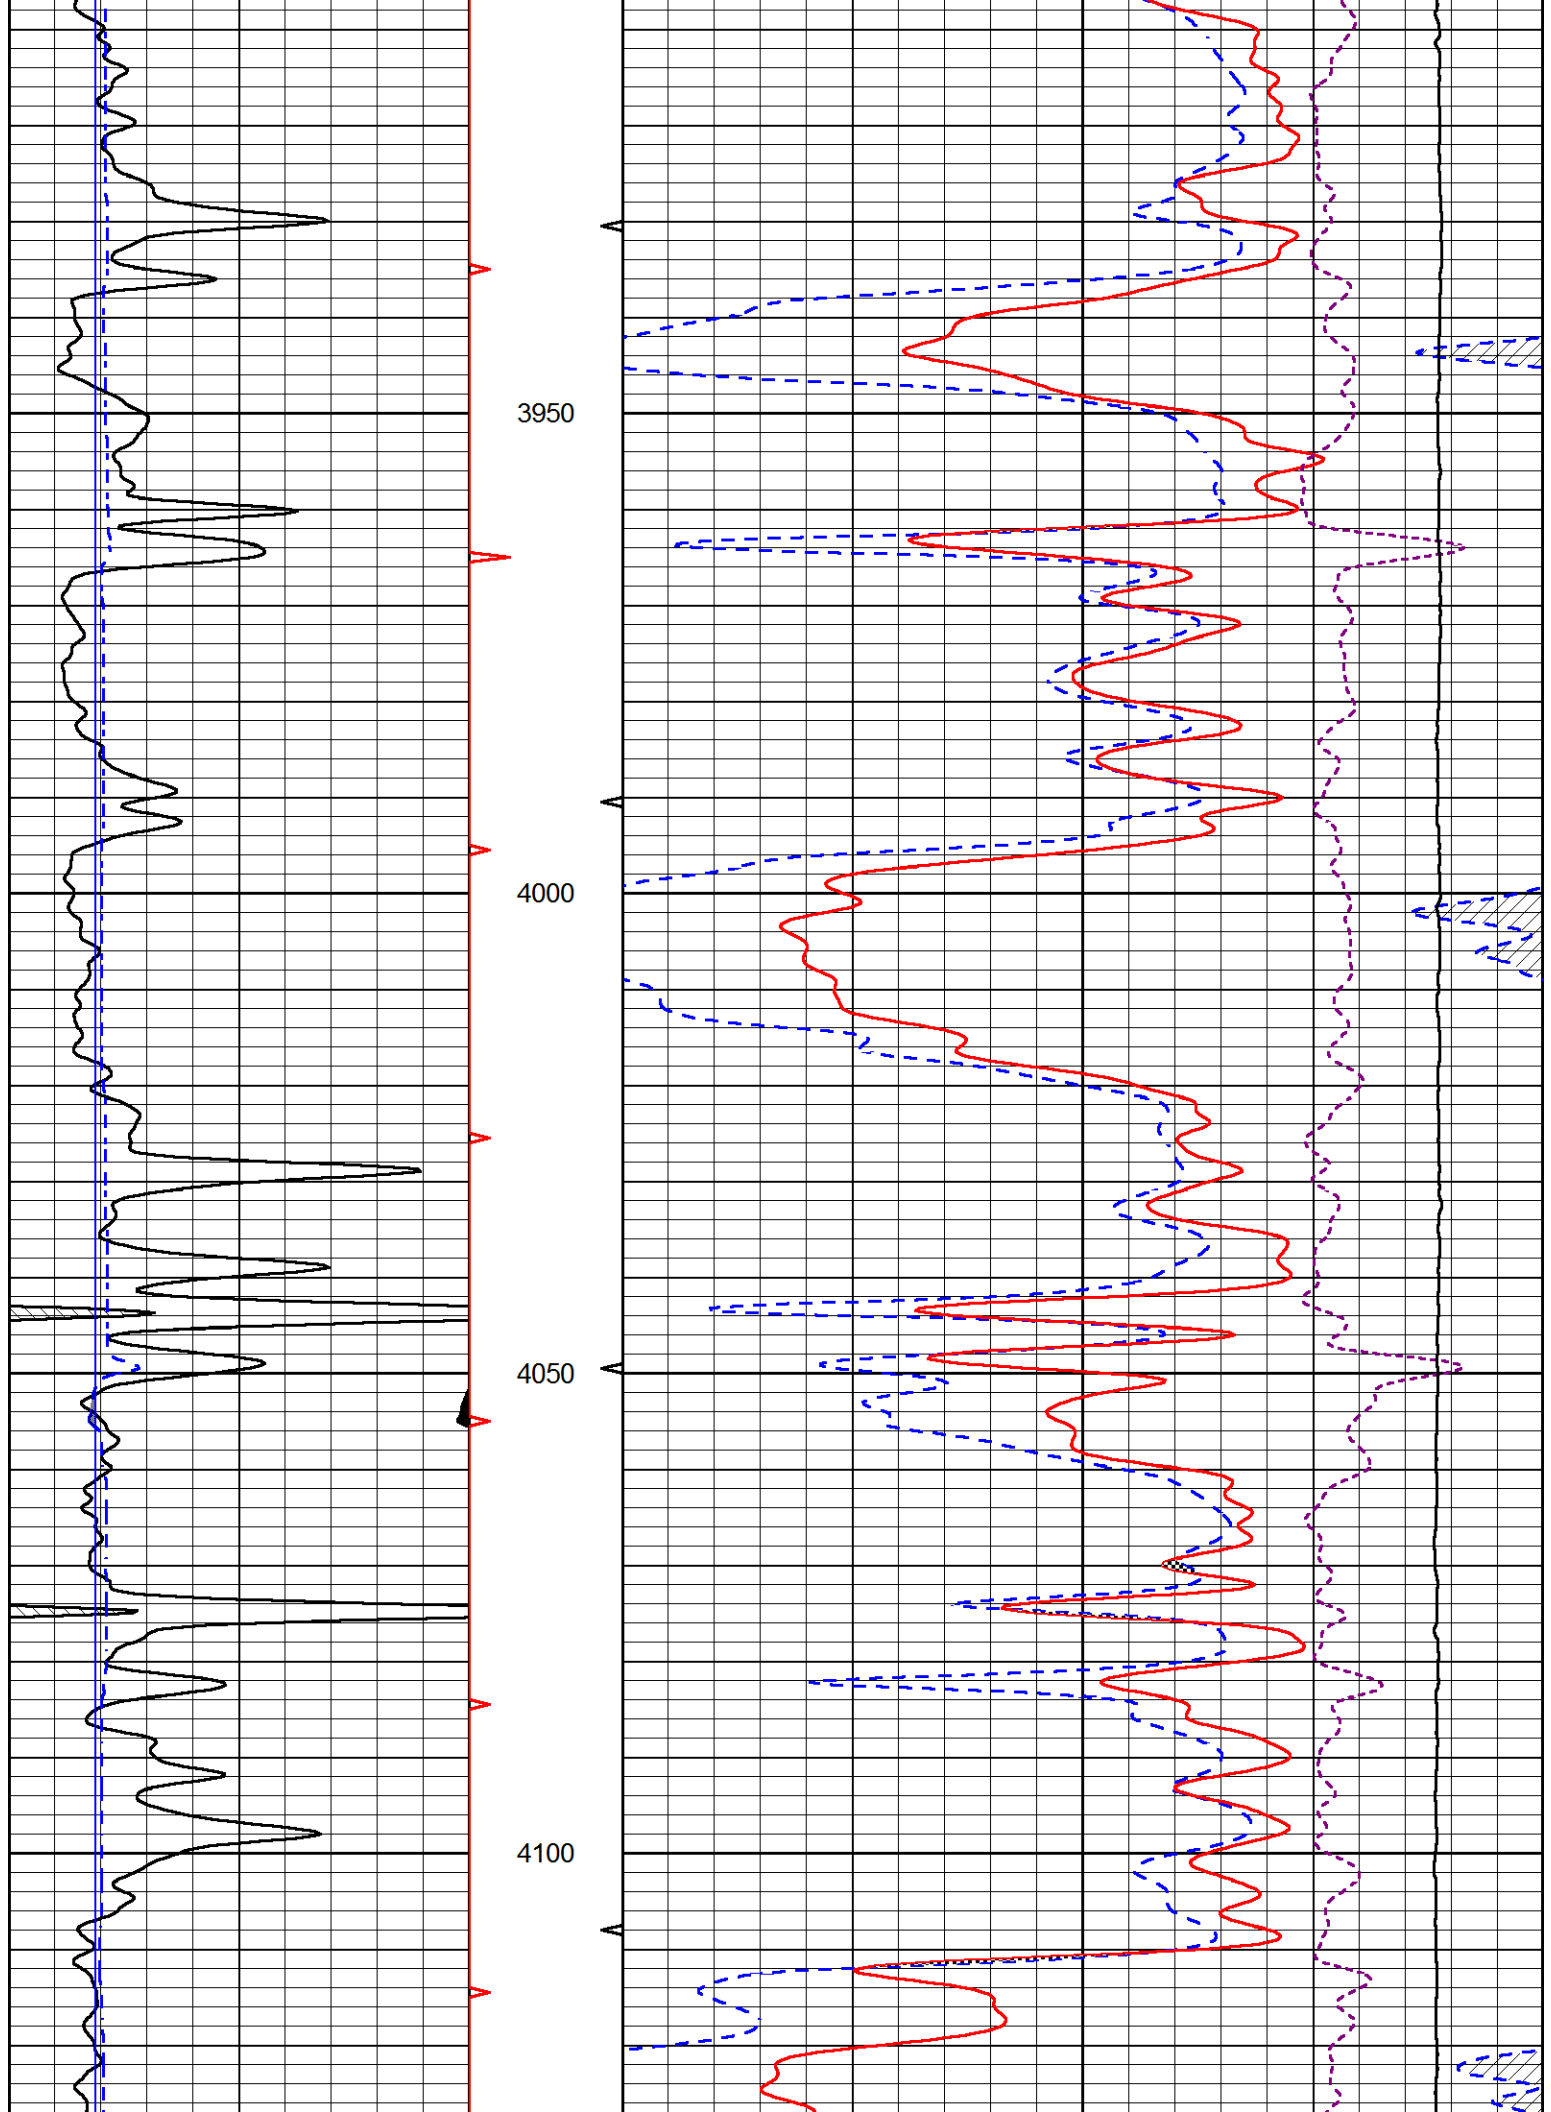

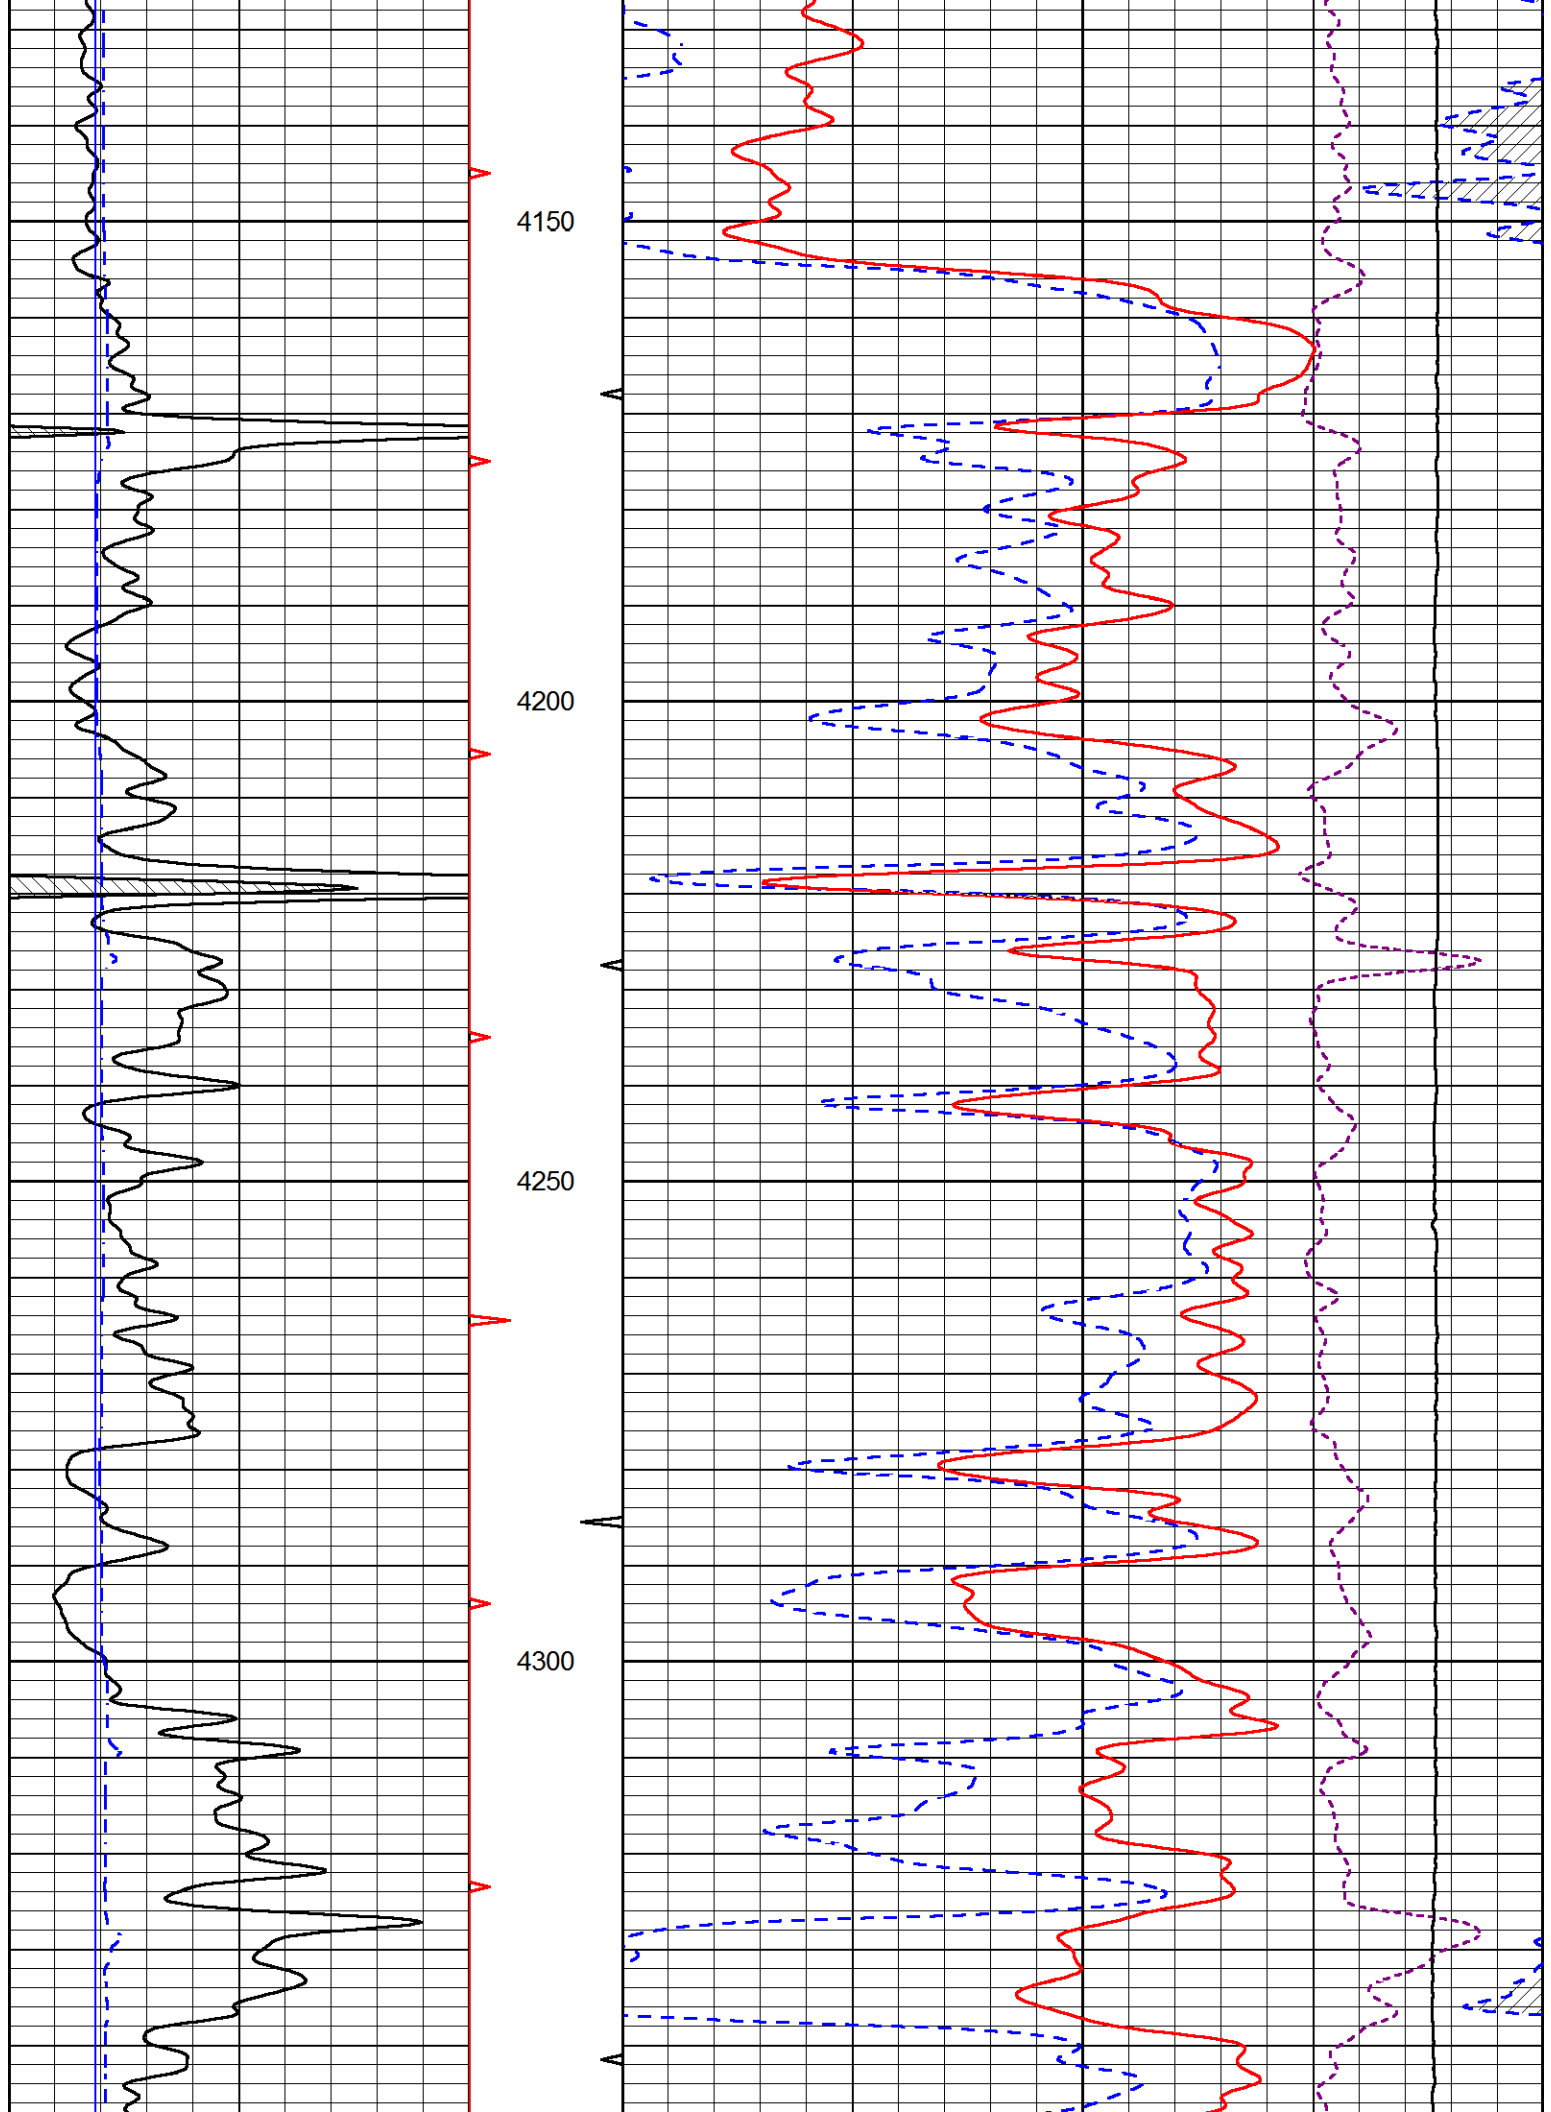


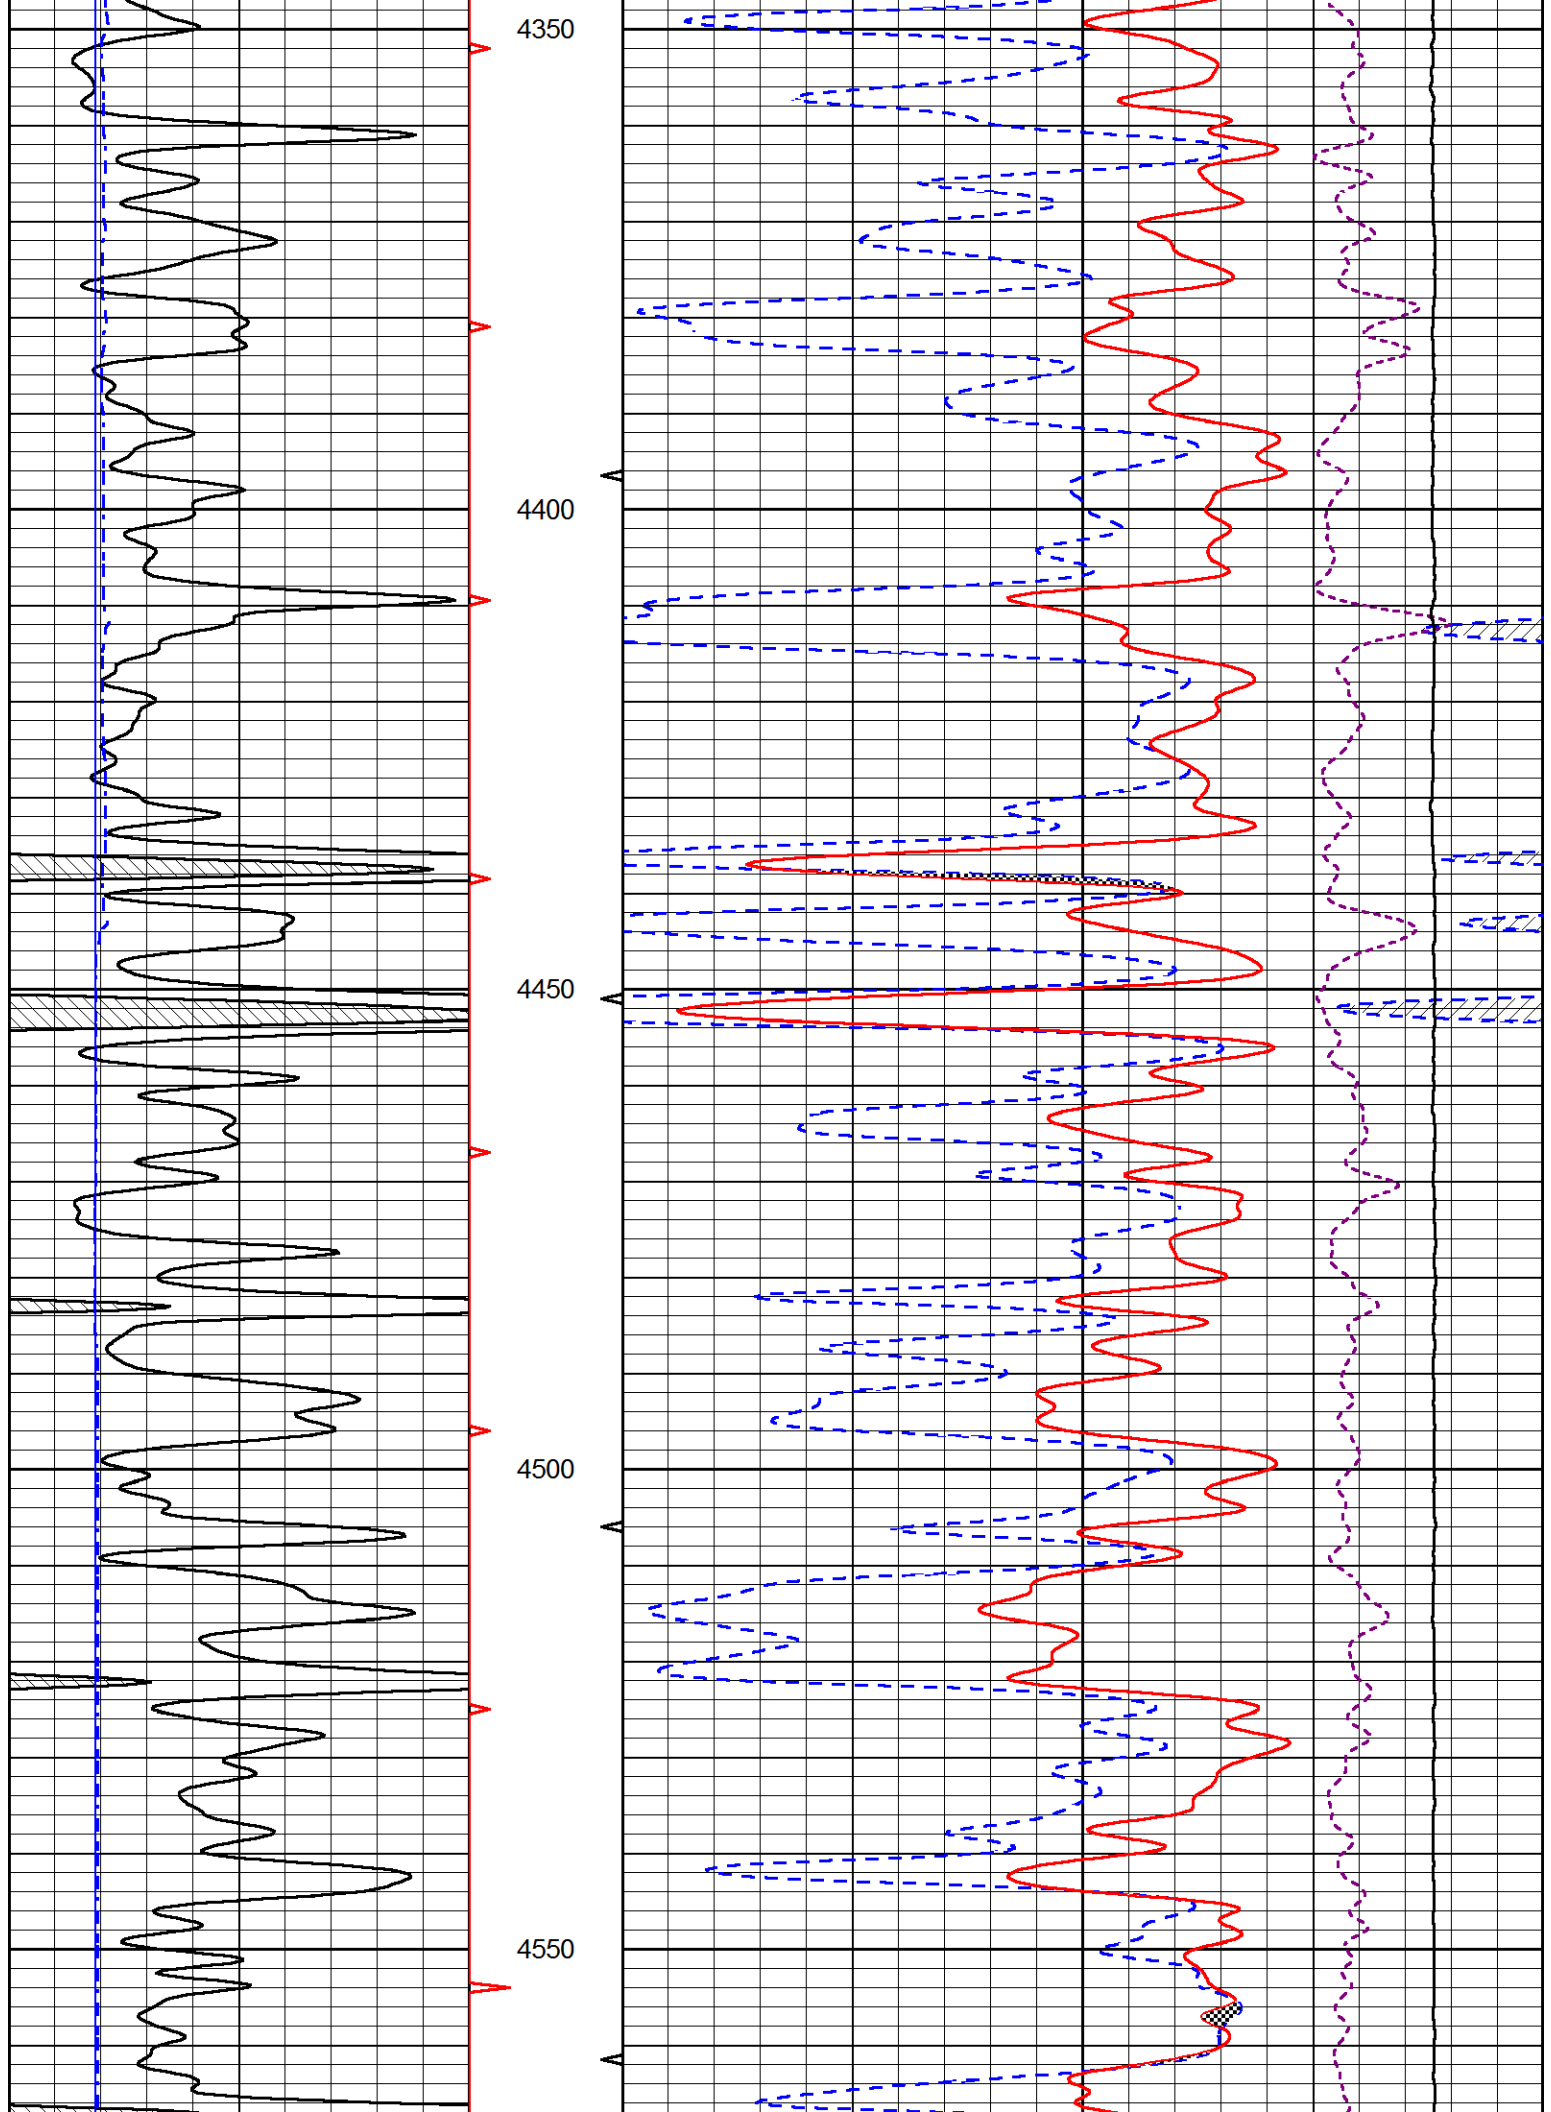


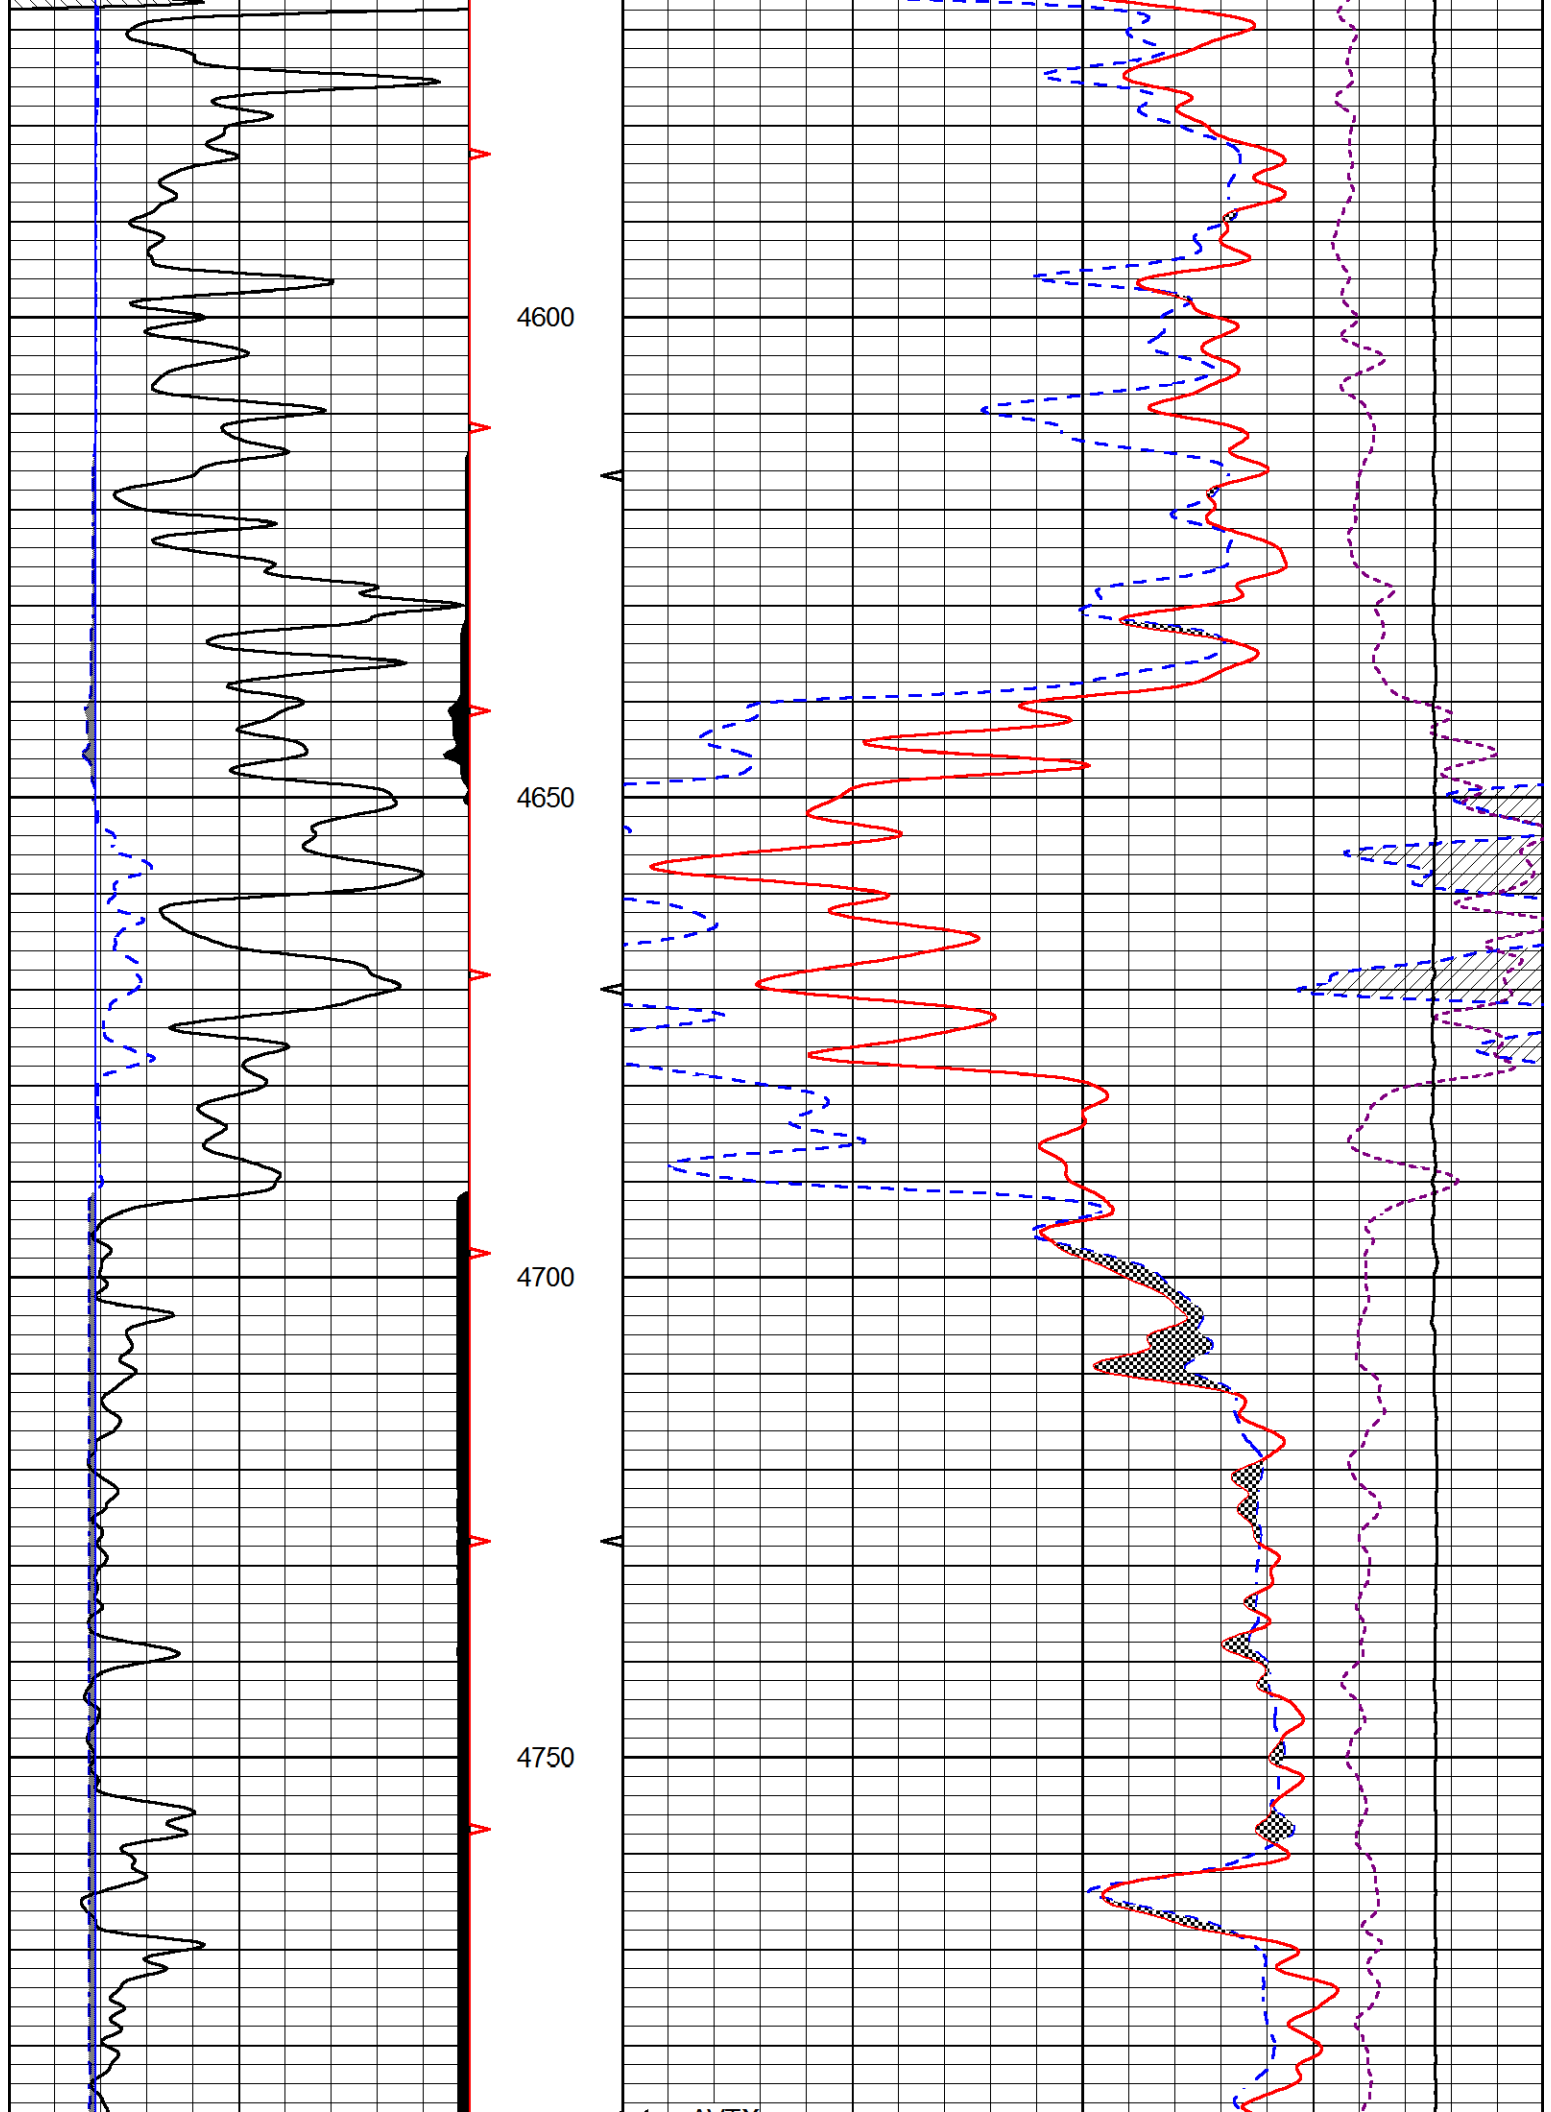


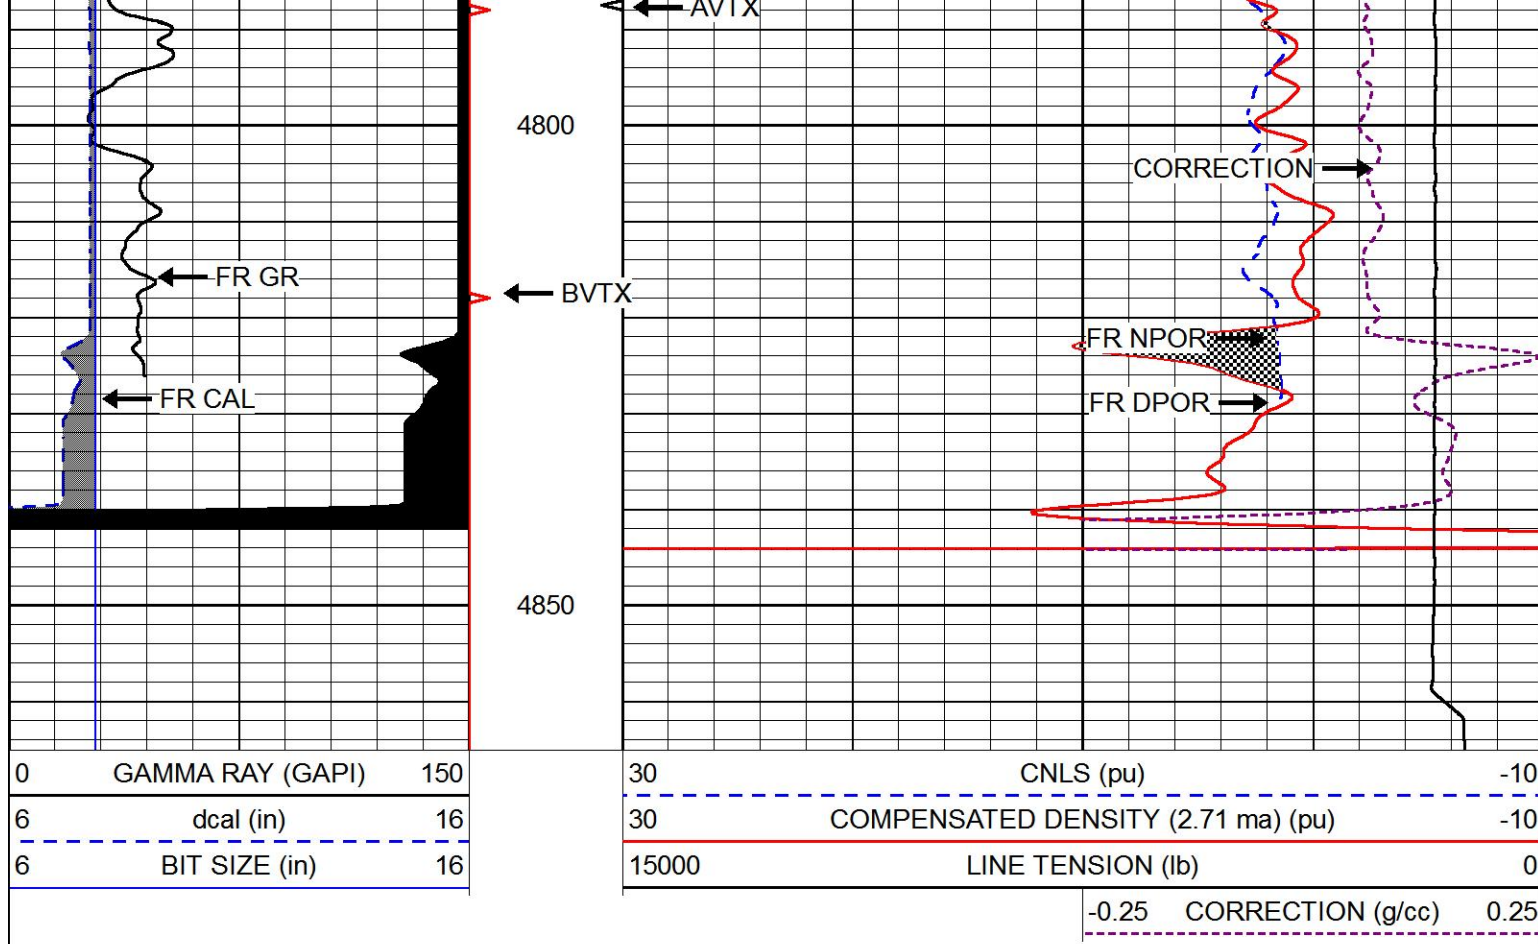

REPEAT SECTION

Database File: lebsack_pfeifer_amyx_1.db
 Dataset Pathname: stackml/pass2.1
 Presentation Format: cndlspec
 Dataset Creation: Sun Dec 10 11:43:58 2017
 Charted by: Depth in Feet scaled 1:240

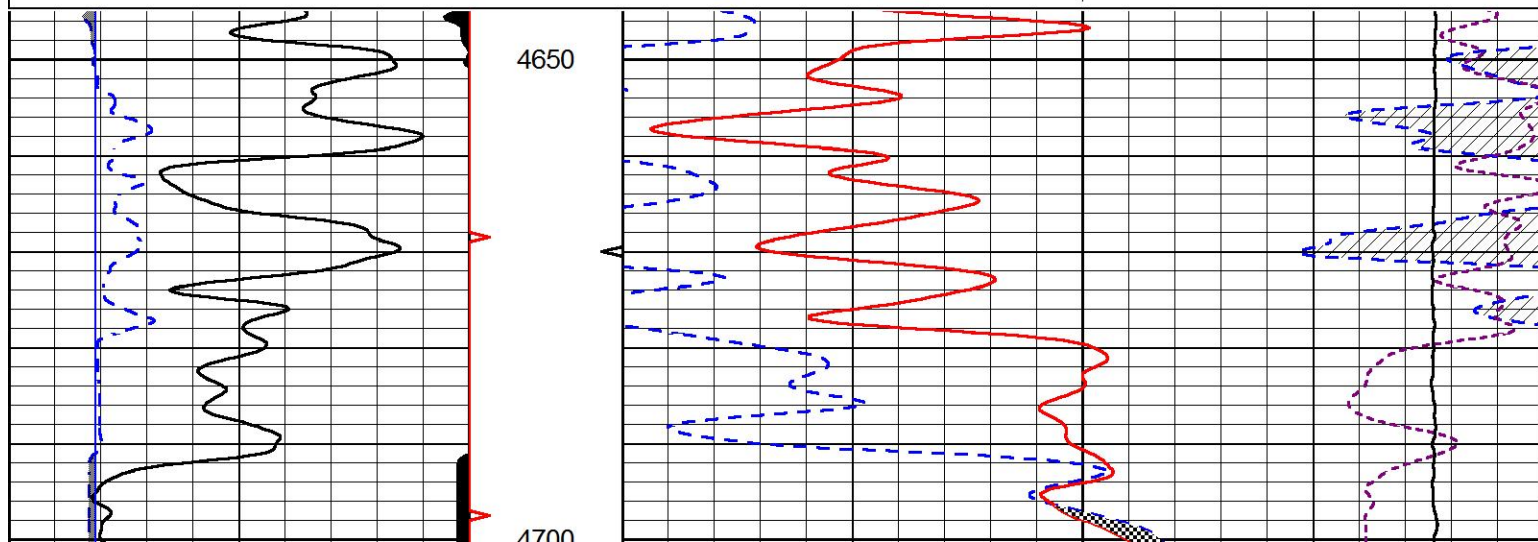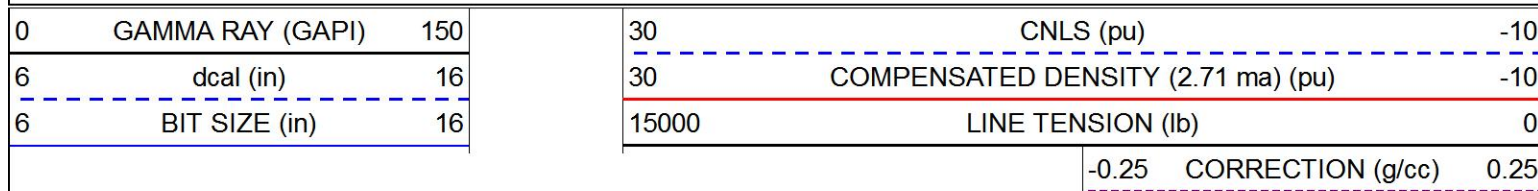

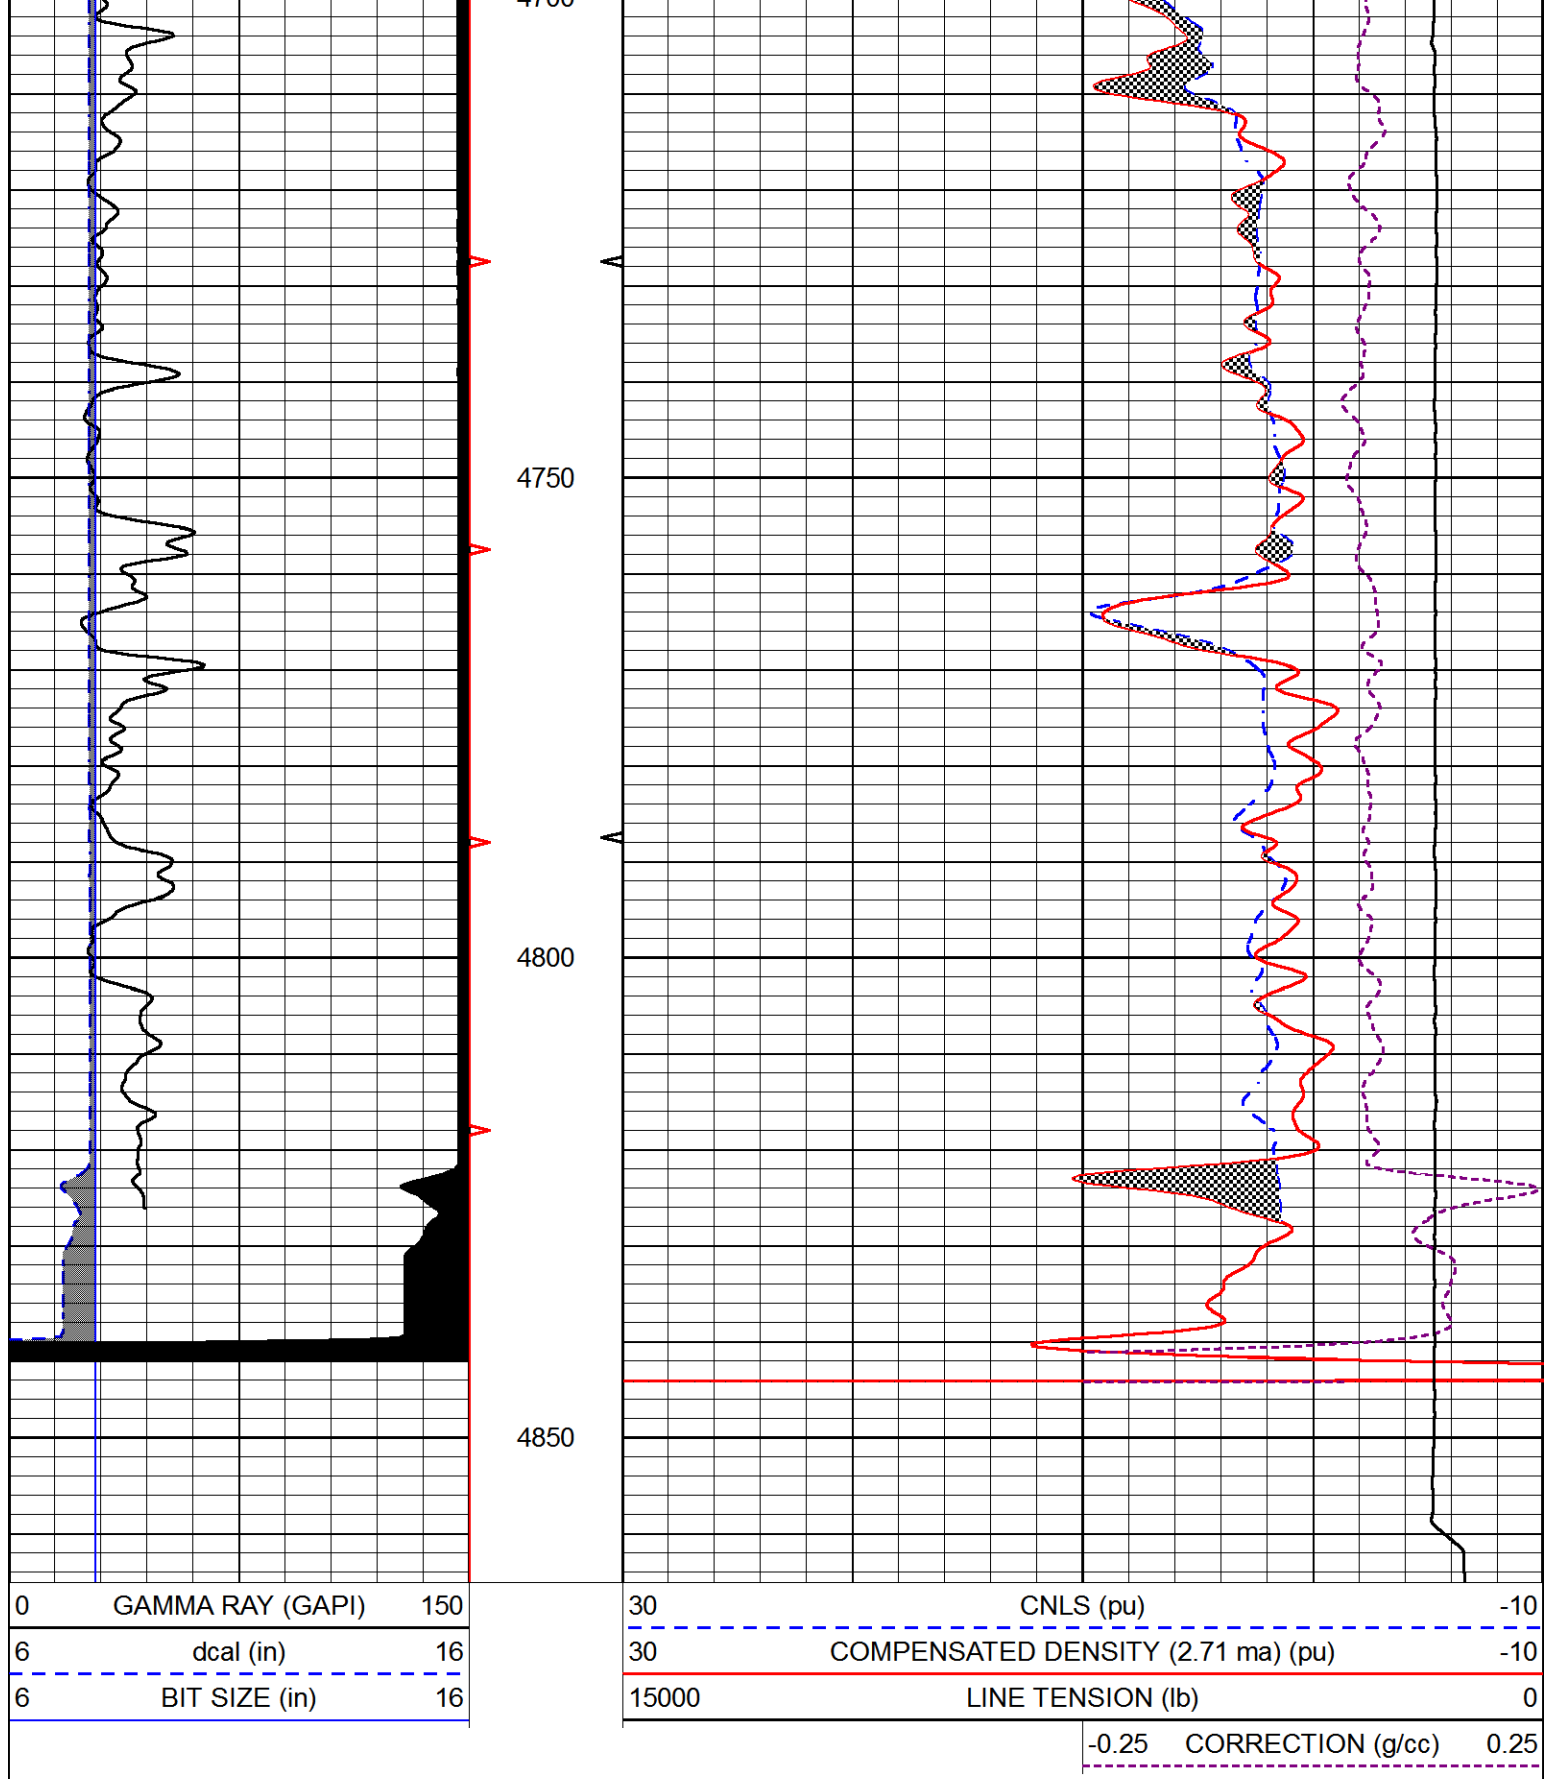

Calibration Report

Database File lebsack_pfeifer_amyx_1.db
Dataset Pathname stackml/pass3.1
Dataset Creation Sun Dec 10 11:42:42 2017

Dual Induction Calibration Report

Serial-Model:
Calibration Performed:

1987-M&W
Tue Apr 11 17:07:38 2017

Loop:	Readings		References			Results	
	Air	Loop	Air	Loop		Gain	Offset
Deep	178.615	710.235	0.000	255.800	mmho/m	0.530	-36.500
Medium	161.982	1441.110	0.000	255.800	mmho/m	0.440	-110.500

Microlog Calibration Report

Serial-Model:
Performed:

PSI-02-PSI STKBL ML
Fri Jun 23 01:25:19 2017

	Readings		References			Results	
	Zero	Cal	Zero	Cal		m	b
Normal	0.0031	0.0043	0.0000	10.0000	Ohm-m	15000.0000	0.0000
Inverse	0.0000	0.0013	0.0000	10.0000	Ohm-m	17000.0000	0.0000
Caliper	1.0020	1.0834	5.5000	16.5000	in	135.1560	-131.4000

Compensated Density Calibration Report

Serial-Model:
Source / Verifier:
Master Calibration Performed:

168-986-M&W
/
Tue Apr 11 17:07:47 2017

Master Calibration

	Density		Far Detector	Near Detector	
Magnesium	1.755	g/cc	4691.86	4818.19	cps
Aluminum	2.705	g/cc	859.57	3020.22	cps
Spine Angle = 74.61			Density/Spine Ratio = 0.540		
	Size		Reading		
Small Ring	4.00	in	1.03		
Large Ring	14.00	in	1.23		

Compensated Neutron Calibration Report

Serial Number: tk10-MW
Tool Model: M&W
Calibration Performed: Wed Nov 16 11:21:36 2016

Detector	Readings		Target		Normalization
Short Space	6240.00	cps	1000.00	cps	1.6025
Long Space	460.00	cps	1000.00	cps	1.9500

Gamma Ray Calibration Report

Serial Number: 89-M&W
Tool Model: M&W
Calibration Performed: Tue Apr 11 17:08:01 2017

Calibrator Value: 1000.0 GAPI

Background Reading: 0.0 cps

Calibrator Reading:	6.2	cps
Sensitivity:	0.5200	GAPI/cps



Company	LEBSACK OIL PRODUCTION, INC.
Well	PFEIFER-AMYX NO. 1
Field	TANKER
County	FINNEY
State	KANSAS