

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-171-20051-00-00
Spot: NW Sec/Twnshp/Rge: 34-18S-31W
1320 feet from N Section Line, 1320 feet from W Section Line
Lease Name: HAMMEKE J M Well #: 1
County: SCOTT Total Vertical Depth: 2840 feet

Operator License No.: 32356
Op Name: INTERMOUNTAIN REFINING CO, INC
Address: PO BOX 35
FARMINGTON, NM 87499

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		1650		WITH 2 SX CMT
PROD	5.5	2838	0	WITH 100 SX CMT
SURF	8.625	341		WITH 200 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 05/10/2006 12:00 PM
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.
Proposal Revd. from: _____ Company: _____ Phone: _____

\$92.30

Proposed Plugging Method: CIBP @ 1650' WITH 2 SX CMT. PERFORATE AT 1620' & PUMP 80 SX CMT OUT PLUS CASING VOLUME. PUMP 200 SX CMT DOWN 8 5/8" ANNULUS.

Plugging Proposal Received By: JERRY W. STAPLETON WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 05/10/2006 5:30 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:

CIBP @ 1650' WITH 2 SX CMT. PUMP 140 SX CMT DOWN 5 1/2" CASING WITH 80 SX CMT OUTSIDE THROUGH PERFS FOR A TOTAL OF 220 SX CMT. SHUT IN PRESSURE 500#. PUMP 180 SX CMT DOWN 5 1/2" X 8 5/8" ANNULUS. SHUT IN PRESSURE 125#.

Perfs:


Top	Bot	Thru	Comments
2765	2776		

INVOICED

DATE 5-18-06
SER NO 2006061674

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES.
Plugged through: CSG

District: 01

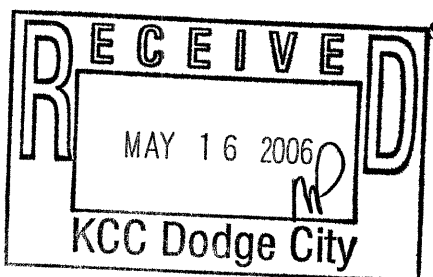

Signed Jim Holland PRT II
(TECHNICIAN)

RECEIVED
MAY 18 2006
KCC WICHITA

PRT AWS