

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas


15-163-02982-00-00

WELL PLUGGING RECORD

Rooks County. Sec. 5 Twp. 8 Rge. (E) 17 (W)

Location as "NE/CNW/SW" or footage from lines SE/NE/NW
Lease Owner COLUMBIA SUPPLY CO.
Lease Name Stamper Well No. C-1
Office Address Box 293, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed 11-29-1952
Application for plugging filed 11-17-1955
Application for plugging approved 11-18-1955
Plugging commenced 1-5-1956
Plugging completed 1-12-1956
Reason for abandonment of well or producing formation Dry hole

NORTH

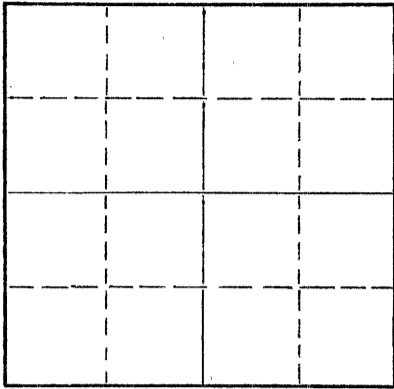

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production Sept. 1955
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Arkuckle Depth to top 3291' Bottom 3314' Total Depth of Well 3314 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugging started 1-5-56 and completed 1-12-56. Measured in to TD 3314'.
Put in 30' sand and 5 sacks of cement. Pumped in 40 sacks of ~~xxx~~ aqua gel mud and 12 sacks of hulls. Shot casing off at 2247' and pulled pipe out of hole. Squeezed 8-5/8" surface casing with 42 sacks of aqua gel mud and 60 sacks of cement. Dumped in 3 sacks of cement for cap on well.

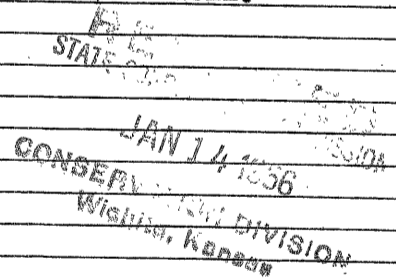

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor J. O. FORBES d/b/a FORBES CASING PULLING CO. 1-14-56
Address P. O. BOX 221, GREAT BEND, KANSAS

STATE OF Kansas COUNTY OF Barton, ss.
Sam Manes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Sam Manes
Box 293, Great Bend, Kans. (Address)

SUBSCRIBED AND SWORN TO before me this 13 day of January, 1956

My commission expires 1-17-59 John Grobe Notary Public.

