


15-163-19108-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

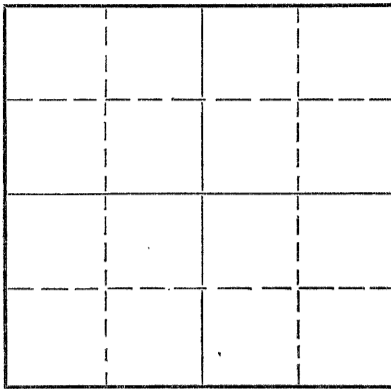

Locate well correctly on above
Section Plat

Rooks County, Sec. 5 Twp. 8 Rge. 17 (W)

Location as "NE/CNW%SW%" or footage from lines NE SE NW

Lease Owner Murfin Drilling Company

Lease Name Stamper "B" Well No. 2

Office Address 507 Union Natl. Bk. Bldg.,

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 3-17-53 19

Application for plugging filed 6-3-53 19

Application for plugging approved 6-3-53 19

Plugging commenced 6-13-53 19

Plugging completed 6-17-53 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 3296 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8 5/8" | 123' | |
| | | | | 5 1/2" | 3322' | 2488' |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with rock to 3080 feet, dumped 4 sacks cement.

Mudded hole with 90 sacks of mud. Pumped 65 sacks cement in hole to surface.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Carroll Bros. Casing Pulling Co.
Address Ellinwood, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss. W. R. Murfin (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W R Murfin

(Address)


SUBSCRIBED AND SWORN TO before me this 22nd day of August, 1953

Edna Siemens

My commission expires 7-20-57

Notary Public.

24-7368-S 3-53-20M



WELL LOG

15-163-19108-00-00

COMPANY Murfin Drilling Company

SEC. 5 T. 8 R. 17W

FARM STAMPER "B" NO. 2

LOC. NE SE NW

TOTAL DEPTH 3296


COMM. 2-2-53

COMP. 3-17-53

COUNTY Rooks KANSAS

SHOT OR TREATED
CONTRACTOR Murfin Drilling Company

ISSUED



CASING

20 10
15 8 5/8 123'
12 6
13 5 1/2 2520'

ELEVATION 1822 D.F

PRODUCTION D & A

FIGURES INDICATE BOTTOM OF FORMATIONS

123 Shale-Shells
370 Shale
405 Shale-Shells
515 Sand
640 Shale
725 Shale-Shells
930 Sand Pyrite
1230 Red Bed
1320 Shale
1745 Shale-Shells
1780 Lime-Shale
1930 Broken Lime
2180 Lime-Shale
2335 Shale-Lime
2405 Lime-Shale
2630 Shale-Lime
2743 Shale
2920 Lime
2980 Shale-Lime
3245 Lime
3284 Lime-Shale
3292 Arbuckle
3296 T.D.

TOPS

Anhydrite 1230
Topeka Lime 2742-918
Heebner 2957-1133
Toronto 2978-1154
Lansing K. C. 2997-1173

DST 3091-3105

Open 30 min (weak blow for 5 min.) Rec.
151 slightly oil cut mud. BHP 1100# in
15 min.

Acidized 1000 gal. Set plug 3127
Perforated 3094-3104
Acidized 1000 gal., very little oil.

RECEIVED
STATE CORPORATION COMMISSION

8-25-53

CONSULTING ENGINEER

State of KANSAS }
County of SEDGWICK } ss:

I, W. R. Murfin of the Murfin Drilling Company
upon oath state that the above and foregoing is a true and correct copy of the log of the Stamper "B" #2 well.

W. R. Murfin

Subscribed and sworn to before me this 22nd day of August 19 53

My Commission Expires: 7-20-57

PLUGGING
FILE SEC 5 T. 8 R. 17W
BOOK PAGE 105 LINE 21

Edna Siemens
NOTARY PUBLIC